


Installation Manual

Decaura®

Round Shower Head Set

- For Model Code: 8562, 8562-2, 8562-3, 8560-2 (In different shower heads only)

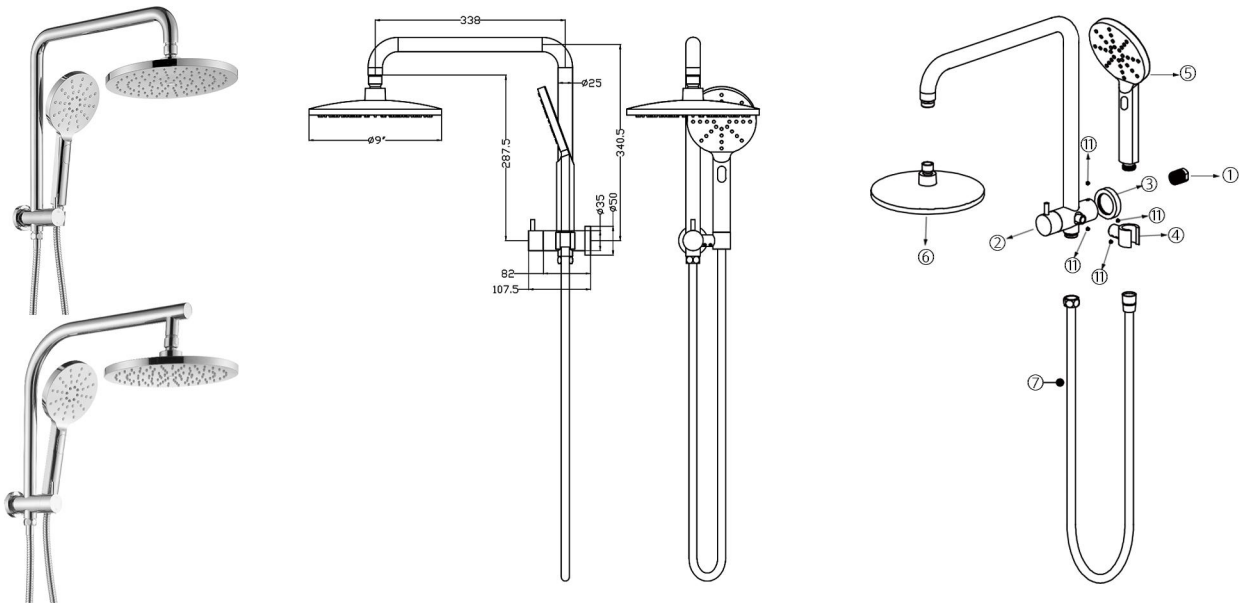

No.	Description	Quantity
1	Connector	x 1
2	Main Body	x 1
3	Decoration Cover	x 1
4	Shower Holder	x 1
5	Handheld Shower	x 1
6	Shower Head	x 1
7	Shower Hose	x 1
8	Grease Oil Pack	x 1
9	Teflon Tape	x 1
10	Allen Key	x 2

Spare Parts :		
11	Spare M5 Grab Screws	x 4
12	Spare Shower Hose Rubber Washer	x 1
13	Spare O-Rings For Connector	x 3
14	Spare M7 Screws for Shower Holder	x 2

Instructions

1. Working pressure: 0.05-1 Mpa, Working temperature: 0-55°C.
2. Products are manufactured as per standard AS/NZS 3662:2005. as per Australian standard, and with WaterMark & WELS certificate as shown in the packing.
3. All surfaces should be cleaned with water or mild liquid detergent. Do not use cream cleaner or citrus based or chemical cleaning products.


Warranty Terms

All products are guaranteed as below:

1. 5 years guarantee against main body, finishing and Cartridge.
2. 2 years guarantee on washers and O-rings.


Installation Steps

1

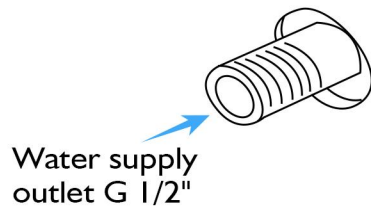


Should wrap enough teflon tape over the water supply outlet.

2

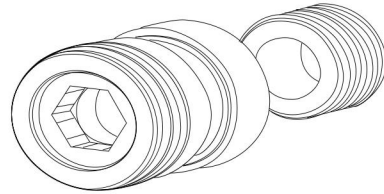


Screw the connector ① to water supply outlet and tighten firmly by spanner.

3

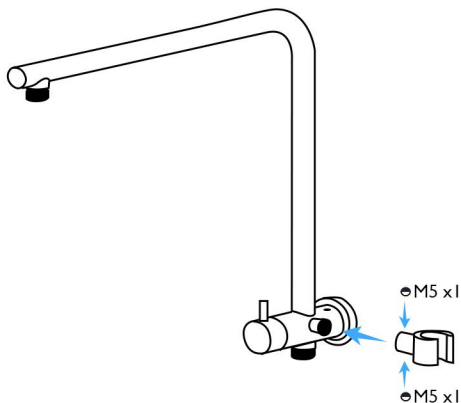

Plug the shower hoder onto the main body and tighten it firmly by 2 M5 grab screws.

4

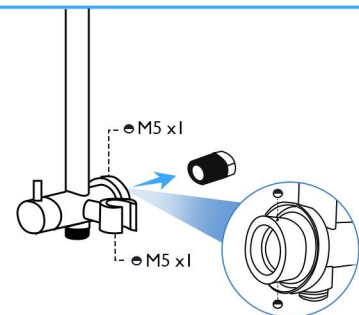


Install The Rail

Very Important:


- (1) Smear the grease oil ⑧ on the connector O-rings. Don't wrap teflon tape over the O-rings.
- (2) To avoid connector O-rings scratched by screw tip and causing water leakage, the screws must be loosed enough before plug the main body onto the connector.
- (3) Gently plug the main body onto the connector and tighten it firmly by 2 M5 grab screws.

5

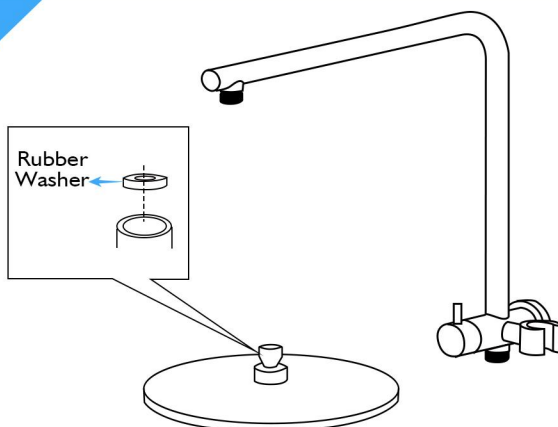

Make sure washers and flow restrictor as shown inside shower rose. Screw shower rose to arm.

6

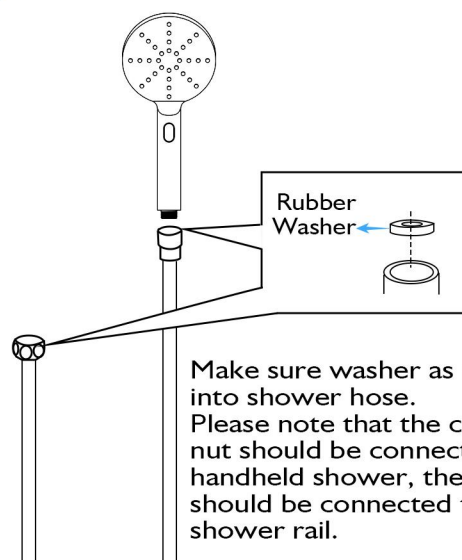

Make sure washer as shown into shower hose. Please note that the conical nut should be connected to handheld shower, the hex nut should be connected to shower rail.