



B71049DSN

# **USER MANUAL**

MINI BAR REGRIGERATOR

- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
  - NOTE: Children aged from 3 to 8 years are allowed to load and unload refrigerating appliances.
- 2. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
  - **NOTE:**Children should be supervised to ensure that they do not play with the appliance.
- 3. Since the flammable refrigerants are used, please installed, handle, and service the appliance strictly according to the instruction and contact the professional agent or our after-sale service to dispose of the appliance.
- 4. If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- 5. WARNING:
  - When positioning the appliance, ensure the supply cord is not trapped or damaged.
  - Do not locate multiple portable socket-outlets or portable power supplies at the rear of the appliance.
  - Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
  - Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
  - Do not damage the refrigerant circuit.
  - Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.
- 6. Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- 7. This appliance is intended to be used in household and similar applications such as
  - staff kitchen areas in shops, offices and other working environments;
  - farm houses and by clients in hotels, motels and other residential type environments;
  - bed and breakfast type environments;
  - catering and similar non-retail applications.
- 8. To ensure the safe preservation of foodstuffs, please comply with this instruction to use.
- 9. The internal temperature difference of the refrigerator is less than 4K, which is suitable for storing refrigerated articles
- 10. To avoid contamination of food, please respect the following instructions:
  - Opening the door for long periods can cause a significant increase of the temperature in the compartments of the appliance.
  - Clean regularly surfaces that can come in contact with food and accessible drainage systems.
  - Clean water tanks if they have not been used for 48 h; flush the water system connected to a water supply if water has not been drawn for 5 days.
  - If the refrigerating appliance is left empty for long periods, switch off, defrost, clean, dry, and leave the door open to prevent mould developing within the appliance.
  - The appliance should be cleaned every four weeks for good maintenance and to avoid contamination of food.
  - For positions, such as seams, slots, holes, and so on, the simple tools may be used to clean, such as soft brushes.
  - If needed, detachable shelves, trays, drawers and similar accessories can be cleaned through removed from the appliance and washed in the basin.
  - For hygiene requirement, contaminants such as the food/juice/fruit residues, especially trapped in small crevices must be clean up.



The symbol indicate there is risk of fire since flammable materials used.





### **DISPOSAL**

Help protect the environment and human health.Put the packaging in applicable containers to recycle it.Help to recycle waste of electrical and electronic appliances.Do not dispose appliances marked with this symbol with the household waste.Return the product to your local recycling facility or contact your municipal office.

#### INTRODUCTION

Thank you for purchasing our compressor refrigerator. This unit is designed to improve your living and entertaining comfort. The compressor system refrigerator deign for quiet demand, and limited temperature rise in refrigerators within 4~8 hours. With its low noise operation and attractive design, you will enjoy the convenience and comfort for years to come.


This easy-to-use manual will guide you to getting the best use of your compressor refrigerator.

#### **TABLE OF CONTENTS**

INSTRUCTIONS	
REFRIGERATOR FEATURES	1
Parts of Soliding/Glass Door Strucure	1
Overall Dimension	1
Over Space Required in Use	
IMPORTANT SAFETY INSTRUCTIONS	2
EXPLOSION HAZARD	3
PROPER DISPOSAL OF YOUR OLD APPLIANCE	3
INSTALLATION REQUIREMENTS	4
LOCATION REQUIREMENTS	4
CONNECTING ELECTRICITY	4
INSTALLATION INSTRUCTIONS	5
UNPACKING REFRIGERATOR	5
PROPER AIR CIRCULATION	5
LEVELING REFRIGERATOR	5
FIXED REFRIGERATOR	6
SLIDER INSTALLATION INSTRUCTION	6
REFRIGERATOR USE	7
SERIES INTELLIGENT CONTROLLER MANUAL	7
CIRCUIT DIAGRAM	8
NORMAL OPERATING SOUNDS	9
LIMITED WARRANTY	10
RECORD KEEPING	10
TABLE OF NARMEUL SUBSTANCES	11

### **REFRIGERATOR FEATURES**


### Parts of Soliding/Glass Door Strucure

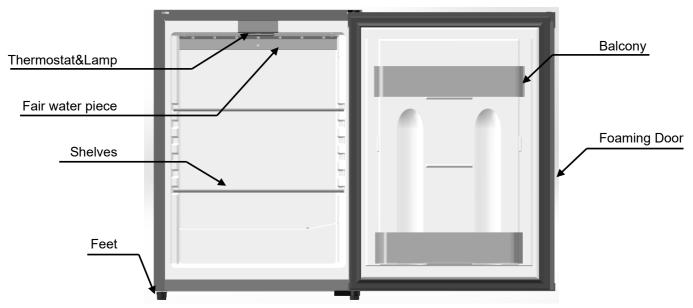


# **CAUTION**


Please push the shelves to the root before operating the unit.

### **Overall Dimension (mm)**





### Over Space Required in Use(mm)

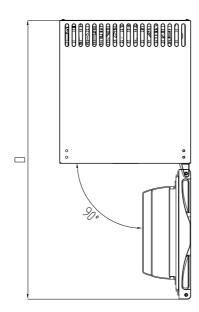

model	W	D	Н	0
B71049DSN	460	500	607	935

#### **IMPORTANT SAFETY INSTRUCTIONS**

To reduce the risk of fire, electrical shock, injury to persons, or damage when using the refrigerator, follow basic precautions, including the following:

### **№ WARNING**

- A.This refrigerator must be properly installed and located in accordance with the Installation Instructions before it is used.
- B.Unplug the refrigerator before making repairs or cleaning or the use is suspended.
  - **NOTE:**Power to the refrigerator cannot be disconnected by any setting on the control panel.
  - **NOTE:** Repairs must be performed by a qualified Service Professional.
- C.That's necessary, the power supply must be properly grounded and wiring to the circuit with a RCBO(Residual Current Circuit Breaker with Overcurrent Protection), the active current of RCBO must not greater than 30mA.
- D.To prevent suffocation and entrapment hazards to children, remove the fresh food and freezer doors from any refrigerator before disposing of it or discontinuing its use.
- E. To avoid serious injury or death, children should not stand on, or play in or with the appliance.
- F.Children and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge can use this appliance only if they are supervised or have been given instructions on safe use and understand the hazards involved.
- G.If the refrigerator is not installed on the ground, adequate fixing or protective measures are taken to avoid accidental dumping causing personal injury.
- H. Glass parts(such as Glass-door, Glass-shelves, etc.) is broken by external forces can cause personal injury
- I. Use this appliance only for its commercial purpose.

# **OPROHIBIT**

- J.Do not try to fix the lamp and open the back guard, refer to agent or manufacture for help.
- K.Do not try to deep the finger into the ventilated grille or back grille, especially children.
- L. Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
- M.Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.
- N. Do not use an adapter plug or an extension cord.
- O.Repair or replace immediately, all electric service cords that have become frayed or otherwise damaged.
- P.Do not use a cord that shows cracks or abrasion damage along its length, the plug or the connector end.
- Q.Do not place unpackaged food directly in the refrigerator.

#### To reduce the risk of injuty when using your refrigerator, follow these basic safety precautions.

# **CAUTION**

- A.Do not clean refrigerator with warm water when it is cold. Components may break if exposed to sudden temperature changes or impact, such as bumping or dropping.
- B.Keep fingers out of the "pinch point" areas; clearances between the lid and cabinet are necessarily small. Be careful closing doors when children are in the area.
- C.Do not touch the cold surfaces in the refrigerator compartment when hands are damp or wet, skin may stick to these extremely cold surfaces.
- D.The refrigerator designed for beverage refrigerating temperature, do not place items beyond the temperature range required for refrigeration.
- E.The refrigerator must be replaced by the manufacturer, its service agent or similar qualified persons in order to avoid a hazard.
- F.Maximum loading of each shelf in storage compartment is 8 kg.
- G.Maximum loading of door balcony is 5 kg.
- H.Sound pressure level at workstation is far below 70dB.
- I.Altitude limit:The Soliding Door can be used below 2000m and the Glass Door Must be used below 1000m.

#### **EXPLOSION HAZARD**

#### Flammable Refrigerant

This appliance contains isobutane refrigerant, R600a, a natural gas with high environmental compatibility. However, it is also combustible. Adhere to the warnings below to reduce the risk of injury or property damage.



- A.When handling, installing and operating the appliance, care should be taken to avoid damage to the refrigerant tubing.
- B.Service shall only be performed by authorized service personnel. Use only manufacturer-authorized service parts."
- C. Dispose of refrigerator in accordance with Federal and Local Regulations. Flammable refrigerant and insulation material used require special disposal procedures. Contact your local authorities for the environmentally safe disposal of your refrigerator.
- D.Keep ventilation openings in the appliance enclosures or in the built-in structure clear of obstruction.

# **OPROHIBIT**

- E.Do not use mechanical devices or other means, such as candles or heaters to accelerate the defrosting process.
- F.Do not damage refrigerant circuit.
- G.Do not use electrical appliances inside the food storage compartment of the appliance.

#### PROPER DISPOSAL OF YOUR OLD APPLIANCE

### **MARNING**

#### Failure to follow these disposal instructions can result in death or serious injury.

Child entrapment and suffocation are not problems of the past. Junked or abandoned appliances are still dangerous even if they will sit for "just a few days." If you are getting rid of your old appliance, please follow the instructions below to help prevent accidents.

Take off the doors.Leave the shelves in place before you throw away your old appliance, so that children may not easily climb inside.

#### Refrigerant and Foam Diaposal:

Dispose of refrigerator in accordance with Local Regulations

Flammable refrigerant and insulation material used require special disposal procedures. Contact your local authorities for the environmentally safe disposal of your refrigerator

#### INSTALLATION REQUIREMENTS

#### **LOCATION REQUIREMENTS**



- A.Explosion and Fire Hazard.
  - Keep flammable materials and vapors, such as gasoline, away from appliance. Failure to do so can result in death, explosion of fire.
- B.To ensure your refrigerator works at optimum efficiency, you should install it in a location where there is proper air circulation, and electrical connections.
- C. Avoid contact with strong oxidizing agents, corrosive gases and fluids.

# **OPROHIBIT**

- D.Do not install the refrigerator where the temperature will go below 60°F(16°C) or above 100°F(37°C), because it will not perform properly.
- E.Do not install the refrigerator in a location exposed to water(rain, a bath, shower,swimming pool, wet environment,etc.).
- F.Do not install your refrigerator in any location not properly insulated or heated, e.g. garage, etc. Keep out of direct sunlight and away from heating sources such as radiators, heaters, and cooking appliances.

#### **CONNECTING ELECTRICITY**



#### **Electrical Shock Hazard**

- A.Plug into a grounded 3-prong outlet. The power cord of this appliance is equipped with a 3-prong (grounding) plug which mates with a standard 3-prong (grounding) wall outlet to minimize the possibility of electric shock hazard from this appliance.
- B.Have the wall outlet and circuit checked by a qualified electrician to make sure the outlet is properly grounded.
- C.The refrigerator should always be plugged into its own individual electrical outlet which has a voltage rating that matches the rating plate.
- D.220 Volt AC, 50 Hz, 10- or 15-amp fused, grounded electrical supply is required. This provides the best performance and also prevents overloading house wiring circuits which could cause a fire hazard from overheated wires.
- E.Never unplug your refrigerator by pulling on the power cord. Always grip plug firmly and pull straight out from the outlet.
- F.Immediately discontinue use of a damaged supply cord. If the supply cord is damaged, it must be replaced by a qualified service professional with an authorized service part from the manufacturer.
- G.When moving the refrigerator away from the wall, be careful not to roll over or damage the power cord.

# **PROHIBIT**

Do not, under any circumstances, cut or remove the third (ground) prong from

Do not remove the ground prong.

Do not use an adapter.

Do not use an extension cord.

Do not, under any circumstances, cut or remove the third (ground) prong from the power cord. For personal safety, this appliance must be properly grounded.

Failure to follow these instructions can result in death, fire, or electrical shock.

#### **UNPACKING REFRIGERATOR**




- A.Explosion and Fire Hazard.Flammable refrigerant used. Handle with care when moving refrigerator to avoid either damaging the refrigerant tubing or increasing the risk of a leak.


  Failure to do so can result in death, explosion or fire.
- B.When moving the refrigerator, never tilt it more than a 45° angle. This could damage the compressor and the sealed system. If the refrigerator has been placed in a horizontal position for any period of time, wait 24 hours before plugging in the refrigerator to allow the refrigerant to settle.
- Step1. Remove all packaging material. This includes the corrugated base and all adhesive tape holding the refrigerator accessories inside and outside.
- Step2. Inspect and remove any remains of packing, tape or printed materials before powering on the refrigerator.
- Step3. It is advisable to clean the inside of the compressor refrigerator with lukewarm water using a neutral detergent, and then to dry it thoroughly prior to use.

#### PROPER AIR CIRCULATION

# **WARNING**

To ensure your refrigerator works at the maximum efficiency it was designed for, you should install it in a location where there is proper air circulation, plumbing and electrical connections. Your refrigerator is not designed to operate in temperatures below 60°F(16°C) or above 100°F(37°C)

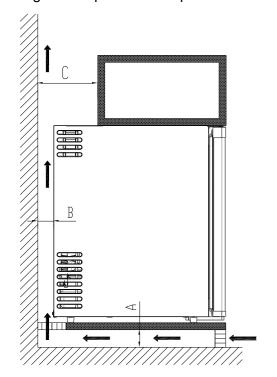

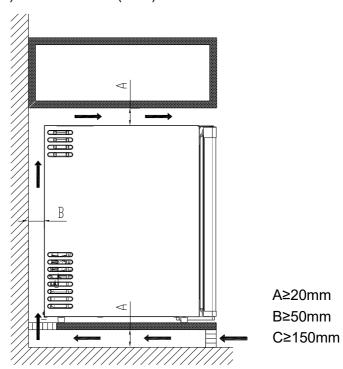

#### LEVELING REFRIGERATOR


Your refrigerator has two leveling legs that are located in the front bottom corners of your refrigerator. After properly placing your refrigerator under its final position, you can level your refrigerator.

Leveling legs can be adjusted by turning them clockwise to raise your refrigerator or by turning them counterclockwise to lower your refrigerator. The refrigerator door will close easier when the leveling legs are extended




#### **FIXED REFRIGERATOR**

After you've finished leveling the refrigerator, use the screws to fix the Feet and use the hole cap to cover. All accessories is in the attachment.

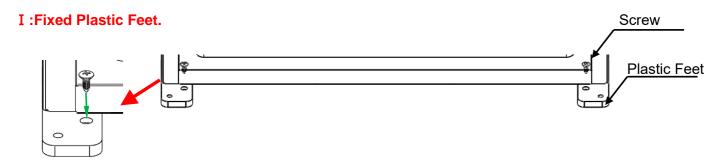


## **A**CAUTION

The refrigerator must have two fixed Plastic Feet

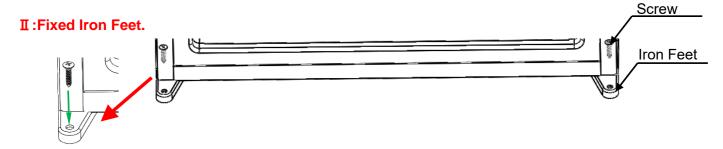


#### **SLIDER INSTALLTION INSTRUCTION**

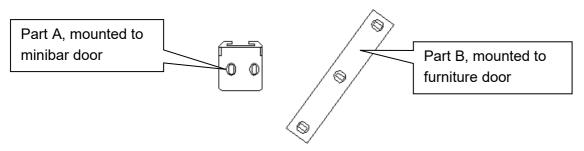


Step 1. Fix Part B onto furniture door with screws.

Make sure the thicker end is be in the outside.

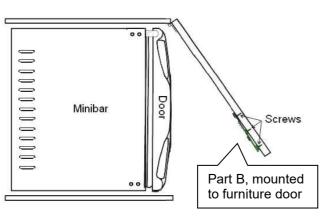


Step2. Fix Part A onto the minibar door with two screws. Make sure Part A slides well along Part B

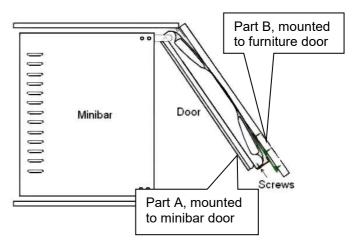

#### **Series Intelligent Controller Manual**

#### 1. Interface

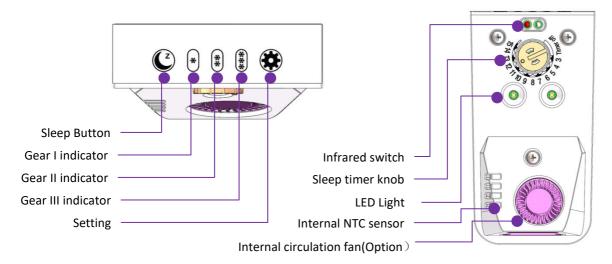

### 2. Functions and settings

- 2.1 Quick setting
- 2.1.1 Gear setting: There are five gear can be selected—I, II, III, fast cooling, and stop, press button to select each gear by cycle and the factory default is II gear.

Note1:Fast cooling function will automatically start for 2h when the power is on, sleep mode is over, and the ambient temperature exceeds 38°C.After the end auto-set to gear II.

#### 2.1.2 Sleep mode setting:

Automatic mode---Adjust the "sleep timer knob" to the scale needed for timing. After the automatic mode is triggered for the first time, sleep mode starts every 24h.

Note2:The sleep function is disabled when "sleep timer knob" positioned at "Timer off".

Note3:This mode is only applicable to the first power supply and power supply restoration after power failure, and only needs to be adjusted once in each power cycle. The scale is in unit of hour.

Manual mode –Press © button 3 times in 5 seconds, and trigger the sleep mode at current scale every 24h.

Note4: Manual mode can be used only after 8 hours of power-on or after 4 hours of last sleep mode. Lunch break mode –Press © button 1 times, the compressor stops working for 1.5h.

Note5: Any sleep mode will cause the internal temperature to rise, and you can press the button 1 times to terminate the current sleep mode in any effective sleep time.

- 2.2 Advanced Setting
- 2.2.1 Sleep time length: Long press © 6S, then press to select 2h,4h,6h,8h, factory default 8h.
- 2.2.2 Sensor compensation: Long press C + 6S, then press to select +3,+2,+1,-1, no compensation.
- 2.2.3 Alarm: Turn on and off by long press 6S.

  High temperature alarm- The refrigerator stops working to protect the compressor when the ambient temperature exceed 43°C, recover run until the ambient temperature is lower—than 38°C.

  Open door timeout alarm-buzzer will alarm after door opening for more than 2min.
- 2.3 Advanced Function
- 2.3.1 The internal circulation fan can reduce the temperature difference in the refrigerator from 6K to 4K, and the temperature control is more precise.
- 2.3.2 External fan starts or closes automatically according to ambient temperature, suitable for harsh environment.
- 2.3.3 Abnormal mode:

Refrigerator will automatically stop for 10min after continuous working for 2h.

The internal sensor fault will automatically trigger the protection mode of 25min on and 5min off.


#### 2.4 Optional Function

Alarm, External sensor, Internal circulation fan, External fan, Open door count

### 3. Indicator Info and Range

Indicator			Townserot we won as	Class times langeth	Internal temperature compens	
ı	Ш	Ш	Temperature range	Sleep time length	ation	
•			6~10°C	2h	Temperature up by 3°C	
	•		2~8°C	4h	Temperature up by 2°C	
		•	-2~4°C	6h	Temperature up by 1°C	
•	•	•	Fast cooling	8h	Temperature down by 1°C	
All o	ut		Halt	Not defined	No compensation	

#### **CIRCUIT DIAGRAM**

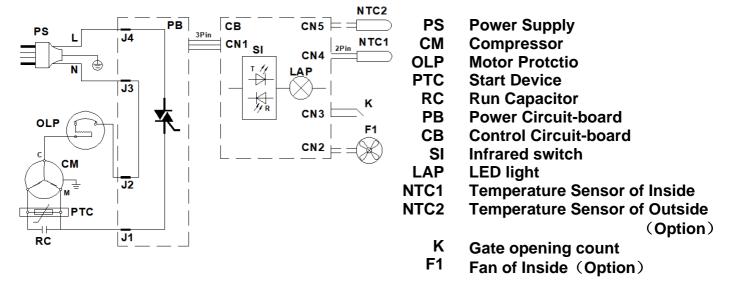

#### **Defrosting**

# **CAUTION**

Defrost is very necessary when the frost thickness exceeds 2mm in order to energy saving and maintaining Refrigeration effect.

You just turn the thermostat knob to zero position until the accumulated frost melts, then return to normal position.

#### **CARE AND CLEANING**



To avoid electric shock always unplug you compressor refrigerator before cleaning. Ignoring this warning may result in injury.

General:Do not use harsh chemicals, abrasives, ammonia, chlorine bleach,concentrated detergents, solvents or metal scouring pads. Some ofthese chemicals may dissolve, damage and/or discolor your compressor refrigerator.

- Step1. Remove the contents of the appliance
- Step 2. Wipe the inside and outside surfaces with a damp cloth. The addition of vinegar to the water is good for the prevention of mold and fungus.
- Step 3. Wipe all parts thoroughly after the cleaning.
- Step 4. After surface drying, reelectrification to use.

#### **IMPORTANT:**

When the compressor refrigerator is not in use it must be completely dry inside to avoid mold and fungus growth (if possible have the door open).

#### REFRIGERATOR INTERIOR SHELVES(Shelves may vary by model)

The shelves of your refrigerator were designed with you in mind. Their varied adjustability allows you to satisfy your personal storage needs. To remove or adjust a full-width slide-out shelf:

Step1.Gently tilt the shelf up and slide forward until the shelf has been completely removed.

Step2. To replace the shelf, select the desired setting and gently slide the shelf back until it rests in the locking position.

#### **REVERSING THE DOOR (OPTION)**

- Step1. Remove the lower hinge by loosening and removing the screws with screwdriver.
- Step2. Carefully lower the door and remove it.
- Step3. Remove the two screws from the left top hinge position, take the metal part off the hinge position.
- Step4. Remove the two screws from the right top hinge and take off the hinge, insert the metal part, rivet the two screws thereafter.
- Step5. Take off the lower hinge and fix it to the opposite side.
- Step6. Take the door. Insert the lower hinge axle into the right bottom hole of the door.
- Step7. Fix the spare hinge to the left top position of the cabinet. Adjust the door, make it straight and in alignment with the cabinet.

**Note:** As the door gasket gets pressed-in during shipment, after reversing the door the gasket might have to be reset. This will be good for seal to avoid any air escaping. If there is a gap between the cabinet and the door gasket, set the gasket by gently pulling it out to seal the gap. If necessary, you are recommended also to use the hair drier to warm the gasket to get rid of the gap.

#### **HUMMM...WHOOSH**

The new high efficiency compressor may run faster and longer than your old refrigerator and you may hear a high-pitched hum or pulsating sound while it is operating. You may hear a whooshing sound when the doors close. This is due to pressure equalizing within the refrigerator.

#### CLICKS, POPS, CRACKS and SNAPS

You may hear cracking or popping sounds when the refrigerator is first plugged in. This happens as the refrigerator cools to the correct temperature. Expansion and contraction of cooling coils during and after defrost can cause a cracking or popping sound.

#### WATER

The flow of refrigerant through the cooling coils may make a gurgling noise like boiling water. Water dropping on the defrost heater can cause a sizzling, popping or buzzing sound during the defrost cycle. A water dripping noise may occur during the defrost cycle as ice melts from the evaporator and flows into the drain pan. Closing the door may cause a gurgling sound due to pressure equalization.

#### LIMITED WARRANTY

As a condition to any warranty service obligation, the consumer must present this Warranty Certificate along with a copy of the original purchase invoice. Product must be accessible, without encumbrance and installed properly to receive warranty repair service.

#### THIS WARRANTY DOES NOT COVER:

- A. Damage, accidental or otherwise, to the compressor refrigerator while in the possession of a consumer not caused by a defect in material or workmanship.
- B. Damage caused by consumer misuse, tampering, used for other that the intended purpose, used commercially, or failure to follow the care and special handling provisions in the manual.
- C. Damage to the finish of the case, or other appearance parts caused by wear
- D. Damage caused by repairs or alterations of the compressor refrigerator by anyone other than those authorized by the manufacturer.
- E. Freight and Insurance cost for the warranty service
- F.Service trips to your home to teach you how to use the product.Improper installation, delivery, or maintenance.
- G.Failure of the product if it is abused, misused, Loss of food due to spoilage.
- H.Damage caused after delivery.Replacement of house fuses or resetting of circuit breakers.Replacement of the light bulbs.
- I.Damage to the product caused by accident, fire, floods or acts of God.Incidental or consequential damage caused by possible defects in this appliance.
- J.Product not accessible to provide required service.

# ALL WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANT ABILITY ARE LIMITED TO CLAIMED DURATION. THE MANUFACTURER DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES.

#### **RECORD KEEPING**

Please complete the following information for future reference. You will need it to obtain warranty service.

Model Name*:	
Serial Number *:	
Date of Purchase:	
Place of Purchase.	

\*The above information is written on the back of the unit. Retain this Owner's Manual with your sales receipt as a permanent record of your purchase.

TECHNICAL DATA		
Model	B71049DSN	
Climate Class	N	
Working ambient temperature	16°C έως 32°C	
Energy Class	D	
Total capacity	46,5 lt	
Daily energy consumption at 32°C	0,21 kWh / 24h	
Annual Energy consumption	55Wh / year	
EEI	70	
Operating current voltage	220~240V	
Rating current	0,23A	
Noise level	38dB	
Noise emmisions Class	С	
Refrigerant type / Quantity	R600a / 17g	
Unit dimensions (WxDxH)	480x500x598 mm	

**Table 1 Climate classes** 

Class	Symbol	Ambient temperature range °C
Extended temperate	SN	+ 10 to + 32
Temperate	N	+ 16 to + 32
Subtropical	ST	+ 16 to + 38
Tropical	Т	+ 16 to + 43

Extended temperate: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 10 °C to 32 °C';

temperate: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 16 °C to 32 °C';

Subtropical: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 16  $^{\circ}$ C to 38  $^{\circ}$ C';

Tropical: 'this refrigerating appliance is intended to be used at ambient temperatures ranging from 16 °C to 43 °C';

### Special for new European standard

The ordered parts in the following table can be acquired from channel:

AMIRIDIS-SAVVIDIS S.A. 87A, 17th November str 55535, Pylea, Thessaloniki +302310944944

		<del>_</del>
Ordered Part	Provided by	Minimum Time Required for Provision
thermostats	Professional maintenance personnel	At least 7 years after the last model is launched on the market
temperature sensors	Professional maintenance personnel	At least 7 years after the last model is launched on the market
printed circuit boards	Professional maintenance personnel	At least 7 years after the last model is launched on the market
light sources	Professional maintenance personnel	At least 7 years after the last model is launched on the market
door handles	Professional repairers and final users	At least 7 years after the last model is launched on the market
door hinges	Professional repairers and final users	At least 7 years after the last model is launched on the market
trays	Professional repairers and final users	At least 7 years after the last model is launched on the market
baskets	Professional repairers and final users	At least 7 years after the last model is launched on the market
door gaskets	Professional repairers and final users	At least 10 years after the last model is launched on the market

### NOTICE ABOUT RECYCLING



Your product is designed and manufactured with high quality materials and components which can be recycled and reused.

This symbol means that electrical and electronic equipment, at their end-of-life,

should be disposed of separately from your household waste. Please dispose of this equipment at your local community waste collection/recycling centre.

In the European Union there are separate collection systems for used electrical and electronic products.

Please help us to conserve the environment we live in!

### DECLARATION OF CONFORMITY

Herewith, we state that this product complies with the requirements of below directives:

EMC-Directive: 14 / 30 / EU

Low Voltage Directive: 14/35 / EU

ErP Directive 09 / 125 / EC

CE Marking: 93 / 68 / EEC

RoHS Directive: 11 / 65 / EU & Delegated Directive (EU) 15 / 863

The detailed declaration of conformity can be found at

www.morris.gr

