

MODEL:

SRWALLBRKT2U

SmartRack® 2U Vertical Wall-Mount Rack Bracket



2 Rack Units



175 lb.
Load Rating



Sturdy Steel
Construction




Accommodates
Standard 19-inch
Equipment



Convenient
Cable Access

- A** Rails support square-hole mounting
- B** Cable Access Holes
- C** Wall-Mounting Slots

Also Includes: Installation Guide and
rack-mount equipment mounting hardware
(12 M6 screws, 12 M6 cup washers and
12 M6 cage nuts).

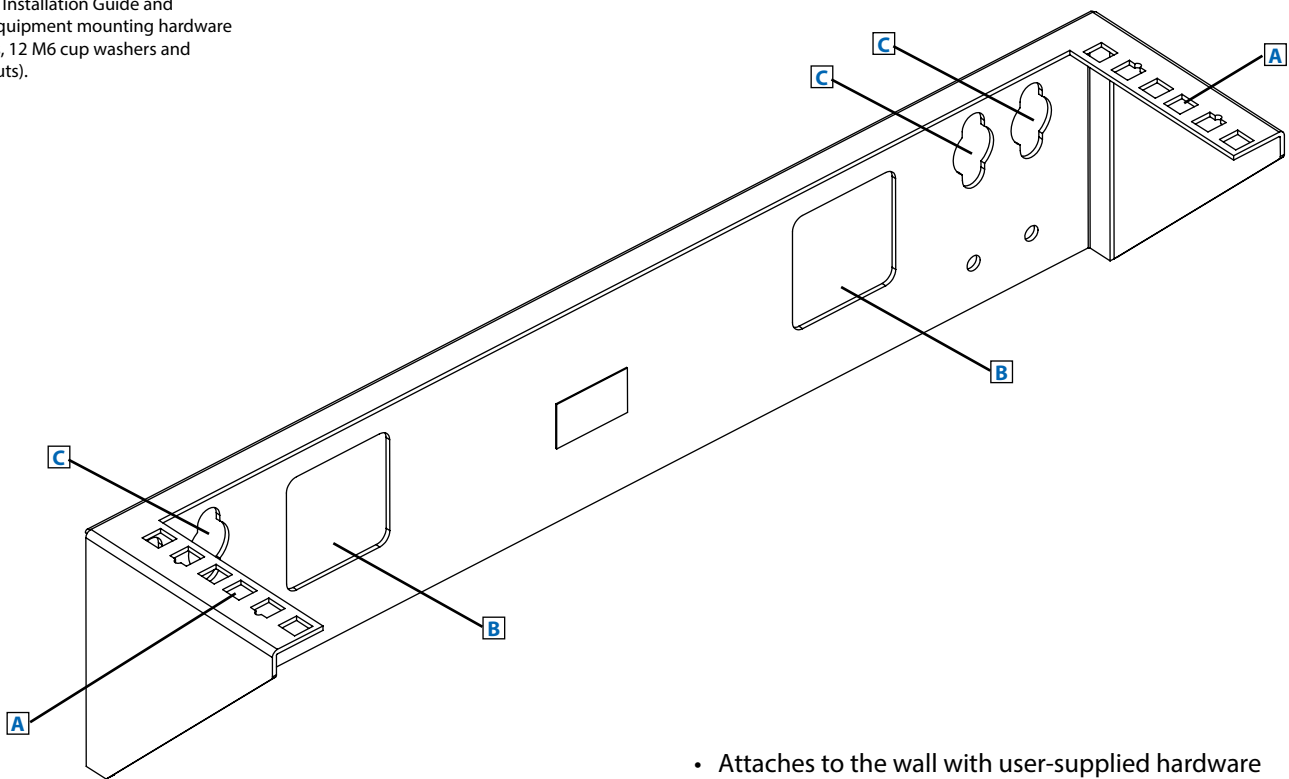

- Attaches to the wall with user-supplied hardware
- Wall-mounting holes spaced 16 in. apart for standard wall stud placement
- Mounts horizontally beneath a desk or workbench
- Component hangs flush against the wall for unrestricted out-of-the-way access
- Compatible with EIA-Standard 19 in. 2-Post Rack Equipment

Specifications

Model	SRWALLBRKT2U
Rack Spaces	2U
Equipment Mounting Depth	Up to 48 in. / 1219 mm
Load Rating*	175 lb. / 79 kg
Unit Dimensions (H x W x D)	4.16 x 19.69 x 4.16 in. / 105 x 500 x 105 mm
Shipping Dimensions (H x W x D)	5.91 x 21.85 x 8.46 in. / 150 x 555 x 214 mm
Unit Weight	2.65 lb. / 1.20 kg
Shipping Weight	3.97 lb. / 1.80 kg
Standards	EIA-310-D, IEC 60297-3-100, RoHS


* The load rating includes the combined weight of the unit and installed equipment. The unit must be mounted to a stable surface with user-supplied anchors capable of bearing the full load.

SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com


FRONT VIEW

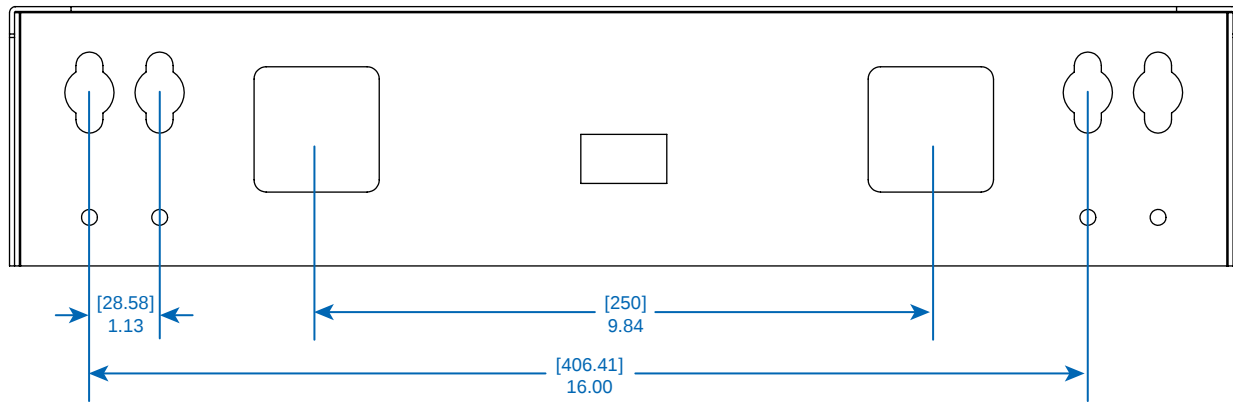


TOP VIEW

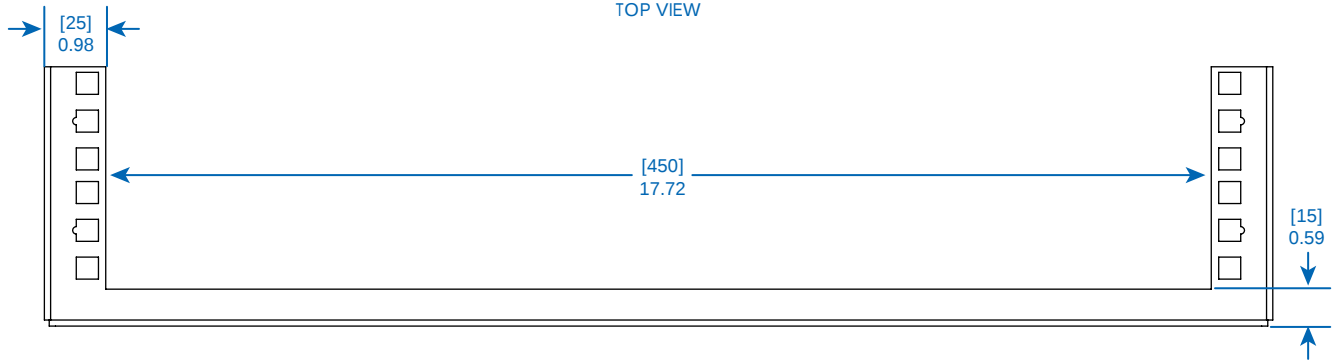

BOTTOM VIEW

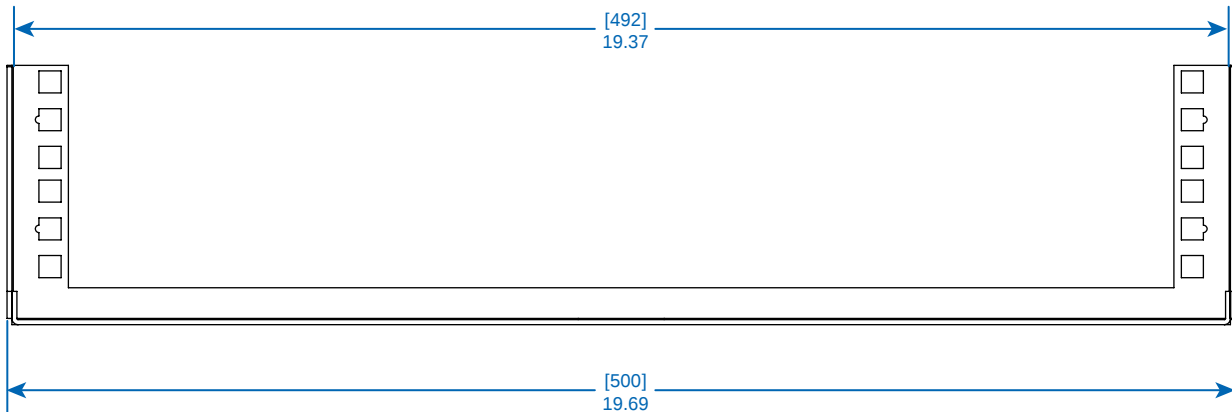

SIDE VIEW

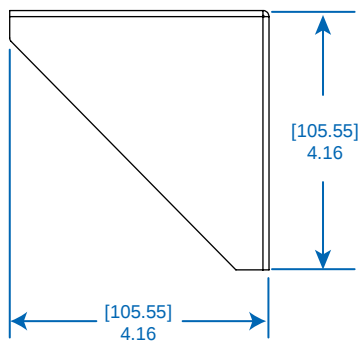

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

MODEL:
SRWALLBRKT2U

TRIPP·LITE

1111 W. 35th Street
Chicago, IL 60609 USA
773.869.1234
www.tripplite.com