



Matter SoC and Module Selector Guide

Selecting the Right Matter Device for Your Applications



Table of Contents

How Silicon Labs' Portfolio is Ideal for Matter Development

- 1 Why Choose Silicon Labs for Matter Development?
- 2 Wireless Hardware for Matter
- 3 Pre-Certified Wireless Software for Matter
- 4 Matter Security Solutions
- 5 Secure Programming
- 6 Most Complete Matter Development Solution

Matter Selector Guide

- 1 High-Performance, Low-Power Wireless SoCs for Thread and Wi-Fi
- 2 Benefits of Silicon Labs' Thread Solutions
- 3 Benefits of Silicon Labs' Wi-Fi Solutions
- 4 Choosing the Right Products
- 5 Hardware Comparison for Thread: MG24 vs. MG21 vs. MR21
- 6 Hardware Comparison for Wi-Fi: 917 vs. 915 vs. RS9116

Matter Development Kits

- 1 Solutions for All Matter Use-Cases
- 2 Solutions for Matter Over Thread
- 3 Solutions for Matter Over Thread, Pro Kit Add-Ons
- 4 Solutions for Matter Over Wi-Fi
- 5 About Silicon Labs


How Silicon Labs' Portfolio is Ideal for Matter Development



Hardware

Single-SoC Matter solutions

- **High-performance RF** enables reliable connectivity in every room of the house and beyond
- **Ultra-low-power** — Extend battery life and recharging interval
- **Fully integrated MCU** — Simplify product design, reduce BoM costs, improve profits
- **RF-Certified Modules** — Accelerate time-to-market by up to 9 months

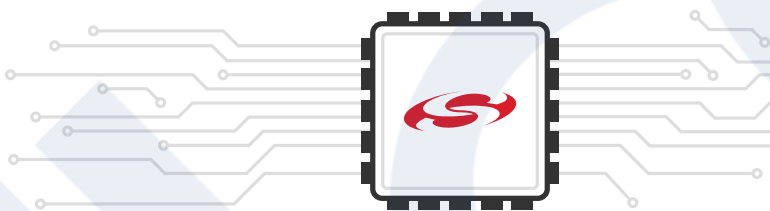

Software

Pre-certified and tested Matter, Wi-Fi, Thread, and Bluetooth software


- **Pre-certified** and tested Matter, Wi-Fi, Thread, and Bluetooth software
- **Full compliance** and maximum performance on Silicon Labs hardware
- **Reduce time and costs** of development and certification
- **Improve** product quality
- **The best SDK support** with 10 years of longevity



Security

Fully Matter-compliant security


- **Secure Vault** covers all mandatory, recommended, and optional security requirements
- **PSIRT** offers constant monitoring and rectification of vulnerabilities (Matter requirement)
- **MG24** — The highest PSA Level 3 certification
- **SiWx917** — The best-in-class IoT security in Wi-Fi

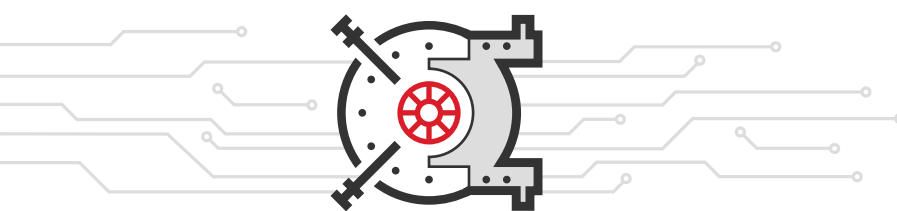

Secure Programming

Securely program Matter certificates, security settings, keys, and flash software


- **Prevent** counterfeiting and IP theft
- **Simplify** the creation of Matter QR codes
- **Reduce** manufacturing risks and costs
- **Accelerate** production time

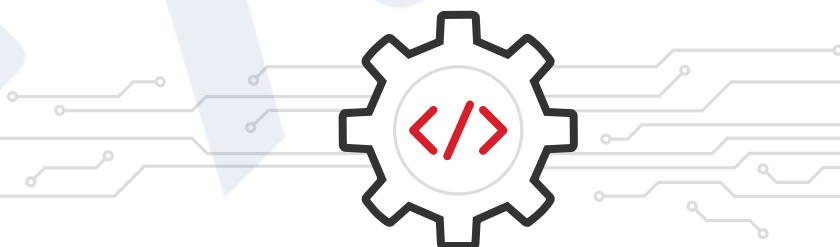

Developer Journey

Most comprehensive end-to-end guide for Matter

- **Reduces your Matter learning curve** to get you to market faster
- **Step by step guide** from learning to production
- **Includes information** on Ecosystems steps along the journey
- **Provides guidance** on hardware including ICs, Modules, and development hardware

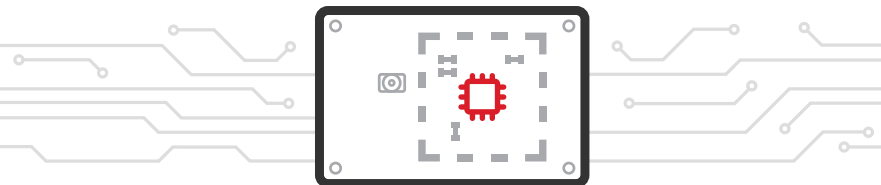

Most Complete

Most Complete Go-to-Market Solution for Matter

- **Enhance user experience** with high-performance wireless and ultra-low-power
- **Matter-compliant security** to protect devices, users, and brand reputation
- **Develop faster and reduce costs** with community support 24/7, developer journeys, and documentation



Wireless Hardware for Matter



Performance

Improve overall product quality, enhance user experience, reduce warranty returns, and minimize support costs through reliable wireless connectivity in every room of the house (and beyond)



Battery Life

Score better on product reviews and enhance user experience with extended battery life and improved recharging intervals on your devices



Security

Stay protected with the industry's most advanced IoT security solution, Secure Vault, which is fully compliant with the Matter specification




Costs & Simplicity

Simplify product designs, reduce BoM costs, and improve your profits using Silicon Labs Matter solutions based on single chip SoCs and modules

Pre-Certified Wireless Software for Matter

Our SDKs provide pre-certified and tested wireless protocol stacks for Wi-Fi, Thread, Bluetooth LE, and Matter application layer firmware.


Silicon Labs wireless protocol stacks are tested and quality assured for full compliance, stability, and maximum performance to:




Increase overall product quality



Reduce development time and costs



Ensure that devices can pass final certifications on the first go

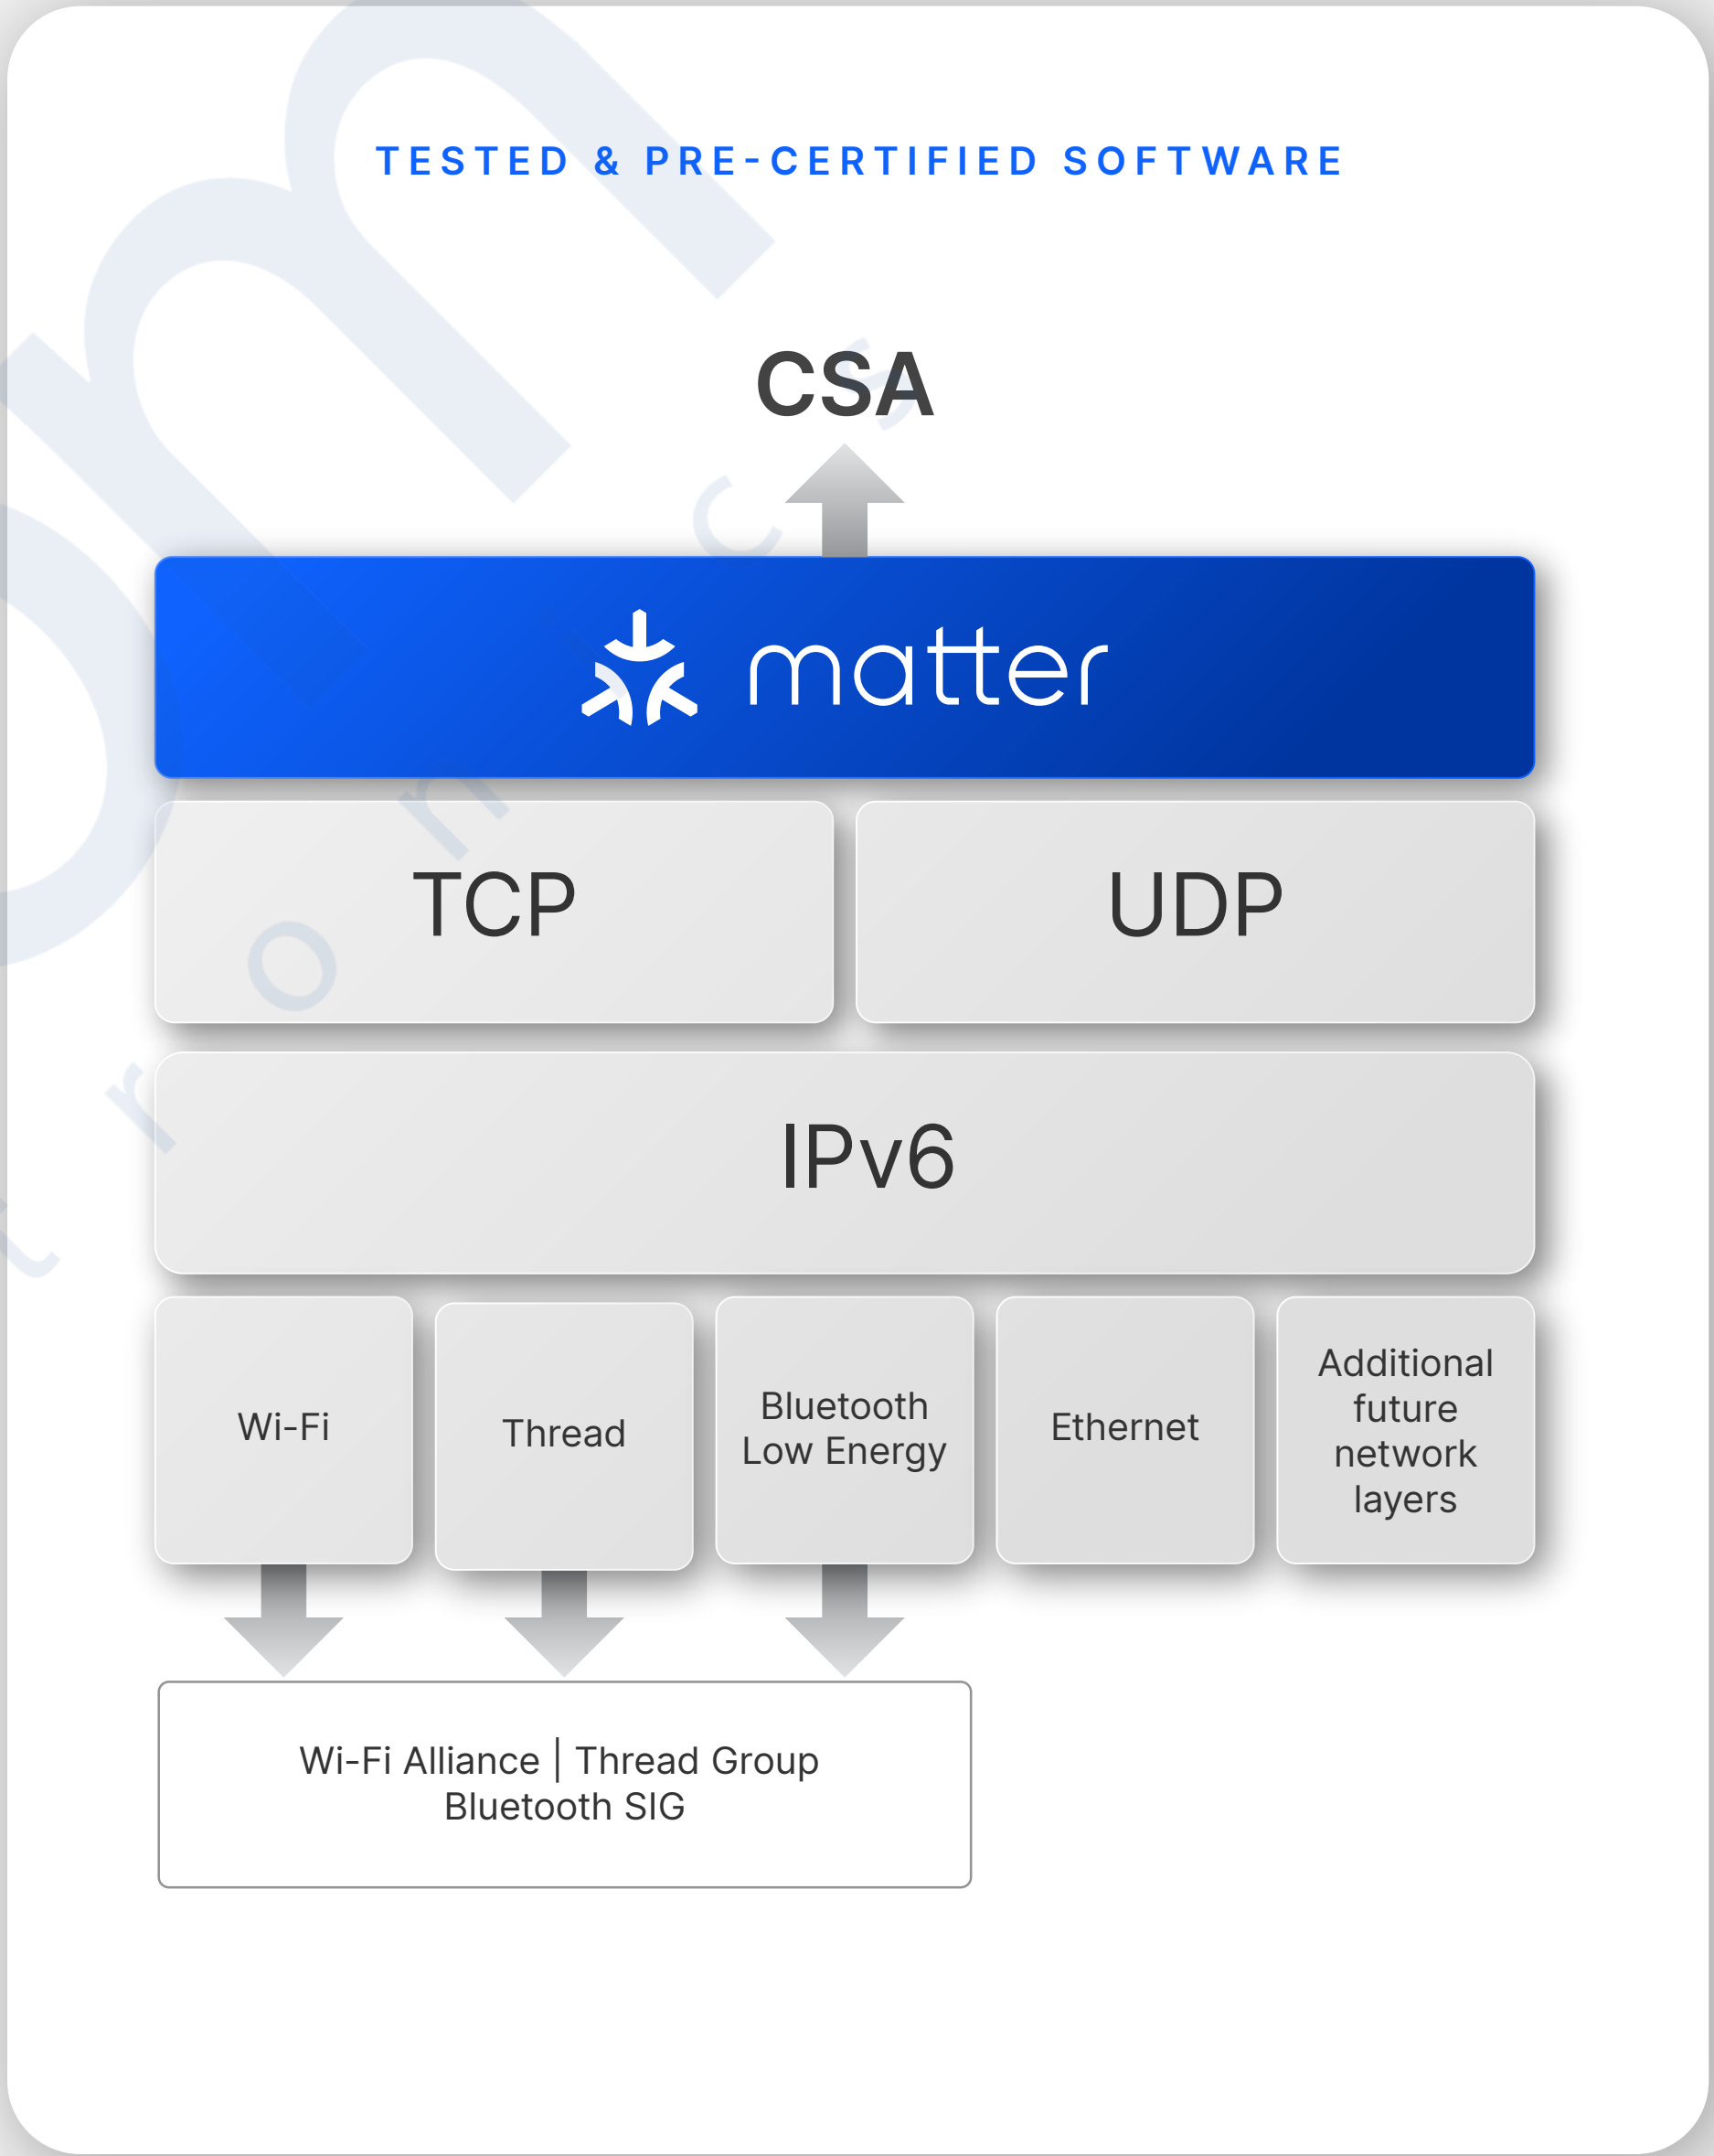

Matter Security Solutions



Fully Compliant

Secure Vault, PSIRT, and CPMS provide the functions needed to cover all mandatory, recommended, and optional security requirements of the Matter specification in one package



Most Advanced

Featuring advanced IoT security solutions, our MG24 supports the highest PSA Level 3 certification and SiWx917 features the IoT security



Always Up-to-Date

Continuously monitor vulnerabilities and receive timely security updates. With us, you get the best support service in the industry, with up to 10 years of longevity for software and security



Programmable

Safely program Matter certificates, keys, security settings, applications, and bootloaders on wireless SoCs to reduce risks, save costs, and accelerate production

Secure Programming



Ready to Ship

With CPMS, securely program all Matter certificates, security settings, keys, applications, and bootloaders. Onboarding Payload is provided for the QR code, so Matter products are ready to ship



Accelerate Production

Instead of separate programming and flashing (in-house/CM), Silicon Labs programs SoCs during production and can deliver Matter-related programming as part of the process; reduces risk, cost, and time-to-market



Reduce Risks

Wireless SoCs are delivered to the CM secured and programmed with an encrypted SW image, preventing counterfeiting and IP theft



Maximize Security


Achieve maximum protection with Silicon Labs Secure Vault, which is broadly recognized as the most advanced IoT security solution and is fully compliant with the Matter specification

Most Complete Matter Development Solution




Learn in Advance

Access the most comprehensive Matter developer journeys for popular ecosystems like Google, Amazon, Apple, and SmartThings; these journeys help development teams learn the entire process in advance to avoid common mistakes and plan resources wisely



Kits for all Use-cases

Leverage development kits for all Matter use cases: Matter over Wi-Fi, Matter over Thread, Border Router, Matter Bridge, and more



Tools for all

No Code to Pro Code, our Simplicity Studio can meet the demands of an RF specialist with no embedded code experience to a team of embedded developers



Advanced Development

Key features like our Packet Trace Interface for advanced network debug is critical for mesh networks like Matter over Thread, while our Energy Profiler can help deliver the lower power solution, extending battery life of both our Matter over Thread and Matter over Wi-Fi solutions

High-Performance, Low-Power Wireless SoCs for Thread and Wi-Fi


- Lowest power on the market for Wi-Fi
- Industry-leading wireless characteristics (TX power, RX sensitivity, etc.)
- Single-SoC Matter solutions with Bluetooth LE co-existence
- Integrated wireless MCUs with many add-ons: AI/ML, Sensor Hub, high-accuracy ADC, etc.
- Most advanced security with PSA Level 3 certification for Matter, Thread, Bluetooth LE

One of the first design considerations you'll encounter is what networking technologies best fit your application. Based on this, you then can decide if your project is best suited for a System-on-Chip (SOC) paradigm or a Network Coprocessor (NCP) paradigm and, for the NCP, what kind of serial communication to use for controlling the coprocessor. This design decision is critical because it will determine the requirements and constraints of both the software and the hardware.

For more information on how to approach this decision, you can read our [Software Design Fundamentals User Guide](#).



Current and Future Application Support

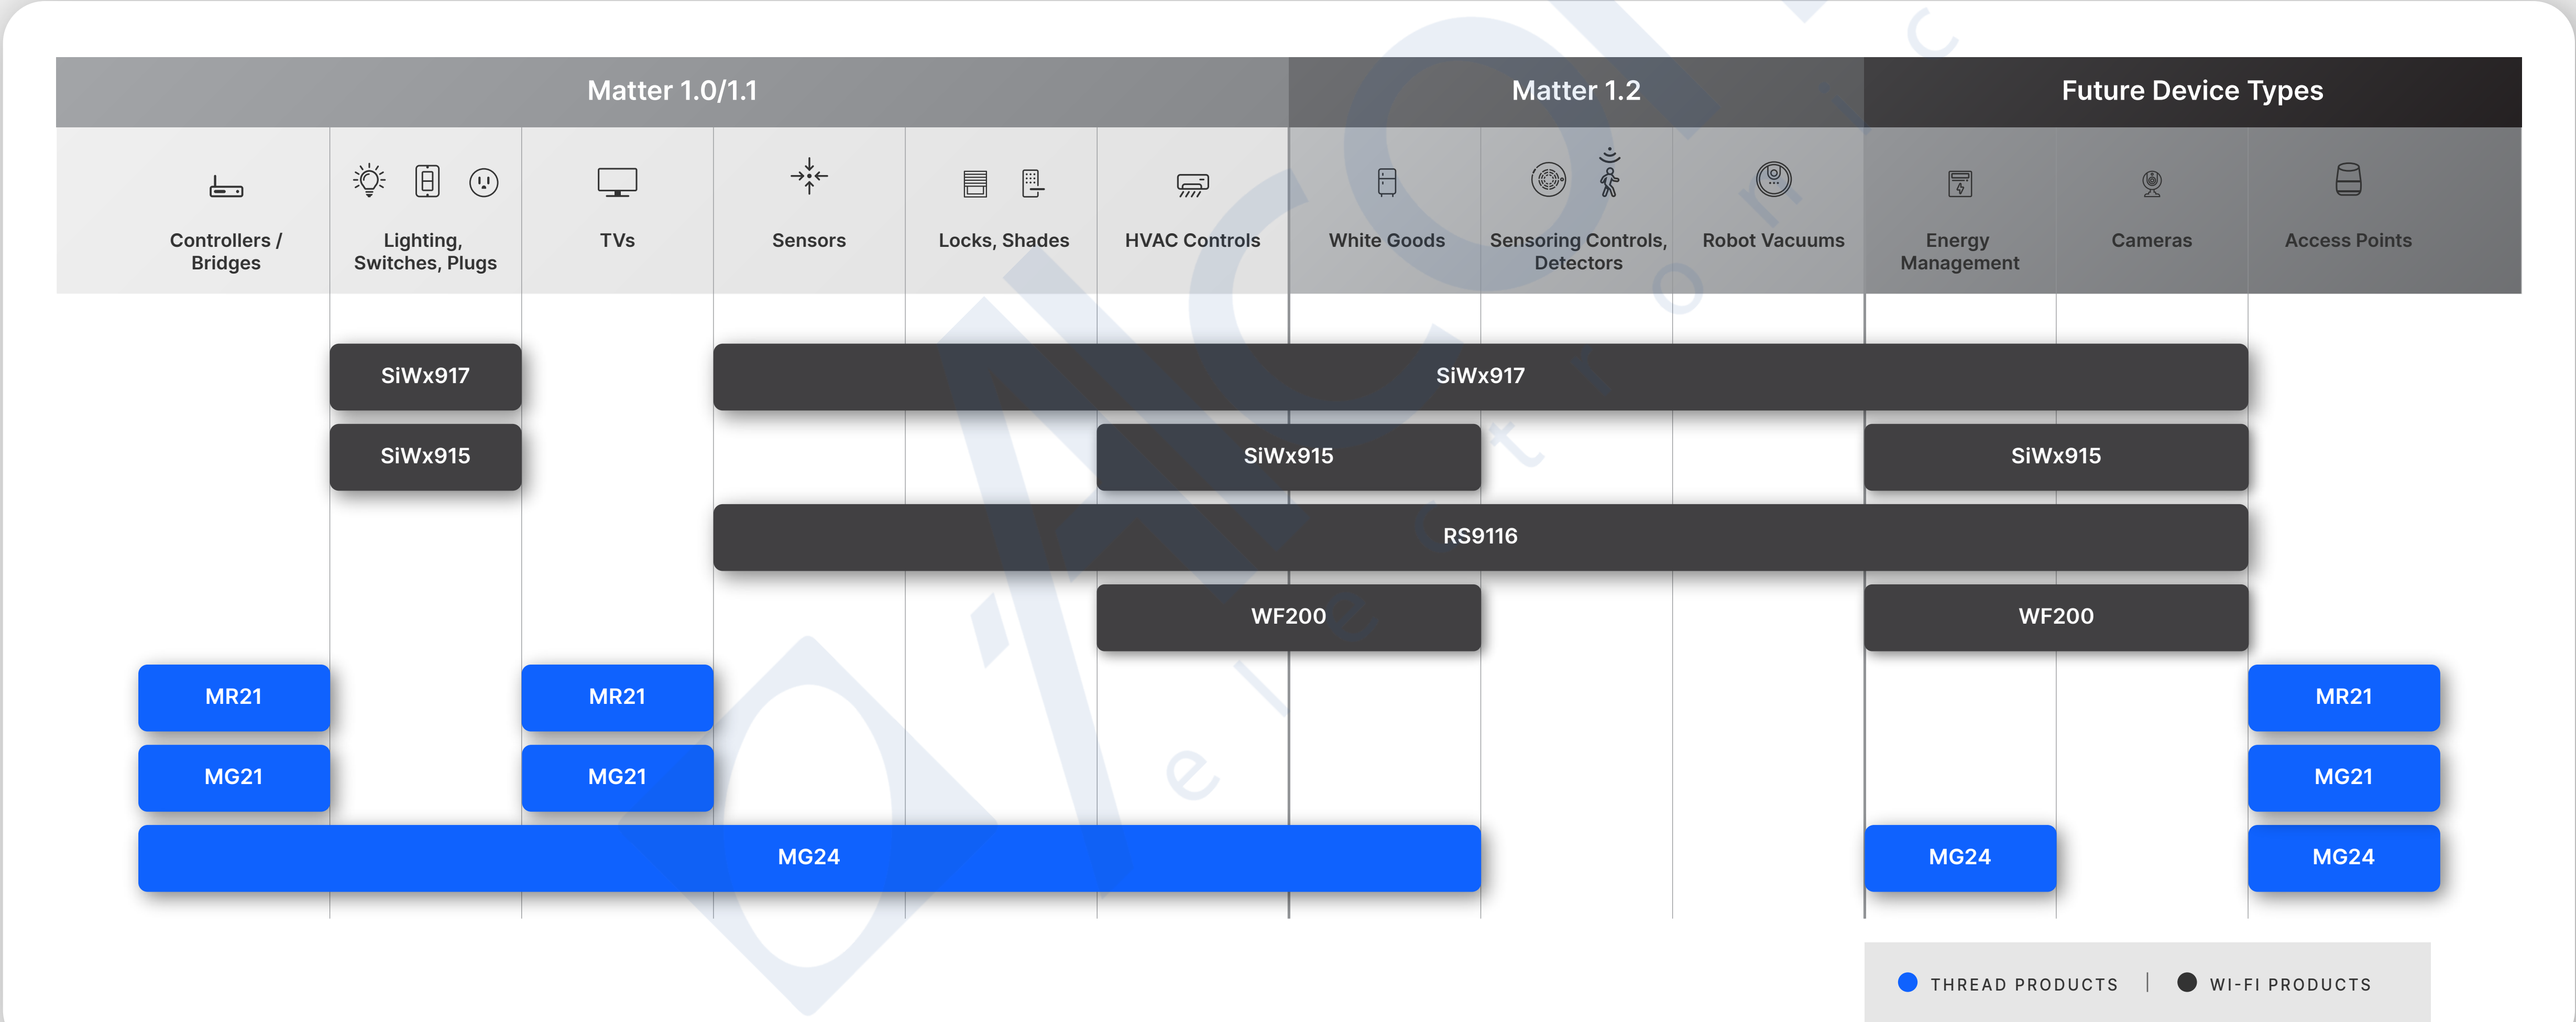

Silicon Labs Thread Solutions



Reliable, low-latency, and long-range Thread connectivity for SoC and RCP solutions

- +19.5 dBm output power
- Increased RF sensitivity

Single-SoC Matter solution

- Integrated Bluetooth LE Co-ex for easy commissioning

Matter-compliant security

- Secure Vault™ High supports the Matter hardware and software security requirements with PSA/SESIP Certification Level 3

Higher accuracy for industrial sensors

- 20-bit ADC for more granular output values

Extend product lifetime

- Large memory facilitating more features, smooth OTA updates, and longer product lifetime

Reduce BOM and PCB footprint while simplifying design

Faster AI/ML processing with lower energy consumption

- Integrated AI/ML hardware accelerator enables 2-4X faster ML inferencing and up to 6X lower power compared to non-accelerated processors (depends on the algorithm and model)

Memory – Flash 1536 kB, RAM 256 kB



High-performance and reliable Thread RCP solution for Matter gateways

- +20 dBm output power
- High RF sensitivity

Multiprotocol

- Bluetooth LE co-ex for easy device commissioning
- Zigbee

Improved Wi-Fi blocking performance

- Prevent interference by filtering out Wi-Fi signals

Secure Vault™ High

- The most advanced IoT security with PSA/SESIP Level 3

Memory — Flash 1024 kB, RAM 96 kB



High-performance and reliable Thread RCP solution for Matter gateways

- +20 dBm output power
- Increased RF sensitivity

Multiprotocol

- Bluetooth LE co-ex for easy device commissioning

Improved Wi-Fi blocking performance

- Prevent interference by filtering out Wi-Fi signals

Secure Vault™ Mid

- The most advanced IoT security with PSA/SESIP Level 2

Memory — Flash 512 kB, RAM 64 kB

Silicon Labs Wi-Fi Solutions



Lowest-power Wi-Fi 6 SoC battery-powered devices

Minimal battery replacement and recharging hassle for users

- Always-on cloud connectivity with minimal power
- Doubling the Wi-Fi 6 battery life compared to the nearest competing SoCs

Improved user experience with superior wireless performance and easy device commissioning

- Bluetooth LE co-existence for commissioning

Devices, users, and brand are protected from cyber threats

- Best-in-Class Security for Wi-Fi

Fully integrated wireless MCU

- Dual core with an application-dedicated ARM core
- High memory, PSRAM
- AI/ML, ultra-low-power sensor hub

Maximum Wi-Fi gateway compatibility

- Independently tested
- Reduce user frustration, customer care costs, and improve brand loyalty
- Comprehensive networking stack (TCP/IP, HTTP/HTTPS, MQTT, etc.)

Seamless integration with Silicon Labs development solutions

- Simplicity Studio 5 streamlines the development process, reducing costs and time-to-revenue



Energy-efficient Wi-Fi 6 SoC for line-powered devices

Improve user experience with exceptional wireless performance and easy device commissioning

- Always-on cloud connectivity
- Wi-Fi 6 for improved connectivity in high-density environments
- Better coverage for devices in every room of the house and beyond (2.4 GHz)
- Bluetooth LE co-ex for easy commissioning

Protect devices, users, brand, and revenue from cyber-threats

- Best-in-class security for Wi-Fi

Maximum Wi-Fi gateway compatibility, independently tested

- Reduce user frustration, customer care costs, and improve brand loyalty

Seamless integration with Silicon Labs development solutions

- Simplicity Studio 5 streamlines the development process, reducing cost and time-to-revenue



Ultra-low-power for Wi-Fi 4 on battery devices

- 55 μ A stand-by associated current at 1 sec

NCP Matter solutions only

Integrated Bluetooth LE Co-ex for easy commissioning

High-performance Wi-Fi connectivity

- +20 dBm TX, -98 dBm RX, 72 Mbps bandwidth with less power than competitors

Maximum Wi-Fi access point compatibility

- Independently tested across 100s of Wi-Fi access points for exceptional interoperability

Enterprise-level security

- TLS 1.0, TTLS, PEAP, WPA2/WPA3

Pre-certified stack by Wi-Fi Alliance

- Making your end-product certification easier (Est. Q1 2023)

Comprehensive networking stack

- Offloads the main MCU with TCP/IP (IP v4), SSL 3.0/TLS 1.2, HTTP/HTTPS, Web sockets, DHCP, MQTT Client

Matter 1.0/1.1 Device Types

 Controllers / Bridges	 Lighting, Switches, Plugs	 TVs	 Sensors	 Locks, Shades	 HVAC Controls
MG24 High-perf Thread RCP, Bluetooth LE co-ex Low power, long battery life Long-range, +19.5 dBm TX AI/ML High PSA L3 security	SiWx917 Single-SoC Matter solution Lowest-power Wi-Fi 6 for battery devices Bluetooth LE co-ex Best Wi-Fi IoT security AI/ML CA Title 20	MG24 High-perf Thread RCP, Bluetooth LE co-ex Long-range, +19.5 dBm TX AI/ML High PSA L3 security	SiWx917 Single-SoC Matter solution Lowest-power Wi-Fi 6 for battery devices Bluetooth LE co-ex AI/ML Best Wi-Fi IoT security ULP Sensor Hub 16-bit ADC	SiWx917 Lowest-power Wi-Fi 6 for battery devices Single-SoC Matter solution Bluetooth LE co-ex AI/ML Best Wi-Fi IoT security	SiWx917 Single-SoC Matter solution Lowest-power Wi-Fi 6 for battery devices AI/ML Best Wi-Fi IoT security ULP Sensor Hub
MG21 Thread RCP for gateways Bluetooth LE co-ex & Multiprotocol Long range, +20 dBm TX Low power, long battery life High PSA L3 security		MG21 Thread RCP for gateways Bluetooth LE co-ex & Multiprotocol Long range, +20 dBm TX High PSA L3 security		SiWx915 Single-SoC Matter solution Wi-Fi 6 for line devices Bluetooth LE co-ex Best Wi-Fi IoT security	SiWx915 Single-SoC Matter solution Wi-Fi 6 for line devices Bluetooth LE co-ex Best Wi-Fi IoT security
MR21 Thread RCP for gateways Bluetooth LE co-ex Low power, long battery life Long range, 20 dBm TX Secure Vault Mid	SiWx915 Wi-Fi 6 for line devices Single-SoC Matter solution Bluetooth LE co-ex Best Wi-Fi IoT security CA Title 20	MR21 Thread RCP for gateways Bluetooth LE co-ex Long range, +20 dBm TX Secure Vault Mid	MG24 Thread SoC for battery devices Low power, long battery life Long-range, +19.5 dBm TX Bluetooth LE co-ex AI/ML High PSA L3 security High-accuracy ADC	RS9116 Lowest power Wi-Fi 4 & Bluetooth LE co-ex for battery devices Matter NCP solution Comprehensive networking stack	RS9116 Lowest power Wi-Fi 4 & Bluetooth LE co-ex for battery devices Matter NCP solution Comprehensive networking stack
				WF200 Low-power Wi-Fi 4 only for battery & line devices Matter RCP solution MCU offload Small 4 × 4 mm	WF200 Low-power Wi-Fi 4 only for battery & line devices Matter RCP solution MCU offload Small 4 × 4 mm
				MG24 Thread SoC for battery devices Low power, Long battery life Long-range, +19.5 dBm TX Bluetooth LE co-ex AI/ML High PSA L3 security	MG24 Single-SoC Matter/Thread solution Low power, long battery life Long-range, +19.5 dBm TX Bluetooth LE co-ex AI/ML High PSA L3 security High-accuracy ADC

Matter 1.2

Future Device Types

White Goods	Robot Vacuums	Sensing Controls, Detectors	Energy Management	Cameras	Access Points
SiWx917 Lowest-power Wi-Fi 6 for battery devices 86 Mbps Single-SoC Matter solution Bluetooth LE co-ex AI/ML Best Wi-Fi IoT security ULP Sensor Hub q SiWx915 Wi-Fi 6 for line devices 86 Mbps Single-SoC Matter solution Bluetooth LE co-ex Best Wi-Fi IoT security RS9116 Lowest power Wi-Fi 4 and Bluetooth LE co-ex for battery devices Matter NCP solution Comprehensive networking stack 72 Mbps WF200 Low-power Wi-Fi 4 only for battery and line devices Matter RCP solution MCU offload 72 Mbps Small 4 × 4 mm	SiWx917 Lowest-power Wi-Fi 6 for battery devices Single-SoC Matter solution Bluetooth LE co-ex AI/ML Best Wi-Fi IoT security RS9116 Thread SoC for battery devices Low power, long battery life Long-range, +20 dBm TX Bluetooth LE co-ex AI/ML High PSA L3 security	SiWx917 Lowest-power Wi-Fi 6 for battery devices Single-SoC Matter solution Bluetooth LE co-ex AI/ML Best Wi-Fi IoT security ULP Sensor Hub 16-bit ADC MG24 Thread SoC for battery devices Low power, long battery life Long-range, +19.5 dBm TX Bluetooth LE co-ex AI/ML High PSA L3 security High-accuracy ADC	SiWx917 Lowest-power Wi-Fi 6 for battery devices 86 Mbps Single-SoC Matter solution Bluetooth LE co-ex AI/ML Best Wi-Fi IoT security ULP Sensor Hub SiWx915 Wi-Fi 6 for line devices 86 Mbps Single-SoC Matter solution Bluetooth LE co-ex Best Wi-Fi IoT security RS9116 Lowest power Wi-Fi 4 & Bluetooth LE co-ex for battery devices Matter NCP solution Comprehensive networking stack 72 Mbps WF200 Low-power Wi-Fi 4 only for battery and line devices Matter RCP solution MCU offload 72 Mbps Small 4 × 4 mm	SiWx917 Lowest-power Wi-Fi 6 for battery devices 86 Mbps Single-SoC Matter solution Bluetooth LE co-ex AI/ML Best Wi-Fi IoT security ULP Sensor Hub SiWx915 Wi-Fi 6 for line devices 86 Mbps Single-SoC Matter solution Bluetooth LE co-ex Best Wi-Fi IoT security RS9116 Lowest power Wi-Fi 4 & Bluetooth LE co-ex for battery devices Matter NCP solution Comprehensive networking stack 72 Mbps WF200 Low-power Wi-Fi 4 only for battery and line devices Matter RCP solution MCU offload 72 Mbps Small 4 × 4 mm	MG24 High-perf Thread RCP, Bluetooth LE co-ex Low power, long battery life Long-range, +19.5 dBm TX AI/ML High PSA L3 security MG21 Thread RCP for gateways Bluetooth LE co-ex and Multiprotocol Long range, +20 dBm TX Low power, long battery life Secure Vault High MR21 Thread RCP for gateways Bluetooth LE co-ex Low power, long battery life Long range, 20 dBm TX Secure Vault Mid

MG24 vs. MG21 vs. MR21



	MG24	MG21	MR21
Protocol Support	RCP	Multiprotocol, Proprietary	Bluetooth (HCI)
	SoC - Dynamic Multiprotocol w/ Bluetooth LE Supports OTA with internal flash	Bluetooth, Thread, and Zigbee (NCP and SoC) Matter (RCP only)	OpenThread (RCP multi-PAN) Zigbee1 (RCP - requires separate license for Zigbee stack) Matter over Thread (RCP multi-PAN + BT HCI)
Frequency Bands	2.4 GHz	2.4 GHz	2.4 GHz
Core	Cortex-M33 (78 MHz)	Cortex-M33 (80 MHz)	Cortex-M33 (80 MHz)
Max Flash	1536 kB	1024 kB	512 kB
Max RAM	256 kB	96 kB	64 kB
Security	Secure Vault Mid	Secure Vault Mid	Secure Vault Mid
	Secure Vault High	Secure Vault High	
Rx Sensitivity (15.4)	-105.4 dBm	-104.5 dBm	-104.3 dBm
Rx Sensitivity (Bluetooth LE 1Mbps)	-97.6 dBm	-97.5 dBm	-97.1 dBm
Active Current	33.4 µA/MHz	59.8 µA/MHz	59.7 µA/MHz
Sleep Current (EM2, 16 kB ret)	1.3 µA	4.5 µA	25 µA
TX Current @ +0 dBm (2.4 GHz)	5.0 mA	9.3 mA	9.3 mA
TX Current @ +10 dBm (2.4 GHz)	19.1 mA	34 mA	60.8 mA (+20 dBm OPN)
TX Current @ +20 dBm (2.4 GHz)	156.8 mA	185 mA	186.5 mA
RX Current (802.15.4)	5.1 mA	9.5 mA	9.5 mA
RX Current (Bluetooth LE 1 Mbps)	4.4 mA	8.8 mA	8.8 mA
Serial Peripherals	USART, EUSART, I2C	USART, I2C	USART
Analog Peripherals	20-bit ADC, ACMP, VDAC	12-bit ADC, ACMP	
Other	Die Temp Sensor	Die Temp Sensor	Die Temp Sensor
Operating Voltage	1.71 to 3.8 V	1.71 to 3.8 V	1.71 to 3.8 V
GPIO	26, 28/32	20	20
Package	5×5 QFN40, 6×6 QFN48 12.9×15.0 PCB Module	4×4 QFN32	4×4 QFN32

917 vs.
915 vs.
RS9116



Parameter	SiWx917	SiWx915	RS9116
Sampling / In-Production	Sampling now, Q4 2023	Sampling/IP: Q1, 2024	In production
RF Bands (GHz)	2.4 GHz	2.4 GHz	2.4 GHz, 5 GHz (Modules)
Wi-Fi Generation / Bandwidth	Wi-Fi 6 / 20 MHz (OFDMA, MU-MIMO, TWT)	Wi-Fi 6 / 20 MHz (OFDMA, MU-MIMO, TWT)	Wi-Fi 4 / 20 MHz
Bluetooth Support	Bluetooth LE 5.1	Bluetooth LE 5.1	BT (SPP, A2DP), Bluetooth LE 5
Modes of Operation	RCP, NCP, SoC	RCP, NCP, SoC	RCP, NCP
Temperature Range	-40 to 105° C	-40 to 85° C	-40 to 85° C
PSRAM, AI/ML	Yes	No	No
Embedded SRAM and FLASH	672 kB and up to 8 MB; opt ext. flash	672 kB and up to 4 MB; opt ext. flash	384 kB and 4 MB
NWP Type / Speed (MHz)	TA-4T / 160 MHz	TA-4T / 160 MHz	TA-4T / 160 MHz
MCU Type / Speed (MHz)	Cortex M4F / 180 MHz	Cortex M4F / 180 MHz	N/A
Security	WPA2/WPA3, SSL/TLS 1.3 PSA-L2 TRNG, PUF, Secure Boot, Secure OTA, Secure Zone, Secure XIP (AES-XTS), Advanced Crypto	WPA2/WPA3, SSL/TLS 1.3 PSA-L2 TRNG, PUF, Secure Boot, Secure OTA, Secure Zone (TEE), Secure XIP (AES-XTS), Advanced Crypto	WPA2/WPA3, SSL/TLS 1.2
Max GPIO (GPIO Multiplexer)	46	22	N/A
IC Pkg	7×7 QFN84, PCB Module	6×6 QFN52, PCB Module	7×7 QFN84, SiP and PCB Modules
WLAN Max Tx Power / Rx Sens	21 dBm / -98 dBm	21 dBm / -98 dBm	20 dBm / -98 dBm
Power Modes	Ultra-Low-Power	Low-Power	Ultra-Low-Power
Target Applications	Door Locks, HVAC, Portable Medical, Sensors, Cameras, Switches, Power Tools, Asset Monitoring, Fleet Management, Clinical Medical, Metering	Appliances, HVAC, Portable Medical, Cameras, Switches, Power Tools, Asset Monitoring, Fleet Management, Clinical Medical, Metering	Speakers, Door Locks, HVAC, Portable Medical, Wearables, Power Tools, Asset Monitoring, Fleet Management, Clinical Medical

Solutions for All Matter Use-Cases


Development solutions for all Matter use-cases:

- Matter over Wi-Fi
- Matter over Thread
- OpenThread Border Routers
- Matter Bridge for Zigbee and Z-Wave

AVAILABLE NOW
Matter Development Solutions


Matter Border Router / Bridge

Matter | Thread | Bluetooth

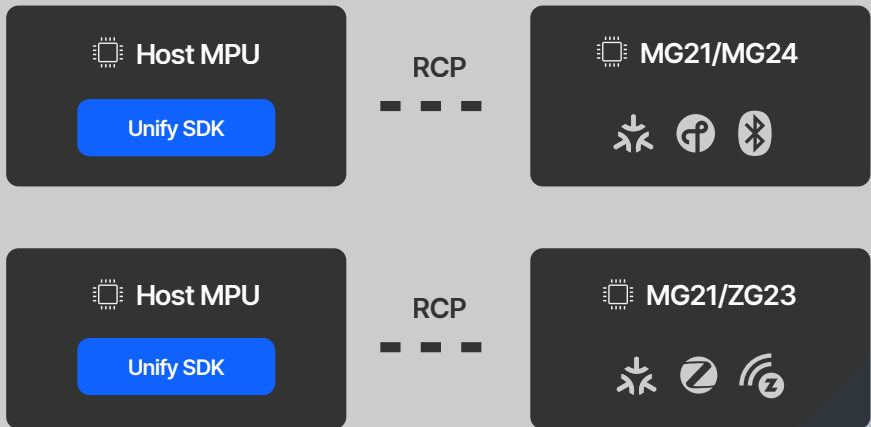

Matter over Wi-Fi 4 (End Node)

Matter | Wi-Fi | Bluetooth

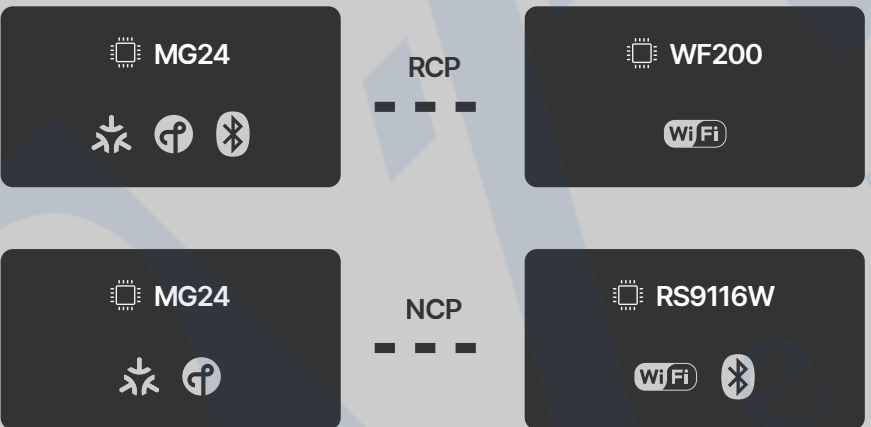

Matter over Wi-Fi 6 (End Node)

Matter | Wi-Fi | Bluetooth



Matter over Thread (End Node)

Matter | Thread | Bluetooth



Solutions for Matter Over Thread



Pro Kit

EFR32xG24

Pro Kit with the MG24 SoC and BRD4187C Radio Board is THE development tool for Matter innovators! All tools for developing wireless applications. Enhance with Add-on radio boards!



[Learn More](#)

Dev Kit

EFR32xG24

A small, cost-effective, and feature-rich development kit based on the MG24 SoC for prototyping and experimenting with energy-friendly Matter devices; supports Qwik and Ada Fruit boards




[Learn More](#)

Explorer Kit

EFR32xG24

An ultra-low-cost board for rapid Matter prototyping and concept creation on the MG24 SoC

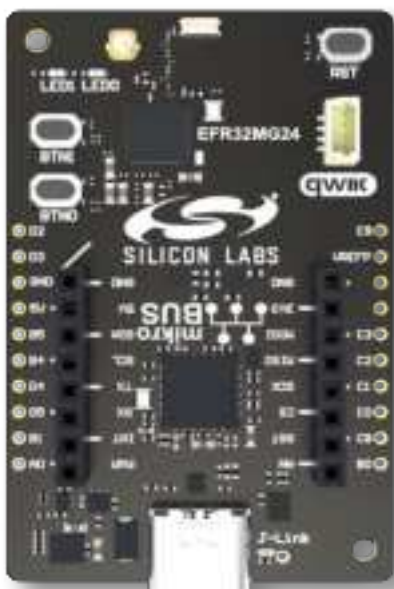

[Learn More](#)

Solutions for Matter Over Thread


Pro Kit Add-Ons



Radio Board

+10 dBm EFR32xG24 Wireless 2.4 GHz

Works with the MG24 Pro Kit; supports Bluetooth LE, Thread, Matter, and other protocols

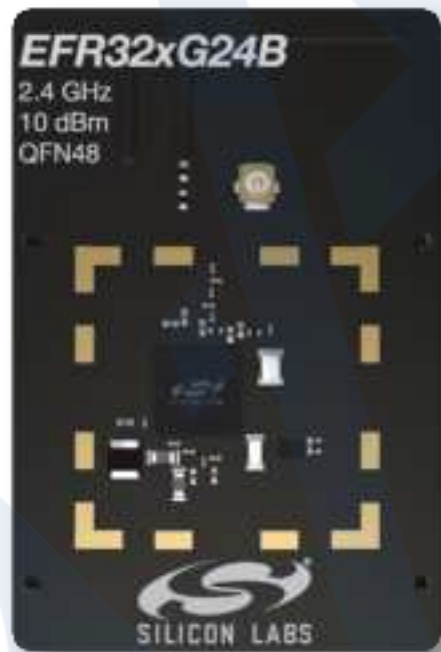

[Learn More](#)

Antenna Diversity

+20 dBm EFR32xG24 Wireless 2.4 GHz

Established for antenna diversity development; designed for managing multipath fading on the MG24 Pro Kit (includes reference)




[Learn More](#)

Radio Board

+20 dBm EFR32xG24 Wireless 2.4 GHz

Works with the MG24 Pro Kit to support Bluetooth LE, Thread, Matter, and other protocols

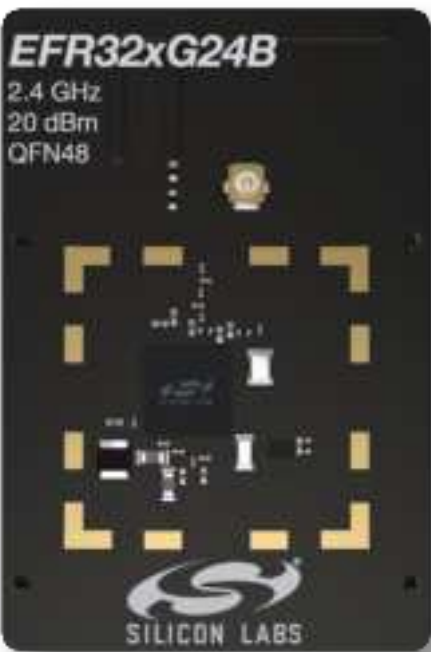


[Learn More](#)

Solutions for Matter Over Wi-Fi



SiWx917 Dev Kit for SoC Mode

Radio board with SiWx917 that plugs into the Pro Kit baseboard; radio board provides access to the SiWx917 MCU peripherals and the internal application MCU for development using Simplicity Studio IDE and Debugger

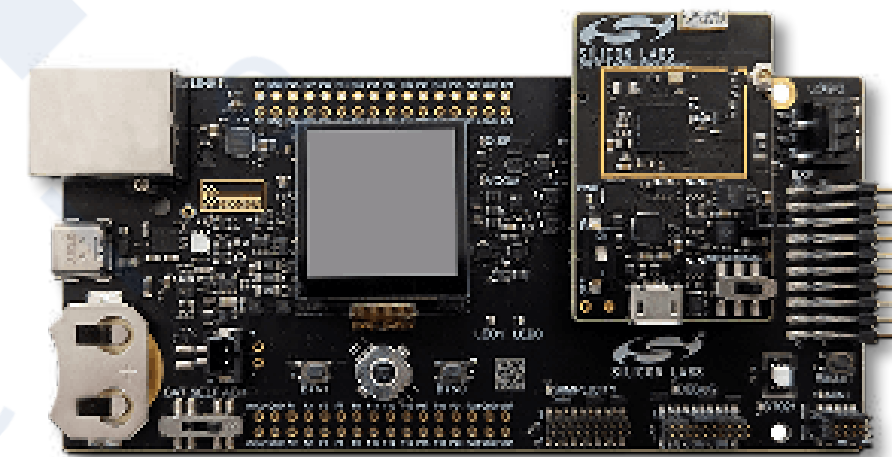

SiWx917 Dev Kit for NCP/RCP Modes

For RCP and NCP hosted modes of operation, the expansion board plugs into an existing EFR32MG24 Pro Kit to enable the development of hosted applications, including Matter on the MG24



Solutions for Matter Over Wi-Fi



RS9116X EVK2 Wi-Fi + Bluetooth Dev Kit

Works with the MG24 Pro Kit;
supports Bluetooth LE, Thread, Matter,
and other protocols



[Learn More](#)

RS9116X EVK1 Wi-Fi + Bluetooth Dev Kit

Established for antenna diversity development;
designed for managing multipath fading on the
MG24 Pro Kit (includes reference)



[Learn More](#)

RS9116X Dual Band Wi-Fi + Bluetooth Development Kit (CC1 Module)

Supports Dual Band Wi-Fi 4 802.11 a/b/g/n
on the 2.4 & 5 GHz bands and dual-mode
Bluetooth, allowing designers to develop
applications for the RS9116 CCx modules



[Learn More](#)

Solutions for Matter Over Wi-Fi



SLEXP8022C - WF200 Wi-Fi Expansion Kit with Raspberry Pi

Allows development on the WF200 Series of Wi-Fi Transceiver SoCs; includes a built-in Raspberry Pi Connector to get started immediately with Linux development and an EXP Connector to enable development on Silicon Labs' MCUs and Wireless MCUs



[Learn More](#)

SLEXP8023C - WFM200S Wi-Fi Expansion Kit with Raspberry Pi

Enables development for the WFM200S Wi-Fi Transceiver modules



[Learn More](#)

About Silicon Labs

Silicon Labs is the leading provider of silicon, software, and solutions for a smarter, more connected world. Our industry-leading wireless solutions feature a high level of functional integration. Multiple complex mixed-signal functions are integrated into a single IC or system-on-chip (SoC) device, saving valued space, minimizing overall power consumption requirements, and improving products' reliability. We are the trusted partner for the world-leading consumer and industrial brands. Our customers develop solutions for a wide range of applications, from medical devices to smart lighting to building automation, and much more.

