



Sound Control Technologies

RCU2E-B30™ USB Application Guide

Updated: 10/10/2023

AVer Cam550



The **RCU2S-B30™** supports multiple camera models:

- 1Beyond IV-CAMFR-12
- AVer Cam520 Pro Advanced
- 1Beyond IV-CAMA3-20
- AVer Cam550
- AVer Cam570

RCC-M004-0.3M

USB-A (RCU2E-CE™) to USB-B

RCC-C002-0.3M

RJ45 (RCU2E-CE™) to RJ45

PPC-003-0.3M

DC Power Plug (RCU2E-CE™)
To DC Power Plug




RCU2E-CE™



SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable

T568A or T568B (100m Max Length)

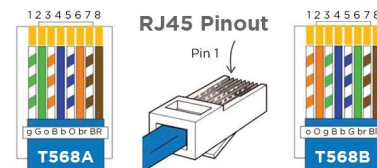

RCU2E-HE™ Front Panel

Field-Upgradeable microSD Slot

RCU2E-HE™



SCTLink™ Cable

Power, Control & Video

The **SCTLink™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply



Laptop



RCC-M004-1.0M

USB-B (RCU2E-HE™) to USB-A

RCC-M014-1.0M

USB-B (RCU2E-HE™) to USB-C

RCC-H016-1.0M

RJ45 (RCU2E-CE™) to RJ45

Module Dimensions

RCU2E-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2E-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)