DUSK TO DAWN LED LIGHT







FEATURES

- IP65 rated, built-in Dusk to Dawn Photocell function
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Area Lighting
- Barn Lighting
- House Lighting
- Building Lighting
- Warehouse Lighting
- Wall Lighting

CONSTRUCTION:

• Heavy die-cast aluminum alloy housing with bronze powder-coated finish.

OPTICAL SYSTEM:

- Lumileds 3030LED chips
- High quality frosted PC cover optics
- 154.3° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

- Available as 120-277V input
- -4°F to 113°F

INSTALLATION & MOUNTING:

Wall mount / Bend pipe pole mounting for easy installation.

PERFORMANCE

	Model NO	Photocell Control	Wattage	Voltage/Current Input		Light Efficiency	Kelvin Options
ı				120V	277V	Light Efficiency	Kelvili Optiolis
	LS-STL55W-50K	3fcON/ 13fc OFF	55W	0.45A	0.19A	130LM/W	5000K



Photocell Control



Built in Photocell function

Motion Sensor




Bend pole for lamp easy installation

Electric Characteristic


c .c /a			
Specification/Model	LDS-2STL-55W-120V-50K-U		
LED Driver	UL listed KHM Brand		
Input Power	55W		
Lumens Output	7150LM		
Efficiency	130LM/W		
CRI	>72		
Color Temperature	5000K		
Input Voltage	120-277VAC		
Light Distribution Type	135D		
Working Temperature	-4~+113°F <167°F ≥90%		
Junction Temperature			
Lamps Efficiency			
Certificate	ETL CETL DLC		
Equivalent	100-150W MH/HPS		

Dimension

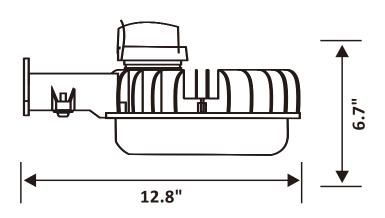

Distribution Diagram

LDS-2STL-55W-120V-50K-U



AVERAGE BEAM ANGLE (50%): 154.3°


Test Number: LS-STL55W-50K Lumens: 7150LM Test Number: 55W Test Number: 5000K -- C0/180,135 -- C30/210,103.8 -- C60/240,104.3 -- C90/270,135.3

UNIT:CD

Installation Instruction

- 1. Dusk-to-dawn LED Outdoor Barn Light luminaire features a design that can be mounted to any vertical surface using lag bolts or other comparable and suitable anchors, with a wiring compartment that is easily accessible without the need to remove the lens or disassemble the fixture.
- 2. Dusk-to-dawn LED Outdoor Barn Light can also be mounted to existing 1-1/2" or 1-5/8" pipe mounts, offering the installer the flexibility to satisfy many different mounting applications and requirements.
- 3. This is especially useful when using the LED Outdoor Barn Light to retrofit older dusk-to dawn luminaires.

Wall Mounting

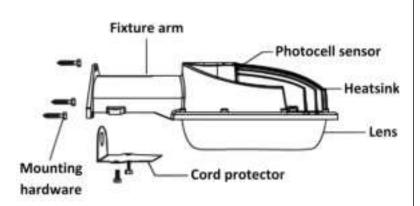

Arm Mounting

