



RADIO TEST REPORT

For

Shenzhen CYX Industrial Co., Ltd.

Laptop

Test Model: AX15

Additional Model No.: Please Refer to Page 6

Prepared for : Shenzhen CYX Industrial Co., Ltd.
Address : Floor 2, Building A, Xiazao Digital Industrial Park, No. 8
Huali Road, Gaofeng Community, Dalang Street,
Longhua District, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C,
Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : September 23, 2023
Number of tested samples : 2
Sample No. : A09013266-1, A09013266-2
Serial number : Prototype
Date of Test : September 23, 2023 ~ October 08, 2023
Date of Report : October 09, 2023



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity

**RADIO TEST REPORT****MIC Notice No.88 Appendix No.43**

Second-Generation Low-Power Data Communication System/Wireless LAN System

Report Reference No. : LCSA09013266EC**Date of Issue..... : October 09, 2023****Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.****Address..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China****Testing Location/ Procedure ... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □****Applicant's Name..... : Shenzhen CYX Industrial Co., Ltd.****Address..... : Floor 2, Building A, Xiazao Digital Industrial Park, No. 8 Huali Road, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China****Test Specification****Standard : MIC Notice No.88 Appendix No.43****Test Report Form No. : LCSEMC-1.0****TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.****Master TRF..... : Dated 2011-03****Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Laptop**Trade Mark : ACEMAGIC****Test Model..... : AX15****Ratings..... : Input: 19V=2.1A**

For AC Adapter Input: 100-240V~, 50/60Hz, 1.5A

Adapter Output: 19V=2100mA

DC 7.6V by Rechargeable Li-ion Battery, 5000mAh

Result : Positive**Compiled by:**

Jack Liu/ Administrator

Supervised by:

Cary Luo/ Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



RADIO -- TEST REPORT

Test Report No. : LCSA09013266ECOctober 09, 2023

Date of issue

Test Model : AX15

EUT..... : Laptop

Applicant..... : Shenzhen CYX Industrial Co., Ltd.

Address..... : Floor 2, Building A, Xiazao Digital Industrial Park, No. 8 Huali Road, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen CYX Industrial Co., Ltd.

Address..... : Floor 2, Building A, Xiazao Digital Industrial Park, No. 8 Huali Road, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China

Telephone..... : /

Fax..... : /

Factory..... : Shenzhen CYX Industrial Co., Ltd.

Address..... : Floor 2, Building A, Xiazao Digital Industrial Park, No. 8 Huali Road, Gaofeng Community, Dalang Street, Longhua District, Shenzhen, China

Telephone..... : /

Fax..... : /

Test Result**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	October 09, 2023	Initial Issue	---



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. DESCRIPTION OF DEVICE (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	8
1.3. EXTERNAL I/O CABLE	8
1.4. DESCRIPTION OF TEST FACILITY	8
1.5. TEST CONDITIONS	9
1.6. FREQUENCY OF CHANNELS	9
2. TEST METHODOLOGY	10
2.1. EUT EXERCISE	10
2.2. MEASUREMENT UNCERTAINTY	10
2.3. TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	10
2.4. DESCRIPTION OF TEST MODES	11
2.5. TEST VOLTAGE	11
3. SYSTEM TEST CONFIGURATION	12
3.1. JUSTIFICATION	12
3.2. EUT EXERCISE SOFTWARE	12
3.3. SPECIAL ACCESSORIES	12
3.4. BLOCK DIAGRAM/SCHEMATICS	12
3.5. EQUIPMENT MODIFICATIONS	12
4. SUMMARY OF TEST RESULTS	13
5. TEST RESULT	14
5.1. FREQUENCY TOLERANCE	14
5.2. ANTENNA POWER	15
5.3. OCCUPIED FREQUENCY BANDWIDTH	17
5.4. SPREAD BANDWIDTH	18
5.5. TRANSMITTER SPURIOUS EMISSIONS (CONDUCTED)	19
5.6. CARRIER SENSING FUNCTION	20
5.7. INTERFERENCE PREVENTION FUNCTION	22
5.8. SECONDARY RADIATED EMISSIONS	23
6. PHOTOGRAPHS OF TEST SETUP	24
7. EXTERNAL PHOTOGRAPHS OF THE EUT	24
8. INTERNAL PHOTOGRAPHS OF THE EUT	24
9. LIST OF MEASURING EQUIPMENTS	24





1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Laptop
Test Model	: AX15
Additional Model No.	: AX16,AX17,AX15PRO,AX16PRO,AX17PRO,CX16S,TX15,TX16 ,TX17,RX15,RX16,RX17,ANL5,ANL6,A2301,A2302,A2303,A270 1,A2702,A2703,NA1401,NA1402,NA1501,NA1502,NA1503,NA1 601,NA1602,NA1603,NA1701,NA1702
Model Declaration	: PCB board, structure and internal of these model(s) are the same, So no additional models were tested
Power Supply	: Input: 19V $\Rightarrow$ 2.1A For AC Adapter Input: 100-240V~, 50/60Hz,1.5A Adapter Output: 19V $\Rightarrow$ 2100mA DC 7.6V by Rechargeable Li-ion Battery,5000mAh
Hardware Version	: DNN21S-V11
Software Version	: /

Bluetooth

Frequency Range	: 2402-2480MHz for Bluetooth (79 channels for Bluetooth V5.0(BDR/EDR) Channel Frequency=2402+(K-1), K=1, 2, 379 40 channels for Bluetooth V5.0(BT LE/BT 2LE) Channel Frequency=2402+2(K-1), K=1, 2, 340
Declared Antenna Power	: Bluetooth V5.0(BDR/EDR): 0.02mW/MHz Bluetooth V5.0(BT LE): 1.0mW
Modulation Technology	: Bluetooth V5.0(BDR/EDR): GFSK, $\pi/4$ -DQPSK, 8-DPSK Bluetooth V5.0(BT LE): GFSK
Data Rate	: Bluetooth V5.0(BDR/EDR): 1/2/3Mbps Bluetooth V5.0(BT LE): 1Mbps
Antenna Description	: PIFA Antenna, 0.65dBi(Max.)

WIFI (2.4G Band)

Frequency Range	: 2412-2472MHz for 802.11b/g/n(HT20) 2422-2462MHz for 802.11n(HT40)
Channel Spacing	: 5MHz
Channel Number	: 13 Channel for 802.11b/g/n(HT20)(2412~2472MHz) 9 channels for 802.11n(HT40) (2422~2462MHz)
Modulation Type	: 802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Declared Antenna Power	: 802.11b: 4.0mW/MHz 802.11g: 6.0mW/MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



802.11n(HT20): 9.0mW/MHz
802.11n(HT40): 5.0mW/MHz
Antenna Description : Antenna 1: PIFA Antenna, 0.61dBi (max.)
Antenna 2: PIFA Antenna, 0.65dBi (max.)

WIFI (5.2G Band)

Frequency Range : 5180-5240MHz

Channel Number : 4 Channel for 20MHz bandwidth(5180-5240MHz)
2 Channel for 40MHz bandwidth(5190-5230MHz)
1 Channel for 80MHz bandwidth(5210MHz)

Modulation Type : 802.11a/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)

Declared Antenna Power : 802.11a: 4.0mW/MHz
802.11n(HT20): 5.0mW/MHz
802.11n(HT40): 4.0mW/MHz
802.11ac(VHT20): 4.0mW/MHz
802.11ac(VHT40): 3.0mW/MHz
802.11ac(VHT80): 1.0mW/MHz

Antenna Description : Antenna 1: PIFA Antenna, 3.53dBi (max.)
Antenna 2: PIFA Antenna, 1.57dBi (max.)





1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Shenzhen Jihongda Power Co.,Ltd.	AC/DC ADAPTER	JHD-AP045C-190 210-AF	---	PSE

1.3. External I/O Cable

I/O Port Description	Quantity	Cable
TF Card Port	1	N/A
USB Port	3	N/A
Headset Port	1	N/A
Type-C USB Port	2	N/A
HDMI Port	1	N/A

1.4. Description of Test Facility

FCC Registration Number is 254912.

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Industry Canada Registration Number is 9642A.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



1.5. Test Conditions

Temperature Range	:	21-25°C
Humidity Range	:	45-85%
Pressure Range	:	86-106kPa

1.6. Frequency of Channels

802.11b/g/n (HT20)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	--	--

802.11n (HT40)

Channel	Frequency(MHz)	Channel	Frequency(MHz)
--	--	7	2442
--	--	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	--	--



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. TEST METHODOLOGY

2.1. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of ARIB STD-T66 Version 3.7/2014.

2.2. Measurement Uncertainty

Test Item		MU	Remark
Bandwidth	:	+/- 0.2 E-6	/
Antenna Power	:	+/-0.33dB	/
Frequency Tolerance	:	+/- 0.3 E-6	/
Conducted spurious emission	:	+/-0.13dB	/
DC Power	:	+/-1%	/

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.3. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling commands provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters:

Test Software Version			
Frequency	2412MHz	2442MHz	2472MHz
802.11b (20MHz)	Default	Default	Default
802.11g (20MHz)	Default	Default	Default
802.11n (20MHz)	Default	Default	Default
Frequency	2422MHz	2442MHz	2462MHz
802.11n (40MHz)	Default	Default	Default

***Note: The output power level of the software was chosen as default only.





2.4. Description of Test Modes

Tested mode, channel, and data rate information				
Mode	Preliminary Test Data Rate (Mbps)	Final Test Data Rate (Mbps) (see Note)	Channel	Frequency (MHz)
802.11b	11/1	11	Low :CH1	2412
	11/1	11	Middle: CH7	2442
	11/1	11	High: CH13	2472
802.11g	54/6	6	Low :CH1	2412
	54/6	6	Middle: CH7	2442
	54/6	6	High: CH13	2472
802.11n HT20	65.0/6.5	6.5	Low :CH1	2412
	65.0/6.5	6.5	Middle: CH7	2442
	65.0/6.5	6.5	High: CH13	2472
802.11n HT40	135.0/13.5	13.5	Low :CH3	2422
	135.0/13.5	13.5	Middle: CH7	2442
	135.0/13.5	13.5	High: CH11	2462
Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.				

2.5. Test Voltage

POWER SUPPLY VOLTAGE FLUCTUATION TEST

Voltage Fluctuation Test	Normal Voltage	High Voltage +10% of Normal Voltage	Low Voltage -10% of Normal Voltage
Input To EUT	DC 7.6V	DC 8.4V	DC 6.8V
Output To RF Module	DC 3.3V	DC 3.3V	DC 3.3V
Voltage Variation (%)	--	--	--

Note: As the EUT was powered by DC 7.6V, and with the voltage stabilizing circuit used, the chip voltage received floating not exceed $\pm 1\%$ of nominal condition when working on extreme voltage, so all test performed at nominal voltage only.





3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in engineering mode.

3.2. EUT Exercise Software

N/A.

3.3. Special Accessories

N/A.

3.4. Block Diagram/Schematics

Please refer to the related document.

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.





4. SUMMARY OF TEST RESULTS

MIC Notice No.88 Appendix No.43 Article 2 Paragraph 1 Item 19

Clause	Description of Test (Transmitter Parameters)	Result
3	Frequency Tolerance	PASS
6	Antenna Power	PASS
6	Tolerances for Antenna Power	PASS
4	Transmission Rate	PASS
4	Occupied Frequency Bandwidth	PASS
4	Spread Bandwidth	PASS
5	Spurious Emissions	PASS
10	Transmission Antenna Gain (EIRP Antenna Power)	PASS
11	Transmission Radiated Angle Width (3dB Beam width)	N/A
12	Interference prevention function	PASS
8	Carrier Sensing function	PASS
8	Number of carrier	PASS
Receiver Parameters		
7	Secondary Radiated Emissions	PASS

Note: (1) N/A is an abbreviation for Not Applicable.

(2) N/T means this test item is not tested.

(3) This is a 2.4G WIFI RF test report for Laptop.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5. TEST RESULT

5.1. Frequency Tolerance

5.1.1. Standard Applicable

Tolerance of frequency shall be $\pm 50 \times 10^{-6}$.

5.1.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.1.3. Test Procedures

- Set EUT work in test mode as described in clause 2.4.
- Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 10 KHz.

Video BW: 10 KHz.


Span: 1MHz.

Detector: Peak.

Trace Mode: Max Hold.

- When the trace is complete, find the peak value of the power envelope and record.

5.1.4. Test Setup Layout

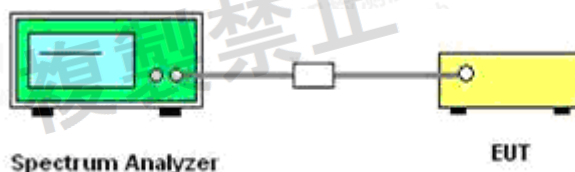

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test Result

Please refer to the Appendix C.1 for 2.4G WIFI RF Test Data.





5.2. Antenna Power

5.2.1. Standard Applicable

Type	Limit
DTS	10mW
OFDM OBW<26MHz, DS	10mW/MHz
OFDM OBW 26-40MHz	5mW/MHz
Tolerance	+20%,-80%

Upper Limit of EIRP for Modulation Systems

Modulation system	Frequency band used	Antenna power (max.)	EIRP (max.)	
			Omnidirectional case	Directional case
DS, OFDM	2,400 - 2,483.5 MHz	10 mW/MHz	12.14 dBm/MHz	22.14 dBm/MHz
FH, DS-FH FH-OFDM	2,400 - 2,483.5 MHz	3 mW/MHz	6.91 dBm/MHz	16.91 dBm/MHz
	Excluding 2,427 - 2,470.75 MHz	10 mW/MHz	12.14 dBm/MHz	22.14 dBm/MHz
Other than the above	2,400 - 2,483.5 MHz	10 mW	12.14 dBm	22.14 dBm

5.2.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.2.3. Test Procedures

- Set EUT work in test mode as described in clause 2.4.
- Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

Resolution BW: 1MHz.

Video BW: 1MHz.

Span: Wide enough to cover the complete power envelope of the signal of the EUT.

Trigger condition: Free run.

Sweep mode: Continuous sweeping.

Detector: Peak.

Trace Mode: Max Hold.

- When the trace is complete, find the peak value of the power envelope and record.



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.2.4. Test Setup

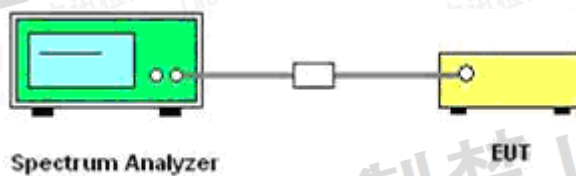

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result

Please refer to the Appendix C.2 for 2.4G WIFI RF Test Data.





5.3. Occupied Frequency Bandwidth

5.3.1. Standard Applicable

Permissible value for occupied bandwidth using the FH system, a hybrid system combining DS and FH systems, or a hybrid system combining FH and OFDM systems shall be 83.5 MHz or less, while necessary bandwidth (minimum occupied bandwidth sufficient to ensure information transmission of required quality at a required transmission rate for the system used under specified conditions for a given emission type) using a system other than any of the above shall be 26 MHz or less.

5.3.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.3.3. Test Procedures

- Set EUT work in test mode as described in clause 2.4.
- Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

RBW/VBW= 300 KHz/300KHz for WIFI.

Span: Wide enough to cover the complete power envelope of the signal of the EUT.


Sweep mode: Continuous sweeping.

Detector: Peak.

Trace Mode: Max Hold.

- When the trace is complete, measure the occupied bandwidth (99% bandwidth) with spectrum analyzer's bandwidth measure function.

5.3.4. Test Setup Layout

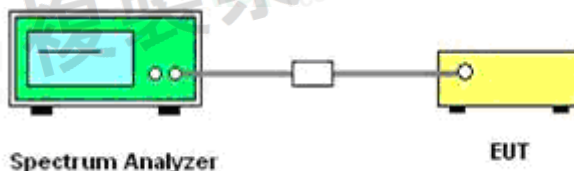

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of 99% Spectrum Bandwidth

Please refer to the Appendix C.3 for 2.4G WIFI RF Test Data.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.4. Spread Bandwidth

5.4.1. Standard Applicable

In spread spectrum systems, spread bandwidth (which refers to a frequency bandwidth with an upper limit and lower limit such that each of the mean powers radiated above the upper frequency limit and below the lower frequency limit is equal to 5 % of the total mean power radiated; this also applies hereafter) shall be 500 kHz or more.

5.4.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.4.3. Test Procedures

- Set EUT work in test mode as described in clause 2.4.
- Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the channel under test.

RBW/VBW= 300 KHz/300KHz for WIFI.


Span: Wide enough to cover the complete power envelope of the signal of the EUT.

Detector: Peak.

Trace Mode: Max Hold.

- When the trace is complete, measure the occupied bandwidth (90% bandwidth) with spectrum analyzer's bandwidth measure function.

5.4.4. Test Setup Layout

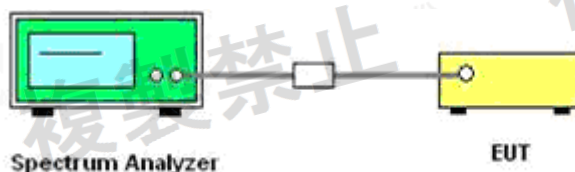

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 90% Occupied Bandwidth.

Please refer to the Appendix C.4 for 2.4G WIFI RF Test Data.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



5.5. Transmitter Spurious Emissions (conducted)

5.5.1. Standard Applicable

Permissible mean power of spurious emission of each frequency supplied to a feeder, that is, mean power of spurious emission in the 1 MHz bandwidth at frequency f other than frequency band used shall be as follows:

STD-T66

- | | |
|--|---------------------|
| a. 30MHz - 1,000MHz | 2.5 μ W or less |
| b. 1,000MHz - 2,387MHz | 2.5 μ W or less |
| c. 2,387MHz - 2,400MHz and 2,483.5MHz - 2,496.5MHz | 25 μ W or less |
| d. 2,496.5MHz - 13GHz | 2.5 μ W or less |

STD-T33

- | | |
|---|---------------------|
| a. $2,458\text{MHz} \leq f \leq 2,471\text{MHz}$ and $2,497\text{MHz} < f \leq 2,510\text{MHz}$
less | 25 μ W or |
| b. $2,458\text{MHz} > f$ and $2,510\text{MHz} < f$ | 2.5 μ W or less |

5.5.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.5.3. Test Procedures

- Set EUT work in test mode as described in clause 2.4.
- Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Below 1GHz: RBW/VBW= 1MHz/ 3MHz


Above 1GHz: RBW/VBW= 1MHz / 3MHz.

Detector: Peak.

Trace Mode: Max Hold.

- All the emissions from 30MHz to 13GHz were measured and record.

5.5.4. Test Setup Layout

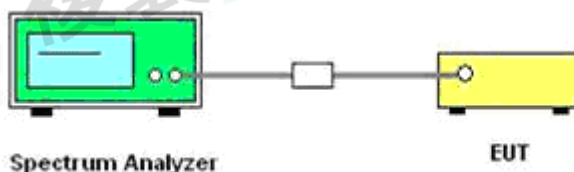

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Test Results

Please refer to the Appendix C.5 for 2.4G WIFI RF Test Data.





5.6. Carrier sensing function

5.6.1. Standard Applicable

Item	Limits
Carrier Sense	Good – EUT stop RF transmission signal after carrier inject to EUT. (On $22.79+Gr-20*\log(f)[dBm]$ (Gr: dBi; f: MHz) or 100mV/m)

5.6.2. Measuring Instruments


Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
RB / VB	1 MHz
Span	0 MHz
Sweep	Continuous
Detector	Peak
Trigger mode	Video

5.6.3. Test Procedures

1. SSG adjusted the frequency as same as the EUT transmitted signal and emitted the absence of modulation from SSG and power level is (On $22.79+Gr-20*\log(f)[dBm]$ (Gr: dBi; f: MHz). Then turn off the RF signal of SSG.
2. EUT have transmitted the maximum modulation signal and fixed channelize.
3. Setting of SA is following as: RB:1MHz / VB:1MHz / SPAN: 50MHz / AT: 10dB / Ref: 0dBm / Sweep time: Auto / Sweep Mode: Continuous sweep / Detect mode: Positive peak.
4. SSG RF Signal On.
5. EUT shall be stop the transmitted any signal and SSG RF Signal Off. Then EUT will be continuous transmitted signal.

5.6.4. Test Setup Layout

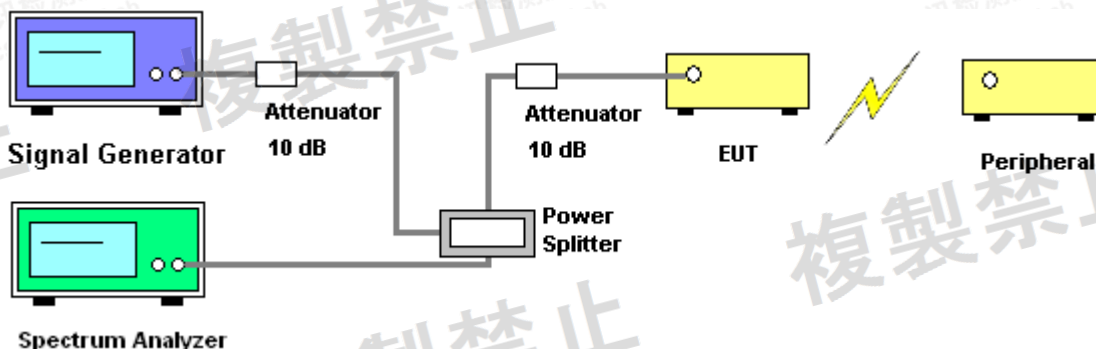

5.6.5. EUT Operation during Test

The EUT was programmed to be in normal transmitting mode.





5.6.6. Test Result

Test Mode	Test Result
802.11n(HT40)	Pass

Note: 1.this test item only applies to those mode with bandwidth greater than 20MHz;

after a carrier signal $22.79+Gr-20*\log(f)[dBm]$ was injected into EUT, it stopped transmission.

2. The EUT has three carriers in the test .





5.7. Interference prevention function

5.7.1. Standard Applicable

Item	Limits
Identification code	≥ 48 bits


5.7.2. Measuring ID Code Software

PC with NetTool	Setting
MAC IP List	MAC Scan

5.7.3. Test Procedures

1. In the case that the EUT has the function of automatically transmitting the identification code: a. Transmit the predetermined identification codes from EUT. b. Check the transmitted identification codes with the demodulator.
2. In the case of receiving the identification code: a. Transmit the predetermined identification codes from the counterpart. b. Check if communication is normal. c. Transmit the other signals than predetermined ID codes from the counterpart. d. check if the EUT stops the transmission, or if it displays that identification codes are different from the predetermined ones.

5.7.4. Test Setup Layout

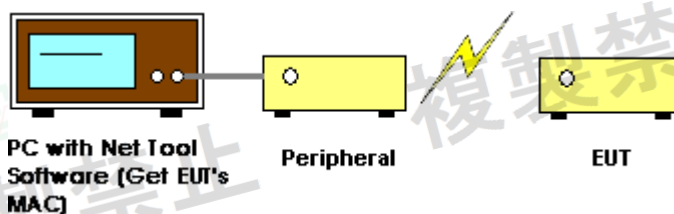

5.7.5. EUT Operation during Test

The EUT was programmed to be in normal transmitting mode.

5.7.6. Test Result

MAC Address: 26:A2:E4:DF:11C:5F

Complies.





5.8. Secondary Radiated Emissions

5.8.1. Standard Applicable

The limit on secondary emissions radiated from the receiving equipment within which the function of other radio equipment will not be impaired shall be, in terms of the power of a dummy antenna circuit that has the same electrical constant as the receiving antenna, 4nW or less at a frequency below 1 GHz and 20 nW or less at a frequency of 1 GHz or higher as measured using the circuit

5.8.2. Measuring Instruments

Please refer to section 6 of equipments list in this report.

5.8.3. Test Procedures

- Set EUT work in test mode as described in clause 2.4.
- Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, set the Spectrum Analyzer as below:

Resolution BW: 100 KHz for frequency below 1GHz and

1MHz for frequency above 1GHz

Video BW: 300 KHz for frequency below 1GHz and


3MHz for frequency above 1GHz

Detector: Peak.

Trace Mode: Max Hold.

- All the emissions from 30MHz to 12.5GHz were measured and record.

5.8.4. Test Setup

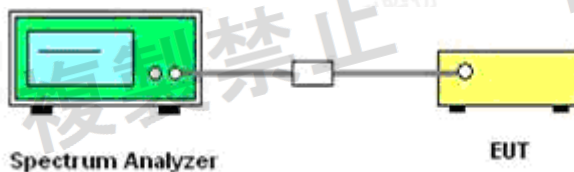

5.8.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.8.6. Test Results

Please refer to the Appendix C.6 for 2.4G WIFI RF Test Data.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



6. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix E for Test Setup Photographs

7. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix F for External Photos of EUT

8. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix G for Internal Photos of EUT

9. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2023-06-09	2024-06-08
2	Power Sensor	R&S	NRV-Z81	100458	2023-06-09	2024-06-08
3	Power Sensor	R&S	NRV-Z32	10057	2023-06-09	2024-06-08
4	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2022-10-29	2023-10-28
5	DC Power Supply	Agilent	E3642A	N/A	2022-10-29	2023-10-28
6	Oscilloscope	Tektronix	46084A/4609A	140920	2023-06-09	2024-06-08
7	Signal Generator	Agilent	N5182A	MY47071151	2023-06-09	2024-06-08

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity