

DESCRIPTION

Eliminate ballast maintenance costs and compatibility issues by retrofitting existing fluorescent fixtures with these ballast bypass LED T8 tubes.

FEATURES

- Frosted glass lens reduces visual glare
- Suitable for use in totally enclosed fixtures
- Instantaneous full light output upon power-up
- Operates directly off of line voltage, no ballast needed
- Solid state replacement for 2 ft. F17T8 tubes
- Delivers 1150 Lumens per Watt for highly efficient performance
- Can be used with select emergency drivers; see Emergency Drivers section for full list of compatible products
- Ballast must be removed and fixture rewired for single or double-ended operation during installation; see installation instructions for more information

LISTINGS

- UL Listed for damp locations
- RoHS
- FCC Part 15 Class B
- DesignLights Consortium® 5.1 Standard - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance; DLC PN - PLTSP4M24

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

APPLICATIONS

- Office Lighting
- High Bays
- Industrial Strips
- Warehouses
- Stairwells
- Cold Storage

project name	type
catalog number	
comments	voltage
approved by	date



RoHS
Compliant

FCC

UL LISTED

DLC
LISTED

PERFORMANCE	Power Consumption	9 Watt
	Lumens	1150
	Efficacy (LPW)	128
	CRI	82
	Beam	210°
	CCT	4000K
	LED L70 Life Hours	≥100,000
ELECTRICAL	Power Factor	20%
	THD	0.9
	Input Voltage	120-277V
CONSTRUCTION	Operating Temperature	-4°F to 113°F (-20°C to 45°C)
	Base	Medium Bi-Pin
	Lens	Frosted
LISTINGS	Certifications	UL Listed; FCC; DLC
	Material Usage	RoHS - No mercury or lead
	Environment	Suitable for Damp Locations

PERFORMANCE SUMMARY


Item #	Length	Lumens	Watts	LPW	CCT	CRI	Beam	Envelope	LED L70 Life Hours	DLC Level	DLC #
PLTS-20126	2'	1150	9W	128	4000K	82	210°	Glass	≥100,000	5.1 Standard	PLTSP4M24

EMERGENCY DRIVERS


Item #	Description
PLTS-20116	5W Emergency Driver
PLTS-20117	10W Emergency Driver

WIRING DIAGRAM

0-10V continuous dimming by selected Dimming Mate. Please refer to the wiring diagram below. 'Dimmable via an external accessory' in definition of DLC V5.1.

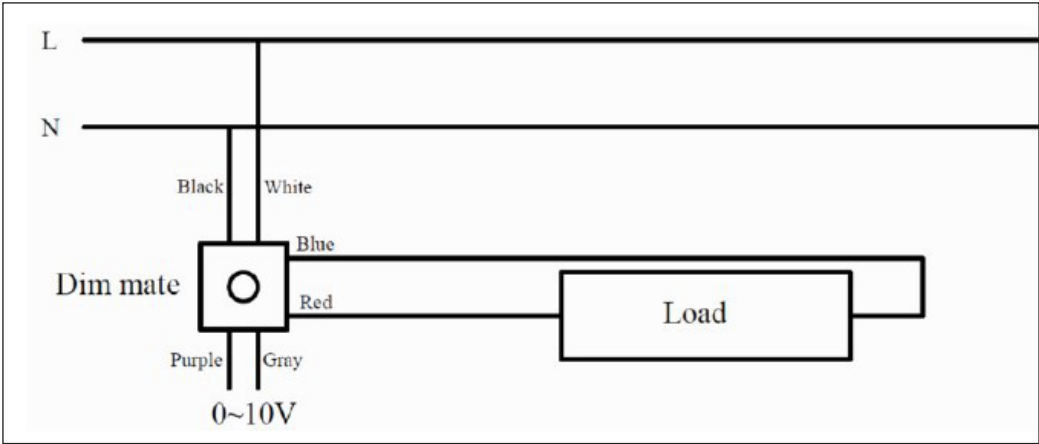

DIMENSIONS

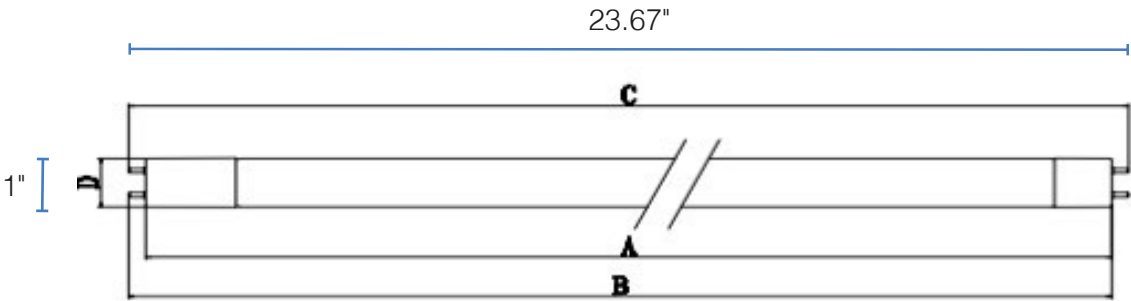

DIMENSIONS

Length: 23.67"
Diameter: 1"

WARNINGS

- Not for use with ballasts.
- Minimum compartment dimensions: 24.02" x 13.39" x 1.77"