

USER GUIDE ZY760A

Bazyths



www.bazyths.com

ENJOY YOUR NEW BAZYTHS SMART TOILET

Please contact Bazyths Support if you have any questions.

Contact Information:

support@bazyths.com


Catalogue

Panel Cognition	1
Remote Control Panel	1
Remote Control Match Code Instruction	1
Knob Button(with Halo)	1
Host Display Screen	1
Ambient Light	1
How to Use	1
When sitting on the seat	1
Start Rear cleansing or Front cleansing Function	1
When unseated on the seat	1
Function Setup and Adjustment	1
Auto-open the seat cover	1
Lid/ Seat Ring Open	1
Aperient	1
Rear cleansing	1
Front cleansing	1
Water Pressure Adjustment	1
Nozzle Position Adjustment	1
Water Temperature Adjustment	1
Hot/Cold Massage	1
Drying Function	1
Dryer Temperature Adjustment	1
Seat Ring Temperature Adjustment	1
Night Light	1
Nozzle Cleaning	1
Power Button	1
Flush by the Remote Control	1
Flushing Manually	1
Flush by Foot Sensor	1
Smart power-saving mode	1
Flushing when Power Off	1
Smart Seat Ring Temperature	1
User 1 and user2 Shortcut Settings	1
Cleaning and Maintenance	1
Clean and Maintain the Power Plug	1
Clean and Maintain the Main Unit of the Smart Toilet	1
Clean and Maintain the Ceramic Part of the Smart Toilet	1
Moisture condensation	1
Change the batteries in remote control	1


Panel Cognition

This product could be conducted mostly by remote control, assisted by the host operate panel.

◆ Remote control panel

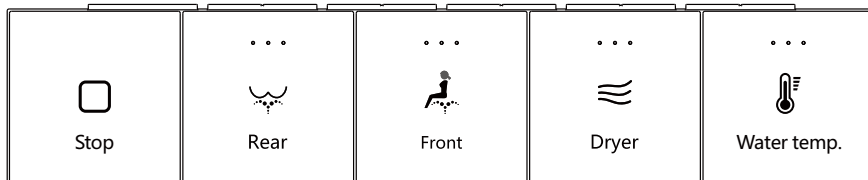

Front

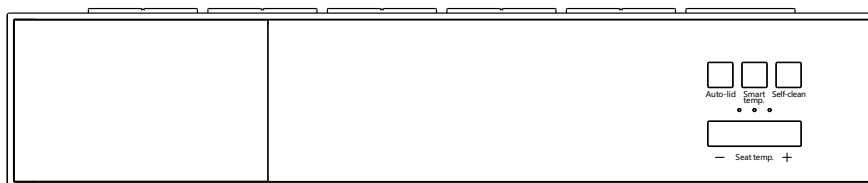

Back




Side

● Remote control match code instruction:

1. Press the "Front cleansing" and "Dryer" buttons on the remote control while powering on, and the indicator light will flash to enter match mode.
2. Cut off and re-power on the power plug, the knob indicator light flashes twice. And then press the "stop" button on the remote control. The knob light "blue" lights up to match.
3. The knob indicator light turns to normal display, indicating successful matching. Wait for the host reset to complete.

◆ Knob button(with halo)

Front Cleansing









Rear Cleansing

Press the knob to switch the function of flushing and stop

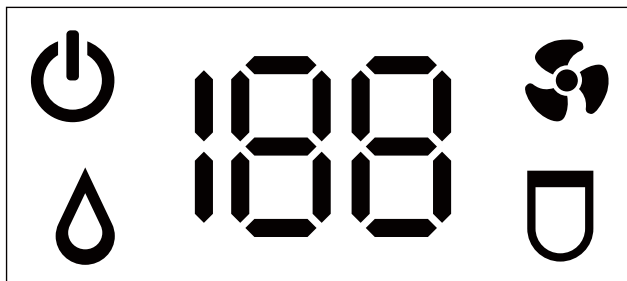
- Vertically pressing the knob to flush once when the smart toilet is not working.
- When on seated, rotating clockwise the knob to turn on the rear cleansing function; Rotating anticlockwise to turn on the front cleansing function; and vertically pressing the knob to stop the running function like rear cleansing, front cleansing or drying.
- When rear cleansing or front cleansing, rotating the knob once in the same direction to turn on the drying function.

◆ Host display screen



-  Power indicator: Light up when smart toilet switches on.
-  Temperature level: Show the setting temperature when smart toilet switches on.
-  Air temperature icon: When the icon lights up, it will show the setting air temperature.
-  Seat temperature icon: When the icon lights up, it will show the setting seat ring temperature.
-  Water temperature icon: When the icon lights up, it will show the setting water temperature.
- The temperature showed on the screen is the setting temperature. It will circularly show the water temperature, seat temperature and air temperature with 30 seconds interval.
- When the human body leaves the toilet sensor area, the screen will be automatically turned off after about 30 seconds.

◆ Ambient light

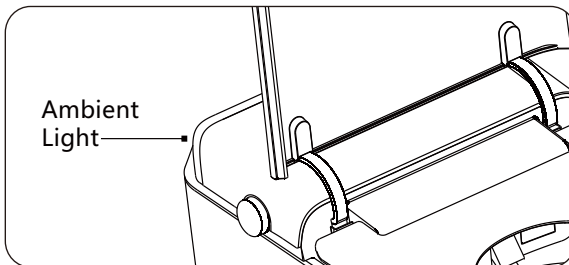


- The smart toilet boot default mode 1 for the atmosphere light: it will be lighted up when the human body is closed and it will be turned off when closing the seat cover over 30 seconds.
- Long pressing the night Light function button on the remote control to set on/off of the atmosphere light. Power off memory on/off and setting mode.
- Pressing the button of Position on remote control to switch atmosphere light mode when the atmosphere light is on within 5 seconds. The display screen displays 1-64 means the mode number. Pressing the Stop button of remote control to exit setting if confirm the mode.

How to Use

■ When seated on the seat

- ◆ When hear "di", all the functions start up.
- ◆ Auto clean the nozzle once.

■ Start rear cleansing or front cleansing function

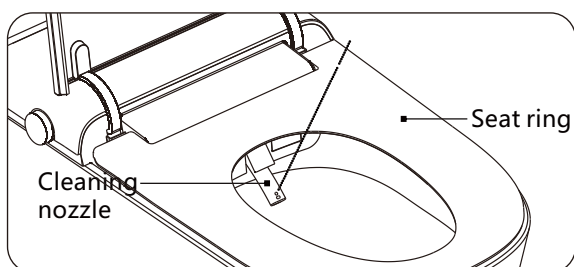


- ◆ Start the rear cleaning or front cleaning function by remote control.
- ◆ Adjust the cleaning position and water pressure by remote control.
- ◆ Start drying function by remote control.
- ◆ Press "Stop" button, rear cleaning, front cleaning or drying stops working.

■ When unseated on the seat

- ◆ Auto flush the toilet once.

Function Setup and Adjustment

■ Auto-open the seat cover

When get close to the toilet, the lid will auto-open. Pressing the button of  on remote control to turn on/off this function.

■ Lid/Seat open

This product has the function of lid/seat open. When people get close to the toilet, the lid and seat ring will be auto opened by foot sense.

Press the button Cover Up/Seat up on the remote control to open/ close the lid and seat.

Open the seat cover and seat ring by foot sensor: Under the state of unseated, when the seat cover and seat ring are in the low position, sense the foot sensor of toilet side with foot once, the seat cover will auto-open; when the seat cover is in the high position and the seat ring is in the low position, sense the foot sensor of toilet side with foot by one time, the seat ring will open; when the seat cover and seat ring are in the high position, sense the foot sensor of toilet side with foot by one time, the seat cover and seat ring will close and the toilet will flush once. Please note that if the last operation is flushing, it won't flush again when close the seat cover.


Open the seat cover and seat ring by remote control: In the state of unseated, press the button open the seat cover and seat ring on the remote control to open or close the seat cover and seat ring. Press the button close the seat cover, the seat cover and seat ring will be closed, and the toilet will flush once. Please note that if the last operation is flushing, it won't flush again when close the seat cover.


● When the smart toilet is under the state of rear cleansing, front cleansing, flushing or other functions, the function of open or close the seat cover and seat ring can not be used.

■ Rear cleansing

This product has the function of rear cleansing by using single hole nozzle.

Pressing the button  on remote control to enter the rear cleansing state: the nozzle moves back and forth, by using single hole nozzle.

In the state of rear cleansing, pressing the button  on remote control to switch the fixed cleansing mode: the nozzle stop moving. It can be operated circularly.


● The rear cleansing function will be off automatically after 90 seconds. Pressing other function buttons to directly switch to other functions or the button  to stop the function of rear cleansing within 90 seconds.


● The nozzle will auto-clean before and after rear cleansing function.

■ Front cleansing

This product is equipped with the function of front cleansing by using a feminine hole nozzle for gentle cleansing.

Pressing the button  on the remote control to enter the moving cleansing state: the nozzle move back and forth, enjoy the gently care.

In the state of front cleansing, pressing the button  on remote control to switch the fixed cleansing mode: the nozzle stop moving. It can be operated circularly.

● Front cleansing function will be off automatically after 90 seconds. Switch to other functions or press the button  to stop it directly within 90 seconds.


● The nozzle will auto-clean before and after front cleansing function.


■ Water pressure adjustment

In the state of rear cleansing or front cleansing, pressing the button of rear cleansing or front cleansing on remote control again to adjust proper water pressure strength.


● 4 levels of water pressure are available.

■ Nozzle position adjustment

In the state of rear cleansing or front cleansing, pressing the button  to move the nozzle back and forth and adjust to the proper cleansing position.


● 5 levels of nozzle position are available. Pressing the button  to start this function and adjust to the proper cleansing position.

■ Water temperature adjustment

Pressing the button  on remote control, it will "di" and enter the state of adjusting water temperature. Then adjust it to the comfortable water temperature for cleansing.


- 4 levels of water temperature are available: normal, high, medium and low. The water temperature will switch to another level when press the button of water temperature once.

■ Hot and cold massage

Pressing the button  on remote control to start the H/C massage mode. The water temperature alternates between cold and hot, changed from normal temperature to setting level. If the setting level of water temperature is normal, it will alternating change from normal level to low level.

■ Drying function

Pressing the button  on remote control, it will dry the wet parts of body.

- The drying function will be off automatically for 3 minutes. Directly switch to other functions or press the button  to stop it within 3 minutes.

■ Drying temperature adjustment

Pressing the button  on remote control, it will "di" and enter the state of drying temperature. Then adjust the proper drying temperature.

- 4 levels of drying temperature are available: normal, high, medium and low. The drying temperature will switch to another level when pressing the button of drying temperature once.


■ Seat ring temperature adjustment

Pressing the button  on remote control, it will "di" and enter the state of seat ring temperature setting. Then adjust the proper seat ring temperature.

- 4 levels of seat ring temperature are available: normal , high, medium and low. The seat ring temperature will switch to another level when pressing the button of seat ring temperature once.


■ Night light

This product is equipped with lighting function, which is convenient for nightly use.


- Pressing the button  to turn on/off the night lighting function.

■ Nozzle cleaning

Pressing the button  on remote control, the water will flow out to clean the nozzle.

- The function of nozzle cleaning only be available when unseated.
- The nozzle cleaning function will be off for 90 seconds. Pressing the button  on remote control to finish it.

■ Power button

Long pressing the button  on remote control to close the host system.

■ Flushing by remote control

Pressing the button  on remote control to flush the toilet once.

- Flushing when in the state of cleansing, the function of cleansing will be stopped.

■ Flushing manually

Pressing the flushing rotary knob vertically, and then flushing the toilet once.

- This function would be available even if the host system is shut down.
- Flushing when in the state of cleansing, the function of cleansing will be stopped.


■ Flushing by foot sensor

Designed for men to urinate, no need to bend down to find the buttons or remote control to flush. Foot sensor can achieve flushing.

- Smart toilet uses capacitive induction technology. Using foot to lightly touch the ceramic sensor area icon, it will flush automatically after the foot left.

■ Smart power-saving mode

Starting the smart power-saving mode, the host system enters the power saving mode. Once the product is used, it will immediately return to normal mode: the seat ring automatically heats to the set temperature.

● Long press the button  on remote control to turn on or off the smart power-saving mode. The smart toilet will auto-remember the last operation when power off. Starting the smart power-saving mode, the knob light flashes 10 seconds; Closing the smart power-saving mode, the knob light flashes 4 times.



● In the smart power saving mode, the seat ring stops heating when unseated; and the seat ring is automatically heated to the set temperature level or the smart seat temperature level when seated.

■ Flushing when power off



When power off, long pressing the side rotary knob for 3 seconds to start the function of flushing when power off.

■ Smart seat ring temperature

When connect the power, toilet will be set to smart seat ring temperature mode, which will adjust the seat ring temperature automatically according to the indoor temperature.

Pressing the button  on remote control to close the smart seat ring temperature mode. Long pressing the button  on remote control or re-connect the power of toilet to enter the smart seat ring temperature mode.


■ User 1 and user 2 shortcut settings

Long press the  or  button on remote control for 3 seconds to save the settings of the current status such as the nozzle position, water pressure, water temperature, seat temperature and drying temperature; When in use, press user1 or user 2 to set the toilet according to the above settings preset by the user.

Cleaning and Maintenance

■ Clean and maintain power plug

Please clean the power plug regularly: when cleaning, remove the power plug from the socket and wipe it with dry cloth.



- Dust accumulated on the power plug may cause fire.

■ Clean and maintain the main engine part of intelligent toilet

When cleaning the surface of the main engine, please wipe it with a soft wet cloth.

<1> When cleaning and maintaining, please pull the power plug out of the socket to avoid contact with water.


<2> If the surface has stubborn blot, you can use a soft wet cloth with kitchen detergent (neuter) to swab.

■ Clean and maintain the ceramic part of intelligent toilet

You can pour a neutral toilet cleaner into a soft brush or sponge and rinse with tap water.

<1> Do not use detergent or disinfectant contained with chlorine or acidity.

<2> Do not use brushes with abrasive materials.



■ Cleaning and maintain of nozzle

■ Moisture condensation

Because the temperature and humidity are different between indoor and ceramic pan/ seat cover, the ceramic pan and seat cover may be moisture condensation. Please change air completely in the bathroom in case of moisture condensation.

- ◆ In case of moisture condensation, please use the dry cloth to scrub.

■ Change the batteries in remote control

Change new batteries when remove control insensitive or the indicator could not work.

- ◆ Do not mistake the positive pole and negative pole when install the batteries.
- ◆ Do not mix the different type of battery.
- ◆ Please take out the battery if not using for a long time.