



To deodorize the leather  
leave the chair in a shady  
outside for 1-2 days.



For longer use

Re-tighten bolts every 6 months by using  
the enclosed allen-key.  
\*Using an electric drill can damage the chair.  
Please re-tighten bolts manually.



## Safety Information



Sit in the center of the  
chair, with your back to  
the backrest



Do not sit at the front  
edge of the chair



Do not stand on the  
chair



Do not use the chair  
with more than one  
person



Do not push the chair  
around when a person  
is sitting in it



Do not push down on  
the backrest when a  
person is reclined

## INSTRUCTION MANUAL

**Model: C-3766**

## INSTRUCTION MANUAL

**C-3766**




### Package List



(A)\*1  
**Backrest**



(B)\*1  
**Seat Cushion**



(C)\*1(L)\*1(R)  
**Armrests**



(D)\*1  
**Me chanism**



(E)\*1  
**Gas Lift**



(F)\*1  
**Base**



(G)\*1  
**Head Pillow**



(H)\*5  
**Casters**



(I)\*5  
**Legs**



(J)\*3  
**Bolts**  
M8\*20mm



(K)\*4  
**Bolts**  
M6\*20mm



(L)\*2  
**Bolts**  
M6\*25mm



(M)\*2  
**Bolts**  
M6\*35mm



(N)\*5  
**Bolts**  
M6\*45mm



(O)\*10  
**Bolts**  
M6\*14mm




(P)\*1  
**Plastic Cover**



(Q)\*1  
**Wrench**


# Assembly Instruction

## Step 1

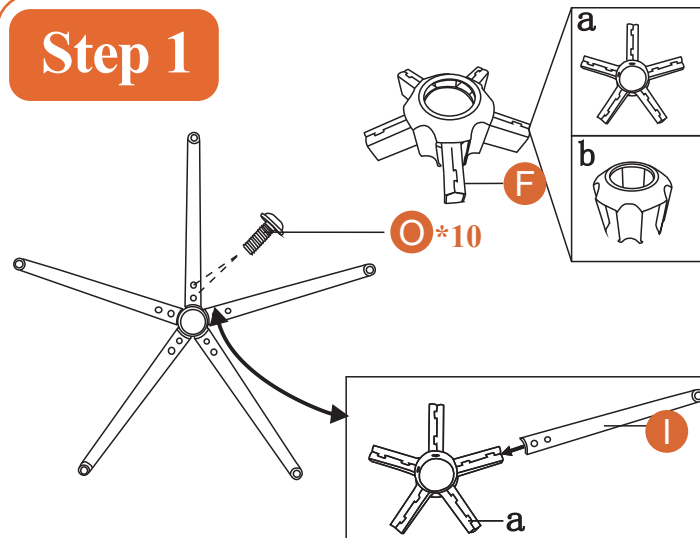


Divide Base (F) into two parts, a and b. Using Wrench (Q), install Legs (I)\*5 to the Base (a) with Bolts (O)\*10.

## Step 2

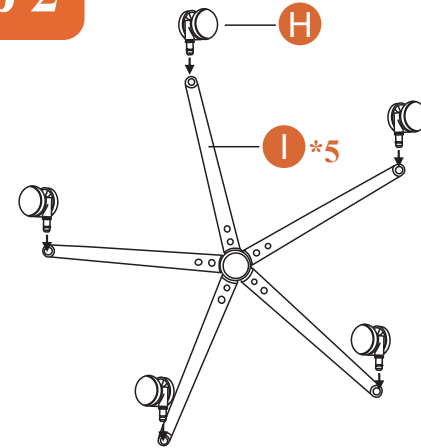


Press Casters (H)\*5 into the holes at the end of Legs (I)\*5.

## Step 3

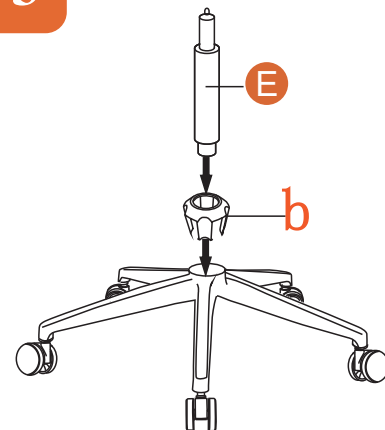


Put Base Cover (b) back on the Base. Then insert Gas Lift (E) into the center hole of the Base (F).

## Step 4

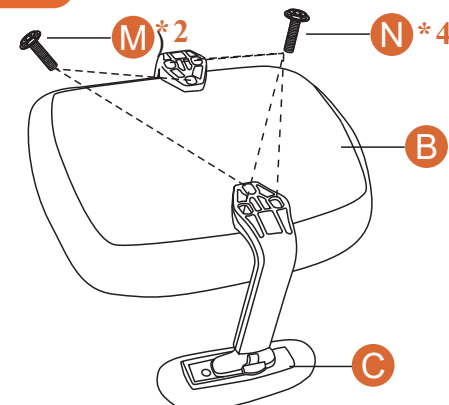


Turn the Seat (B) upside down. Install Armrests (C)\*1L\*1R to the Seat (B) with Bolts (M)\*2 and (N)\*4.

## Step 5

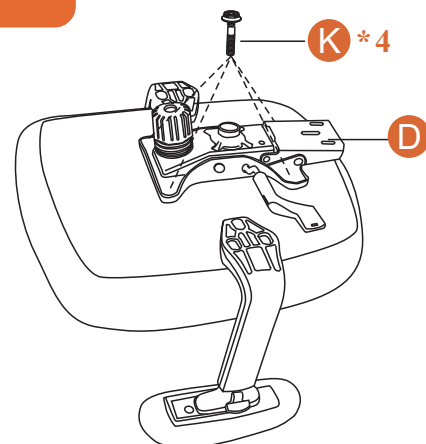


Attach Mechanism (D) to the Seat Cushion (B) with Bolts (K)\*4.

## Step 6

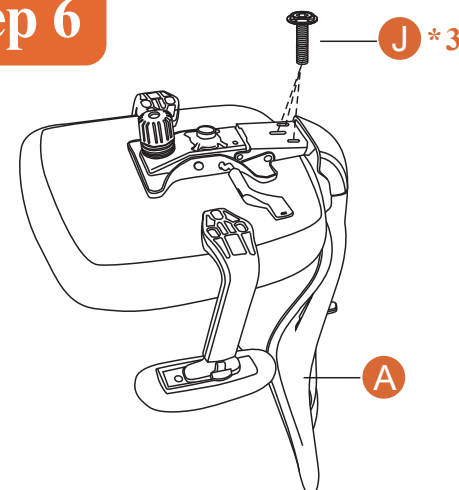


Align the screw holes of the Backrest (A) and Mechanism (D). Using Wrench (Q), secure both completely with Bolts (J)\*3.

## Step 7

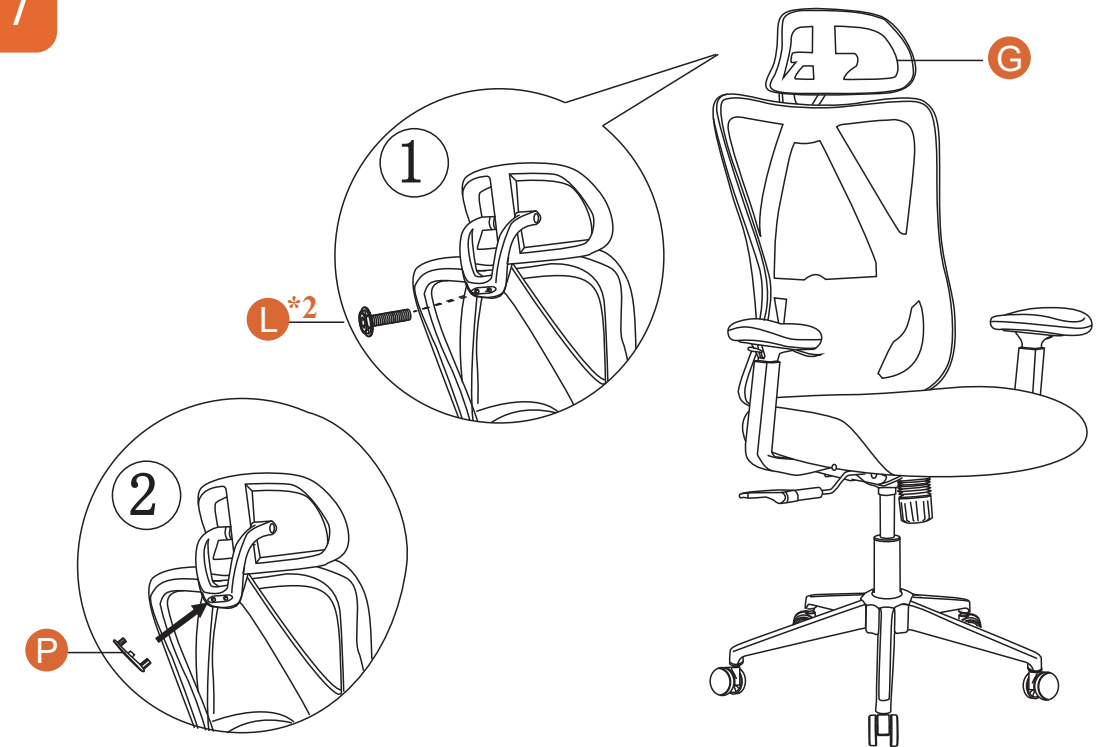

Using Wrench (Q), attach Head Pillow (G) to the Backrest (A) with Bolts (L)\*2. Then, attach the Plastic Cover (P) to the hole.

## Step 8

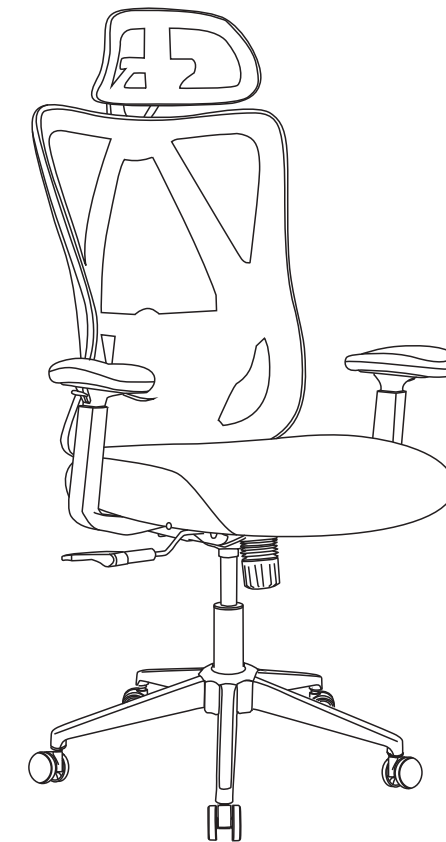

## CAUTION:

- \* Before using the chair, check to ensure that all bolts are fully tightened.
- \* Lubricate all parts and tighten all bolts every 6 months or whenever needed.