

Overview

Introduction

The HP t5630 Thin Client delivers great value with a familiar Windows experience at the right performance level. Microsoft Windows XP Embedded SP2 operating system combined with a full-featured browser, Enhanced Write Filter, Symantec Endpoint Protection, terminal emulations, native dual monitor and widescreen support make the t5630 the optimum choice for business environments requiring a cost-effective thin client with flexibility and power.

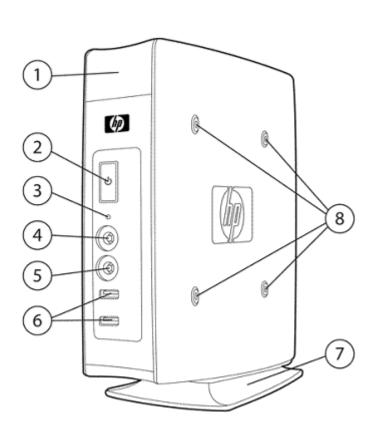

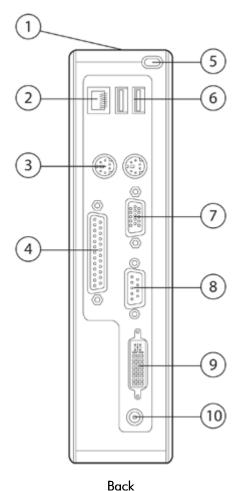

Front

- 1. Secure USB compartment (2 USB connectors)
- 2. Power button with LED
- 3. Flash storage activity indicator
- 4. Audio connector (mic in)
- 5. Audio connector (headphone out)
- 6. USB connectors (2)
- 7. Vertical stand (removable)
- 8. VESA mounting points (4)
 (standard in Germany only; available as an option in other countries)

- 1. Cable lock slot
- 2. 10/100/1000 Ethernet RJ-45 connector
- 3. PS/2 connectors (2)
- 4. Parallel port
- 5. Cable management feature
- 6. USB connectors (2)
- 7. VGA connector
- 8. Serial port
- 9. DVI-D connector
- 10. +12V DC power input



Overview

At A Glance

- Microsoft® Windows® XP Embedded SP2 with support for local applications
- VIA Eden 1 GHz processor for great performance
- 1 GB Flash memory provides ample storage for applications and drivers
- Up to 1 GB system memory (64 MB reserved for video)
- Includes one parallel, one serial, two PS/2, and six USB 2.0 ports (two in back, two in front, and two in secure USB compartment)
- MIC in and Audio out ports in front
- Enhanced Write Filter and Symantec Endpoint Protection Agent for enhanced data security
- Built in dual monitor support (VGA and DVI-D native)
- HP Device Manager lets you remotely manage client devices from a central location.
- HP's alliance with Altiris brings a leading management solution to the thin client market. Altiris Deployment Solution's standards-based, advanced thin client management solution helps reduce the costs of deploying, updating, and maintaining your thin clients. A free client license is included with each HP thin client.
- Exclusive HP ThinState Tools offers in-box, easy-to-use image deployment and recovery tools.
- Support for HP Client Automation for quick and easy deployment of images and thin client management. HP Client Automation Starter Edition is available as a free download. For more details visit: www.hp.com.
- Supports HP Universal Print Driver for Windows, a single, intelligent print driver that provides instant access to a wide range of HP print devices. The HP UPD is available for free at: www.hp.com/go/upd.
- HP Total Care Warranty and Services: limited three-year hardware warranty in most regions. HP Care Pack Services extend service contracts which go beyond your standard warranties. For more details visit: www.hp.com/go/lookuptool.



Models

FQ801AA#XXX Model Name HP t5630 Thin Client
Processor VIA Eden 1 GHz

FQ801AT#XXX (SmartBuy or Promo) Flash 1 GB

System Memory 1 GB (64 MB reserved for video)

Mouse (USB or PS/2) varies by region

FY267AA#XXX (Available in Asia Pacific

only)

Model Name HP t5630 Thin Client Processor VIA Eden 1 GHz

Flash 1 GB

System Memory512 MB (64 MB reserved for video)Operating SystemMicrosoft Windows XP Embedded SP2KeyboardKeyboard (USB or PS/2) varies by regionMouseMouse (USB or PS/2) varies by region



¹ Product complies with U.S. Trade Agreement (TAA). Available in U.S only.

Options

| Accessories | NOTE: Options are available as separate purchase ¹ HP Quick Release Kit HP Quick Release/VESA Panels Kit HP Integrated Work Center Stand 50 Watt External Power Supply | Part Number EM870AA FV248AA GN783AA FJ851AA |
|----------------|---|---|
| Third-Party | Belkin USB Wireless 802.11b/g ^{2,3} (Security: WEP, WPA & WPA2 Only) | HP4050 |
| Communications | Detail OOD Wireless GOZ.1113/g / (Seconity, WLI, WIA & WIAZ Only) | 111 4000 |
| Touch Screens | ELO Touch 1529L Flat Panel ² | E926109 |
| | HP L5006tm LCD Touchscreen (available in selected countries) | RB146AA |
| Security | HP USB Smartcard Keyboard | ED707AA |
| | SCM USB Smart Card Reader SCR331 ² | 904622 |
| | HP/Kensington Cable Lock | PC766A |
| Input Devices | HP PS/2 Standard Keyboard | DT527A |
| | HP USB Standard Keyboard | DT528A |
| | HP USB Smartcard Keyboard | ED707AA |
| | HP PS/2 2-Button Optical Scroll Mouse | EY703AA |
| | HP USB 2-Button Optical Scroll Mouse | DC172B |
| Storage | Apacer 2 GB Disk on Key (DOK) ² | 91.HTD2S.HP00C |
| | Apacer 4 GB Disk on Key (DOK) ² | 91.HTE2S.HP00C |
| | External USB 2.0 Multibay II Cradle | PA509A |
| | Multibay II DVD Drive (Does not support DVD play back) | PA849A |

Care Pack Services⁴

9x5 Next-Business-Day Advanced Exchange – 3 Years 9x5 Next-Business-Day On-Site Coverage – 3 Years



¹ The warranties for HP branded products are set forth in the express limited warranty statements accompanying such products. Although third-party products may work effectively on HP thin clients, these third-party products are provided "AS IS." HP does not support or warrant third-party products, including the interoperability of such products with HP thin clients. However, third-party manufacturers and vendors may provide their own warranties and support directly to you. Please contact the manufacturers or vendors for hardware or software support on their products.

² This is a third-party product. Product, warranty and support available directly from third-party vendor.

³ Wireless access point and Internet service sold separately. Roaming not supported. Not certified in Australia, China, Indonesia, Korea, Malaysia, New Zealand, Pakistan, Philippines, or Taiwan.

⁴ Service levels and response times for HP Care Pack Services may vary depending on your geographic location. Service starts from date of hardware purchase. Restrictions and limitations apply. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at: www.hp.com/hps/carepack.

Technical Specifications

VIA Eden 1 GHz **Processor**

VIA VX800 north/south bridge unified chip Chipsets

Flash 1 GB Memory

> Up to 1 GB (64 MB reserved for video) System Memory

Graphics VIAChrome9 HC3 Integrated Graphics Processor

NOTE: The resolutions your monitor displays may vary. The graphics controller supports these

resolutions:

| Resolutions | Refresh Rates (Single Monitor Mode) | Color Depth (Single Monitor Mode) | |
|-------------------------|---|---|--|
| 640 x 480 | 60, 72, 75, 85 Hz | 8, 16, 32 bit | |
| 800 x 600 | 60, 70, 72, 75, 85 Hz | 8, 16, 32 bit | |
| 848 x 480 | 60, 75, 85 Hz | 8, 16, 32 bit | |
| 1024 x 480 | 60 Hz | 8, 16, 32 bit | |
| 1024 x 768 | 60, 70, 72, 75, 85 Hz | 8, 16, 32 bit | |
| 1280 x 720 | 60, 75, 85 Hz | 8, 16, 32 bit | |
| 1280 x 768 | 60 Hz | 8, 16, 32 bit | |
| 1280 x 800 | 60, 75, 85 Hz | 8, 16, 32 bit | |
| 1280 x 1024 | 60, 70, 75, 85 Hz | 8, 16, 32 bit | |
| 1360 x 768 | 60 Hz | 8, 16, 32 bit | |
| 1368 x 768 | 60, 75, 85 Hz | 8, 16, 32 bit | |
| 1400 x 1050 | 60 Hz | 8, 16, 32 bit | |
| 1440 x 900 | 60, 75, 85 Hz | 8, 16, 32 bit | |
| 1600 x 1200 | 60, 75 ,85 Hz | 8, 16, 32 bit | |
| 1680 x 1050 | 60, 75 Hz | 8, 16, 32 bit | |
| 1920 x 1080 | 60, 75 Hz | 8, 16, 32 bit | |
| 1920 x 1200 | 60, 75, 85 Hz (DVI-D 60 Hz only) | 8, 16, 32 bit | |
| Keyboard | Keyboard (USB or PS/2) varies by re | Keyboard (USB or PS/2) varies by region | |
| Mouse | Mouse (USB or PS/2) varies by regio | Mouse (USB or PS/2) varies by region | |
| Printer | Local and/or network printers (RDP, ICA, LPD) | | |
| Video | VGA-type video output (DB-15) DVI-D digital video output | | |
| Output | Internal amplified speaker 1/8-inch mini-jack, 24-bit stereo, 192-kHz sample rate | | |
| Input | 1/8-inch microphone mini-jack, 20-bit stereo, 96-kHz sample rate | | |
| Security lock slot (cak | ole lock sold separately) | | |

Hardware Security

Secure USB compartment with 2 USB 2.0 ports

Server Based Computing Citrix ICA

Protocols Microsoft RDP

10/100/1000 Ethernet (RJ-45) Networking

TCP/IP with DNS and DHCP



Input/Output/ Peripheral Support

Audio

Technical Specifications

Point-to-Point Protocol (PPP), Point-to-Point over Ethernet (PPPoE),

Point-to-Point Tunneling Protocol (PPTP), Layer-2 Tunneling Protocol (L2TP)

Server Network Time Protocol (SNTP)

Simple Network Management Protocol (SNMP)

Wake on LAN

PXE

I/O ports and connectors 6 USB 2.0 ports, 1 serial, 1 parallel, 2 PS/2, 1 RJ45, 1 VGA, 1 DVI-D, 1 headphone, 1 microphone

Resident Operating

System

Microsoft Windows XP Embedded SP2

Languages (MUI)

English, French, German, Spanish, Dutch, Norwegian, Korean, Simplified Chinese, Traditional Chinese,

and Japanese

Server OS Compatibility/

Citrix Presentation Server (up to 4.5)

Support

Windows Server 2008

Windows 2000/2003 Server families

Windows 2000/2003 Server Terminal Services

Windows 2000 Advanced Server, Windows 2000 Advance Server Terminal Services

VMware Virtual Desktop Infrastructure using RDP

Session Allocation

Managers/Session

HP Session Allocation Manager (SAM) Citrix XenDesktop DDC broker

Brokers

VMware VDM broker

Leostream Desktop Connection Broker (contact vendor directly for broker sales and support)

Provision Networks (Quest) Virtual Access Broker (contact vendor directly for broker sales and support)

Software Included

Microsoft Windows XP Embedded SP2 Citrix ICA 10.x and Microsoft RDP 6.0

Microsoft Internet Explorer 7.0 Windows Media Player 11

Symantec Endpoint Protection Agent

HP Device Manager Agent

Altiris Deployment Solution (full client license). Altiris Deployment Solution (management console)

available as free download from Altiris at: www.altiris.com/hptc

HP ThinState for image capture and redeploy

TeemTalk Terminal Emulation Suite

HP Client Automation (available as a separate download). For details visit www.hp.com

HP Universal Print Driver (available as a free download at www.hp.com/go/upd)

ThinPrint .print TCP client (available as add-on)

See www.hp.com/support for list of available add-ons

Emulations TeemTalk Terminal Emulator supports these emulations. SSH/SSL is supported in terminal emulation

mode allowing users to secure their connections to the host.

Emulation Terminal ID ADDS Viewpoint A2 ADDS-A2 **AIXTerm** aixterm **ANSI BBS** ansi AT&T AT 386 at386-m AT&T Dataspeed 4410 att4410

Bull BQ3107 VIP7700, VIP7760

Data General Dasher dg410

410/412



Technical Specifications

Hewlett Packard HP700-2392A, 2622A, 70092, 70094, 70096 92/96 Hazeltine 1500 HZ1500 IBM 3151 11, 11-28, 31, 31-28 IBM 3270 3278-2 (24x80 Mono), 3278-3 (32x80 Mono), 3278-4 (43x80 Mono), 3278-5 (27x132 Mono), 3278-2-E (24x80 Color), 3278-3-E (32x80 Color), 3278-4-E (43x80 Color), 3278-5-E (27x132 Color), 3279-2 (24x80 Color), 3279-3 (32x80 Color), 3279-4 (43x80 Color), 3279-5 (27x132 Color), 3287-1 (Printer) IBM 5250 3179-2 (24x80 Color), 3180-2 (27x132 Mono Msg), 3196-A1 (24x80 Mono), 3477-FC (27x132 Color Msg), 3477-FG (27x132 Mono Msg), 3486-BA (24x80 Mono), 3487-HA (27x132 Mono), 3487-HC (27x132 Color), 3812-1 (Printer), 5251-11 (24x80 Mono), 5291-1 (24x80 Mono), 5292-2 (24x80 Color), 5553-B01 (DBCS Printer), 5555-B01 (DBCS 24x80 Mono), 5555-C01 (DBCS 24x80 Color) McDonnell Douglas Prism-tty 8, Prism-12 McDonnell Douglas Prism-tty Prime PT250 pt250 **SCO** Console ansi Siemens 97801 97801 Stratus V102 v102 Tandem TA6526, TA6530 tn6530-8 Televideo 910 TVI910 Televideo 920 TVI920 Televideo 925 TVI925 TVI950 Televideo 950 Televideo 955 TVI955



Unisys T27

UNISYS-TD830

Technical Specifications

Viewdata 40 VIEWDATA – 40
Viewdata 80 VIEWDATA – 80
Viewdata Split VIEWDATA – SPLIT
DEC VT PCTerm VT-PCTERM

DEC VT100 m2200, vt100, vt101, vt102, vt125, vt131, vt132, vt220, vt240, vt320,

vt340, vt420, vt510, vt520, vt525

DEC VT100+ VT100+

DEC VT500 7-bit m2200, vt100, vt101, vt102, vt125, vt131, vt132, vt220, vt240, vt320,

vt340, vt420, vt510, vt520, vt525

DEC VT500 8-bit m2200, vt100, vt101, vt102, vt125, vt131, vt132, vt220, vt240, vt320,

vt340, vt420, vt510, vt520, vt525

DEC VT 52 m2200, vt100, vt101, vt102, vt125, vt131, vt132, vt220, vt240, vt320,

vt340, vt420, vt510, vt520, vt525

 VT HP220
 vt220

 VT UTF8
 VT-UTF8

 Wyse WY370
 WYSE-370

 Wyse WY50
 WYSE-50

 Wyse WY50+
 WYSE-50

 Wyse WY60
 WYSE-60

 Wyse PCTerm
 WYSE-PCTERM

Dimensions H x W x D Without stand 8.25 x 2.05 x 8.5 in (209.55 x 52.07 x 215.90 mm)

With stand 8.65 x 2.05 x 8.5 in (219.70 x 52.07 x 215.90 mm)

Weight (approximate) With stand 3.40 lbs (1.54 kg)

Power* Operating voltage range 100-240 VAC
Rated line frequency 50-60 Hz

Power output (max) 50W
Rated output current 4.16A

(max)

Output voltage + 12V DC

Power consumption Average power consumption of this thin client in a typical setup is 14.0 W

* The actual power consumption at your location could vary and is dependent on many factors including but not limited to software load on the thin client, attached peripherals, and environmental factors.

Environmental Operating temperature 50° to 104° F (10° to 40° C)

range

Non-operating -22° to 140° F (-30 to 60° C)

temperature range

Humidity (non- 10% to 90% operating/5% to 95% non-operating

condensing)

Regulatory Compliances Product Safety International: IEC60950-1, 12:2005, with CB Certificate and all National

Deviations

US and Canada: UL 60950-1 / CAN/CSA 22.2 No. 60950-1-03,

07:2006, Bi-National Standard for ITE Safety in the US and Canada and

is published jointly by UL and CSA.

Europe: EN 60950-1, 06:2003, Information Technology Equipment



Technical Specifications

Ergonomics The product has been tested and found to comply with all applicable GS

ergonomic requirements.

RF Interference FCC Class B, CE Mark, VCCI

Warranty Three-year limited hardware warranty.

NOTE: Certain restrictions apply. Consult the HP Customer Support Center for details.

Environment-friendly Products and Approach RoHS Compliance Hewlett-Packard is committed to compliance with all applicable

environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis. From July 1, 2006, RoHS substances will be virtually eliminated (virtually = to levels below legal limits) for all HP electronic products subject to the RoHS Directive, except where it is widely recognized that there is no technically feasible alternative (as indicated by an exemption

under the EU RoHS Directive).

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at

www.hp.com/hpinfo/globalcitizenship/environment/

supplychain/gen specifications.html):

Asbestos

- Certain Azo Colorants
- Certain Brominated Flame Retardants may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

HP follows these guidelines to decrease the environmental impact of product

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.

Packaging



packaging:

Technical Specifications

- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information For more information about HP's commitment to the environment:

Global Citizenship Report

www.hp.com/hpinfo/globalcitizenship/

gcreport/index.html Eco-label certifications

www.hp.com/hpinfo/globalcitizenship/environment/

productdesign/ecolabels.html

ISO 14001 certificates:

www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html

© Copyright 2008 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation.

