





User Manual

Jump Starter

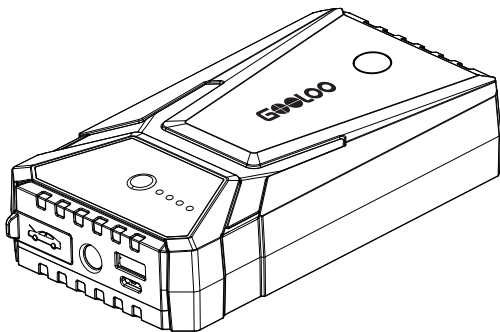

GE1500

A.PRODUCT LAYOUT:

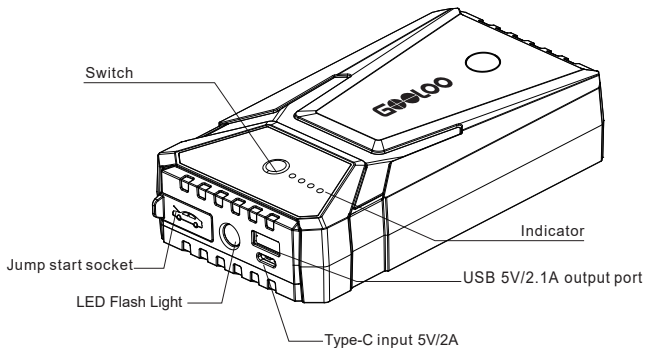

Jump start socket



Type-C input 5V/2A



B. OPERATION GUIDANCE

1.Storage Level Indicators


Press the switch to check the storage level of Jump Starter

Indicator	1 lighting	2 lighting	3 lighting	4 lighting
Storage level	25%	50%	75%	100%

The indicator will flash one by one during the period of charging. Different numbers of lighting indicators show different storage level of Jump Starter. All indicators light off when the charging is completed.


GE1500 Charging Instruction:

- 1、 Connect the USB cable with the home adaptor and then plug the home adaptor into the universal socket.
- 2、 Connect the Type-C connector to the GE1500 host.

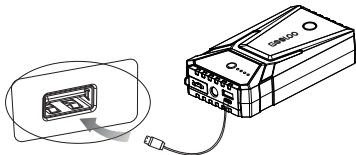


Jump start 12V vehicle Instruction(by Jumper cable):

1. Make sure that the number of indicators is not less than 2 ones.
2. Connect the RED clamp to the vehicle's battery positive (+) terminal and connect the BLACK clamp to the vehicle's battery negative (-) terminal.
3. Plug the cord of jumper cable into the jump start socket.
4. Start the vehicle.
5. When the vehicle is started, remove the jumper cable from GE1500 and disconnect RED and BLACK clamps to the vehicle battery.
6. Leave the vehicle's engine running.

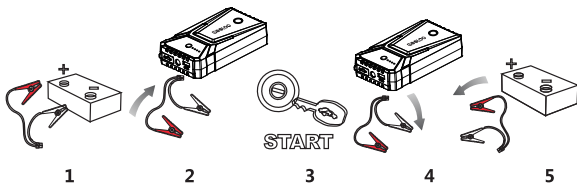

Jump start 12V vehicle Instruction(by Intelligent jumper cable):

1. Connect the blue plug fully seated into the host, and make sure the Cable Indicator is off.
2. Connect Red Clamp to the positive (+) battery terminal, Black Clamp to the negative (-) battery terminal.
3. Operate following the instruction of the Cable Indicator:



GREEN LIGHT on: Telling the connection is correct and the circuit is working, you can turn on the engine to jump-start directly.



REVERSE RED LIGHT on: Telling the connection is wrong, to correct the clamps as step 2 mentioned above, wait until the GREEN LIGHT is on to turn on the engine.



GREEN LIGHT blinking: Saying the vehicle battery is low, press the "BOOST" button, wait GREEN LIGHT becomes solid, then turn on the engine within 30s.




No Lights on: Saying the vehicle's battery maybe damaged, after confirm the clamps connection is correct, press the "BOOST" button, wait GREEN LIGHT is on, and then turn on the engine within 30s.

4. Start the vehicle.
5. When the vehicle is started, remove the jumper cable from the vehicle battery. Leave the vehicle's engine running.

Charging Cell Phone or Tablet Instruction:

1. Plug the switch cable to Quick Charge output port.
2. Select appropriate connector and connect it to your mobile phones or tablet.
3. Press the switch button to charge.



LED flash light

Press the switch 3 seconds to start the LED flash light.

There are 4 modes of LED light appear in order (normal. strobe. SOS. off) if you press slightly.

C. PARTS LIST :

#	Parts Name	Quantity
1	Host	1
2	USB-Type C charging cable	1
3	Intelligent Jumper Cable	1
4	User Manual	1
5	Storage Bag	1

D. TECHNICAL SPECIFICATIONS:

Model	JS-378B
Dimension	151*80*29mm
Weight	276g
Battery Capacity	29.6Wh
Output	5V==2.1A; 12V jump start
Input	Type-C 5V== 2A
Full charging time	About 2.6 hours
Peak current	1500A
Operating temperature	-20°C~60°C/-40°F~140°F

E. Product Highlights

- The GOOLOO GE1500 is a powerful 1500A peak current jump starter that can start up to 6L gasoline or 4L diesel engines, suitable for cars, trucks, motorcycles, snowmobiles, SUVs, lawnmowers, boats, and more.
- Weighing only 300 grams, this compact and lightweight device is highly portable, easily fitting in your hand, bag, or car, making it a convenient solution for on-the-go use.
- Not just a jump starter, the GE1500 features a powerful LED flashlight with three modes (normal, strobe, SOS) and an integrated compass, making it a reliable companion for camping, emergencies, and adventures.
- Doubling as a power bank, the device has a USB-C input and USB output port, allowing you to charge various electronic devices like smartphones, tablets, and Bluetooth headsets.

- With 10 built-in protection types and durable all-metal clamps, the GE1500 ensures safe usage and prevents damage from long-term use, providing peace of mind for users.

F. FAQ:

Q. How to turn off this appliance?

A. This appliance will power off automatically when no load or charging is complete.

Q. How long time to full charge the GOOLOO Jump Starter?

A. It takes about 2.6 hours for GE1500 to be fully charged via Type-C input.

Q. How many times can this appliance charge for my cell phone?

A. Depend on the battery capacity of your cell phone. Take iPhone13 as an example,GE1500 can full charging 2 times.

Q. How many times can this appliance jump start the 3.0L Gasoline vehicle if it is in full battery?

A. Approx. 10 times for GE1500.

Q. What's the lifetime of GOOLOO Jump Starter?

A. Usually 3-5 years in normal condition.

Q. How long the storage of battery will remain?

A. 6-12 months, however, we suggest to recharge it every 3 months.

G. TROUBLE SHOOTING :

Finding	Cause	Remedies
No response when pressing the switch button.	Low voltage protection of Jump Starter is started.	Plug the adapter into the Type-C input port to activate.

H. TOXIC AND HARMFUL SUBSTANCES:

Composition and amount of toxic and harmful substances in GE1500.					
Pb	Hg	Cd	Cr(Vi)	PBB	PBDE
0	0	0	0	0	0
O: Indicate all homogeneous materials' hazardous substances content are below the MCV limit specified in the Standard 2002/95/EC(RoHs).					

I. WARNING:

- 1.Read the instruction manual carefully before using this unit.
- 2.Jump for 12V vehicles , it would be hazard if for other jumping.
- 3.If the clamp is not intelligent jumper cable, don't connect the wrong battery terminal, reverse polarity will cause short circuit and battery overheating even fire.
- 4.DO NOT use this unit if any cable clamp or cord is damaged.
- 5.DO NOT use in place of a vehicle battery.
- 6.Never remain the unit on car battery after cranking the car success.
- 7.Make sure to check all the battery connections are CLEAN before Jump Starting! Make sure the battery clamps are well connected! If the battery terminals on the vehicle are dirty or corroded, the power of the unit will be lessened.
- 8.DO NOT Jump Start more than 3 times in a row. It could damage the unit by overheating. When starting up multiple times, each start-up interval is two minutes.

- 9.Remove the product from the vehicle battery within 30 seconds of Jump Starting. If not, it could lead to damage.
- 10.DO NOT connect the two clamps together.
- 11.DO NOT use by young or infirm persons without supervision.
- 12.DO NOT use as a toy.
- 13.DO NOT allow the product to become wet.
- 14.DO NOT immerse the product in water.
- 15.DO NOT operate the product in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.
- 16.DO NOT modify or disassemble GE1500. Only a repair technician may repair this unit.
- 17.DO NOT expose product to extreme heat or fire.
- 18.Make sure someone should be within range of your voice or close enough to come to your aid when working with batteries.
- 19.Remove personal metal items like rings, bracelets, necklaces, etc. When using the products.
- 20.DO NOT drop unit. If unit receives a sharp blow or is otherwise damaged in any way have it checked by a qualified battery technician.
- 21.DO NOT store in locations where the temperature may exceed 60°C
- 22.Charge only at ambient temperature between 0°C and 45°C.
23. Charge only using the charger provided with this unit or the same standard with the host input port.
- 24.DO NOT use the unit to jump start a vehicle while charging the internal battery.
- 25.If this unit is leaking liquid dispose of at proper recycle facility immediately.
- 26.Under extreme conditions, battery leakage can occur. If a liquid is noticed coming from product do not handle with bare hands. In case of skin contact wash with soap and water immediately. If liquid comes in contact with eyes rinse eyes with cold running water for at least 10 minutes and get medical attention immediately.
- 27.Product contains lithium based battery, at end of product life dispose of product according to local regulation.

28. After jump start the car, don't charge this unit immediately.

29. Don't use the jumper cable to charge other equipments.

J. WARRANTY INFORMATION:

1. We offer a limited warranty for this product against any defects in material and workmanship for a period of 18 months from the date of purchase by the end user/consumer. The conditions of the warranty are as follows:

2. The warranty is only valid upon presentation of the original receipt (from dealer/retailer) by the original purchaser with the product to be repaired or replaced.

3. The warranty is void if the serial number, date of purchase and label has been removed.

4. The warranty does not cover damage or product failure resulting from normal wear and tear, physical abuse, improper installation, misuse, modification or repairs by unauthorized third parties.

5. We do not assume responsibility for any loss or damage incurred during shipment or as a result of a force majeure.

6. We are not liable for any incidental or consequential damages arising from the use or misuse of this product.

7. All warranty claims are limited to repair or replacement of the defective product and at the sole discretion of us.

8. If we repair or replace the product, the product will be covered for the remaining time of the original warranty period. Repair or replacement may involve the use of reconditioned units which are equivalent in function. Replaced part or product becomes the property of us.

9. Consumable components such as batteries are not covered by the warranty.

Customer Service



18 Months Limited Warranty Service



Lifetime Technical Service



Feel Free to Contact Us
Support.eu@gooloo.com



For FAQ and More Information
Support.eu@gooloo.com

Made in China



RoHS



Manufacturer	Shenzhen Carku Technology Co.,Ltd		
Address	No.103, block A, Qixing Creative factory, GaoFeng community, Dalang street, LongHua, Shenzhen, Guangdong, China		
Importer	shen zhen shi lan de wo ke ji you xian gong si		
Address	Guangdong, Shenzhen, Longgang, 2nd Floor, Building 12, Shenao Cultural Industry Park, Dafapu Community, Bantian Street		
Tel	+442921680945		
"UK Representative Name and contact"	<table border="1"> <tr> <td>UK</td><td>REP</td></tr> </table> <p>OST_UK_20220608000011</p> <p>EVATOST CONSULTING LTD Office 101 32 Threadneedle Street, London, United Kingdom, EC2R 8AY contact@evatost.com</p> <p><small>We simply act as UK representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.</small></p>	UK	REP
UK	REP		