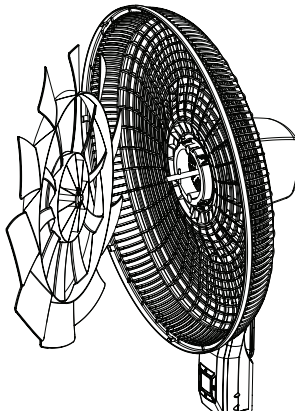
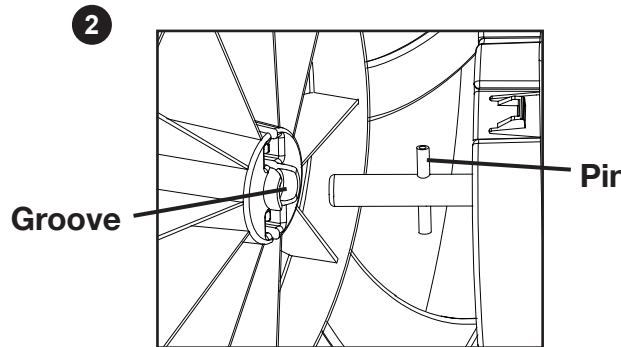



# S18654 QUICK TIPS

## How To Install Your Fan Blade

- 
- 

Slide blade onto motor shaft. Align groove on blade hub with pin on motor shaft.
- 

Gently press the blade onto the motor shaft until you hear a "click."

### Don't Hear a Click?

Check to make sure that the fan blade is lined up with the pin. Next, make sure the blade has been securely pressed onto the motor shaft. An audible click ensures the secure installation of the fan blade.

Viewing the fan blade from a side view, the blade should be flush with the rear grill when installed correctly. See below



## Where Is Your Remote Control Located?



When you remove the parts from the box, the remote control can be found on the on-board remote storage area located on the back of the fan. (See photo to left)



To remove the remote. Pull one side of the remote forward to release.



To Replace the remote. Place remote in groove. Snap in place by pressing center of remote to secure to the back of the fan.

## How To Remove The Plastic Tab From The Back Of Your Remote Control

- Remove the battery cover. Use a coin similar to a quarter to unlock the remote control battery door. Turn counterclockwise to unlock.
- Remove the plastic tab from the remote control
- To reinstall the cover, align the dots with the unlock icon on the remote. Use a coin similar to a quarter to lock the battery door. Turn clockwise to lock.

