

CHALLENGE. SOLUTION. SUCCESS.

24

PRODUCT
CATALOGUE

**High-quality radio
technology for
real-time wireless
data communication.**

SATEL

Mission-Critical Connectivity

SOLVING YOUR CHALLENGES

SATEL is a trusted wireless technology expert and innovator who develops and sells high quality connectivity solutions.

Our solutions are used in a wide range of industrial applications enabling secure, mission-critical connections. All SATEL products are designed and manufactured in Finland.

Reliable connections, protected business

SATEL technology is easy and fast to implement and use with low life cycle costs. Our solutions are expandable, customizable, flexible and secure.

You get added value from our services. We offer network design and technical support, and we have a wide distributor network at your service.



Expertise
High quality
Operational security
Independence

Easy implementation
Low life cycle costs
Service and support
Global distribution network



SUSTAINABILITY AS A CORE VALUE

- SATEL is committed to carrying out its business in a sustainable way.
- Our radio technology is designed, manufactured and tested in Finland.
- We have a long tradition of environmentally friendly practices, and we perform highly in ESG (Environmental, Social and Governance) criteria.
- SATEL radio technology can be used in various mission-critical applications such as Non-Road Mobile Machinery, autonomous vehicles, maritime and harbour, utility, environmental monitoring and Intelligent Transportation Systems. Mission-critical nature of these applications calls for very tight requirements for connectivity, reliability, accuracy and security. Many of the applications that use radio connectivity solutions make operations safer and more sustainable.



APPLICATIONS

SATEL's technology is used globally in a wide range of industrial applications that require the utmost reliability and security. The application possibilities are numerous.

UTILITIES

Utility systems require a highly reliable monitoring and controlling network. Malfunctions should be pinpointed quickly and even restored remotely. SATEL offers comprehensive solutions that are easy to implement and expand. SATEL radio technology is currently being used e.g. in power distribution, advanced metering infrastructure, windmills, waterworks, sewer networks, district heating and gas pipelines.

In utility communications, real-time wireless monitoring and remote access add efficiency and support interference-free operation, cut reaction times and minimize the environmental impact, for example water losses.



ITS

Intelligent Transport Systems are improving travel experience everywhere, and operational communication is a major factor in this. Private radio data network ensures the functionality of these applications. SATEL's radio technology is used in in public transport e.g. in traffic light and traffic sign control, real-time passenger information systems and automatic vehicle location.

In ITS radio technology contributes to making transportation more efficient, environmentally friendly and safe. The results can be seen in reduced driving times, less fuel consumption and less CO₂ emissions.



ENVIRONMENTAL MONITORING

Wireless radio technology is one key aspect in Environmental Monitoring. It brings safety, operability and control. With SATEL's solutions you can monitor weather conditions and get information for example in flood, fire or drought situation. They provide real-time information of environmental conditions without additional costs and with a minimum supervision.



TELEMETRY

Telemetry refers to the process of collecting and transmitting data from remote or inaccessible sources to a central location for monitoring, analysis, and decision-making. This data can include various measurements, such as temperature, pressure, speed, location, or any other relevant parameter depending on the application.

SATEL's solutions provide real-time data from remote locations, and improve efficiency and safety in mobile or temporary telemetry applications. High-quality radio technology is reliable even in the most difficult environments, such as hot desert or icy arctic conditions.



MACHINE CONTROL

Modern construction machinery transfer data from/to cloud environment to ensure efficient and safer worksite, and enable accurate workflow.

Machine control requires accurate position based on design models and plans. SATEL's connectivity technology is perfect for mission-critical operations in harsh extreme areas, even in areas with limited network coverage or no coverage at all.

With machine control operations become easier and more sustainable. Environmental impact is manifested in lower fuel consumption and CO₂ emissions, and longer machine lifecycle. For example, in precision farming, the use of seeds, fertilizers and pesticides becomes more accurate.



OEM

SATEL have produced a range of OEM radio modules for system manufacturers to integrate into customer solutions. They are secure, customizable and flexible in mounting options. SATEL's solutions are widely compatible and also support other manufacturers' radio protocols.



DEFENCE

Defense forces all around the world use lot of time and money for practicing. To get the most out of the investment and to guarantee the quality and safety, practices are monitored in real-time and the results are analyzed for further development.

SATEL's radio technology is used for example in target practice on land, at sea, and in the air. SATEL products can be used to transmit location and telemetry data from a moving target to the operator reliably, even over long distances.

SATEL MCCU

The MCCU (Mission-Critical Connectivity Unit) platform is designed to resolve connectivity challenges in harsh environments. It delivers mission-critical signaling from relatively small machine control messages with constant latency to wideband and low latency camera stream.

SATEL focuses on mission-critical connectivity applications by intelligently and smartly combining multiple wireless technologies. The machine and vehicle manufacturers, and machine control system providers can integrate SATEL MCCU into their offering without knowing what kind of technology is available in the operating area. The vehicle can be operated under varying connectivity environments.

SATEL MCCU-20

The SATEL MCCU-20 LTE / UHF is a unique dual-technology RTK transceiver for receiving the GNSS RTK correction data to a moving vehicle with UHF radio based RTK or NTRIP over LTE. The RTK correction data is forwarded over RS-232 serial communication to machine control system.

The SATEL MCCU-20 LTE / UHF has IP67 and IP69K classification and it withstands vibration and shock. It is based on field proven mechanics, and all the electrical connections are equipped with surge and ESD (Electrostatic Discharge) protection.

To ease up the SATEL MCCU-20 configuration SATEL offers:

- SATEL NARS-BT Bluetooth device together with SATEL Command application (for iOS and Android)



SATEL MCCU-20

SATEL order code	YT0200 SATEL MCCU-20 EU, with encryption support, with eSIM YT0205 SATEL MCCU-20 EU, w/o encryption support, with eSIM YT0210 SATEL MCCU-20 US/CA, with encryption support, with eSIM YT0225 SATEL MCCU-20 BR, with encryption support, with eSIM
Communication modules	LTE: (NTRIP application, NMEA position upstream) UHF: 410 ... 475 / 902 ... 928 MHz radio (RTK Receiver)
Serial interface	RS-232 (TD, RD lines)
Operating voltage range	+9 ... +30 VDC (-15% / +20%)
Power consumption	Typ. 2.4 W (NTRIP receive) / Typ. <1 W (RTK receive)
Serial data speed	4800 – 460800 bps


SATEL CONNECT

SATEL CONNECT – Global Connectivity Solution is a unique cellular connectivity service concept that solves complex cellular subscription and SIM card issues.

Perfect for machine control applications

Each SATEL MCMC device contains a SATEL CONNECT eSIM solution by default. It is perfect for machine control applications because SIM installations are not needed for the devices that can be in very hard-to-reach locations.

satel.hapyservices.com

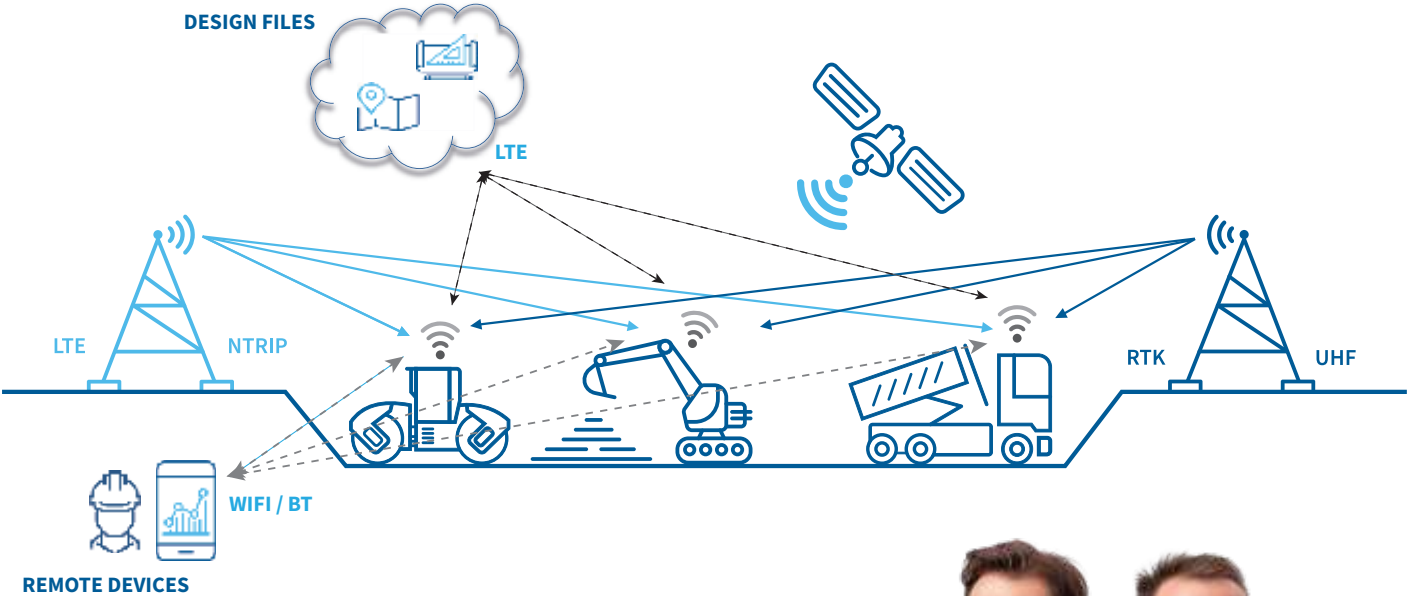

**SATEL VISIONERDS
ARE HERE TO HELP YOU**

We know how to make intelligent machines and work sites seamless in their connections and operations, and safe for everyone with future-proof multitechnology connectivity solutions. Feel free to contact our experts; SATEL Visionerds.



SATEL MCCU-30

The SATEL MCCU-30 is a versatile, innovative, and robust multi-band vehicle router solution that effectively tackles connectivity challenges in a wide range of applications, including machine control and off-highway vehicles.

It excels in providing reliable connectivity by smartly integrating various wireless technologies to tackle even the most intricate scenarios, all within a single unit. Whether you are dealing with a new build or retrofit projects, SATEL MCCU-30 offers adaptability, thanks to its field proven and IP classified mechanics.

SATEL MCCU-30 is designed to resolve various connectivity challenges in harsh environments:

- LTE, Wi-Fi, UHF, BT (all can be used simultaneously)
- Based on field proven mechanics
- IP67 / IP69K classification
- Vibration, shock and temperature
- Connections with surge and ESD (Electrostatic Discharge) protection

SATEL MCCU-30

Communication technologies	LTE Cat 4
	UHF 403 ... 473 MHz
	WiFi 802.11a/b/g/n/ac 2.4 GHz and 5 GHz
	Bluetooth V5.2
Interface	1 Gb Ethernet
Operating voltage range	+9 ... +40 VDC (-15% / +20%)
Power consumption	< 25 W



SATEL-EASy+

The SATEL-EASy+ product family has an improved LCD display for easy configuration, an improved MCU capacity and variable physical interfaces available. It is compatible with SATELLINE-EASy and -M3-TR4 / SATEL-TR4+ based radios as well as with SATELLINE-3AS NMS modems. SATEL-EASy+ is available on two different frequency ranges; 403 ... 473 MHz that is a common frequency range in Europe and in USA, and lower 320 ... 380 MHz, that is an excellent choice for GNSS industry in Asia and utility business in the Middle East.

HW

- New generation mechanics
- Operating voltage +7 ... +27.5 VDC (-15 % / +20 %)
- Improved LCD
- Improved MCU capacity
- Variable physical interfaces

FW

- NMS (Network Management System) protocol compatibility (with routing, diagnostics and packet filters)

The benefits of network monitoring:

- Enhanced reliability, through advance indication of anticipated faults and failures
- Reduced configuration and maintenance costs, through remote configuration
- An efficient tool for network development
- DRM Feature support (AES256, IP networking *)





SATEL-EASY+	
SATEL order code	320 ... 380 MHz: YM6030 SATEL-EASy+ (with AES) YM6035 SATEL-EASy+ YM6060 SATEL-EASy+ (with display and AES) YM6065 SATEL-EASy+ (with display)
	403 ... 473 MHz: YM6010 SATEL-EASy+ (with AES) YM6015 SATEL-EASy+ YM6050 SATEL-EASy+ (with display and AES) YM6055 SATEL-EASy+ (with display)
Frequency	320 ... 380 / 403 ... 473 MHz
Tuning range	60 / 70 MHz
Channel width	6.25 / 12.5 / 20 / 25 kHz @ 320 ... 380 MHz 12.5 / 20 / 25 kHz @ 403 ... 473 MHz
RX sensitivity	-116 dBm @ 12.5 kHz (4FSK) / -112 dBm @ 25 kHz (4FSK) -106 dBm @ 25 kHz (16FSK)
TX power (max.)	1W
Interface	RS-232, -422, -485
Operating voltage range	+7 ... +27.5 VDC (-15% / +20%)
Power consumption TX / RX	< 5.5 W / < 1.5 W
Data speed (max.) radio / serial	28800 bps / 115200 bps

*) Ask availability from SATEL.

THE FOLLOWING VARIANT
IS COMING NEXT:

Variant with USB, ETH and BT interface

- For transmitting and receiving data and modem configuration

SOLUTIONS FOR THE TOUGHEST PLACES

SATEL-EASy Pro+ is a new IP67 classified UHF radio modem with a high 35 W power transmitter, wide 70 MHz tuning range (403 ... 473 MHz) in one hardware and selectable channel spacing.

SATEL-EASy Pro+ is equipped with one antenna port and either with one RS-232 port for data (with NMS features, no diagnostic port) or with dual serial port, RS-232 by default and RS-485/-422 data ports optional (with NMS features and diagnostic port). Note! Dual serial port model is needed for NMS master operation. Supported AES128 (by default) / AES256 (as an order option) encryption on radio channel increases the data security. Future options include for example lower frequency band 320...380 MHz.

Due to the high transmitting power, connection distances more than 80 kilometres can be covered in favorable conditions.

SATEL-EASy Pro+

SATEL order code	Models with one serial port: YM6820 SATEL-EASy Pro+ (with AES, 25 W, for EU) YM6823 SATEL-EASy Pro+ (with AES, 35 W) YM6825 SATEL-EASy Pro+ (w/o AES, 25 W, for EU) YM6830 SATEL-EASy Pro+ (with AES, 25 W, for AU) YM6833 SATEL-EASy Pro+ (w/o AES, 35 W) YM6835 SATEL-EASy Pro+ (w/o AES, 25 W, for AU) YM6840 SATEL-EASy Pro+ (with AES, 35 W, for BR) YM6845 SATEL-EASy Pro+ (w/o AES, 35 W, for BR)
	Models with dual serial port: YM6843 SATEL-EASy Pro+ (with AES, 35 W) YM6853 SATEL-EASy Pro+ (w/o AES, 35 W) YM6860 SATEL-EASy Pro+ (with AES, 25 W, for EU) YM6865 SATEL-EASy Pro+ (w/o AES, 25 W, for EU) YM6870 SATEL-EASy Pro+ (with AES, 25 W, for AU) YM6875 SATEL-EASy Pro+ (w/o AES, 25 W, for AU)
Frequency	403 ... 473 MHz
Tuning range	70 MHz
Channel width	12.5 / 20 / 25 kHz
RX sensitivity	-114 dBm
TX power (max.)	35 W (Limited 25 W version is available as an order option)
Interface	RS-232 / HW model with data port 2: RS-232/-485/-422 (data/NMS)
Operating voltage range	+9 ... +30 VDC (-15% / +20%)
Power consumption	TX: 9 ... 10 W @ 1W output power TX: 60 ... 72 W @ 25 W output power TX: 84 ... 97 W @ 35 W output power RX: 1.8 ... 2.3 W Sleep mode: 0.9 ... 1.4 W
Data speed (max.) radio / serial	28800 bps / 115200 bps



DEFYING ALL CHALLENGES

SATEL Compact-Proof is particularly well suited for outdoor use (land surveying, for instance) under varying weather conditions.

The lithium-ion battery provides a long-lasting performance and plenty of operating hours. The operating time in +25°C is more than 15 h.



SATEL Compact-Proof

SATEL order code	YM6570 (with battery) YM6571 (w/o battery)
Frequency	403...473 MHz
Tuning range	70 MHz
Channel width	12.5 / 20 / 25 kHz programmable
RX sensitivity	-114 dBm
TX power (max.)	1 W
Interface	RS-232
Operating voltage range	+10.6 ... +13.3 VDC (-15% / +20%)
Power consumption TX / RX When idle (no charging and modem off)	7 W / 1.2 W 6 mW
Data speed (max.) radio / serial	19200 bps / 38400 bps



LICENCE FREE RADIO MODEM

SATEL Compact-Proof (869 MHz)

SATEL order code	YM6575 with battery YM6576 w/o battery
Frequency	869.4125 ... 869.6375 MHz (865 ... 867 MHz for India)
Channel width	25 kHz
RX sensitivity	-111 dBm
TX power (max.)	500 mW (1 W for India)
Interface	RS-232
Operating voltage range	+10.6 ... +13.3 VDC (-15% / +20%)
Power consumption TX / RX	TX 3.8 W (869 MHz) / 7 W (865 MHz) / RX 1.2 W
Data speed (max.) radio / serial	19200 bps / 38400 bps

BATTERY for SATEL Compact-Proof

Capacity and type	7.2 V, 8700 mAh, Li-Ion	
Charging current (max.)	1.6 A	
Charging time (empty to full)	5.5 hrs (+20 C°)	
Charging voltage	+10.6 ... +13.3 VDC (-15% / +20%)	
Max. time of operation	+60 °C (1 W, TX 100%)	13 h
	+60 °C (1 W, TX 50%)	22 h
	-20 °C (1 W, TX 100%)	10 h
	-20 °C (1 W, TX 50%))	15 h
	-20 Co (RX only)	44 h

*) In -20 °C operational times can decrease 40 %.

**) Due to the Li-Ion battery technology capacity will slightly decrease after each cycle affecting directly to the operation times.

IP67 RADIO MODEMS

SATELLINE-EASy Pro

SATEL order code	YM6803 YM6813 (with AES)
Frequency MHz	403 ... 473 MHz
Tuning range	70 MHz
Channel width kHz	12.5 / 20 / 25 kHz programmable
RX sensitivity	-114 dBm
TX power (max.)	35 W (25 W as an order option)
Interface	RS-232
Operating voltage range	+10.6 ... +13.3 VDC (-15% / +20%)
Power consumption TX / RX	120 W / 1.8 W
Data speed (max.) radio / serial	19200 bps / 38400 bps

IP67 / IP69K RADIO MODEMS

SATEL Proof-TR4+ / -R4+ / TR9

SATEL order code	YM6577 SATEL Proof-TR4+ (with AES) YM6578 SATEL Proof-TR4+ YM6596 SATEL Proof-R4+ (RX only) YM6597 SATEL Proof-R4+ (RX only with AES) YM6410 SATEL Proof-TR9 YM6411 SATEL Proof-TR9 for US, CA YM6412 SATEL Proof-TR9 for AU,NZ, BR
Frequency	403 ... 473 / 902 ... 928 MHz
Channel width	12.5 / 20 / 25 kHz @ TR4+ / R4+
Spreading method	Frequency hopping @ TR9
RX sensitivity	-118 ... -105 dBm
TX power (max.)	1 W
Interface	RS-232 (TD, RD lines)
Operating voltage range	+7 ... +27.5 VDC (-15% / +20%)
Power consumption TX / RX	7 / 1.2 W (typical)
Data speed (max.) radio / serial	28800 bps / 115200 bps @ TR4+ / R4+ 115200 bps / 115200 bps @ TR9

SATEL Proof-TR4+ / -R4+ / TR9
SATEL Proof-TR489

SATEL Proof-TR489

SATEL order code	YM6920 SATEL Proof-TR489 (with AES, region all), YM6925 SATEL Proof-TR489 (w/o AES, region all) YM6930 SATEL Proof-TR489 (with AES, for US/CA 400/915), YM6935 SATEL Proof-TR489 (w/o AES, for US/CA 400/915) YM6940 SATEL Proof-TR489 (with AES, for AU/BR 400/915), YM6945 SATEL Proof-TR489 (w/o AES, for AU/BR 400/915) YM6950 SATEL Proof-TR489 (with AES, for EU 400/869), YM6955 SATEL Proof-TR489 (w/o AES, for EU 400/869)
Frequency	403 ... 473 / 869.4 ... 869.65 / 902 ... 928
Tuning range	70 MHz / 0.25 MHz / frequency hopping spread spectrum
Channel width	12.5, 20, 25 kHz / 25, 50 kHz / 7 user selectable hopping bands
RX sensitivity	-113 dBm / -108 dBm / -106 dBm
TX power (max.)	1 W / 0.5 W / 1 W
Interface	RS-232 (TD, RD lines)
Operating voltage range	+7 ... +27.5 VDC (-15% / +20%)
Power consumption TX / RX	7 / 1.3 W (typical)
Data speed (max.) radio / serial	28800 bps / 115200 bps @ 400 MHz 38400 bps / 115200 bps @ 869 MHz 115200 bps @ 915 MHz



SATELLINE-EASy Pro



LONG DISTANCES MADE SHORT

*NETWORK MANAGEMENT SYSTEM

SATEL NMS software can be used to set up a new radio modem network or modify an existing one. It is also an excellent tool for monitoring the condition of the radio network, and by setting different alarm levels it enables immediate reactions.

- Graphical tool for designing a radio network
- Enhanced reliability through advance indication of anticipated faults and failures
- Reduced configuration and maintenance costs through remote configuration
- Flexibility in adapting to customer protocols and applications

SATELLINE-3AS VHF

SATEL order code	YM5000
SATELLINE-3AS VHF	YM5010 (with display)
SATELLINE-3ASd VHF	YM5020 (with cooling part)
SATELLINE-3AS VHF C	YM5030 (with display and cooling part)
SATELLINE-3ASd VHF C	
Frequency	135...174 MHz
Tuning range	135...155, 138...160, 155...174 MHz
Channel width	12.5 / 25 fixed kHz
RX sensitivity	-115 dBm
TX power (max.)	5 W
Interface	RS-232, -422, -485
Operating voltage range	+10.6 ... +25 VDC (-15% / +20%)
Power consumption TX / RX	6.6 W @ 1 W, 22 W @ 5 W / 1.7 W
Data speed (max.) radio / serial	19200 bps / 38400 bps



YM5000



YM5010



YM5020



YM5030

THE WORLD IS OPEN

UHF RADIO MODEM

SATELLINE-EASy

SATEL order code	YM6500 SATELLINE-EASy YM6510 SATELLINE-EASy (with AES) YM6550 SATELLINE-EASy (with display) YM6560 SATELLINE-EASy (with display and AES)
Frequency	330 ... 420 / 403 ... 473 MHz
Tuning range	90 / 70 MHz
Channel width	12.5 / 20 / 25 kHz programmable
RX sensitivity	-114 dBm
TX power (max.)	1 W
Interface	Port1: RS-232 fixed Port2: RS-232 / -422
Operating voltage range	+3.5 ... +7.5 / +7 ... +25 VDC (-15% / +20%)
Power consumption TX / RX	7 W / 1.2 W
Data speed (max.) radio / serial	19200 bps / 38400 bps



YM6500/YM6510



YM6550/YM6560

LICENCE FREE RADIO MODEM

SATELLINE-EASy 869

SATEL order code	YM6501
SATELLINE-EASy 869	YM6551 (with display)
SATELLINE-EASy 869	
Frequency	869.4000 ... 870.0000 MHz (865 ... 867 MHz for India)
Channel width	25 kHz
RX sensitivity	-111 dBm
TX power (max.)	500 mW (1 W for India)
Interface	RS-232, -422
Operating voltage range	+7 ... +25 VDC (-15% / +20%)
Power consumption TX / RX	TX 3.8 W (869 MHz)/7 W (865 MHz)/RX 1.2 W
Data speed (max.) radio / serial	19200 bps / 38400 bps



YM6501



YM6551

SATEL BT-RS232 is an IP66-rated robust and waterproof Bluetooth to RS-232 serial port adapter. It offers a compact and easily integrable solution for devices that needs to communicate without a cable connection.

SATEL BT-RS232 is equipped with long range Bluetooth 2.1, that offers connection distances upto 400 meters.




SATEL BT-RS232

SATEL BT-RS232

SATEL order code	YI0232 SATEL BT-RS232 adapter
Electrical interface	RS232
Data speed serial	115200 bps
TX power	+12 dBm with Bluetooth BR/EDR
RX sensitivity	-96 dBm
Operation mode	Slave mode
Operating voltage	+9 ... +27.5 VDC (-15% / +20%)

SATELLINK I/O CONVERTERS



SATEL I-LINK 100



SATEL I-LINK 300

*Extension module for I-LINK 100 and I-LINK 100 MB. Note: EOL product, limited availability.

	SATEL order code	Digital I/Os	Analog I/Os 4-20 mA	Connectors, switches
SATEL I-LINK 100	YI0007	4	2	Screw conn. / D15m / D15f / DIP
SATEL I-LINK 100 MB	YI0017	4	2	Screw conn. / D15m / D15f / DIP
SATEL I-LINK 300*	YI0010	6	-	Screw conn. / D15m / D15f / DIP

THE HEART OF THE SATEL XPRS SOLUTION

SATEL XPRS IP radio router is an excellent choice for data transfer for mission-critical applications requiring long range and the benefits of the privately owned networks.

The IP radio router provides high availability connections with device and routing protection. The SATEL XPRS solution utilizes the interoperability of the radio routers with other communications technologies, as well as technology switchovers.

IP RADIO ROUTER



SATEL XPRS IP radio router is suitable for both serial and IP data networking in UHF frequencies. It provides a reliable data connectivity for applications that require stability, high availability and long range. It supports low latency networking and has easy remote management with intuitive user interface.

The product consists of two separate modules, a radio unit and central unit. The radio unit alone can be used as a serial data radio router and as a repeater in packet routing networks. When central unit is added to the radio unit, full TCP/IP functionality is obtained. Advanced features, such as adaptive modulation and radio parameters, cyber security features, monitoring and management, protocol routing and conversion functionality provide a complete digital solution that takes into account all data transfer scenarios.



Radio and central unit w display
YF0220



Radio and central unit w/o display
YF0210



Radio unit only
YF0200

	XT 5R		XT 5RC	
Model / Type identification	SATELLAR RU-Q / TA-26		SATELLAR RU-Q / TA-26	
SATEL order code with display	YF0200		YF0210 YF0220	
Frequency MHz	400–445			
Channel width	12.5 kHz / 25 kHz			
Data speed radio (max.)	60.5 kbps @ 12.5 kHz (64QAM) 121 kbps @ 25 kHz (64QAM) Max. coded			
RX sensitivity (BER 10E-6)	Air speed	Channel width	Modulation	Sensitivity (10E-6)
	121 kbps	25 kHz	64QAM	-98 dBm
	60.5 kbps	12.5 kHz	64QAM	-100 dBm
	80.6 kbps	25 kHz	16QAM	-105 dBm
	40.3 kbps	12.5 kHz	16QAM	-106 dBm
	40.3 kbps	25 kHz	4QAM	-111 dBm
	20.2 kbps	12.5 kHz	4QAM	-113 dBm
TX power (nominal)	37 dBm (5 W) mean: average 30 dBm (1 W), max 32 dBm (1.5 W) PEP: average 37 dBm (5 W), max 38 dBm (6.6 W)			
Interface	RS-232, -422 / -485		RS-232, -422 / -485, USB, Ethernet	
Operating voltage range	12.5 ... +25 VDC (-15% / +20%)			
Power consumption without display TX / RX with display TX / RX	14.4 W / 3.8 W		15.8W/5.2W 16.4W/5.8W	

Long range	VLAN	Unicast Broadcast	Bridge mode	NETCO	Cyber security
Redundant routing	SNMP monitoring	Radio data up to ~121 kbps	Interoperability	UHF	
Firewall	Protocol conversions	IEC-104/101, DNP3, Modbus TCP/RTU	Serial over IP	0.1-5 W TX-power	

COMPACT AND COMPATIBLE

SATEL has a wide range of OEM radio modules for system manufacturers to integrate into customer solutions. They are secure, customizable and flexible in mounting options. SATEL's solutions are widely compatible and also support other manufacturers' radio protocols.

The latest addition to SATEL radio modules is the SATEL GO radio module family. SATEL GO modules introduce new revolutionary features: one to three frequencies in the same small module and more practical interfaces. The design is compact and the integration easy.

SATELGO

SATEL-TR49 SnapOn

SATEL-TR49 SnapOn fits to a standard PCIe bus. This makes it compatible with millions of equipment already in the market, and the integration is easy. If there is Mini PCIe bus, it can replace other technologies such as cellular and LoRa. Ideal for real-time IoT applications!

- Ultra-compact design
- Easy integration and deployment
- Possibility of power over USB (max 500 mW, more with extra input)
- Robust mounting and interfaces



SATEL order code	YM8600 region all, with AES YM8605 region all, w/o AES YM8610 region US/CA, with AES YM8615 region US/CA, w/o AES YM8630 region AU/BR, with AES YM8635 region AU/BR, w/o AES
Frequency	410 ... 475 / 902 ... 928 MHz
Channel width	12.5 / 25 kHz @ 400 MHz
Spreading method	Frequency hopping @ 900 MHz
RX sensitivity	-120 dBm @ 400 MHz -109 dBm @ 900 MHz
TX power (max.)	1 W
Interface	CMOS / UART
Operating voltage	+3.3 VDC +/-9%
Power consumption TX / RX	4.5 – 4.8 W / 400 mW @ 400 MHz 4.0 W / 400 mW @ 900 MHz
Data speed (max.) radio / serial	19200 bps (115200 bps @ 900 MHz) / 115200 bps

SATEL-TR49

SATEL order code	YM8490 region all, with AES YM8495 region all, w/o AES YM8500 region US/CA, with AES YM8505 region US/CA, w/o AES YM8510 region AU/BR, with AES YM8515 region AU/BR, w/o AES YM8520 region NZ, with AES YM8525 region NZ, w/o AES
Frequency	410 ... 475 / 902 ... 928 MHz
Channel width	12.5 / 20 / 25 kHz @ 400 MHz
Spreading method	Frequency hopping @ 900 MHz
RX sensitivity	-120 dBm @ 400 MHz -109 dBm @ 900 MHz
TX power (max.)	1 W
Interface	CMOS / UART
Operating voltage range	+3.7 ... +5.5 VDC
Power consumption TX / RX	4.8 W (TX 1 W) / 440 mW (RX) @ 400 MHz 4.1 W (TX 1 W) / 440 mW (RX) @ 900 MHz
Data speed (max.) radio / serial	19200 bps (115200 bps @ 900 MHz) / 115200 bps



Ask availability from SATEL for the modules with region limitations.

SATEL-R4+

SATEL order code	YM7490 with AES YM7495 w/o AES YM7491 DTE connector at TOP YM7496 w/o AES, DTE connector on TOP
Frequency	403 ... 473 MHz
Tuning range	70 MHz
Channel width	12.5 / 20 / 25 kHz programmable
RX sensitivity	-115 dBm
Interface	CMOS-UART
Operating voltage range	+3.8 ... +5.5 VDC
Power consumption RX	0.86 W
Data speed (max.) radio / serial	28800 bps / 115200 bps



SATEL-R4+

RECEIVER ONLY

SATEL-TR4+

SATEL order code	YM7470 with AES YM7475 w/o AES YM7480 DTE connector at TOP YM7485 w/o AES, DTE connector on TOP
Frequency	403 ... 473 MHz
Tuning range	70 MHz
Channel width	12.5 / 20 / 25 kHz programmable
RX sensitivity / TX power (max)	-115 dBm / 1 W
Interface	CMOS-UART
Operating voltage range	+3.8 ... +5.5 VDC
Power consumption TX / RX	4.8 W / 0.89 W
Data speed (max.) radio / serial	28800 bps / 115200 bps



SATEL-TR4+

**TRANSCEIVER WITH
16FSK MODULATION**

SATEL-TR489

SATEL order code	YM8810 region all YM8815 w/o AES, region all YM8816 SATEL-TR489 w/o AES, region all, DTE connector on TOP YM8820 region US/CA YM8825 w/o AES, region US/ CA
Frequency	403 ... 473 MHz / 856 ... 876 MHz / 902 ... 928 MHz
Tuning range	70 MHz / 20 MHz / frequency hopping spread spectrum
Channel width	12.5, 20, 25, 50*) kHz / 25, 50*) kHz / 7 user selectable hopping bands
RX sensitivity / TX power (max.)	-115 dBm / -110 dBm / -108 dBm 1 W / 0.5 W / 1 W
Interface	CMOS-UART
Operating voltage range	+3.8 ... +5.5 VDC
Power consumption TX / RX/	TX / RX 4.7 W / 0.73 W
Data speed (max.) radio / serial	28800 bps / 115200 bps @ 400 MHz 38400 bps / 115200 bps @ 800 MHz 115200 bps / 115200 bps @ 900 MHz

*) Ask availability from SATEL.



SATEL-TR489

LICENCE FREE

SATEL-TR300

SATEL order code	YM7300 with AES YM7305 w/o AES YM7315 w/o AES, DTE connector on TOP
Frequency	320 ... 380 MHz
Tuning range	60 MHz
Channel width	6.25 / 12.5 / 20 / 25 kHz programmable
RX sensitivity / TX power (max.)	-113 dBm / 1 W
Interface	CMOS-UART
Operating voltage range	+3.8 ... +5.5 VDC
Data speed (max.) radio / serial	28800 bps / 115200 bps



SATEL-TR300

LICENCED

SATEL-B2 motherboard and SATEL radio module combinations are available either as enclosed assemblies or as a board level OEM variant.

SATEL-B2 motherboard is easy to integrate into the host device and due to the modular structure, user can select the optimum radio solution fitting to their application.

Three variants of SATEL-B2 motherboard are available as a board level OEM variant:

- YR0000, MP1 With horizontal 26-pin header connector
- YR0000, MP2 With horizontal 26-pin header connector with D15 adapter
- YR0000, MP3 With vertical 26-pin header connector

Following HIROSE U.FL compatible antenna connector options are available: TNC, BNC, SMA, MCX and MMCX.

The combination of SATEL-B2 motherboard and radio module is available as enclosed assembly inside an aluminum enclosure. Three models available, all either with SATEL-TR4+ or -TR489 radio module:

- ME1 = With ears, with TNC antenna connector
- ME2 = With ears, with TNC antenna connector and DIN clip
- ME3 = With ears, with BNC antenna connector and DIN clip



To see all available variants inside an aluminum enclosure and product codes for those, please visit:

www.satel.com/products/radio-modems/satel-b2-motherboard-with-enclosure/

All variants are FCC/EU certified.

RADIO MODULES

SATELLINE-M3-TR9

SATEL order code	YM7900 region all YM7920 DTE TOP/U.FL same side YM7910 region US/CA YM7915 region AU
Frequency	902 ... 928 MHz
Spreading method	Frequency hopping
RX sensitivity / TX power (max.)	-109 dBm / 1 W
Interface	CMOS-UART
Operating voltage range	+3.5 ... +5.5 VDC
Power consumption TX / RX	3.2 W / 0.3 W
Data speed (max.) radio / serial	115200 bps

SATELLINE-M3-R9

SATEL order code	YM7950
Frequency	902 ... 928 MHz
Spreading method	Frequency hopping
RX sensitivity / TX power (max.)	-109 dBm
Interface	CMOS-UART
Operating voltage range	+3.5 ... +5.5 VDC
Power consumption TX / RX	0.3 W
Data speed (max.) radio / serial	115200 bps



SATELLINE-M3-TR9

**FREQUENCY HOPPING
TRANSMITTER MODULE**





SATELLINE-M3-R9

**FREQUENCY HOPPING
RECEIVER MODULE**

SATELLINE-M3-TR1	
SATEL order code	YM6300 YM6310 with AES
Frequency	330 ... 420 / 403...473 MHz
Tuning range	90 / 70 MHz
Channel width	12.5 / 20 / 25 kHz programmable
RX sensitivity / TX power (max.)	-114 dBm / 1 W
Interface	RS-232, -422, LVTTTL, TTL
Operating voltage range	+3.5 ... +7.5 / +7 ... +25 VDC (-15% / +20%)
Power consumption TX / RX	3 W @ 0.5 W, 7 W@ 1 W / 1.2 W
Data speed (max.) radio / serial	19200 / 38400 bps

SATELLINE-M3-TR1 869	
SATEL order code	YM6301
Frequency	869.4000 ... 870.0000 MHz (865 ... 867 MHz for India)
Tuning range	0.25 MHz (2 MHz India)
Channel width	25 fixed kHz
RX sensitivity / TX power (max.)	-111 dBm/ 0.5 W (1 W for India)
Interface	RS-232, -422, LVTTTL, TTL
Operating voltage range	+7 ... +25 VDC (-15% / +20%)
Power consumption TX / RX	3.8 W / 1.2 W
Data speed (max.) radio /serial	19200 bps / 38400 bps

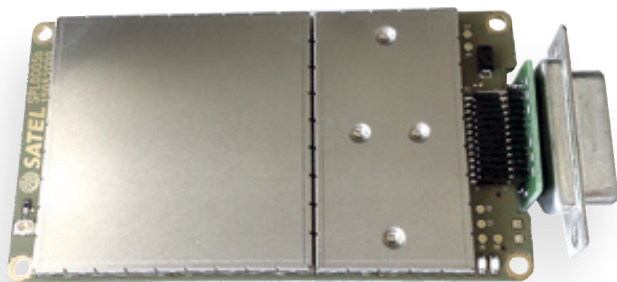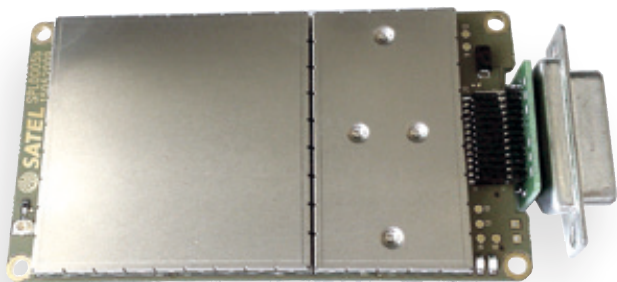

Examples of the customized radio modems.
Ask your local SATEL distributor about the various options.



Software — Ready, steady, go!

SOFTWARE

SATEL software

SATEL product	SATEL software						
	SATEL NETCO DEVICE	SATEL NETCO DESIGN	SATEL Configuration Manager	SATELLINE SaTerm	SATEL NETCO NMS	SATEL NMS PC	Free Channel Scan Monitor
SATEL MCCU-20				*			
SATEL-EASy+							
SATEL-EASy Pro+							
SATEL Proof-TR4+, -R4+				*			
SATEL Proof-TR489				*			
SATEL Proof-TR9				*			
SATELLINE-EASy							
SATEL Compact-Proof							
SATEL Compact-Proof 869							
SATELLINE-EASy Pro							
SATELLINE-EASy 869							
SATELLINE-3AS VHF							
SATEL XPRS IP Radio					**		
SATEL XPRS Radio					**		
SATEL-TR4+, -R4+				*			
SATEL-TR300				*			
SATEL-TR49				*			
SATEL-TR489				*			
SATEL-TR49 SnapOn				*			
SATELLINE-M3-TR9, -R9				*			
SATELLINE-M3-TR1							
SATELLINE-M3-TR1 869							
SATEL-TR4+ OA				*			
SATEL-B2-TR4+				*			
SATEL-B2-TR489				*			
SATEL-B2-TR4+OA				*			

*) SL command support

**) Configuration

SATEL NETCO DEVICE

SATEL NETCO DEVICE is a software for configuring and updating a device. The configuration parameters can be read and written from/to the locally connected, powered device. The device configuration can be also created/saved/explored from/to a file without device connection.

The most common use case for which the SATEL NETCO DEVICE is optimized for is editing existing parameters in a SATEL radio product using local connection, such as serial interface.

SATEL NETCO DESIGN

SATEL NETCO DESIGN is an intuitive and user-friendly network configuration software for network design and management. The software supports configuration of the Routing Setup and NMS Routing Setup modes for SATEL-EASy+ product family and configuration of the XPRS radio family.

The user interface of the product is browser-based and can therefore be used both locally and remotely. Design with graphical user interface for easy optimizing network design and deployment in a few simple steps, with local and remote connection to SATEL radios.

SATEL NETCO NMS

SATEL NETCO NMS is an intuitive and user-friendly network configuration software for network design and management with radio network monitoring option. The software supports configuration of the Routing Setup and NMS Routing Setup modes for SATEL-EASy+ product family and configuration of the XPRS radio family.

The user interface of the product is browser-based and can therefore be used both locally and remotely. Design with graphical user interface for easy optimizing network design and deployment in a few simple steps, with local and remote connection to SATEL radios.

SATELLINE SaTerm

SATELLINE SaTerm is a terminal software for configuring the Routing Setup mode and for configuring and testing the radios. Routing Setup refers to Message Routing feature for SATEL-EASy+ and SATELLINE-EASy family radio modems, where messages can be automatically routed over the radio network to correct recipient terminal. This SW can assist in tests procedures and configuration for the radios via terminal interface with SL command support.

SATEL NMS PC

SATEL NMS PC is a software for creating and managing SATEL-EASy+ and SATELLINE-3AS VHF product families for NMS Routing networks with radio network monitoring option. NMS Routing refers to NMS Message Routing feature, where messages can be automatically routed over the radio network to correct recipient terminal, monitoring and diagnostics included for the radio network. Graphical design of topology for NMS Message Routing, remote modification of settings, online storing and trending of field data with programmable alarm triggers.

SATEL Configuration Manager

SATEL Configuration Manager is a software for SATEL radio device configuration and reprogramming. The parameters can be read and written from/to the connected, powered device. The program file can be saved into a separate file to be used to other devices.

The most common use case for which the SATEL Configuration Manager is optimized for is editing existing parameters in a SATEL radio product using locally connected product over a serial interface.

FCS Monitor

Free Channel Scan Monitor program can be used for setting the FCS parameters and for loading them to modems and for monitoring the channels for noise or interference. FCS feature supported in SATELLINE-EASy radio modem family.

Additional information can be found: www.satel.com/products/software/

For more information, please contact SATEL or local distributor: www.satel.com/where-to-buy/

Antennas & cables

Antennas

- Half Wave Antennas for frequencies 400 ... 470 MHz for short distances.
- Quarter Wave Antennas for frequencies 400 ... 470 MHz and 869 MHz for short distances.
- Helix Antennas for frequencies 400 ... 470 MHz for short distances.
- Directional Antennas for frequencies 330 ... 470 MHz, 869 MHz and 135 ... 174 MHz for long distances.
- Omnidirectional Antennas for frequencies 330 ... 470 MHz, 869 MHz and 135 ... 174 MHz for long distances.



Cables

- CRF-1 RG58 length 1 meter with TNC male / TNC female -connectors.
- CRF-5F RG58 length 5 meter with TNC male / TNC female -connectors or CRF-5M TNC male / TNC male -connectors.
- ECOFLEX10 low loss (0.9 dB / 10 m) cable for cable lengths up to 20 meter with N or TNC -connectors.
- ECOFLEX15 low loss (0.6 dB / 10 m) cable for cable lengths over 20 meter with N -connectors.

We can also offer a wide range of interface and power cables, for example:

- CRS-2M length 2 meter, includes power supply wires, with D15 / D9 male or CRS-2F female -connectors.
- CRS-PB length 2 meter, includes power supply wires, with D15 / D9 male -connectors for RS-485 interface.
- CRS-35W 8-pin 2 m cable ODU 8-pin male / D9 female.
- C-P-35W 2m Power cable 2 m, ODU 4-pin male / 4 mm lab plugs.

Please contact your local distributor to get more information regarding cable types.

Selection guide



- 1) SATEL XPRS IP radio
- 2) Check product details

1) SATEL XPRS IP radio 2) Check product details	SATEL MCCU-20	SATEL MCCU-30	SATEL XPRS radio	SATELLINE-3AS VHF	SATELLINE-EASy	SATEL-EASy+	SATEL-EASy Pro+	SATELLINE-EASy Pro	SATEL Compact-Proof	SATELLINE-M3-TR1	SATEL-TR4+ / -R4+	SATEL-TR489	SATEL-TR49	SATEL-TR300	SATEL-TR49 SnapOn	SATEL Proof-TR4+, -TR9	SATEL Proof-TR489	SATELLINE-M3-TR9 / -R9	SATELLINE-EASy 869	SATELLINE-M3-TR1 869	SATEL I-LINK
Frequency range																					
UHF		•	•		•	•	•	•		•	•			•							
VHF				•																	
UHF & Licence free	•								2)			•	•		•	•	•	•	•	•	
LTE	•	•																			
Bluetooth		•				2)															
WiFi		•																			
Interfaces																					
RS-232	•		•	•	•	•	•	•	•	•						•	•		•	•	•
RS-422			•	•	•	•	•			•									•	•	
RS-485			•	•		•	•														
TTL / LV-TTL										•										•	
CMOS-UART											•		•	•	•						
Ethernet		•	1)			2)						•	•	•	•			•			
USB			1)			2)															
Digial / Analog I/O																					•
Tuning range																					
≤ 2 MHz																	2)		2)	2)	
20 MHz				2)								•									
45 MHz			•																		
65 MHz														2)	•						
70 / 90 MHz	2)	2)			•	2)	2)	2)	2)	•	2)	2)				•	2)				
FHSS												•	•		•	•	•	•			
Channel width kHz																					
Fixed (12.5 or 20 or 25)				•															2)	2)	
Programmable (6.25 / 12.5 / 20 / 25)						2)								•							
Programmable (12.5 / 20 / 25)	•	•			•		•	•	•	•	•		•			•					
Programmable (12.5 / 25)			•												•						
Programmable (12.5 / 20 / 25 / 50)												•					•				
FHSS	•											•	•			•		•			
Max. TX power																					
500 mW												•							•	•	
1 W	•	•			•	•			•	•	2)	•	•	•	•	•	2)	2)	2)		
5 W			•	•																	
35 W							•	•													
Operating voltage range																					
+3.3 VDC +/- 9%															•						
+3.5 ... +5.5 VDC																		•			
+3.7 ... +5.5 VDC													•								
+3.8 ... +5.5 VDC											•	•		•							
+3.5 ... +7.5 / +7 ... +25 VDC (-15% / +20%)					•					•											
+7 ... +25 VDC (-15% / +20%)																			•	•	
+7 ... +27.5 VDC (-15% / +20%)						•										•	•				
+9 ... +30 VDC (-15% / +20%)	•	•					•														
+10.6 ... +13.3 VDC (-15% / +20%)								•	•												
+10.6 ... +25 VDC (-15% / +20%)				•																	
+12.5 ... +25 VDC (-15% / +20%)			•																		
Battery									•												
Housing																					
Aluminium IP44				•	•	•													•		
Aluminium IP52			•																		
Aluminium IP67	•	•					•	•	•							•	•				
Aluminium IP69K	•	•														•	•				
Sheet metal aluminium / Stainless steel										•										•	•
Module: PCB card only										•	•	•	•	•	•			•		•	
Interface connector																					
RJ-45			1)			2)															
D9			•																		
D15				•	•	2)				•									•	•	•
ODU 8 pin							•	•	•												
M12 X-coded 8 pin		•																			
26 pin header / 26 pin strip										•										•	
USB			1)			2)									•						
1.27 mm pitch socket											•	•	•	•				•			
Deutsch DT04-6P-CL09	•															•	•				
Screw connector																					•
Model or variant w. display			•	•	•	•	•	•	•										•		

Size / Weight			
130 x 77 x 77 mm / 940 g	SATEL XPRS	139 x 67 x 29 mm / < 300 g	SATELLINE-EASy, EASy 869, 3AS VHF
174 x 95 x 46 mm / < 500 g	SATEL Proof-TR4+ / -TR9 / -TR489	138 x 67 x 29 mm / < 350 g	SATEL-EASy+
174 x 95 x 47 mm / 520 g	SATEL MCCU-20	89 x 49 x 10 mm / 50 g	SATELLINE-M3-TR1, SATELLINE-M3-TR1 869
187 x 84 x 50 mm / 850 g	SATEL Compact-Proof	126 x 63 x 23 mm / < 300 g	SATEL-B2 with enclosure
187 x 186 x 55 mm / < 1500 g	SATEL MCCU-30	57 x 36 x 6.9 mm / 20 g	SATEL-TR4+, SATEL-TR49, SATEL-TR489, SATEL-R4+, SATEL-TR300
189 x 138 x 71mm / 1420 g	SATELLINE-EASy Pro	57 x 36 x 6.7 mm / 20 g	SATELLINE-M3-TR9, SATELLINE-M3-R9
180 x 138 x 71mm / 1400 g	SATEL-EASy Pro+	51 x 30 x 4.75 mm / 10 g	SATEL-TR49 SnapOn

SATEL serial radio modems

Available frequencies

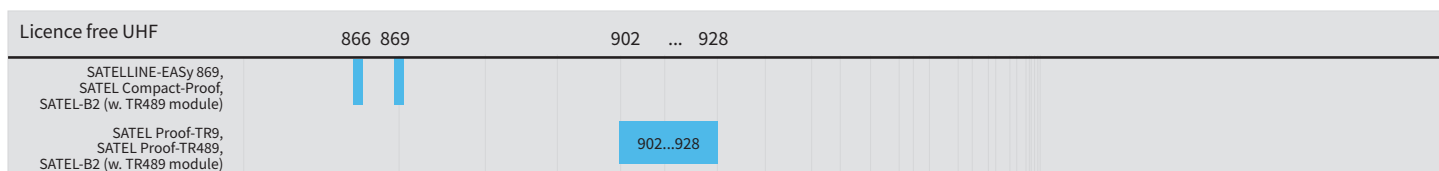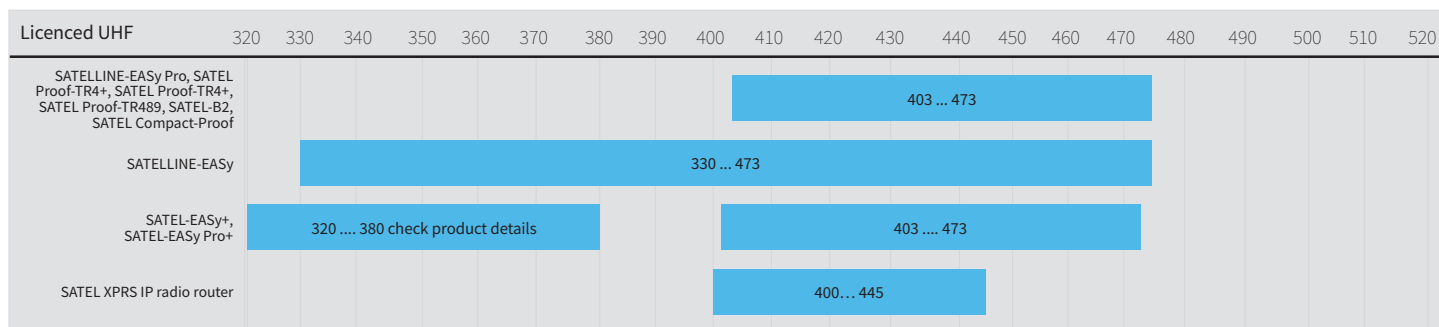

Channel width and data speed

		Max. air data speed					Max. serial data speed
		6.25 kHz	12.5 kHz	20 kHz	25 kHz	50 kHz	
SATEL XPRS			60.5 kbps		121 kbps		256 kbps
SATELLINE-EASy Pro			9600 bps	9600 bps	19200 bps		38400 bps
SATELLINE-EASy			9600 bps	9600 bps	19200 bps		38400 bps
SATEL Compact-Proof			9600 bps	9600 bps	19200 bps		38400 bps
SATELLINE-3AS VHF			9600 bps	9600 bps	19200 bps		38400 bps
SATEL Compact-Proof 869					19200 bps		38400 bps
SATELLINE-EASy 869					19200 bps		38400 bps
SATEL-EASy+	4800 bps @ 320...380 MHz		14400 bps	14400 bps	28800 bps		115200 bps
SATEL-EASy Pro+			14400 bps	14400 bps	28800 bps		115200 bps
SATEL Proof-TR4+ / -TR9			14400 bps	14400 bps	28800 bps	115200 bps	115200 bps
SATEL-Proof-TR489			14400 bps	14400 bps	28800 bps	38400 bps	115200 bps
SATEL-B2 (w. TR489 module)			14400 bps	14400 bps	28800 bps	38400 bps	115200 bps
SATEL-B2 (w. TR4+ module)			14400 bps	14400 bps	28800 bps		115200 bps



Protocols

SATEL radio modems are compatible with all commonly used industrial protocols. Here are some examples of the protocols: ANSI, CACTUS, COMLI, DNP 3.0 Serial & IP, 4 Exoline, HostLink, IEC 60870-5-101, IEC 60870-5-104, IEC 61850, Mewtocol, Modbus ASCII, Modbus RTU, Modbus TCP, Modbus RTU over TCP, Profibus DP, R-com, RP-570, RP-571, SATELLINK, S-bus, Siemens 3946 (R), Siemens Sinaut ST1/ST7 FT1.2, Siemens Sinaut ST7 FT2.0 ja NMEA 0183, SNMP, NTP, Ethernet/IP, SATEL NMS, Rockwell DF etc.

Ask for more information from your local distributor.

Disclaimer

©2024 SATEL Oy. All rights to this catalogue are owned solely by SATEL Oy. (referred to in this catalogue as SATEL). All rights reserved. The copying of this catalogue (without the written permission from the owner) by printing, copying, recording or by any other means, or the full or partial translation of the manual to any other language, including all programming languages, using any electrical, mechanical, magnetic, optical, manual or other methods or devices is forbidden. SATEL reserves the right to change the technical specifications or functions of its products, or to discontinue the manufacture of any of its products or to discontinue the support of any of its products, without any written announcement and urges its customers to ensure, that the information at their disposal is valid. SATEL software and programs are delivered "as is". The manufacturer does not grant any kind of warranty including guarantees on suitability and applicability to a certain application. Under no circumstances is the manufacturer or the developer of a program responsible for any possible damages caused by the use of a program. The names of the programs as well as all copyrights relating to the programs are the sole property of SATEL. Any transfer, licensing to a third party, leasing, renting, transportation, copying, editing, translating, modifying into another programming language or reverse engineering for any intent is forbidden without the written consent of SATEL.

IMPORTANT

SATEL PRODUCTS HAVE NOT BEEN DESIGNED, INTENDED NOR INSPECTED TO BE USED IN ANY LIFE SUPPORT RELATED DEVICE OR SYSTEM AND ARE GRANTED NO FUNCTIONAL WARRANTY IF THEY ARE USED IN ANY OF THESE APPLICATIONS.

... Distributors

ALBANIA

See Croatia

AUSTRALIA

ROJONE PTY LIMITED

+61 2 9829 1555

warren@rojone.com.au

www.rojone.com.au

Rojone is serving Australia and New Zealand

AUSTRIA

See Germany

BELGIUM

See The Netherlands

BOSNIA AND HERZEGOVINA

See Croatia

BRAZIL

SATELRADIO COMUNICAÇÃO

+55 11 3090 4094

botelho@satelradio.com.br

www.satelradio.com.br

TECHTON RADIO MODEM

+55 15 99106 3505

jaimilton@tehtonradiomodem.com.br

www.tehtonradiomodem.com.br

CAMBODIA

See South East Asia

CANADA

MDA CONTROLS INC.

+1 905 845 3666

orit.altman@mdacontrols.com

www.mdacontrols.com

METACON CANADA INC.

+1 888 563 9333

intel@metaconx.ca

www.metaconx.ca

CHILE

METCOM LIMITADA

+56 2 2335 3812

gailrybertt@metcomchile.cl

www.metcomchile.cl

CHINA P.R.

SATEL CHINA CO., LTD

+86 20 8251 4925

info@satel.cn

www.satel.cn

CROATIA

ADRINET D.O.O.

+385 1 8886 884

adrinet@adrinet.hr

www.adrinet.hr

Adrinet is serving Croatia, Albania, Macedonia, Serbia and Bosnia and Herzegovina.

CZECH REPUBLIC

CONTROLTECH S.R.O.

+420 321 7420 11

info@controltech.cz

www.controltech.eu/en

ControlTech s.r.o. is serving

Czech Republic and Slovak Republic

DENMARK

COMSYSTEM A/S

+45 49 139 693

salg@comsystem.dk

www.comsystem.dk

ESTONIA

ALARMTEC AS

+372 6 511 500

alarmtec@alarmtec.ee

www.alarmtec.ee

Alarmtec AS is serving Estonia, Latvia and Lithuania.

FRANCE

COMATIS

+33 1 3930 2900

info04@comatis.com

www.comatis.com

COMATIS is serving France and Northern Africa countries excluding Egypt

GERMANY

WELOTEC GMBH

+49 2554 9130 00

info@welotec.com

www.welotec.com/radio-modems

Welotec is serving Germany and Austria

GREECE

INTELLIGENT AUTOMATION

CONTROL SYSTEM SA.

+30 2310 527 228

info@iacs.gr

www.iacs.gr

HUNGARY

CONTROLTECH S.R.O.

+36 23 445 900

info@ctech.hu

www.ctech.hu/hu

ICELAND

NAUST MARINE HF

+354 414 8080

naust@naust.is

www.naust.is

INDIA

LOTUS WIRELESS

+91 891 276 1678

info@lotuswireless.com

www.lotuswireless.com

INDONESIA

PT. INZAN PERMATA

+62 21 875 2727

inzan_permata@yahoo.co.id

www.inzanpermata.id/

IRELAND

SIGMA WIRELESS

COMMUNICATIONS LTD

+353 1 814 2100

pkinna@sigma.ie

www.sigmawireless.com

Sigma Wireless Communications Ltd is serving Ireland and Northern Ireland.

ISRAEL

ARROWMID GROUP LTD

+972 36 247 080

info@arrowmid.com

www.arrowmid.com

ITALY

SARTELCO SISTEMI S.R.L.

+39 039 629 051

sistemi@sartelco.it

www.sartelco.com

KAZAKHSTAN

AUTOMATION AND

TECHNOLOGIES-SERVICE LTD

+7 727 277 4949

info@automation-trade.com

www.automation-trade.com

KOREA

THOMAS CO., LTD

+82 31 467 8554

system@thomas.co.kr

www.thomas.co.kr

LATIN AMERICA-CARIBBEAN

SOLARES FLORIDA CORP

Tel +1-305-592 0593

isolares@solaresflorida.com

www.solaresflorida.com

Solares Florida is serving part of the Latin America and Caribbean countries.

LAOS

See South East Asia

LATVIA, LITHUANIA

See Estonia

LUXEMBOURG

See The Netherlands

MACEDONIA

See Croatia

MALAYSIA

DIGISELECT (M) SDN BHD

+6 03 5614 3167

enquiry@dgselect.com

www.dgselect.com

MEXICO

ROSSBACH DE MÉXICO, S.A. DE C.V.

+52 555 147 0547

noemi.alvarez@rossbach.com.mx

www.rossbach.com.mx

MIDDLE EAST

EASY WORLD AUTOMATION LLC

+971 4 447 1137

sales@eworldme.com

www.eworldme.com/partners/satel

SAUDI TELECOMMUNICATION

+966 13 820 0477

mansour@stpest.com

www.stpest.com

Saudi Telecommunication & Power

is serving Saudi Arabia, Kuwait, UAE,

Bahrain, Qatar and Oman.

MONTENEGRO

See Slovenia

THE NETHERLANDS

SATEL BENELUX B.V.

+31 255 820 009

info@satelbv.nl

www.satelbv.nl

SATEL Benelux is serving The Netherlands,

Belgium and Luxembourg

NEW ZEALAND

See Australia

NORTHERN AFRICA

See France

NORWAY

SATEL NORGE AS

+47 69 27 70 40

produktinfo@satel.no

www.satel.no

PERU

MOR REPRESENTACIONES SAC

+51 1 222 6185

jmalmeida@morsac.com

www.morsac.com

PHILIPPINES

See South East Asia

POLAND

ASTOR MISSION CRITICAL SP. Z O.O.

+48 60 178 3744

satel@astor.com.pl

www.astor.com.pl

PORTUGAL

See Spain

SERBIA

See Slovenia

SINGAPORE

CLOCKWISE SUBSEA PTE LTD

+65 9159 1000

enquiries@cwsbsea.com

www.cwsbsea.com

SLOVAK REPUBLIC

See Czech Republic

SLOVENIA

METRONIK D.O.O

+386 1 514 0800

info@metronik.si

www.metronik.si

METRONIK d.o.o is serving Slovenia,

Serbia and Montenegro

SOUTH AFRICA

CSTREAM

+27 12 664 4515

info-cs@cstream.co.za

www.cstream.co.za

cStream serves Africa, excluding Northern Africa

SOUTH EAST ASIA

SATEL OY IN S.E.A.

+66 899 276 966

janne.kankaanpaa@satel.com

www.satel.com

SATEL Sales Manager Mr. Janne Kankaanpaa serves S.E.A. region (Philippines, Thailand, Kambodzha, Laos, plus other S.E.A. countries).

SPAIN

SATEL IBERIA

+34 91 636 22 81

info@satel-iberia.com

www.satel-iberia.com

SATEL IBERIA is serving Spain and Portugal.

SWEDEN

INDUO AB

+46 8 659 43 00

info@induo.com

www.induo.com

SWITZERLAND

SATEL SWITZERLAND - TUNCELLI SA

+41 21 729 59 83

ctuncelli@satelch.com

www.satelch.com

TAIWAN

ENVIRONMENTAL

SCIENCE & ENG'N CORP.

+886 2 2963 4300

daniel@esne.com.tw

www.esne.com.tw

THAILAND

See South East Asia

TURKEY

BILKO AS

+90 212 320 1383

bilko@bilko-automation.com

www.bilko-automation.com

UKRAINE

PE "STC NEW TECHNOLOGIES"

+38 044 499 7715

satel@ntech.kiev.ua

www.ntech.com.ua

UNITED KINGDOM

SADERET LTD

+44 1624 880366

sales@saderet.co.uk

www.saderet.co.uk

XL SYSTEMS LTD

+44 1883 622 778

sales@xls.co.uk

www.xls.co.uk

Contact us

SATEL

SATEL, Meriniitynkatu 17
P.O.Box 142, FI-24101 Salo
FINLAND
Tel. +358 2 777 7800
info@satel.com

Follow us

