

Introducing Extra C-Tap

Our signature hot-and-cold water dispenser: outstanding design and state-of-the-art technology.

- Smart and stylish: brushed stainless-steel designer tap with glass touch panel above the counter; filter, carbonator, cooler and boiler out of sight below
- Choice of up to five water types: unchilled and chilled still, chilled semi-sparkling and sparkling – plus hot water on demand e.g., for tea
- Low energy consumption, with programmable boiler standby/night modes
- Proven BRITA filtration technology ensures excellent-tasting cold and hot water and prevents limescale.
- Optional Easy Access Panel for greater barrier-free accessibility

Extra C-Tap

Our signature hot-and-cold water dispenser:
outstanding design and state-of-the-art
technology.



ThermalGate™
powerful thermal-
disinfection feature



PureProtect
smart self-cleaning
feature



Our water dispensers produce
86% less CO₂ emissions than
pre-bottled water and 64% less
than bottled water dispensers



Intuitive glass touch pad
plus optional Easy Access Panel

Anti-scalding feature
for hot water

BRITA filtration
preserves minerals in
water while removing
unwanted substances

Drip tray
with direct connection to
wastewater system



The **Easy Access Panel** helps create
a barrier-free, inclusive working
environment. The optional control
unit can be positioned to provide
easy access for wheelchair users

[Watch our Video on Youtube](#)







Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net













BRITA

Extra C-Tap



Technical data



Model	Extra C-Tap still	Extra C-Tap still + sparkling	Extra C-Tap still + hot	Extra C-Tap still + sparkling + hot
Design / Type	Tap System: C-Tap			
Types of water	 	   	  	    
Configuration options				
Tap height	330 mm			
For installation in barrier-free environments	Easy Access Panel			
For installation without waste water connection	waste water container			
Specifications				
Cooling capacity	20-100 regular users			
Heating capacity	-	-	L boiler: 20 l/h, XL boiler: 30 l/h	
Fits into undercounter cabinet with the following dimensions (W x H x D)	600 x 800 x 600 mm		800 x 800 x 600 mm	
Dimensions of undercounter appliances (W x H x D)	cooler: 272 x 490 x 473 mm		cooler: 272 x 490 x 473 mm L boiler: 230 x 415 x 234 mm, XL boiler: 230 x 670 x 234 mm	
Dimensions of tap incl. drip tray (W x H x D)	134 x 409 x 269 mm			
Weight	tap: 1.9 kg undercounter appliance (cooler): 38.5 kg		tap: 1.9 kg undercounter appliance: cooler 38.5 kg undercounter appliance: L boiler 7.8 kg, XL boiler: 11.3 kg	
Max. power consumption, cooler	540 W			
Max. power consumption, boiler	-	-	2.1 KW	
Max. flow rate, still water	2 l/min			
Max. flow rate, sparkling water	-	1.6 l/min	-	1.6 l/min
Max. flow rate, hot water	-	-	L boiler 1.6 l/min, XL boiler 1.9 l/min	
Max. instant draw-off, hot water	-	-	L boiler 1.8 l at up to 95°C, XL boiler 6 l at up to 95°C	

CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Reduces:

- particles such as microplastics and sand
- per- and polyfluoroalkyl substances (PFAS)
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres
- removes bacteria and microbial cysts




CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Mains water is strictly controlled. But healthcare and similar environments where hygiene is of the utmost importance demand an extra level of safety. CLARITY Protect delivers this through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “standard” filter.

CLARITY Protect reduces:

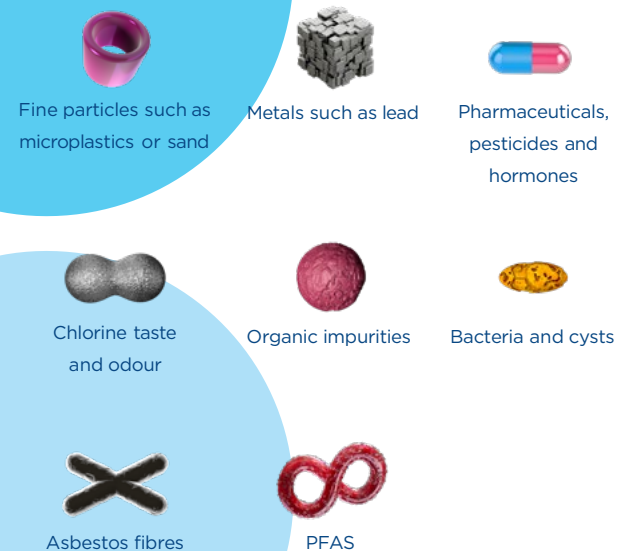

Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net



The right balance
Preserves minerals
in water

**Activated carbon
filtration**
Reduces substances
that impair taste and
odour

Pre-filter
Removes particles



Hollow fibre membrane
Nominal pore size of
0.15µm filters out
99.999% of bacteria
and 99.95% of cysts

Filter capacity:
Protect: 11,500 l

Exceptionally clean,
safe water

Protects equipment
lowering dispenser
maintenance costs



CLARITY Protect



Technical data



Model	BRITA CLARITY Protect 100
Technology	activated carbon and hollow fiber membrane filtration
Water intake temperature	4°C to 30°C
Ambient temperature for operation	4°C to 40°C
Ambient temperature for storage / transport	-20°C to 50°C
Water inlet and outlet connection	JG 8 mm
Operating pressure	2 bar to 8.6 bar
Flow rate at 1 bar pressure loss	180 l/h
Nominal filter capacity	11,500 l
Operating position	horizontal or vertical
Efficacy	
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)
Reduction of PFAS	> 99% (NSF 53 testet by independent laboratory)
Reduction of metals such as lead	> 90% (DIN EN 14898)
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)
Reduction of organic impurities such as benzene	> 90%
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	> 90% up to at least 8,000
Reduction of bacteria	99.999% (ASTM F838-20)
Reduction of cysts	99.95% (NSF 53)
Dimensions (W x D x H)	
Filter system (filter head with filter cartridge)	68 x 68 x 338 mm
Filter cartridge	68 x 68 x 311 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 371 mm

PURITY C Dispenser

Water filter: Excellent filtration designed for hot water dispensers.

Reduces:


- fine particles such as sand
- metals such as lead
- carbonate hardness
- chlorine taste and odour
- organic impurities

PURITY C Dispenser

Water filter: Excellent filtration designed for hot water dispensers.

Need piping-hot water? That's no problem for the PURITY C Dispenser cartridge, designed with hot water in mind. It protects the dispenser by reducing water hardness, tackling the common problem of limescale build-up head on. It also removes unwanted, taste-impairing substances. And with its IntelliBypass® feature, you can control the degree of hardness – just the right amount, for instance, to prepare a perfect cup of tea.

PURITY C Dispenser reduces:

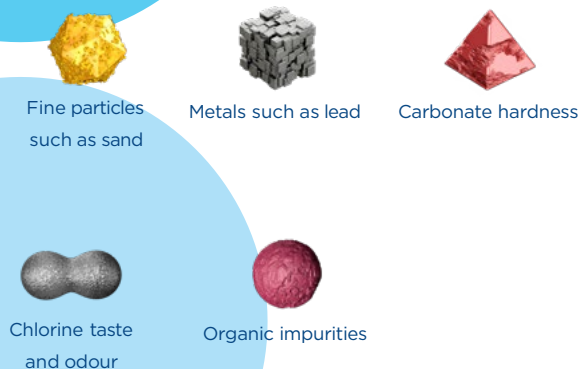

Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net

Post-filter

An extra layer of filtration for perfect results

Activated carbon filtration

Reduces substances that impair taste and odour

Ion exchanger

Reduces limescale and metals e.g. lead

Pre-filter

Removes particles.



IntelliBypass®

for achieving the ideal mineral composition

Filter capacity:

PURITY C300: 2,784 l
PURITY C500: 5,008 l
PURITY C1100: 8,480 l

Adjustable water hardness

For great-tasting and perfect hot drinks

Protects equipment

lowering dispenser maintenance costs


BRITA



PURITY C Dispenser



Technical data

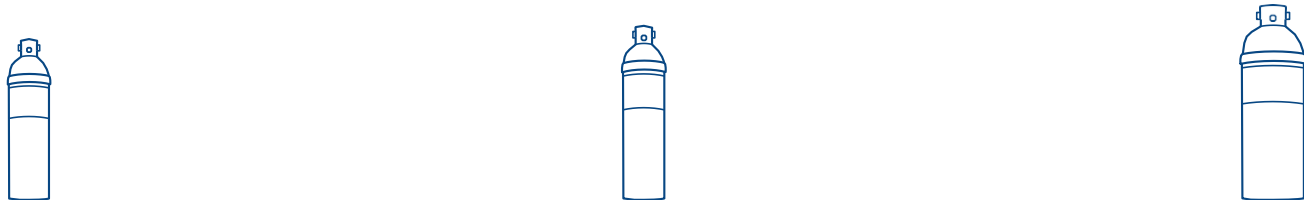

Model	BRITA PURITY C Dispenser C300		BRITA PURITY C Dispenser C500	BRITA PURITY C Dispenser C1100
Technology	decarbonisation			
Capacity ¹ at a carbonate hardness of 10°dH / bypass setting of 40%	2,784 l		5,008 l	8,480 l
Max. operating pressure	2 bar to max. 8.6 bar			
Water intake temperature	4 – 30 °C			
Nominal flow	60 l/h		100 l/h	
Pressure loss at nominal flow	0.25 bar		0.5 bar	
Dimensions (W x D x H) of filter head with filter cartridge	125 x 119 x 466 mm		144 x 144 x 557 mm	184 x 184 x 557 mm
Weight (dry / wet)	2.8 / 4.2 kg		4.6 / 6.9 kg	7.7 / 12.5 kg
Connections (input / output)	G 3/8“ or John Guest 8 mm			
Operating position	horizontal and vertical			

¹ The capacities given have been tested and calculated on the basis of normal application and machine conditions. Due to external influences (e.g. variations in raw water quality and/or machine type), deviations from these results can occur.