

MB720MK-B V3

4 x M.2 NVMe SSD PCIe 4.0 Mobile Rack for 5.25" Bay with OCUlink

Superior PCIe 4.0 Performance

Utilizing PCIe 4.0 Interface

Reduce cable clutter inside your system


PCIe 4.0	64Gbps	10X FASTER!
PCIe 3.0	32Gbps	
SATA	6Gbps	

ToughArmor Protection

FULL METAL CONSTRUCTION



Compatible M.2 NVMe sizes

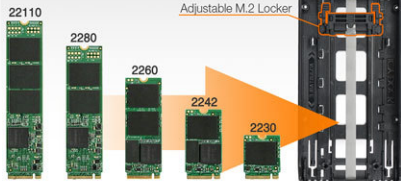

Maximizing Cooling Performance

Integrated Aluminum Heatsink Cover



ToughArmor MB720MK-B V3 Features & Specs

- Fits 4x M.2 NVMe SSDs of all lengths, 30mm (2230), 42mm (2242), 60mm (2260), 80mm (2280), and 110mm (22110)
- Installs into any standard external 5.25" optical drive bay
- Supports Tri-mode controllers PCIe/NVMe pinout (Broadcom, Areca, and more)
- Connects with 4x OCUlink (SFF-8612) (NVMe host required)
- Supports PCIe 4.0 specification with transfer rates up to 64Gbps per drive bay
- Patent-pending screw-less M.2 adjustable locker securely holds all length drives
- Removable and tool-less drive installation design for easy drive maintenance
- Rugged, full-metal enclosure meets flammability requirements
- Integrated large, high-efficiency heatsink and ample ventilation for excellent cooling performance
- 2-segment key lock for additional physical security
- Eagle-hook tray latch securely holds the drive tray inside the enclosure
- EMI Grounding protects SSDs from electrical damage

Model Number	MB720MK-B V3
Support Drive Size	M.2 SSD (2230-22110)
Compatible Drive Type	NVMe PCIe Gen 4x4
Number of Drives	4
Host Interface	4 x SFF-8612
Transfer Rate	Up to 64Gbps (depending on SSD Speed)
Power Input	2 x 15pin SATA power connector
Drive Bay	1 x 5.25" half height bay
Drive Cooling (Active)	2 x 40*40*20mm fan
Structure / Material	Full metal
Drive Security	2 segment key lock
Dimension (W x H x D)	146.0 x 41.3 x 182.0mm
Product Net Weight	1352.2g
Package Contents	Device, manual, screws, drive ID plugs, keys