


# Baylis spotlights

## INSTRUCTIONS


Single spotlight	1
Double spotlight	4

## Single spotlight

### INCLUDED

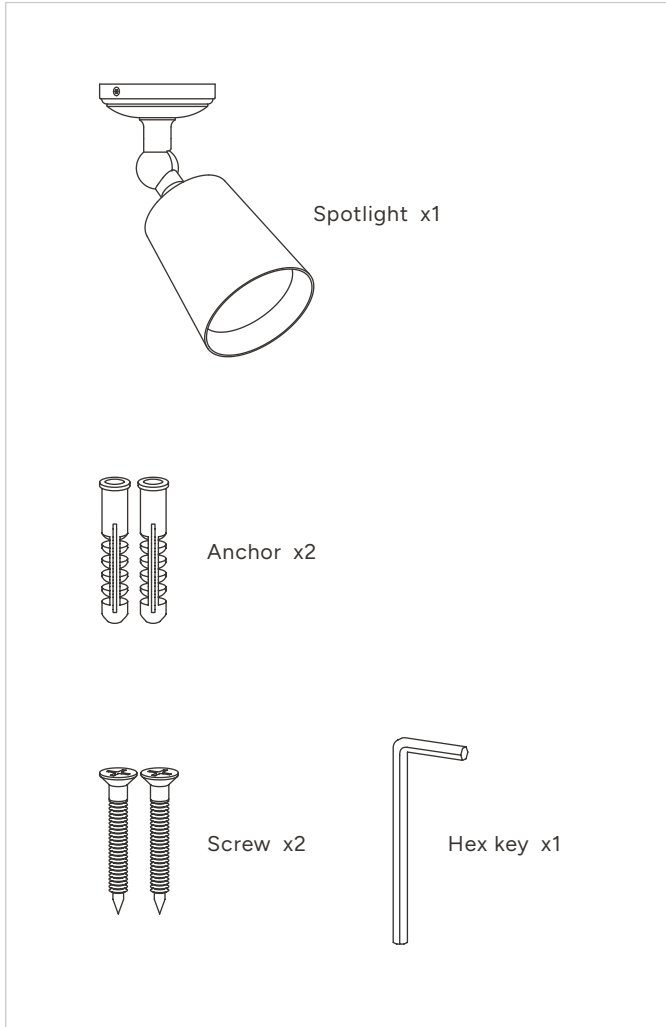

### TOOLS YOU'LL NEED

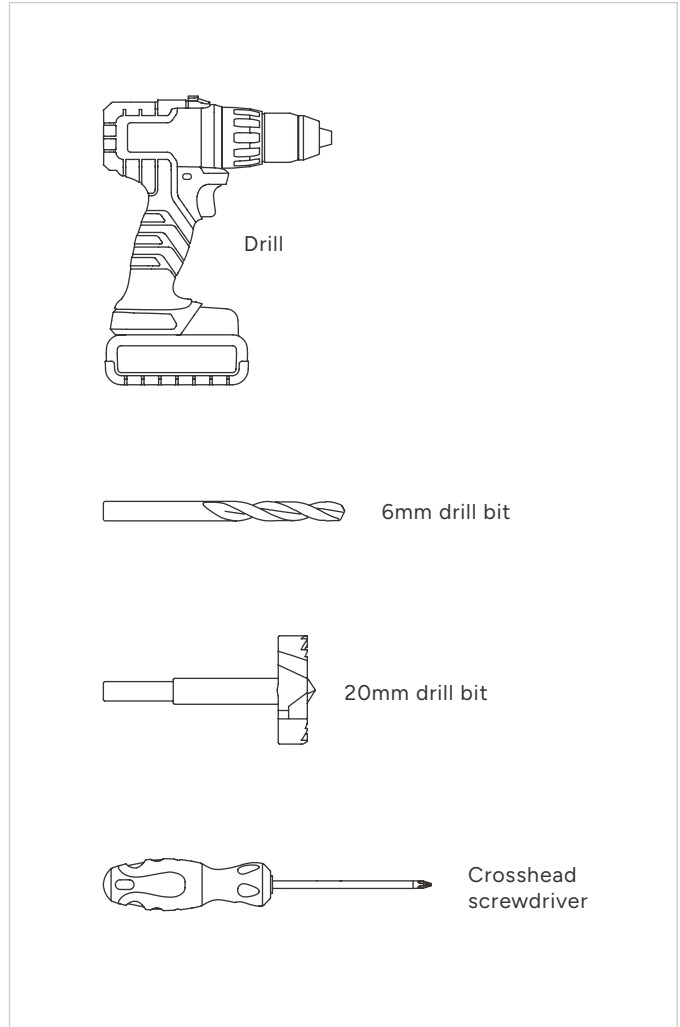


Before installation, the power supply should be isolated at the consumer unit circuit breaker. Check that the power is off.


These products must be installed by a qualified electrician in accordance with the latest building regulations.

We include 300mm of additional cable and a small terminal box to assist with installation. You'll need space, such as a void above the ceiling or behind the wall, to house these parts.


## Single spotlight

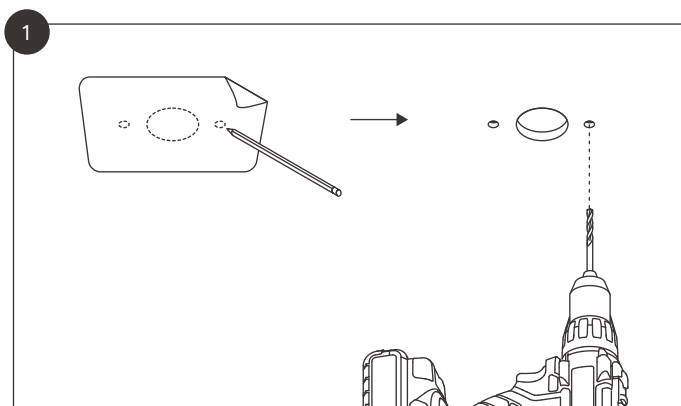


Drill the 20mm hole for the wires and the two 6mm holes for the plastic anchors. See the template on **page 4**.

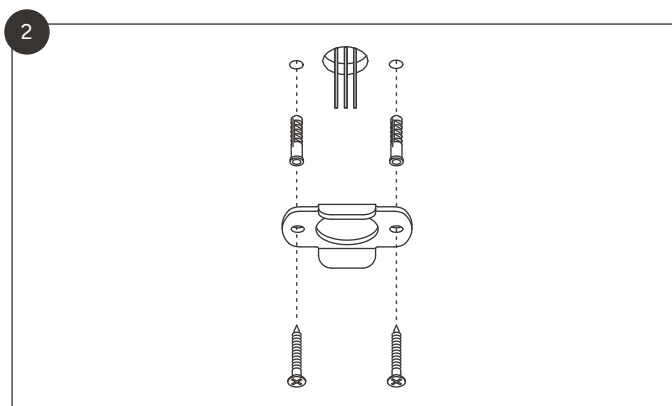

Use the screws and anchors provided to attach the mounting plate to the ceiling or wall.

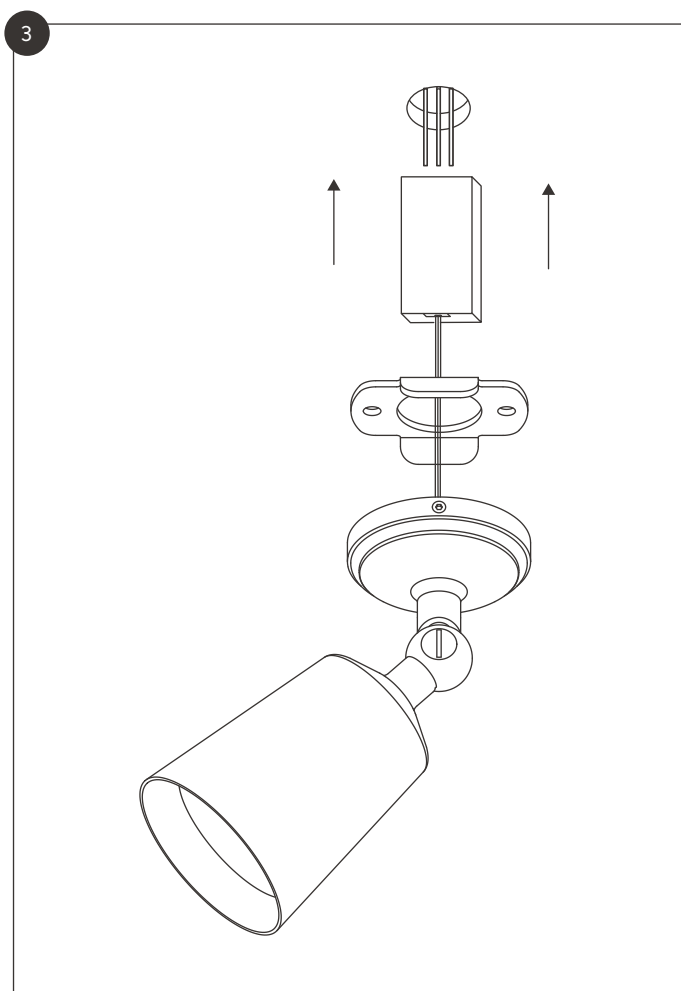


Using the terminal box provided, connect the live (brown) and neutral (blue) wires. Tuck the wires and the terminal box into the void and push the brass cover over the mounting plate.

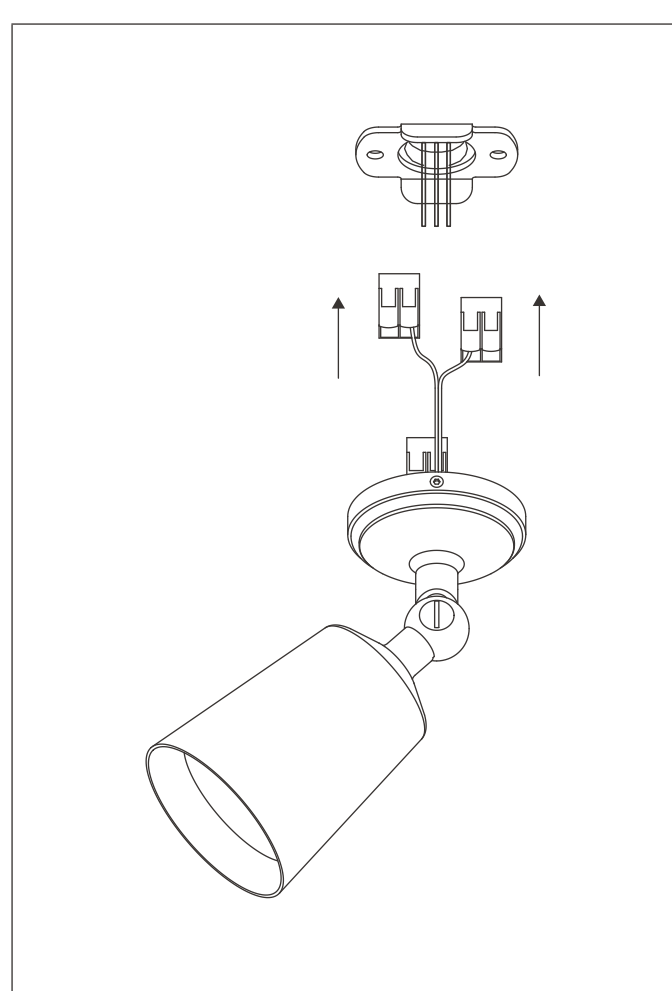


### Single spotlight

4




When the cover is flush with the ceiling or wall, tighten the two grub screws to secure the spotlight.

5



Insert a 50mm GU10 bulb (Arthur or Chester) or 35mm bulb (Court) into the shade and test the light to make sure the wiring is correct.


Single spotlight

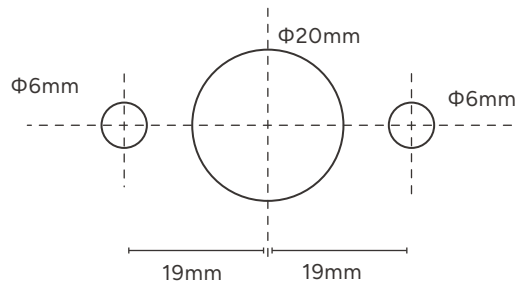


Print on A4

## Double spotlight

### INCLUDED

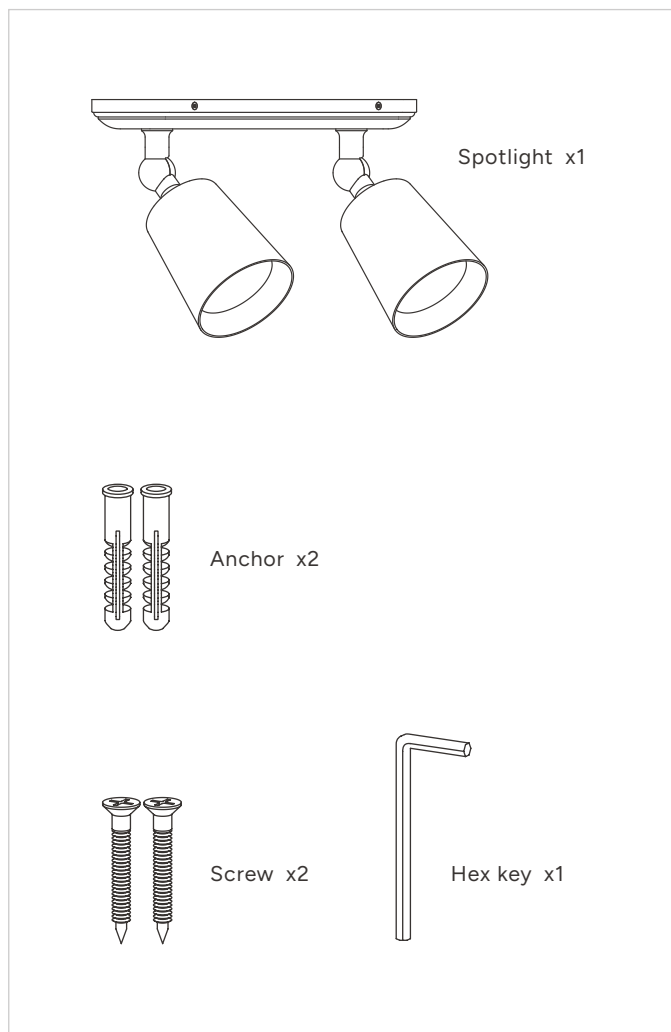

### TOOLS YOU'LL NEED

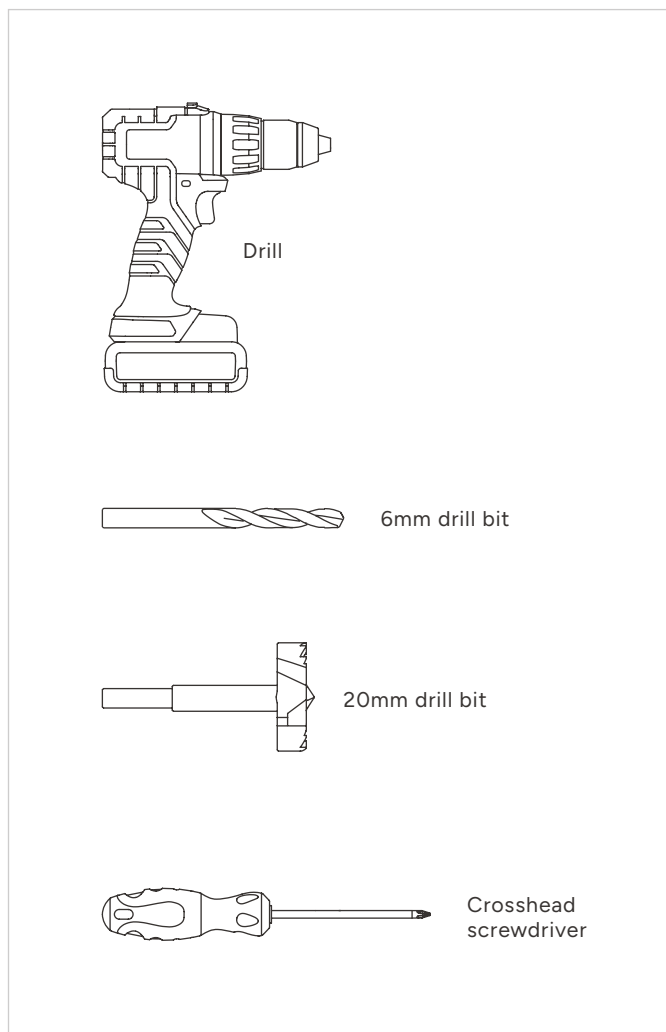


Before installation, the power supply should be isolated at the consumer unit circuit breaker. Check that the power is off.


These products must be installed by a qualified electrician in accordance with the latest building regulations.

We include 300mm of additional cable and a small terminal box to assist with installation. You'll need space, such as a void above the ceiling or behind the wall, to house these parts.


## Double spotlight

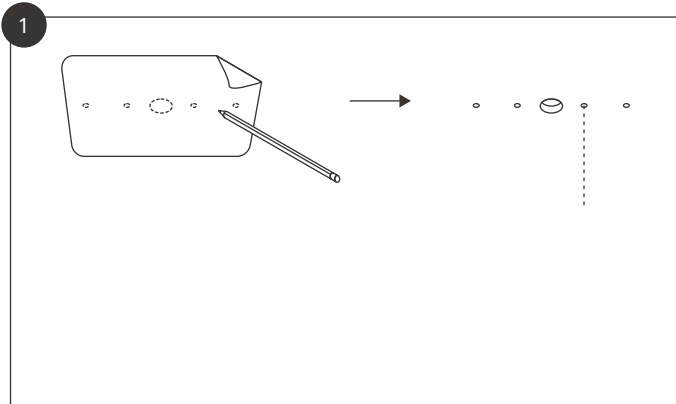


Drill the 20mm hole for the wires and the four 6mm holes for the plastic anchors. See template on **page 6**.

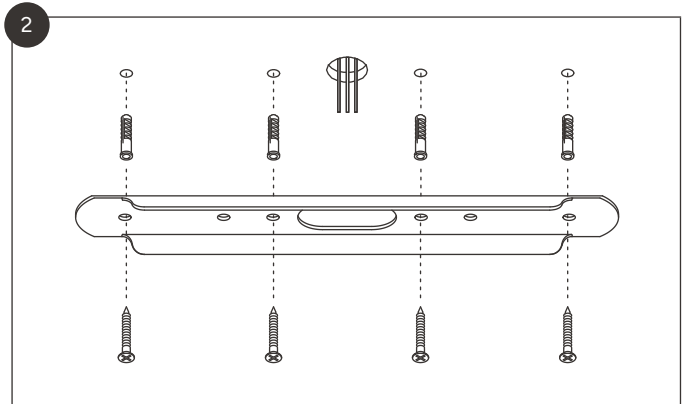


Use the four screws and anchors provided to attach the mounting plate to the ceiling or wall.

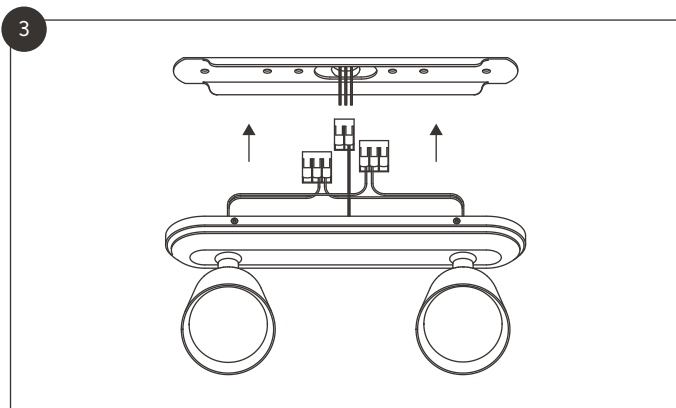

Using the terminal box provided, connect the live (brown) and neutral (blue) wires. Tuck the wires and the terminal box into the void. Push the brass cover over the mounting plate.

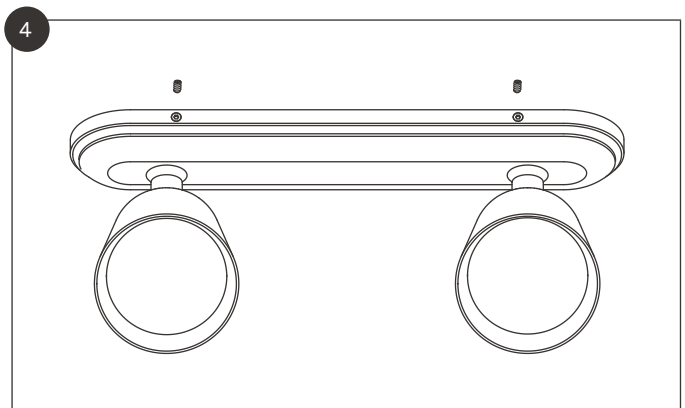

When the cover is flush with the ceiling or wall, tighten the four grub screws to secure the spotlight.

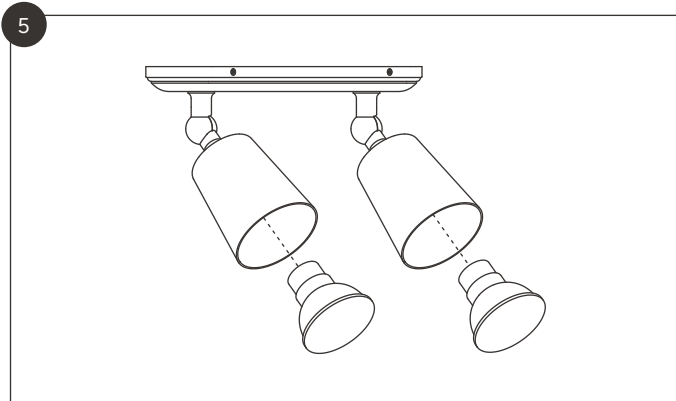

Insert 50mm GU10 bulbs (Arthur or Chester) or 35mm bulbs (Court) into the shades and test the light to make sure the wiring is correct.

Double spotlight

