


ARQIS108i

CABINET LOUDSPEAKERS

Architectural Loudspeaker Cabinet

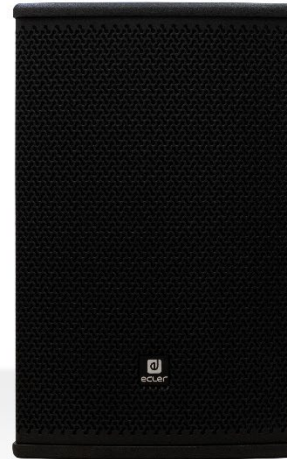

PRODUCT OVERVIEW

ARQIS108i is a 2-way wooden loudspeaker cabinet with a compact format, stylish aesthetics, excellent sound quality and long-term reliability, featuring 150 WRMS @ 8Ω, 8" woofer and 1" HF Compression Driver. Its VEASY wall bracket (VESA compatible), allows for pan & tilt adjustment, employing a single screw for fastening. It has been specifically designed to fulfil permanent installation requirements where a perfect balance between sound performance and architectural/interior's design matching is a must.

KEY FEATURES

- Full range, 2-way architectural loudspeaker
- 150 WRMS @ 8Ω
- 8" low frequency woofer
- 1" high frequency compression driver (rotatable)
- Double INPUT/STACK connector, Euroblock type, with security attachment screws to avoid accidental disconnection
- VEASY Wall bracket included, allowing for pan & tilt adjustment, employing a single screw for fastening. Robust, quick and easy to install, including jumps and markings for repeating speaker orientation.
- Metal safety sling included, to avoid drops in case of accidental detachment from the wall surface
- U-bracket wall-mount accessory compatible (not included)
- Available in black (RAL 9005) and white (RAL 9003) colour.
- [Ecler Loudspeakers EQ Settings available.](#)
- [EASE files available](#)



APPLICATIONS

- Commercial
- Corporate
- Hotels and restaurants
- Education
- Sports and wellness
- Leisure

ACCESSORIES

- ARQ108UB




TECHNICAL SPECIFICATIONS

ARQIS108i		
System		
Effective frequency range ¹	65 Hz - 20 kHz (-10dB)	
Coverage angle ²	130°x130° (HxV)	
Power handling	150W RMS / 600W Peak	
Sensitivity ³	90dB (1W/1m)	
Maximum SPL ⁴	112dB continuous / 118dB peak	
Recommended amplifier	300W	
Transducers		
Ways	2-way, full range	
Low frequency driver	8" woofer	
High frequency driver	1" Compression driver (rotatable)	
Nominal impedance	8Ω	
Filters		
Crossover filter	3,5 kHz	
Recommended High-Pass protection filter	70 Hz with minimum 12 dB / octave filter	
Physical		
Connection type	1 x Euroblock & 1x Speakon© (+1, -1)	
Installation options	Surface, wall, desktop	
Environmental	IP31	
Enclosure material	MDF	
Grille material	Steel	
Grille fixing system	Screw fixation	
Flying points	6 x M6 & 2 x M8	
Operating temperature	Min: -20°C ; -4°F Max: 70°C ; 158°F	
Operating humidity	<85% HR	
Storage temperature	Min: -20°C ; -4°F Max: 70°C ; 158°F	
Storage humidity	<90% HR	
Included accessories	VEASY Wall Bracket / 3mm Allen key/ 4mm Allen key / 6mm Allen key	
Finished color	Black (RAL9005) or White (RAL 9003)	
Dimensions (WxHxD)	244 x 390 x 280 mm / 9.61 x 15.35 x 11.02 in	
Weight	8.4 kg / 18,51 lb	
Pieces per box	1 unit	
Shipping dimensions (WxHxD)	435 x 445 x 320 mm / 17.13 x 17.52 x 12.60 in	
Shipping weight	10.5 kg / 23.14 lb	

¹10dB below the sound pressure level at specified sensitivity²6dB below the sound pressure level than that at the direction of maximum level, Max. angle between 1 kHz and 4 kHz.³Measured on-axis, far field and referenced to 1 meter by inverse square law. Average from 100 Hz to 10 kHz.⁴Calculated from sensitivity and power handling specifications, exclusive of power compression


FREQUENCY RESPONSE ON-AXIS

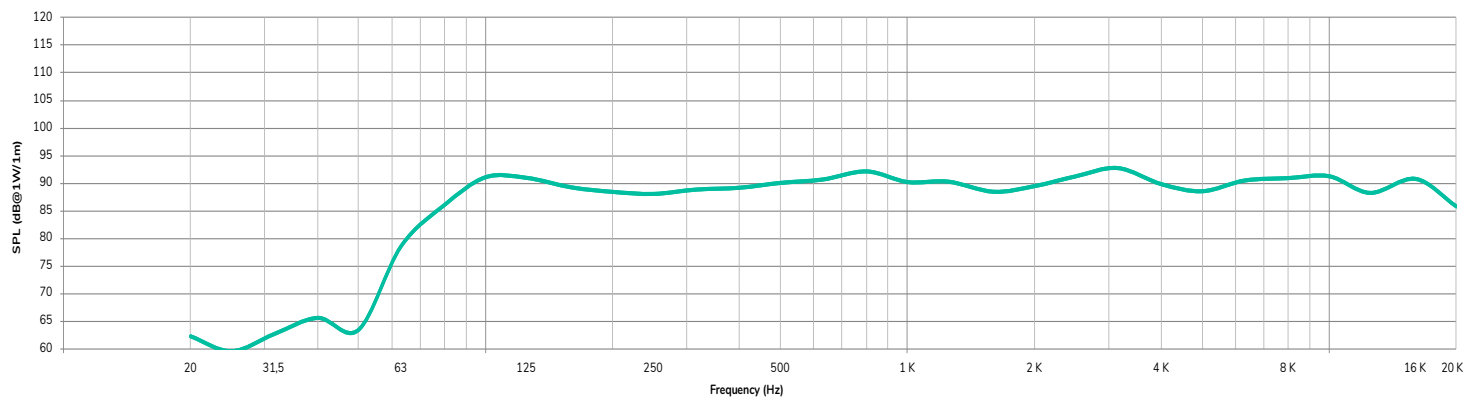



MECHANICAL DIAGRAMS



Ecler ARQIS108i Mechanical Diagram

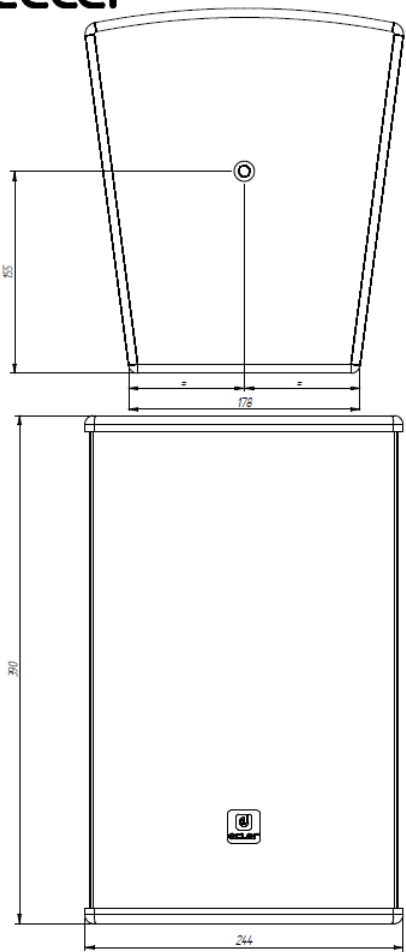


61-1091-0100

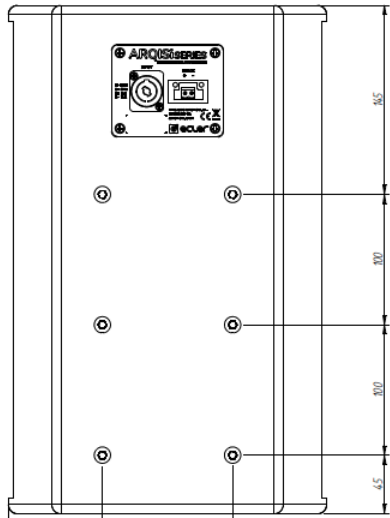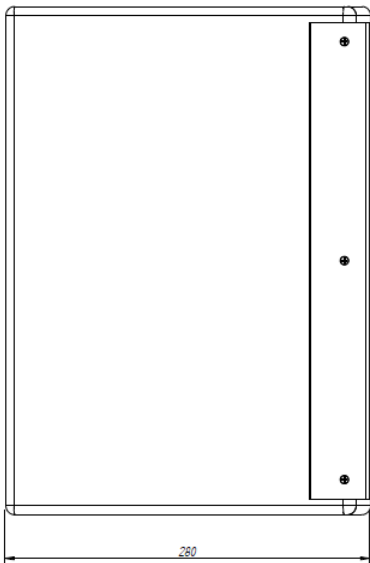


www.ecler.com

POLAR DIAGRAMS

HORIZONTAL

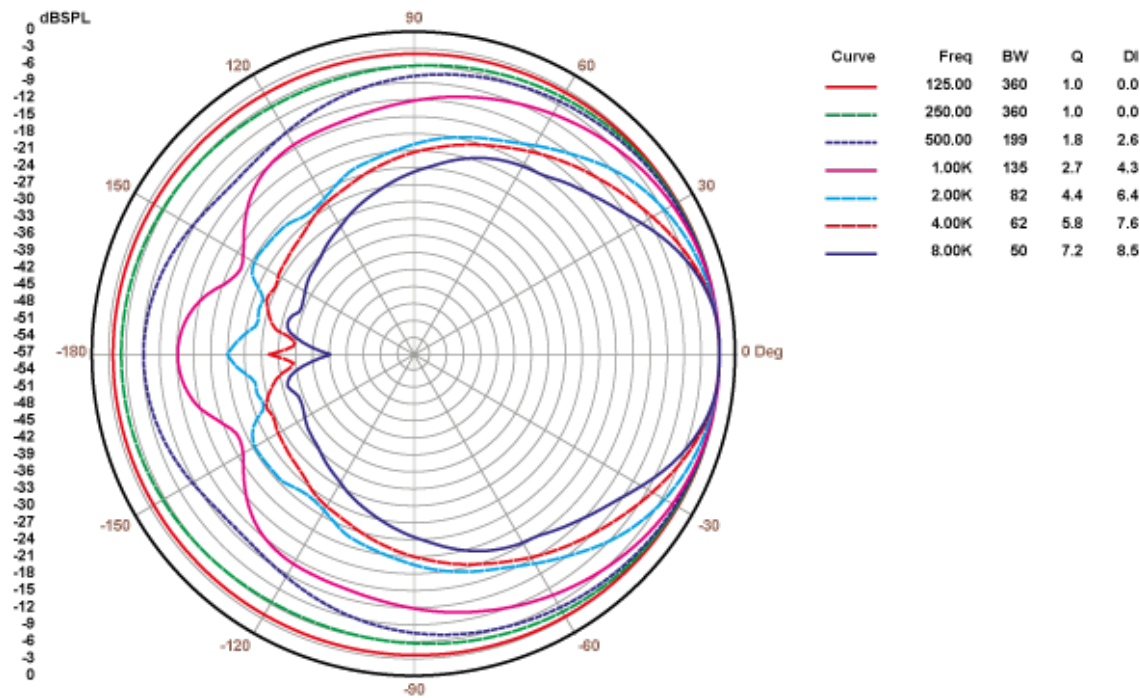

VERTICAL

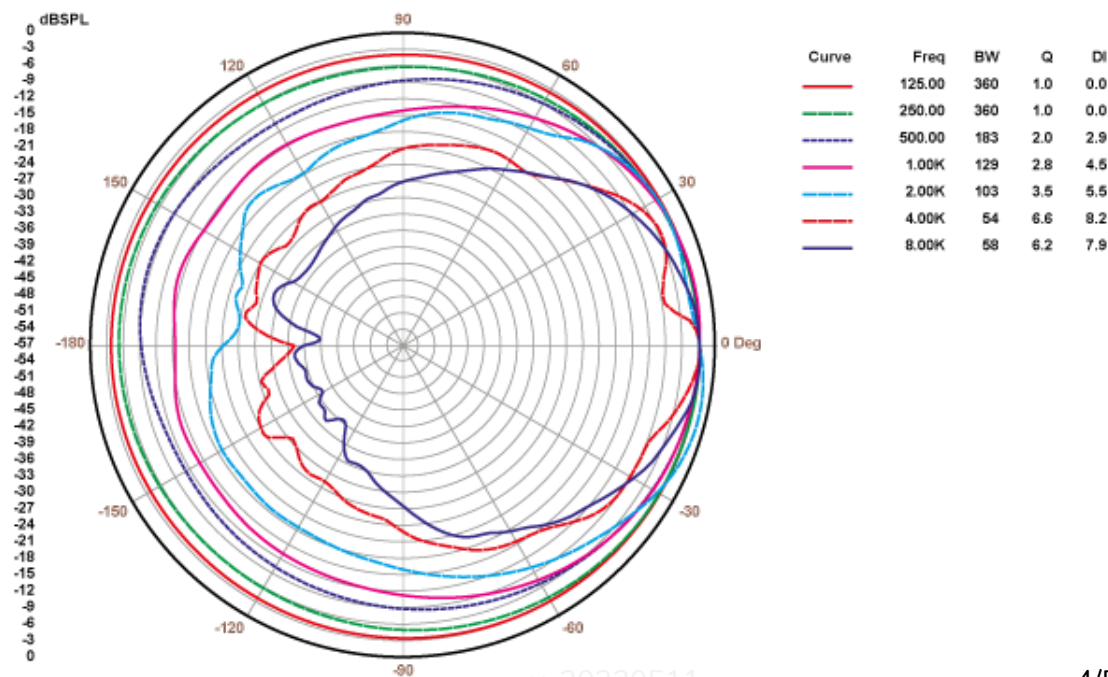

A&E SPECIFICATIONS

The loudspeaker shall be a 2-way wooden loudspeaker cabinet, incorporating a high-efficiency 8" mid/low woofer and 1" rotatable compression driver. It shall have a power handling of 150 W RMS with a peak power handling of 600 W and the effective frequency range (± 10 dB) shall be from 65 Hz to 20 kHz.

Crossover filter shall be at 3,5 kHz. The sensitivity shall be 90 dB when measuring with an input signal of 1 Watt at a distance of 1 meter, while the maximum continuous sound pressure level shall be 112 dB. The coverage angle shall be $130^\circ \times 130^\circ$ (HxV).

The loudspeaker shall have a nominal impedance of 8 Ω . It shall have an enclosure constructed out of medium density wood with a textured and scratch resistant paintwork finish. The front finishing shall be made with an overlapping front grill with a rotatable logo, giving a slim and elegant impression. It shall include a Speakon® and Euroblock connector, with security attachment screws to avoid accidental disconnection.

It shall include a VESA compatible wall bracket, which enables pan & tilt adjustment, employing a single screw for fastening. An additional metal safety sling shall be provided, to avoid drops in case of accidental detachment. The full range system's enclosure shall be 244 mm wide, 390 mm high and 280 mm deep and the weight shall not exceed 8,4 Kg.

The loudspeaker shall be the ECLER ARQIS108i.

All product characteristics are subject to variation due to production tolerances. **NEEC AUDIO BARCELONA S.L.** reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical queries contact your supplier, distributor or complete the contact form on our website, in [Support / Technical requests](#).

Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 | information@ecler.com | www.ecler.com