



# OXEO VP

## CONNECTED PERISTALTIC ORP CHEMICAL FEEDER



### AUTOMATED CHEMICAL REGULATION, INTUITIVELY

Regulate your ORP from a simple, and easy to use application, setting alerts, schedule chemical dispensing, receive alerts directly to your phone, and let the Oxexo do the rest.



### QUICK VISUALIZATION

The peristaltic dosing Oxexo VP is equipped with a color changing, LED light, which changes according to the water chemistry of your pool.




### RELIABLE AND SIMPLE

The Oxexo VP is paired with a compact measuring probe to make ORP measurement more reliable and simplify the installation of your device.

# EASY TO INSTALL

The Oxexo VP is the easiest ORP regulator system to install in the market. Plug the Oxexo VP into any protected 120 V outlet. From there, the flow rate sensor captures the filtration status and gives you a more reliable indication. For an even easier setup, you can add a measurement chamber (Zelia Pod), which houses all the accessories needed to treat your pool water in a single location. The Zelia Pod has slots for the flow switch, ORP probe, and injecting tube.

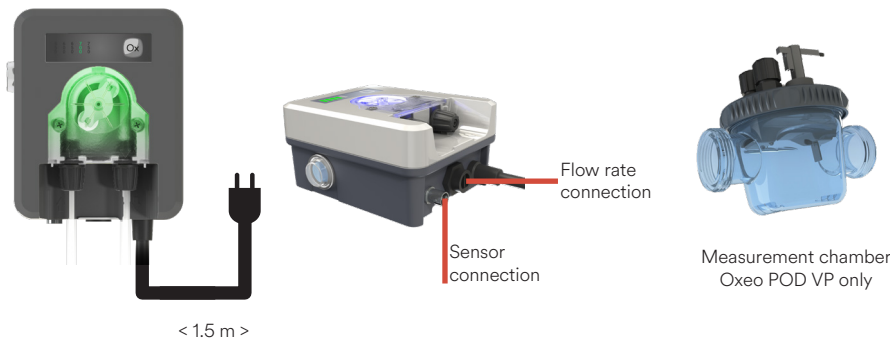

# COMPLETE AND INTUITIVE SETTINGS

The settings for ORP regulation can be done in mere minutes, thanks to a single button or the intuitive smartphone app, allowing for additional settings and functions.

- ✓ Choice of setpoint value (500mv to 700mv)
- ✓ Overdose alert setup
- ✓ Calibration of the 2-points sensor
- ✓ Tank volume setup
- ✓ Manual adjustment of the measurement
- ✓ Remote setup



# PEACE AND QUIET AT A GLANCE

The peristaltic dosing Oxexo VP is equipped with a color changing, LED light, which changes according to the water chemistry of your pool. This patented process provides you with the water chemistry feedback you need, from across your pool deck, and immediately tells you when your pool needs to be rebalanced.



To make your installation even easier, it's possible to add a Zelia Pod measurement chamber which requires just one hole, drilled in the piping.

Reference	Description	Equipment supplied		Power	Max. injection volume	Max. Flow rate	Max Tank volume	Connection	Dimension box
PF10J055	Oxexo VP	ORP sensor, calibration solution, injection kit	Saddle clamps	120V AC	1.9L/h (64oz/h)	1 l / h 34 oz / h	150 m³ 5300 ft³	Wi-Fi (close range and at a distance) / wireless (BLE)	5.1 in x 4.5 in x 1.37 in
PF10J056	Oxexo POD VP		Zelia Pod measurement chamber						



Do not dispose of on the public highway