

GT-X1500THI

GT Series Car Audio Subwoofer Tube



THANK YOU FOR CHOOSING THIS JBL® PRODUCT

This product has been designed to deliver great bass performance from a compact, easily installed enclosure. To get the best performance from your enclosure, we strongly recommend that you consult professional audio installation professionals. Although these instructions explain how to install your enclosure in a general sense, they do not show specific installation methods that may

be required for your particular vehicle. If you do not have the necessary tools or experience, do not attempt the installation yourself. Instead, please ask your authorized JBL® car audio dealer about professional installation. To help us serve you better if your enclosure ever requires warranty service, please retain your original sales receipt and serial number.

INSTALLATION WARNINGS AND TIPS

- INSTALLATION TIPS**
- Always wear protective eyewear when using tools.
 - Turn off all electrical components and other electrical devices before you start. Disconnect the negative (-) lead from your vehicle's battery.
 - Check clearances on both sides of a planned mounting surface. Be sure that screws or wires will not puncture brake lines, fuel lines or wiring harnesses, and that wire routing will not interfere with the safe operation of the vehicle.
 - When making electrical connections, make sure they are secure and properly insulated.
 - Before drilling or cutting holes, use a utility knife to remove unwanted fabric or vinyl, to keep material from snagging in a drill bit or saw.
 - Do not mount speakers where they will get wet.
 - If a fuse must be replaced, be sure to use the same type of fuse and current rating as the original fuse.

CHOOSING A MOUNTING LOCATION FOR THE ENCLOSURE
Choose a mounting location that doesn't interfere with cargo, the fold-down rear seat or the trunk lid. The best location is usually a corner of the trunk or cargo area. Securely mount the enclosure to the mounting surface, using the supplied material.

WARNING: Playing loud music in an automobile can permanently damage your hearing as well as hinder your ability to hear traffic. Listening at low levels while driving is recommended. HARMAN International accepts no liability for hearing loss, bodily injury or property damage resulting from use or misuse of this product.

OWNER'S MANUAL

THANK YOU FOR CHOOSING THIS JBL® PRODUCT

This product has been designed to deliver great bass performance from a compact, easily installed enclosure. To get the best performance from your enclosure, we strongly recommend that you consult professional audio installation professionals. Although these instructions explain how to install your enclosure in a general sense, they do not show specific installation methods that may

be required for your particular vehicle. If you do not have the necessary tools or experience, do not attempt the installation yourself. Instead, please ask your authorized JBL® car audio dealer about professional installation. To help us serve you better if your enclosure ever requires warranty service, please retain your original sales receipt and serial number.

INSTALLATION WARNINGS AND TIPS

- INSTALLATION TIPS**
- Always wear protective eyewear when using tools.
 - Turn off all audio components and other electrical devices before you start. Disconnect the negative (-) lead from your vehicle's battery.
 - Check clearances on both sides of a planned mounting surface. Be sure that screws or wires will not puncture brake lines, fuel lines or wiring harnesses, and that wire routing will not interfere with the safe operation of the vehicle.
 - When making electrical connections, make sure they are secure and properly insulated.
 - Before drilling or cutting holes, use a utility knife to remove unwanted fabric or vinyl, to keep material from snagging in a drill bit or saw.
 - Do not mount speakers where they will get wet.
 - If a fuse must be replaced, be sure to use the same type of fuse and current rating as the original fuse.

CHOOSING A MOUNTING LOCATION FOR THE ENCLOSURE


Choose a mounting location that doesn't interfere with cargo, the fold-down rear seat or the trunk lid. The best location is usually a corner of the trunk or cargo area. Securely mount the enclosure to the mounting surface, using the supplied material.

WARNING: Playing loud music in an automobile can permanently damage your hearing as well as hinder your ability to hear traffic. Listening at low levels while driving is recommended. HARMAN International accepts no liability for hearing loss, bodily injury or property damage resulting from use or misuse of this product.

OWNER'S MANUAL

SPEAKER CONNECTIONS

Connect the (+) and (-) terminals of this enclosure to the ring and the (+) and (-) terminals of your battery. Do not short circuit (+) and (-) terminals with any wire. See wiring diagram for the correct wiring.

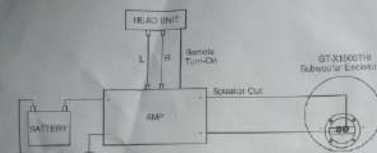

SPECIFICATIONS

Power Rating	250 watts (RMS)
Subwoofer	12" (305mm)
Power Handling	100W
Power Amplifier	100W
Impedance	4Ω
Frequency Response	20 Hz - 200 Hz
Dimensions	12" x 12" x 12" (305mm x 305mm x 305mm)

GENERAL CARE

This subwoofer is the only component with a limited warranty. Do not use any other components or accessories on this subwoofer. It is not recommended to use any other components or accessories on this subwoofer. It is not recommended to use any other components or accessories on this subwoofer.

HARMAN International Company, Inc. 10000 Wilshire Blvd., Suite 1000, Beverly Hills, CA 90212-1000. © 2000 HARMAN International Company, Inc. All rights reserved. HARMAN International Company, Inc. is a registered trademark of HARMAN International Company, Inc. HARMAN International Company, Inc. is a registered trademark of HARMAN International Company, Inc. HARMAN International Company, Inc. is a registered trademark of HARMAN International Company, Inc.

