



Qualcomm® aptX™
Low Latency



CP-NS01

User Manual

Bluetooth Adapter for Nintendo Switch& Switch Lite

Package Contents



CP-NS01



User Manual



USB-A TO USB-C
Adapter




Silicone Case



Pouch

About your CP-NS01 :

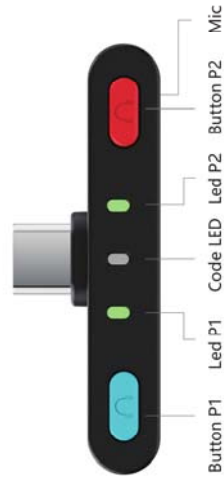

Button P1/P2: Press to connect the Headphones/Earbuds or toggle internal Mic On/Off

Led P1&P2: Green=Connected with Mic Off

Orange=Connected with Mic On

Flashing Green=Connecting or Pairing

Code LED: Off=SBC / Blue=aptX / Orange=aptX Low Latency

Setting :



1. Turn on the Nintendo Switch .
2. Connect the CP-NS01 Adapter with Nintendo Switch via the USB-C port.
3. Once CP-NS01Adapter connected with the Nintendo Switch, there will be USB/Speaker Icons appeared on the display of Switch, LED indicators of USB.
4. CP-NS01 is ready for pairing and connecting with your Headphones/ Earbuds once the LEDs start flashing.
5. For in-game voice chat, once the Headphones/Earbuds were connected, press the P1/P2 Button to toggle the Internal Mic ON/OFF, when the internal Mic is off, P1/P2 LED is green, when the internal Mic is on, P1/P2 LED is Orange.



1. Turn on the Nintendo Switch.
2. Connect the CP-NS01 Adapter with Nintendo Switch via the USB-C port.
3. Once CP-NS01 Adapter connected with the Nintendo Switch, there will be USB/Speaker Icons appeared on the display of Switch, LED indicators 4^{USB}.
4. CP-NS01 is ready for pairing and connecting with your Headphones/ Earbuds once the LEDs start flashing.
5. For in-game voice chat, once the Headphones/Earbuds were connected, press the P1/P2 Button to toggle the Internal Mic ON/OFF, when the Internal Mic is off P1/P2 LED is green, when the Internal Mic is on, P1/P2 LED is Orange.

Connecting to 1 Pair Bluetooth headphones



1. Upon powering on, CP-NS01 will start pairing mode automatically.
2. Make sure the Bluetooth Headphones/Earbuds are in pairing mode.
3. Keep the headphones close to the CP-NS01 during initial pairing.
4. If the pairing fails, the lights will go out.
5. Once connected then the P1 LED will be Green and Headphones/Earbuds will start receiving audio from the Nintendo Switch or Switch Lite.

Connecting to 2 Pair Bluetooth headphones



1. Pair and connect to the 1st set Headphones/Earbuds,P1 LED will be Green, for details pls refer to the last page.
2. Pair and connect the 2nd set Headphones/Earbuds by pressing the P2 button for 3 seconds
3. Keep the 2nd set Headphones/Earbuds close to CP-NS01 during initial pairing
4. Once 2nd set Headphones/Earbuds was connected, then P2 Led will be Green and Headphones/Earbuds will start receiving audio from the Nintendo Switch .
5. Both 2 Pair Headphones/Earbuds will start receiving audio from the Nintendo Switch .

Reconnecting to a previously paired headphones

Automatic re-connect

When a previously paired Headphones/Earbuds was turned on, it will automatically re-connect to the CP-NS01.

Manual re- connect

You may also initiate a re-connect manually by pressing either the P1 or P2 button, the corresponding previously paired 1st or 2nd headphones will be re-connected respectively.

In-game Voice Chat


1. Make sure one or both headphones are paired and connected to the CP-NS01
2. Press the P1/P2 button to toggle the internal Mic On/Off. When internal Mic is Off, P1/P2 LED is Green, When internal Mic is On, P1/P2 LED is Orange.

Factory Reset

1. Turn on the Nintendo Switch or Switch lite and unlock it.
2. Connect the CP-NS01 Adapter with Nintendo Switch or Switch lite via the USB-C port.
3. Press and hold both P1 and P2 buttons for 5 seconds until all LEDs start flashing.

TV Mode

The CP- NS01 can be used with the Switch TV dock. Simply plug the bundled USB-C TO USB-A adapter to the TV Dock side USB-A port. Then insert the CP-NS01 into the USB-A TO USB-C Adapter is ok.



Protective case use

1. If you're not using protective case for Nintendo Switch, then pls use the CN-NS01 with its Silicone case, the fitting will perfect.
2. If you're using protective case for Nintendo Switch, and wall-thickness of Nintendo Switch Protective Case less than 2.2mm, then pls also use the CN-NS01 with its Silicone case, you will find the fitting is also perfect.
3. If you're using protective case for Nintendo Switch, and wall-thickness of Nintendo Switch Protective Case more than 2.2mm, then pls do not use the CN-NS01 Silicone case, cause the space is not enough.

LED Indicators

LED			Status
P1	Codec	P2	
			Powering up
			off/standby
			P1 Pairing
			P1 Connecting
			P2 Pairing
			P2 Connecting
			P1 Connected and Internal Mic Off
			P1 Connected and Internal Mic ON
			P2 Connected and Internal Mic Off
			P2 Connected and Internal Mic ON
			Audio streaming in SBC
			Audio streaming in aptX
			Audio streaming in aptX Low Latency

 LED Off
  Colored
  -line-box-LED On
  Dashed box-LED flashing

Product Specification

Electrical specifications	Input	TYPE-C
	Operating Voltage	4.8-5.2V Type
	Operating current	80+/-20mA Type
	Operating Temperature Range	0-45
Bluetooth specifications	Bluetooth version	Bluetooth 5.0
	Operating Frequency	2402-2408MH
	Supported Bluetooth Profiles	A2DP,HFP
	Supported Codecs	aptX LL,aptX,SBC
	Operating Range	Up to 10 meters line of sight

Safety Instructions

1. Do not use this device in medical facilities, aircraft, refueling points, close to automatic Doors, automatic fire alarms or other remotely controlled devices .
2. keep this device at lestst 20 cm from pacemakers and other medical devices as Bluetooth signal may interfere with their operation

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help
- This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.