

Kombi A9

General data

Voltage, V	3~400
Nominal current, A	27,7
Power cable, mm ²	5x4
IP protection class	IP 40
Heat pump section weight, kg	180
Boiler and AHU section weight, kg	238
Unit weight, kg	418
Heat pump section dimensions BxHxL, mm	550 × 2005 × 684
Boiler and AHU section dimensions BxHxL, mm	850 × 2005 × 684
Maintenance space, mm	900

Connections

Water supplied to the heating system	1"
Water returning from the heating system	1"
Heating system refill	½"
Domestic cold water inlet	½"
Domestic hot water supplied to the system	½"
Domestic hot water recirculation	½"
Ducts, heat pump section, mm	2 (3) × 400 × 400
Ducts, air handling unit, mm	4 × 200

Noise power level, L_{WA}



Casing in heating mode (A7/W35), dB(A)	48
Casing in heating mode (A7/W45), dB(A)	49,5
Casing in heating mode (A7/W55), dB(A)	49
Casing max., dB(A)	53,6
Outdoor in heating mode (A7/W35), dB(A)	50,4
Outdoor in heating mode (A7/W45), dB(A)	50,5
Outdoor in heating mode (A7/W55), dB(A)	51,1
Outdoor max, dB(A)	58,1

Accessories


Closing damper	AGUJ-M-200 + TF230/CM230
Silencer	ODA/EHA AGS-200-50-600-M
	SUP/ETA AGS-200-50-900-M
Noise damping / connection boxes	KSD-800 × 800
Flexible duct connection, mm	JLSF-400 × 400



Shown as right

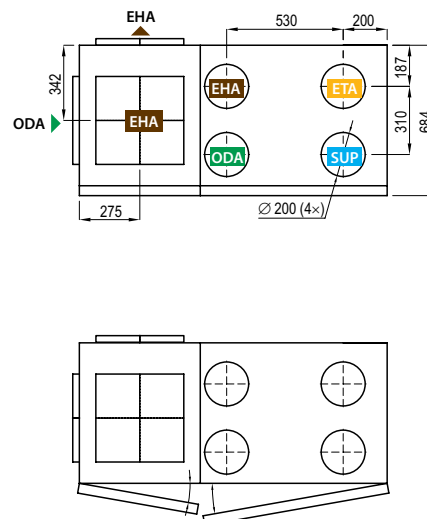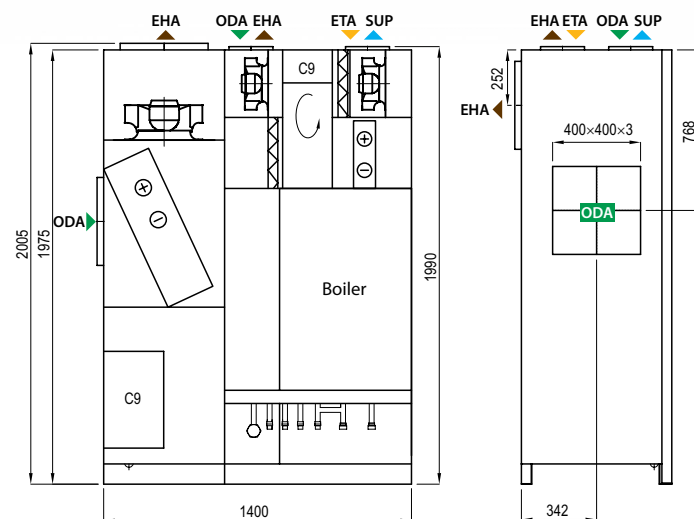

Shown as left

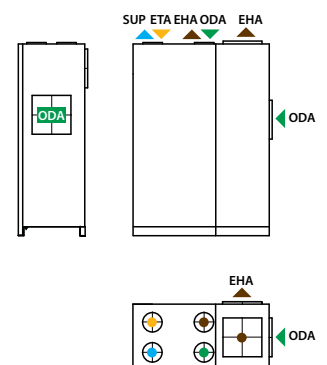

Air handling unit data


Maximal air flow, m ³ /h	517
Maximal air flow, l/s	144
Reference flow rate, m ³ /s	0,101
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,31
Thermal efficiency of heat recovery, %	86
Air heater capacity at nominal airflow, W45, kW	3,4
Air cooler capacity at nominal airflow, W7, kW	3,3
Electric power input of the fan drive at maximum flow rate, W	137
Electric power input of the fan drive at reference flow rate, W	59
Noise power level, Supply inlet, L _{WA} , dB(A)	55
Noise power level, Supply outlet, L _{WA} , dB(A)	67
Noise power level, Exhaust inlet, L _{WA} , dB(A)	57
Noise power level, Exhaust outlet, L _{WA} , dB(A)	68
Air filters dimensions BxHxL, mm	585 × 258 × 46
Air filters class according to ISO 16890, Supply/Extract	ePM1 60 % / ePM10 50 %

Heat pump data

Refrigerant type	R410A
Refrigerant charge, kg	4,5
Nominal heating capacity, kW	9
Nominal cooling capacity (floor+AHU), kW	7
Back-up electrical heater, kW	6
Number of integrated water pumps	2
Max. water pump power consumption, W	75
Integrated expansion vessel for heating system, l	12
Internal water volume for heating system, l	13,6
Heating circuit water flow min., m ³ /h	0,34
Heating circuit water flow at nominal capacity, m ³ /h	1,54
Operating water pressure min., bar	0,5
Operating water pressure max., bar	3
Operating outdoor temperature min. (heat pump only), °C	-25
Operating outdoor temperature max. (heating), °C	17
Operating outdoor temperature min. (cooling), °C	15
Operating outdoor temperature max. (cooling), °C	30
Air filter dimensions BxH, mm	585 × 505
Filter class according to ISO 16890	coarse 65%
Heat pump seasonal energy efficiency to EN 14825	
Heating average climate (+2 °C), SCOP W 35 °C	4,86
Heating warm climate (+7 °C), SCOP W 35 °C	6,53
Heating cold climate (-7 °C), SCOP W 35 °C	4,03
Cooling (35 °C), SEER W 18 °C	5,11

Domestic hot water (DHW) data

Hot water tank volume, l	186
Hot water tank material	Stainless steel
Hot water tank corrosion protection	Magnesium anode
Integrated expansion vessel for DHW, l	8
Operating water pressure max., bar	10
Water heating time from 10 °C to 45 °C, min.	25
Tap profile according to DIN EN 16147	XL
Number of water circulation pumps (optional)	1
Max. water pump power consumption, W	5
Tank disinfection water temperature max., °C	70

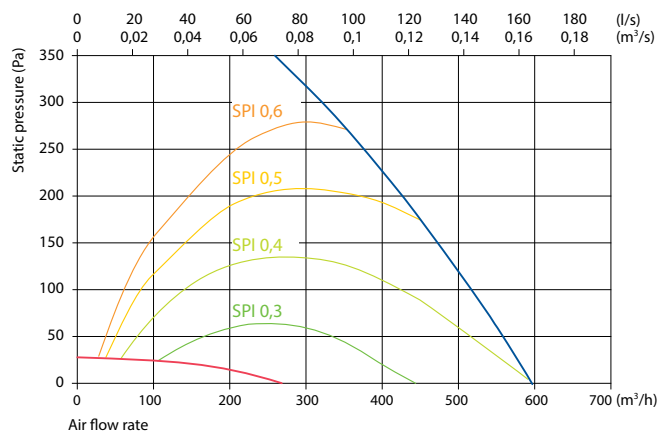AHU performance**Air heat recovery**

	Winter					Summer		
Outside air temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	15,7	16,8	17,5	18,2	18,9	22,4	23,1	23,8

indoor +22 °C, 20 % RH

Heating/cooling performance data according to EN 14511

	Capacity, kW	Power consumption, kW	COP	EER
A2/W35	9	2,14	4,21	–
A7/W35	9	2,01	4,47	–
A2/W45	9	2,80	3,21	–
A7/W45	9	2,47	3,65	–
A2/W55	9	3,17	2,84	–
A7/W55	9	2,90	3,1	–
A35/W18	7	1,38	–	5,07
A35/W7*	3,3	1,24	–	2,67

* AHU only