

GV Series

MODEL GVC59

BARRIER FREE,
WALL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Both Child and Adult Compliant (when properly installed)
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- P-trap, 1-1/4" O.D.
- Vandal resistant galvanized steel bottom plate and screws

SUGGESTED SPECIFICATIONS

Model GVC59 is a wall mounted, vandal resistant drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a brown concrete aggregate arm. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit complies with ANSI A117.1 and shall be certified to Public Law 111-380 (NO- LEAD) and NSF/ ANSI/CAN 61. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

INSTALLATION NOTES: Refer to installation detail to ensure fixture Mounting Channel is compatible with wall construction type.



MODEL:

(Must Specify)

- ☐ GVC58 Tan Concrete Aggregate
- ☐ GVC59 Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)

- ☐ -FRA1 Freeze resistant valve

ACCESSORIES

(additional costs may be incurred)

- ☐ -A0000000-MP1 Mounting Plate

Complies with the following standards:



Federal Public Law 111-380 (No Lead)



NSF/ANSI/CAN 61



Recyclable Product



Water Conserving Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL


IMPORTANT: INSTALLATION AND SITE PREP FOR FREEZE RESISTANT OPTIONS "-FRA" WILL DIFFER FROM STANDARD. REFER TO DESIGNATED FREEZE RESISTANT INSTALLATION DETAILS.

GV Series

MODEL GVC59

BARRIER FREE,

WALL MOUNTED DRINKING FOUNTAIN

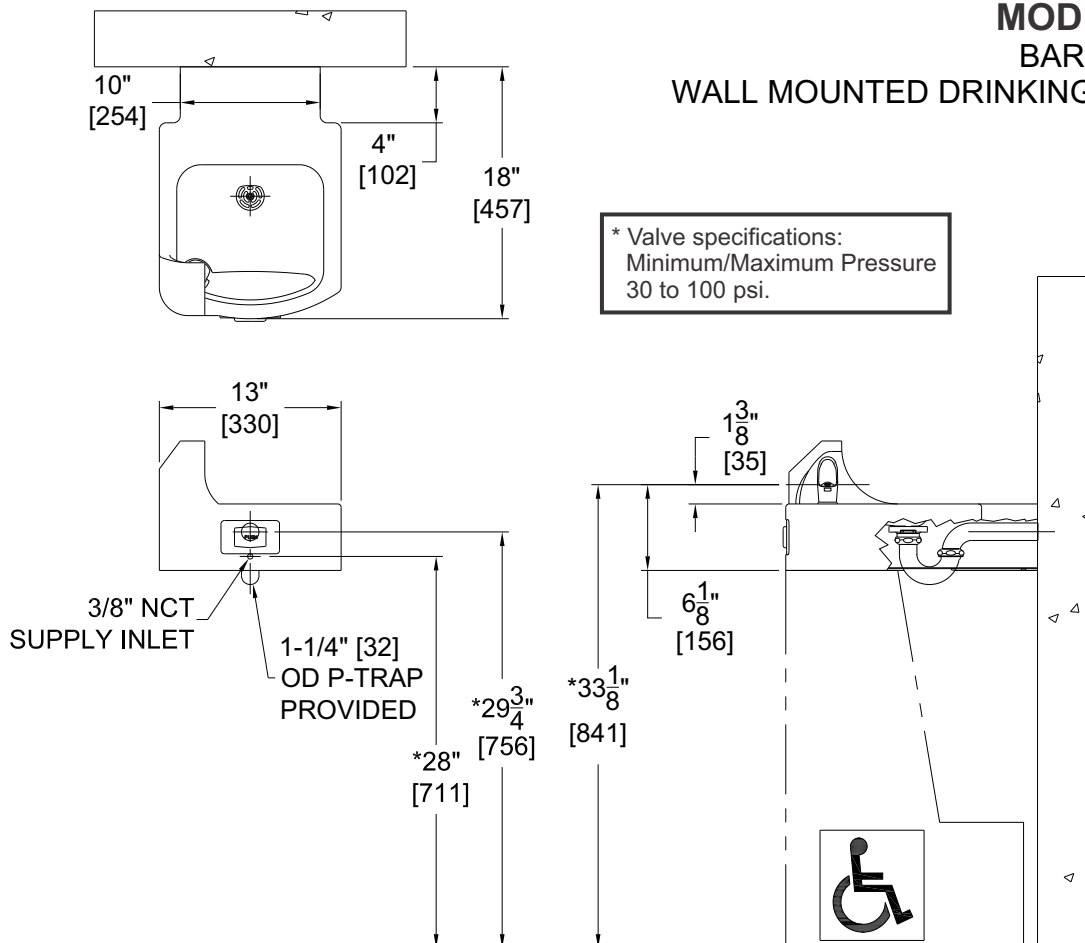

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT.
ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH
FEDERAL, STATE, & LOCAL CODES.
3. STOP VALVE NOT PROVIDED.
4. REFER TO INSTALLATION NOTES PAGE 1.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____ Quantity _____

Company _____

Contact _____ Title _____

Signature _____ Date _____
(Approval for Manufacturing)

All dimensions are subject to manufactures tolerance of plus or minus 1/4" nominal and subject to change without notice. Murdock® assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock® Mfg., Member of Morris Group International®, Please visit www.murdockmfg.com for most current specifications.