


TouchWo®

21.5" Industrial Touch Monitor

Model : DM215G

Views & Dimensions

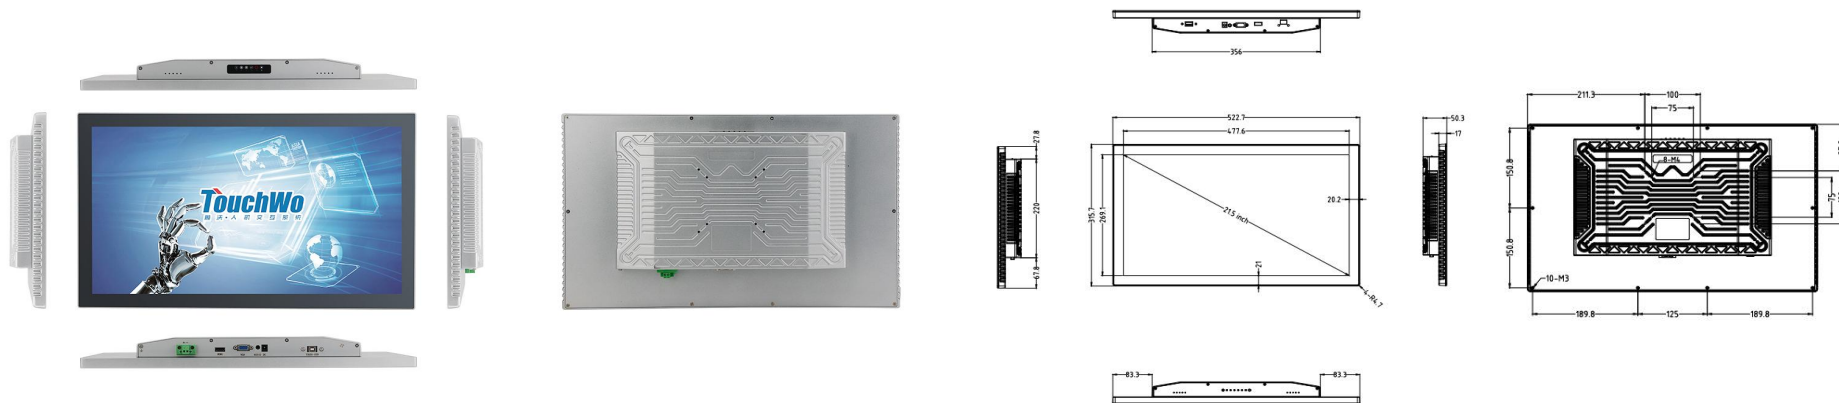

Features

- **24/7 Commercial Use**

Industrial-grade Power Supply

15,000-hour extended life LCD display

- **Support multiple installation requirements**

- **Stylish Appearance**

High precision die-casting integrated molding

High quality structural design of aluminum alloy

- **Surface IP65 waterproof**


CE FC RoHS

Tech Specs

LCD Panel	Screen diagonal	21.5 inch	Touch Panel	Touch technology	PCAP
	Physical resolution	1920*1080		Response time	<5ms
	Aspect ratio	16 : 9		Touch points	10 points standard
	Display size (mm)	477.6(W)*269.1(H)		Touch effective recognition	>1.5mm
	Colours displayed	16.7M, 72% NTSC		Scanning Frequency	200Hz
	Brightness (cd/m2)	≥250cd/m2		Scanning accuracy	4096 * 4096
	Contrast	≥ 3000: 1			
	Visual Angle H/V (°)	85/85/85/85(Typ.) (CR≥10)		Working Current/Voltage	180Ma/DC+5V±5%
	Backlight Lifetime (hours)	30000h		Surface Hardness	Mohs class 7 explosion-proof glass
	Refrash Rate	60 Hz			
Operation Environment	Operation Temperature	0℃-50℃	Dimension	Machine(cm)	52.3(L) * 31.6(W) * 5(H)
	Operation Humidity	10% - 80%		Package(cm)	58.5(L) * 42(W) * 14.9(H)
	Storage Temperature	-5℃-60℃		Net weight	5.25 KG
	Storage Humidity	10% - 85%		Gross weight	7.31 KG
	EMC	CE/FCC Class B		Mounting bracket	Desktop/Wall mounted

Power supply parameters	Power Output	DC 12V3A	Included in the Delivery	Manual	* 1
	Standby power consumption	<24W		Mounting bracket	* 1
Vibration during work	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis			Power Adapter&cable	* 1
Impact during work	SSD applied: 10 G, IEC 60068-2-27, Half sine wave, lasting for 11ms			USB-B cable	* 1

External Connectors

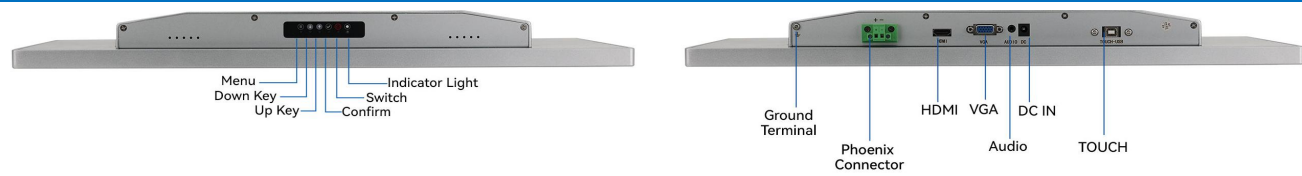

Button function	AUTO, MENU,POWER,LEFT,RIGHT		Touch interface	1 * TOUCH (B port)
Power interface	1 * 2P Phoenix terminal interface/1 * DC2.1		Video input	1 * HDMI 1.4/1 * VGA
Audio	1 * Audio Input			

Use Case

