

# HANECO LED TRACK SPOTLIGHT INSTALLATION GUIDE

## FOCI<sup>G2</sup>




Please read these installation instructions carefully before installing or maintaining this equipment. The product is designed for installation and maintenance in accordance with relevant Australian standards (AS/NZS3000), by an authorised and licensed electrician. The installation instructions were correct at the time of print. To reflect changes in technology and Australian and New Zealand standards; Haneco reserves the right to amend the instructions without notice. Updated guidelines can be found on relevant brand web site.

### PRODUCT NAME: FOCI<sup>G2</sup> LED Track Spotlight


Issue Date: 11/11/2024

Product code	FOCI24W-B / FOCI24W-W	FOCI35W-B / FOCI35W-W
Power	12 W, 15 W, 20 W, 24 W	24 W, 28 W, 31 W, 35 W
CCT	2700 / 3000 / 4000 K	
Electrical Classification	Class II	
IP rating	IP20	
CRI	> 90	
Flicker-free	Yes	
Driver	Integral	
Nominal voltage & Frequency	220-240Vac,50/60Hz	
Power factor	> 0.9	
Surge protection rating	Overload / Short Circuit	
Inrush current	24A @ 6.5uS	26A @ 6.5uS
Rated operating ambient temperature	-20 to 35°C* *Luminaire is only to be installed outside arms reach	
Electrical connection	Universal 3 Circuit Track	
Installation type	Universal Track	
Warranty	5 yrs	

### Line diagrams and dimensions

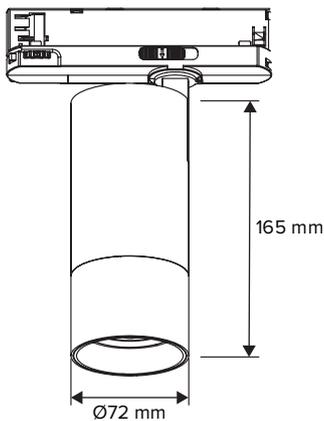

FOCI24W-B  
FOCI24W-W

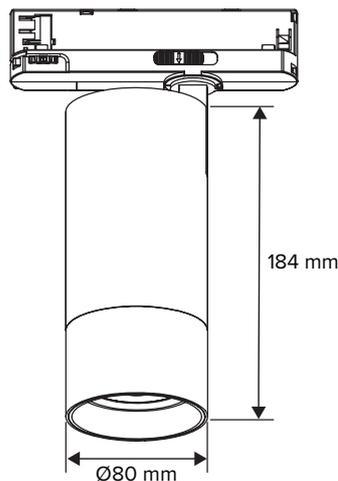

FOCI35W-B  
FOCI35W-W




# HANECO LED TRACK SPOTLIGHT INSTALLATION GUIDE

## FOCI<sup>G2</sup>

### Installation

Fitting Code:	FOCI24W-B
	FOCI35W-B
	FOCI24W-W
	FOCI35W-W


1

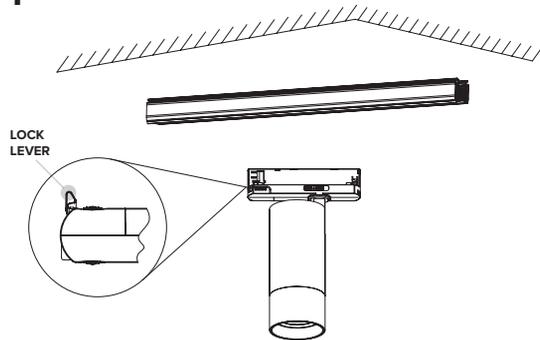

Before installation, make sure the contact points are retracted fully inside the head of the track light using the locking lever. Then, insert the head fully into the track.


#### IMPORTANT INFORMATION

Read before installation

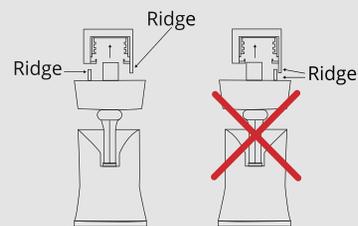


It's important that the luminaire has the correct orientation. Ensure that the ridges on the top of the unit are on the opposite side of the ridge which protrudes from one side of the track. The unit should fit so that it is secured square to the track and does not wobble once the locking lever is engaged.

2

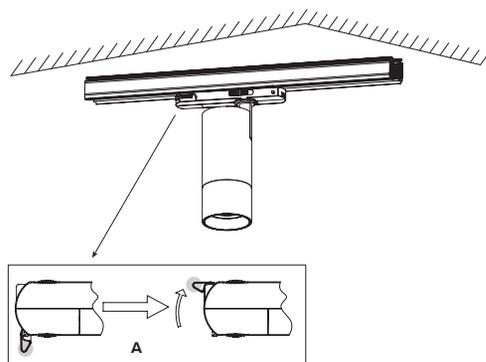

After fully inserting the head of the track light into the track, pull the lever (A) in the direction indicated by the arrow to engage the contact point into the track bus.

3

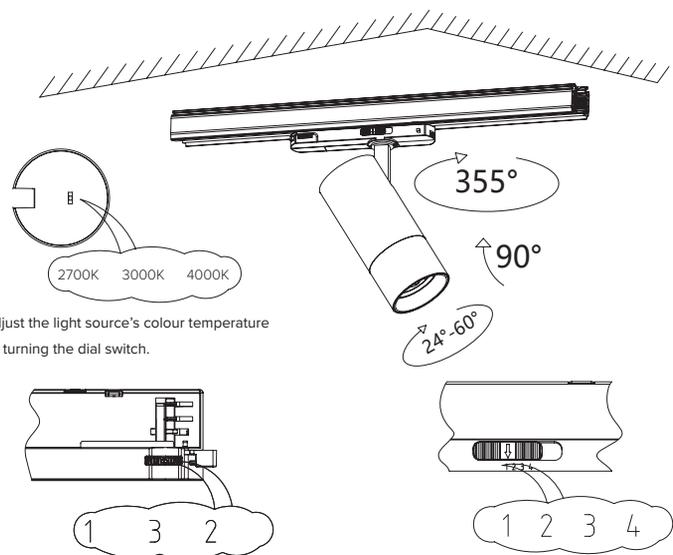

Adjust the light source's colour temperature by turning the dial switch.

Rotate the guide track head of the light, aligning the numbers on the dial with the corresponding circuit.

Rotate the track light head dial to adjust the power of the light. Adjust the colour temperature of the light source using the dial switch.

Power setting	FOCI24W-B	FOCI35W-B
	FOCI24W-W	FOCI35W-W
1	12 W	24 W
2	15 W	28 W
3	20 W	31 W
4	24 W	35 W