T24UR925DS

UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR











Also Available:

T24UR915DS – With Masterpiece® Series Handle

T24UR905DP - Custom Panel-Ready

FEATURES & BENEFITS

- Customizable cooling modes—Refrigerator, Pantry and Bar
- SoftClose® drawers for ultra-smooth closing
- Customizable drawer dividers and shelving
- Quick Chill
- LED Lighting
- Drawer mats keep items from sliding and remove for easy cleaning
- Touch electronic controls for temperature management $% \left(\mathbf{r}_{i}^{\mathbf{r}_{i}}\right) =\mathbf{r}_{i}^{\mathbf{r}_{i}}$

| SoftClose® Drawers Lighting LED Lighting LED Lighting Customizable Aluminum Dividers / Shelving Removable Drawer Mats Yes Full Extension Drawers Yes Drawer Open Alarm Quick Chill Yes Touch Electronic Controls STAR-K Certified Sabbath Mode Yes CAPACITY Total Capacity (cu. ft.) 4.4 cu. ft. TEMPERATURE RANGES Refrigerator Refrigerator Refrigerator Refrigerator Quick Chill Refrigerator 37°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Party 44°F (6.6°C) Bar 34°F (1°C) Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) Stown Current (A) Volts (V) 115 V Frequency (Hz) Power Cord Length (in.) Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"—35 1/8" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes Annual Energy Consumption | GENERAL PROPERTIES | |
|--|---|----------------------|
| Customizable Aluminum Dividers / Shelving Removable Drawer Mats Full Extension Drawers Press Press Press Quick Chill Yes Touch Electronic Controls STAR-K Certified Sabbath Mode CAPACITY Total Capacity (cu. ft.) TEMPERATURE RANGES Refrigerator Refrigerator Pre-Set Cooling Modes Refrigerator 37°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Quick Chill Refrigerator 33°F (0.5°C) Fre-Set Cooling Modes Refrigerator 33°F (0.5°C) Quick Chill Refrigerator 33°F (0.5°C) Frey Adre (6.6°C) Bar 34°F (1°C) Frey Cooling Modes Frey Cooling | SoftClose® Drawers | Yes |
| Removable Drawer Mats | Lighting | LED Lighting |
| Full Extension Drawers Drawer Open Alarm Quick Chill Yes Touch Electronic Controls STAR-K Certified Sabbath Mode CAPACITY Total Capacity (cu. ft.) Pre-Set Cooling Modes Refrigerator Quick Chill Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 33°F (0.5°C) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/g"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"—35 1/8" x 24" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | Customizable Aluminum Dividers / Shelving | Yes |
| Drawer Open Alarm Quick Chill Yes Touch Electronic Controls STAR-K Certified Sabbath Mode CAPACITY Total Capacity (cu. ft.) Pre-Set Cooling Modes Refrigerator Quick Chill Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 33°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/g"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"—35 1/8" x 24" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | Removable Drawer Mats | Yes |
| Quick Chill Touch Electronic Controls STAR-K Certified Sabbath Mode CAPACITY Total Capacity (cu. ft.) Pre-Set Cooling Modes Cuick Chill Refrigerator Quick Chill Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 33°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) Current (A) 15 Amp Volts (V) 115 V Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | Full Extension Drawers | Yes |
| Touch Electronic Controls STAR-K Certified Sabbath Mode CAPACITY Total Capacity (cu. ft.) Pre-Set Cooling Modes Refrigerator Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 33°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) Current (A) 15 Amp Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | Drawer Open Alarm | Yes |
| STAR-K Certified Sabbath Mode CAPACITY Total Capacity (cu. ft.) TEMPERATURE RANGES Refrigerator Refrigerator Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 33°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) Current (A) 150 W Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | Quick Chill | Yes |
| CAPACITY Total Capacity (cu. ft.) TEMPERATURE RANGES Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 37°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) 150 W Current (A) Volts (V) Frequency (Hz) | Touch Electronic Controls | Yes |
| Total Capacity (cu. ft.) TEMPERATURE RANGES Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 37°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) 150 W Current (A) 15 Amp Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | STAR-K Certified Sabbath Mode | Yes |
| TEMPERATURE RANGES Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 37°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) 150 W Current (A) 15 Amp Volts (V) 115 V Frequency (Hz) 60 Hz Power Cord Length (in.) 60" Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | CAPACITY | |
| Refrigerator 33°F (0.5°C) to 64°F (14.5°C) Pre-Set Cooling Modes Refrigerator 37°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) 150 W Current (A) 15 Amp Volts (V) 115 V Frequency (Hz) 60 Hz Power Cord Length (in.) 60" Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8" x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | Total Capacity (cu. ft.) | 4.4 cu. ft. |
| (14.5°C) Pre-Set Cooling Modes Refrigerator 37°F (3°C) Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) Current (A) 150 W Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | TEMPERATURE RANGES | |
| Pantry 44°F (6.6°C) Bar 34°F (1°C) Quick Chill Refrigerator 33°F (0.5°C) for approximately 24 hours TECHNICAL DETAILS Watts (W) 150 W Current (A) 15 Amp Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | Refrigerator | , , |
| TECHNICAL DETAILS Watts (W) 150 W Current (A) 15 Amp Volts (V) 115 V Frequency (Hz) 60 Hz Power Cord Length (in.) 60" Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | Pre-Set Cooling Modes | Pantry 44°F (6.6°C) |
| Watts (W) 150 W Current (A) 15 Amp Volts (V) 115 V Frequency (Hz) 60 Hz Power Cord Length (in.) 60" Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | Quick Chill | for approximately 24 |
| Current (A) 15 Amp Volts (V) 115 V Frequency (Hz) 60 Hz Power Cord Length (in.) 60" Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | TECHNICAL DETAILS | |
| Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified 115 V 60 Hz 60 " 120V 3-Wire 120V 3-Wire 120V 3-Wire 120V 3-Wire 120V 3-Wire 149 " x 23 7/8" x 23 5/8" 138 / 149 lbs. | Watts (W) | 150 W |
| Frequency (Hz) 60 Hz Power Cord Length (in.) 60" Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | Current (A) | 15 Amp |
| Power Cord Length (in.) 60" Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | Volts (V) | 115 V |
| Plug Type 120V 3-Wire DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) 34 1/8"* x 23 7/8" x 23 5/8" x 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | Frequency (Hz) | 60 Hz |
| DIMENSIONS & WEIGHT 34 1/8"* x 23 7/8" x 23 5/8" | Power Cord Length (in.) | 60" |
| Appliance Dimensions (H x W x D) (in.) $ 34 \frac{1}{8} \times 23 \frac{7}{8} \times 24 \times 2$ | Plug Type | 120V 3-Wire |
| 23 5/8" Required Cutout Size (H x W x D) (in.) 34 1/2"-35 1/8" x 24" x 24" Net / Gross Weight (lbs.) 138 / 149 lbs. EFFICIENCY ENERGY STAR® Qualified Yes | DIMENSIONS & WEIGHT | |
| x 24" Net / Gross Weight (lbs.) EFFICIENCY ENERGY STAR® Qualified Yes | Appliance Dimensions (H x W x D) (in.) | |
| ENERGY STAR® Qualified Yes | Required Cutout Size (H x W x D) (in.) | |
| ENERGY STAR® Qualified Yes | Net / Gross Weight (lbs.) | 138 / 149 lbs. |
| | EFFICIENCY | |
| Annual Energy Consumption 269 kWh | ENERGY STAR® Qualified | Yes |
| | Annual Energy Consumption | 269 kWh |

WARRANTY

Limited, Entire Appliance, Parts and Labor on any Part of the Refrigerator that Fails Because of a Manufacturing Defect

2 Year

Limited Warranty for Sealed Refrigeration System*; Parts and Labor 3rd to 6th Year

Limited Warranty for Sealed Refrigeration System*; Parts Only

7th to 12th Year



Page 1 of 3 11 / 21

^{*}Height adjustable + 1/2" (13 mm) with legs fully extended

 $[\]hbox{**Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing}$


T24UR925DS

UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR


PROFESSIONAL SERIES HANDLE




DOUBLE DRAWER REFRIGERATOR PRODUCT DIMENSIONS

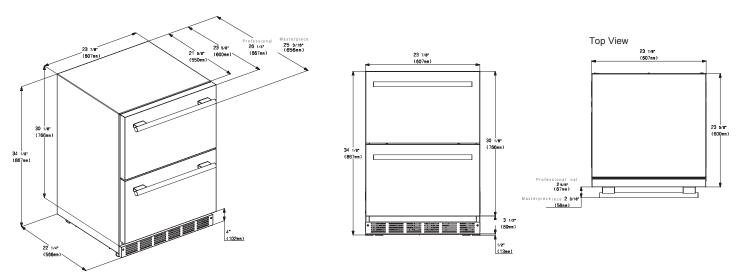

DOUBLE DRAWER REFRIGERATOR CUTOUT DIMENSIONS

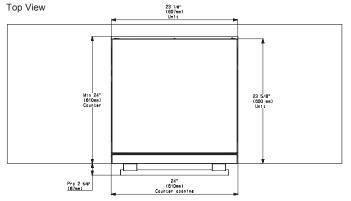


Thermador Double Drawer under counter top dimension. (Unit door flush with cutout)

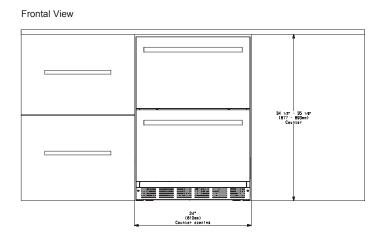

Measurements in inches (mm)

DOUBLE DRAWER REFRIGERATOR CLEARANCE DIMENSIONS

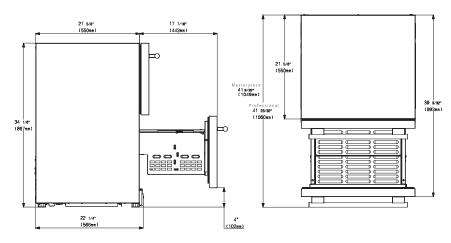


Page 2 of 3 11 / 21


T24UR925DS UNDER-COUNTER DOUBLE DRAWER REFRIGERATOR PROFESSIONAL SERIES HANDLE



DOUBLE DRAWER REFRIGERATOR SIDE-BY-SIDE INSTALLATION

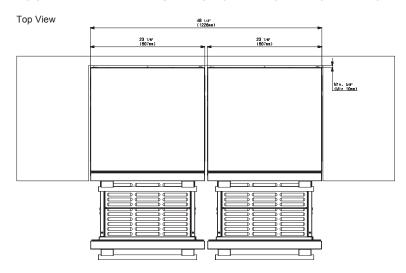

DOUBLE DRAWER REFRIGERATOR CUTOUT DIMENSIONS & ELECTRICAL LOCATION

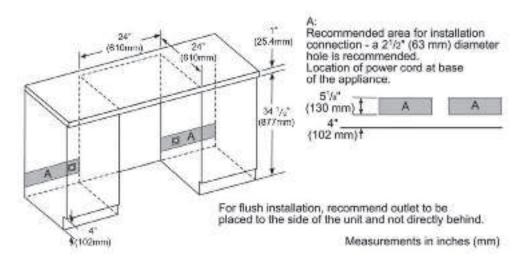

These warranties give you specific legal rights and you may have other rights that vary from state to state. Limited warranty from date of purchase. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | ©2021 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3