




Important information about installing GIGA automatic coffee machines with a permanent water connection

(GIGA X8c / GIGA X3c)

**i** Before the JURA service technician can correctly install the GIGA X8c/X3c, certain preparations are necessary **on site**. The following preparations must be carried out **professionally** (in accordance with European standard EN 1717 (fluid category 4)).

## Overview: On-site requirements and installation instructions

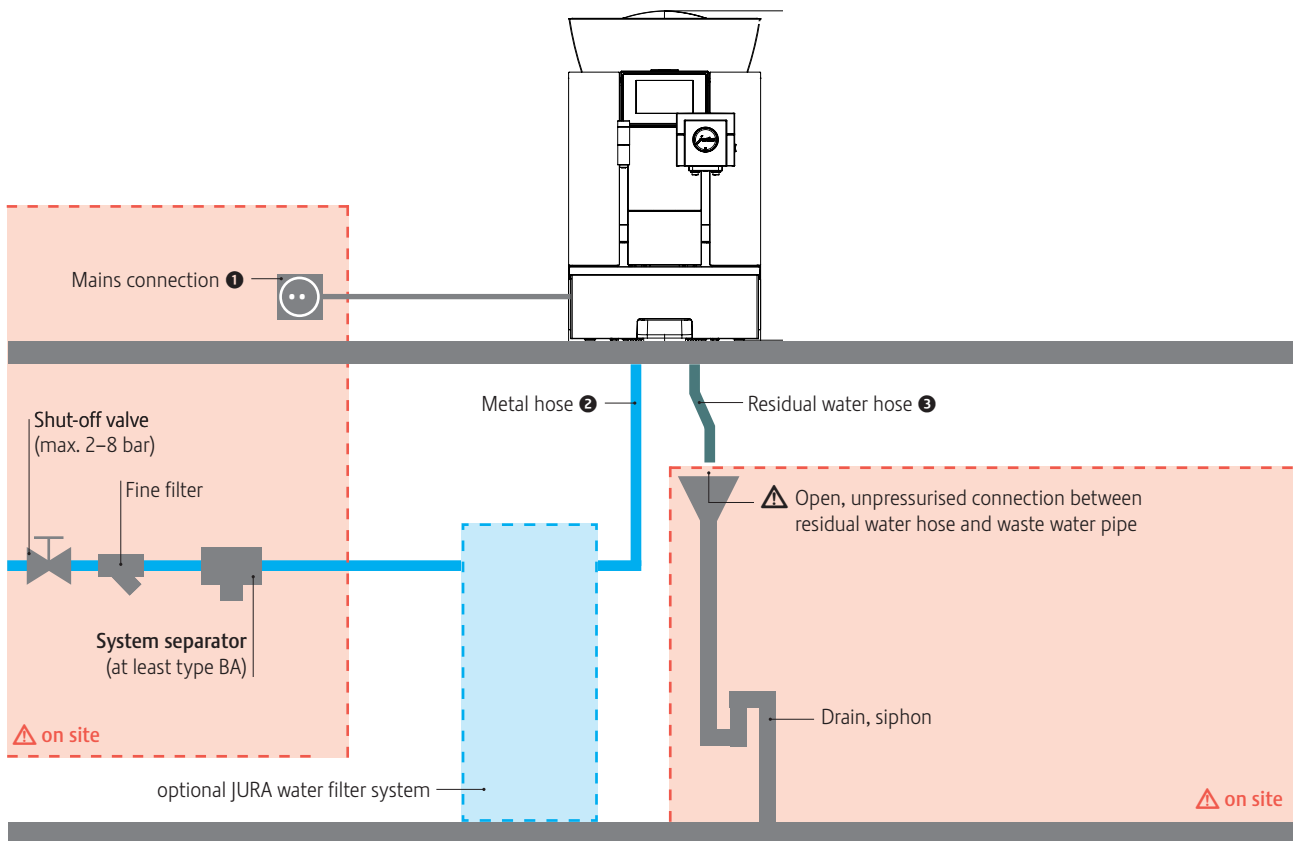

### Mains connection

- 1**
  - The mains connection must be protected by a residual current device (RCD).
  - It must be possible to interrupt the power supply using a main switch.

### On-site permanent water connection (external thread G 3/4")

- 2**
  - Must have a shut-off valve, filter and **system separator** (at least **type BA**)
  - Water pressure from local network: max. 2-8 bar (without pressure surges)

### Residual water hose and drain

When using a residual water hose:

- The hose should be installed as short as possible and with the maximum possible inclination (in the fall line).
- 3**
  - During installation, avoid a counter-inclination of the hose or the formation of a siphon in the residual water hose.
  - It must be possible to ventilate and evacuate air from the hose. This is achieved by an open, unpressurised connection between the residual water hose and the waste water pipe.
  - There should be a siphon in the waste water pipe installed on site.

We always recommend using a JURA water filter system with your GIGA with a permanent water connection