



WALL MOUNT TEMPERATURE SENSORS

Discrete Wall Mount Housing

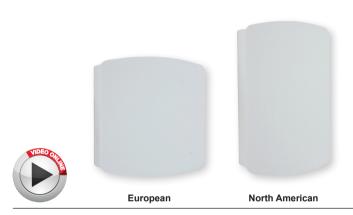

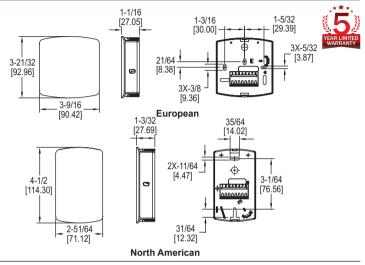

The **Series TE-E/N Wall Mount Temperature Sensors** provide a low cost temperature input for any building management system.

FEATURES/BENEFITS

- North American or European housing aesthetic options
- Uniform look matches other Dwyer wall mount devices
- Universal mounting plate meets various installation requirements

APPLICATIONS

- · Building automation
- · Room temperature monitoring

SPECIFICATIONS

Accuracy: Thermistor temp sensor: $\pm 0.22^{\circ}$ C @ 25° C ($\pm 0.4^{\circ}$ F @ 77° F); RTD temp sensor: DIN class B; $\pm 0.3^{\circ}$ C @ 0° C ($\pm 54^{\circ}$ F @ 32° F).

Temperature Limits: -40 to 140°F (-40 to 60°C).

Housing Material: ABS plastic.

Weight: 0.3 lb (136 g).

MODEL CHART					
North American Model	Sensor Type	Price	European Model	Sensor Type	Price
TE-NND-A	10k Ω type III thermistor	\$9.80	TE-END-A	10k Ω type III thermistor	\$9.80
TE-NND-B	10k Ω type II thermistor	9.80	TE-END-B	10k Ω type II thermistor	9.80
TE-NND-C	3k Ω thermistor	11.25	TE-END-C	3k Ω thermistor	11.25
TE-NND-D	Pt100 Ω RTD	13.50	TE-END-D	Pt100 Ω RTD	13.50
TE-NND-E	Pt1000 Ω RTD	13.50	TE-END-E	Pt1000 Ω RTD	13.50
TE-NND-F	20k Ω thermistor	9.80	TE-END-F	20k Ω thermistor	9.80
TE-NND-Q	10k Ω type III with 11 k Ω shunt	11.25			