


Console air conditioner

Aneru A26X ^[R16]

S-LINE

HP-LINE

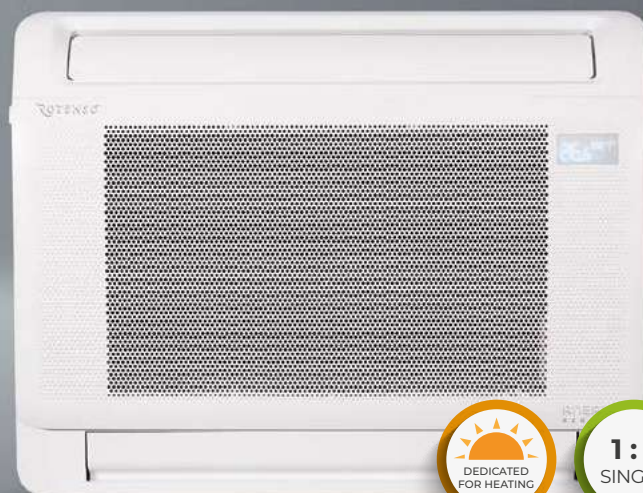

Features device



Digital DC Inverter SKY®



Automatic purification iClean ⁽¹⁾



Electrostatic HD iAIR filter



Super Ionizer iAIR



Super Silent eMOTO mode ⁽¹⁾



Wide-angle eMOTO air supply



Turbo eMOTO mode ⁽¹⁾



Air supply eMOTO control system



Eco eMOTO mode ⁽¹⁾



SMART Wi-Fi



Humidity sensor ⁽¹⁾⁽³⁾



Wired controller SMART port ⁽²⁾



SMART panel display ON/OFF



Wireless remote control



Wired controller ⁽²⁾



SMART Follow mode



SMART heating to 8°C ⁽¹⁾



Louvre setting memory



Auto restart memory



Anti-corrosive gold fins



Drip tray heater



Compressor crankcase heater



Silence mode



Timer



Cooling at low outdoor temp. down to -15°C



Heating at low outdoor temp. down to -20°C ⁽¹⁾



1-side condensate drainage



Self-diagnostics



Automatic louvre



Sleep mode



ON/OFF remote output ⁽²⁾



Alarm output ⁽²⁾



Weekly controller output ⁽²⁾



Central controller output ⁽²⁾



Double-sided air supply



Individual louvre control



BMS Modbus ⁽²⁾



BMS Bacnet ⁽²⁾

Technical specification

Model				Aneru 2,6 kW
Capacity	Cooling	Nom. (Min. - Max.)	W	2638 (762-4250)
Rated input		Nom. (Min. - Max.)	W	660 (170-1350)
Operating current		Nom. (Min. - Max.)	A	2,9 (0,7-5,9)
Capacity	Heating	Nom. (Min. - Max.)	W	2931 (454-4689)
Rated input		Nom. (Min. - Max.)	W	700 (150-1300)
Operating current		Nom. (Min. - Max.)	A	3,0 (0,6-5,7)
Reversible heat pump type				air-to-air
Design load in cooling mode			kW	2,6
SEER			W/W	7,4
Energy efficiency class, cooling				A++
Annual electric energy consumption, cooling			kWh/a	123
Design load in heating mode (Tbiv -7°C)			kW	2,2
SCOP			W/W	4,2
Energy efficiency class, heating				A+
Annual electric energy consumption, heating			kWh/a	734
Dehumidification			l/h	1,0
Maximum energy consumption			W	1850
Maximum operating current			A	8,0
Indoor unit				A26Xi R16
EAN product code				5905567606007
Fan speed	T / H / M / L	rpm	992 / 884 / 776 / 650	
Air flow	T / H / M / L	m³/h	650 / 580 / 490 / 420	
Sound pressure level	T / H / M / L	dB(A)	35 / 32 / 25 / 20	
Sound power level		dB(A)	53	
Rated input		W	42	
Operating current		A	0,2	
Net dimensions	W × D × H	mm	794 × 206 × 621	
Gross dimensions	W × D × H	mm	865 × 280 × 719	
Net weight / Gross weight		kg	14,9 / 18,8	
Condensate drain		mm	16	
Outdoor unit				A26Xo R16
EAN product code				5905567606014
Fan speed	H / M / L	rpm	760 / 580 / 500	
Maximum air flow		m³/h	2160	
Sound pressure level		dB(A)	53	
Sound power level		dB(A)	63	
Net dimensions	W × D × H	mm	765 × 303 × 555	
Gross dimensions	W × D × H	mm	887 × 337 × 610	
Bracket spacing	W × D	(mm)	452 × 286	
Net weight / Gross weight		kg	24,6 / 27,0	
Refrigerant	Type		R32	
	GWP		675	
	≤ 5m	kg	0,71	
		TCO ₂ eq	0,48	
Charged (> 5m)		g/mb	12	
Pipe connections	Liquid/Gas	mm (inches)	Φ6,35 / Φ9,52 (1/4" / 3/8")	
Maximum installation length		m	25	
Maximum height difference		m	10	
Compressor type				Rotary DC
Type of outdoor unit power supply		V-Hz, Ø	220-240-50, 1f	
Electrical protection		A	B10	
Power cables: outdoor unit		pcs × mm²	3 × 1,5	
Control and power cables: indoor unit - outdoor unit		pcs × mm²	4 × 1	
Indoor operating range (cooling / heating)		°C	16~32 / 0~30	
Outdoor operating range (cooling / heating)		°C	-15~50 / -20~24	
Compatible systems				
1:1 SINGLE				●
1:2 DUAL				
1:X MULTI S-Line				●
1:X MULTI N-Line				
1:X MULTI HP-Line				●

T - Turbo; H - High; ML - Middle; L - Low