


6" Ultra-Slim LED Downlight

Easy to install with slender lines, this IC rated 6" Slim requires only a 2" minimum clearance and features a smooth trim for a seamless look. J-Box is included. This 6" slim consumes only 14W. Use the Slim around or near joists in small ceiling spac-es. Will fit soffit to double drywall ceilings. No can needed!


MODELS

DL_SL6-14W

Illuminance Cone Diagram

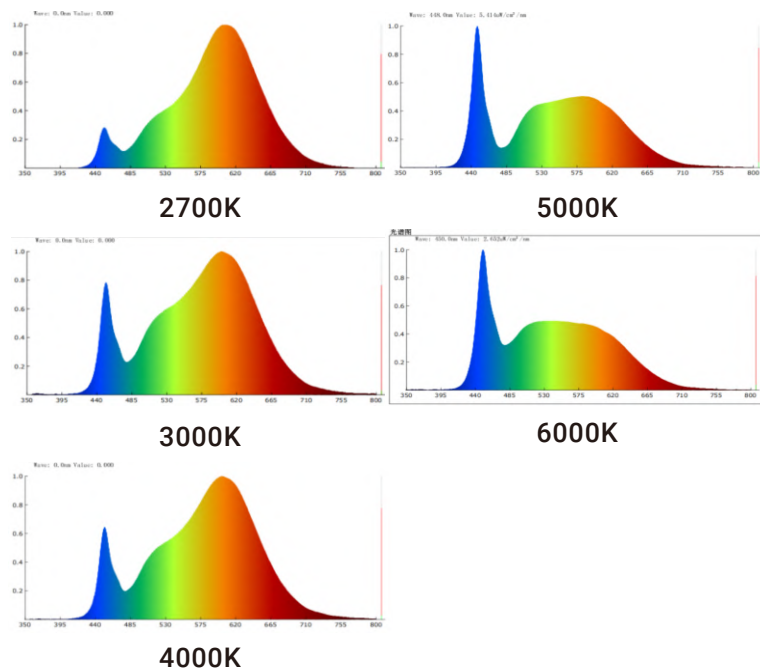

CERTIFICATIONS

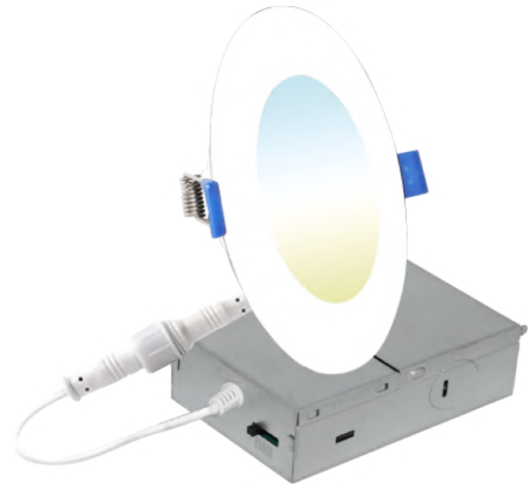

SPECIFICATIONS

Voltage	120V
Wattage	14w
Power Source	Hardwired
Contains Battery	No
Power Factor	0.90

LIGHTING PERFORMANCE

Lumens	1200lm
CCT	2700K, 3000K, 4000K, 5000K, 6000K
CRI	80+
Beam Angle	120°
Dimmable	Yes
Efficacy	86lm/w

ENVIRONMENT

Operating Temperature	-4°F - 113°F
Moisture Rating	Damp

CONSTRUCTION

Lens Material	PS
---------------	----

LIFETIME

Average Lifetime	50,000 Hrs
Warranty	7 Year

6"LED Recessed Slim Downlight

Dimmer Compatibility Guide

This compatibility list is based on testing conducted by the manufacturer in a lab simulated environment. Actual results may vary.

MODELS

- | | | | |
|--------------|----------------|--------------|---------------|
| • CL_SL6_NL | • DL_SL6_HO | • DL_SG6 | • DL_XSL6 |
| • DL_SL6-B | • DL_SL6_MO | • DL_BS6_NL | • DL_SL6_MJBX |
| • DL_SL6-NL | • DL_SLBF6-14W | • DL_G6-14W | • DL_SL6_PR |
| • DL_SL6-14W | • CL_SLIJ6-14W | • DL_EG6_INL | |

BRAND	MODEL
LEVITON	6672-1LW
LEVITON	6674-10W
LEVITON	D26HD-2RW
LEVITON	DDMX1-BLZ
LEVITON	DSL06-1LZ
LEVITON	IPL06-10Z
LEVITON	RDL06-10Z
LEVITON	RNL06-10Z
LEVITON	TGCL-153PH-WH
LEVITON	TSM10-1LW
LUTRON	AYCL-153P-WH
LUTRON	PD-6WCL
LUTRON	CTCL-153PDH-WH
LUTRON	DVCL-153PR-WH
LUTRON	LGLC-153PLH

We highly recommend using a Triac (forward-phase) dimmer that is compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

May experience "pop-on" or "dropout" behavior if the dimmer's low-end trim is not adjusted to match the driver. To resolve this issues, adjust the low or high-end trim on the dimmer to maximize the dimming range. If needed, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as desired.

6"LED Recessed Slim Downlight

Dimmer Compatibility Guide

This compatibility list is based on testing conducted by the manufacturer in a lab simulated environment. Actual results may vary.

MODELS

BRAND	MODEL
LUTRON	MACL-153MH-WH
LUTRON	MSCL-OP153M
LUTRON	PD-6WCL-WH
LUTRON	P-PKG1W-WH
LUTRON	SCL-153P-WH
LUTRON	STCL-153PH-WH
LUTRON	TGCL-153PH-WH
LUTRON	TTCL-100H-BR
LEGRAND	HCL453PMM
LEGRAND	RHCL453PW
CLOUDY BAY	CBLD001WHA
KASA SMART	HS220
KASA SMART	HS220P3
EATON	AL06-C1
EATON	SAL06P-W

We highly recommend using a Triac (forward-phase) dimmer that is compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

May experience "pop-on" or "dropout" behavior if the dimmer's low-end trim is not adjusted to match the driver. To resolve this issues, adjust the low or high-end trim on the dimmer to maximize the dimming range. If needed, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as desired.