

RADIO DEFAULTS

These are recommended settings for optimum performance with a **PMX-3** source unit:

PUNCH EQ



CROSSOVER



INTERNAL AMP



REAR RCA




Before installing amplifier, remove cover and set PRESET to OFF position. Verify remaining settings are properly configured. Replace cover for water-tight protection. **Adjusting settings beyond those listed below will void your warranty.**

INPUT SWITCH




REMOVE 2 SCREWS USING SUPPLIED 3mm ALLEN

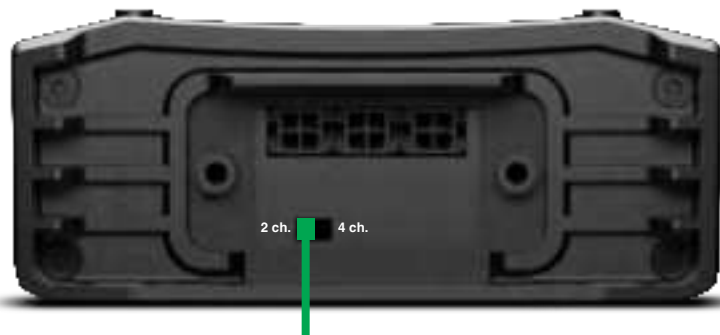

INPUT SWITCH: **2-CHANNEL INPUT** (default)

GAIN/EQ/CROSSOVER

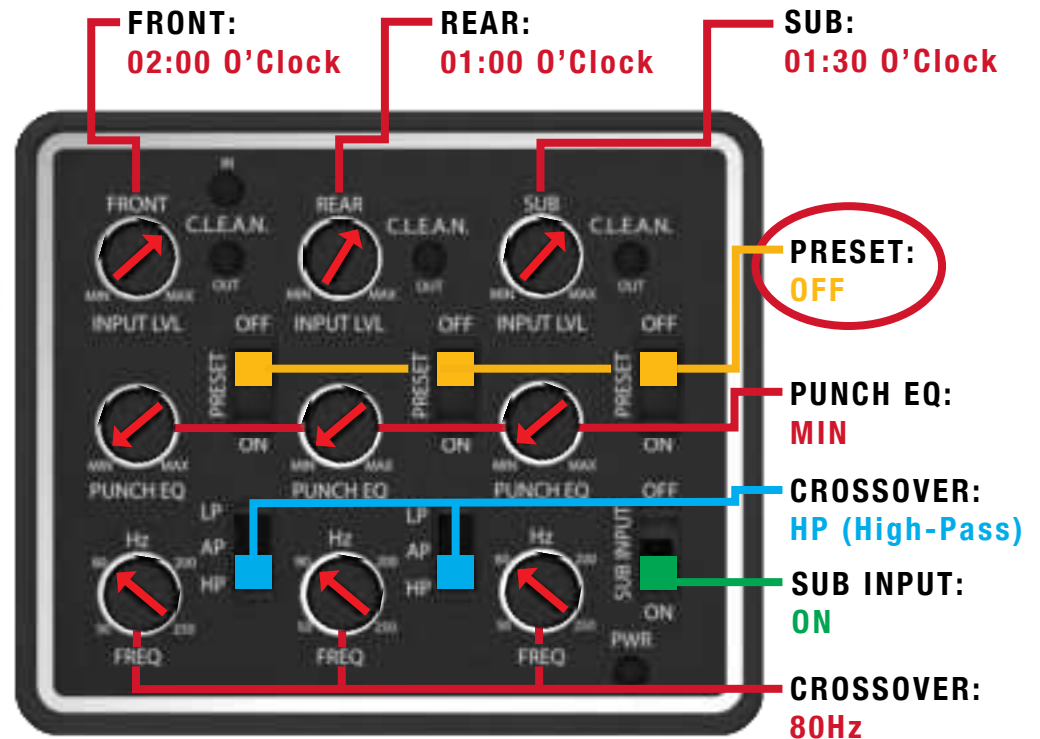



2024+ RZR TUNING GUIDE

RZR24RCXP-STG6

RADIO DEFAULTS

These are recommended settings for optimum performance with a **RIDE COMMAND** source unit:

FADE/BALANCE



EQUALIZER




A.V.C.




Before installing amplifier, remove cover and set PRESET to OFF position. Verify remaining settings are properly configured. Replace cover for water-tight protection. **Adjusting settings beyond those listed below will void your warranty.**

INPUT SWITCH

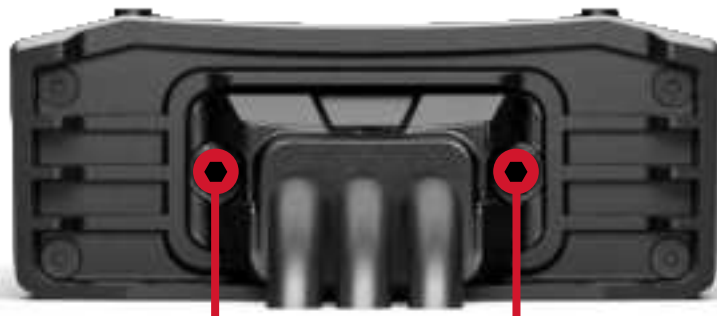

REMOVE 2 SCREWS USING SUPPLIED 3mm ALLEN

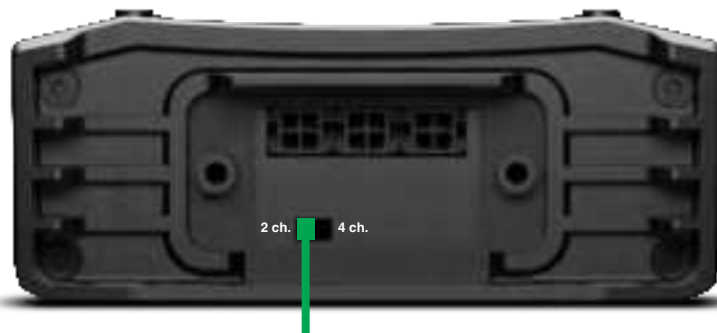

INPUT SWITCH: **2-CHANNEL INPUT** (default)

GAIN/EQ/CROSSOVER

