

Overview

Important Note: Features and Supported Configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W Processors and the Z4 G4 Workstation with Intel® Core™ X Processors. Where different – features are shown side by side. Supported configurations are indicated by the CPU Support references.



HP Z4 G4 Workstation



Front view

1. Front I/O module options
 - Premium (optional): power button, 2 USB 3.1 G1 Type-A, 2 USB 3.1 G2 Type-C™, Headset audio, SD Card Reader (optional) (Left-most Type-A port has charging capability)
 - Standard (shown here): power button, 4 USB 3.1 G1 Type-A (left-most Type-A port has charging capability), Headset audio, SD Card Reader (optional)
2. Front handle
3. 2 x 5.25" external drive bays

Overview

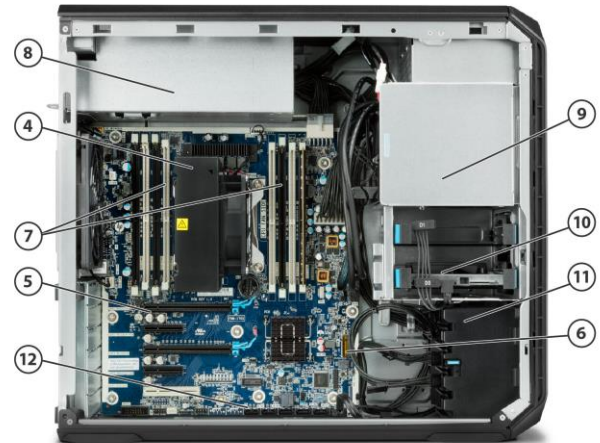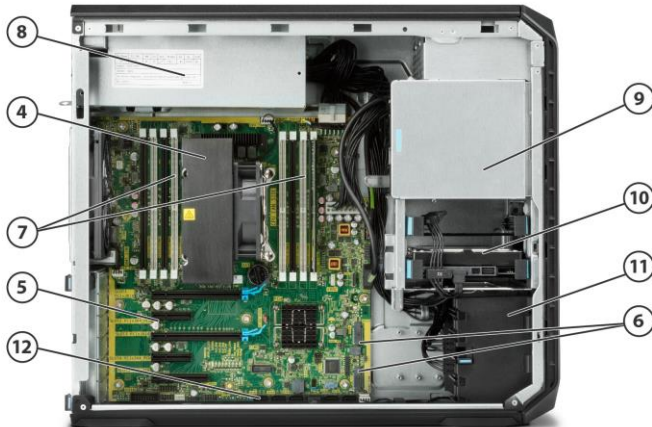

Internal view


Intel® Xeon® W Processors

4. Intel® Xeon® Processors: W-2100 family
5. 2 PCIe G3 x16, 2 PCIe G3 x4, 1 PCIe G3 x8
6. 2 PCIe G3 x4 M.2 for SSDs
7. 8 DIMM slots; DDR4-2666 ECC Registered RAM
8. PSU options:
 - 465W 90% efficient with 0 graphics power adapters
 - 750W 90% efficient with 2 graphics power adapters
 - 1000W 90% efficient with up to 4 graphics power Adapters
9. 2 x 5.25" external drive bays
10. 2 x 2.5"/3.5" internal drive bays
11. Front card guide and fan (select configurations)
12. 6 x 6Gb/s SATA ports

Intel® Core™ X-series Processors

4. Intel® Core™ i7-X-series processors
Intel® Core™ i9-X Series processors
Intel® Core™ i9 Extreme Edition processor
5. Core i9-X configs/Core i7 9800X: 2 PCIe G3 x16, 2 PCIe G3 x4, 1 PCIe G3 x8
Other Core i7-X configs: 1 PCIe G3 x16, 1 PCIe G3 x16 (x8 electrical), 2 PCIe G3 x4, 1 PCIe G3 x8 (mechanical only)
6. 1 PCIe G3 x4 M.2 for SSDs
7. 8 DIMM slots: DDR4-2666 Non-ECC Unbuffered RAM
8. PSU:
 - 1000W 90% efficient with up to 4 graphics power Adapters

Overview

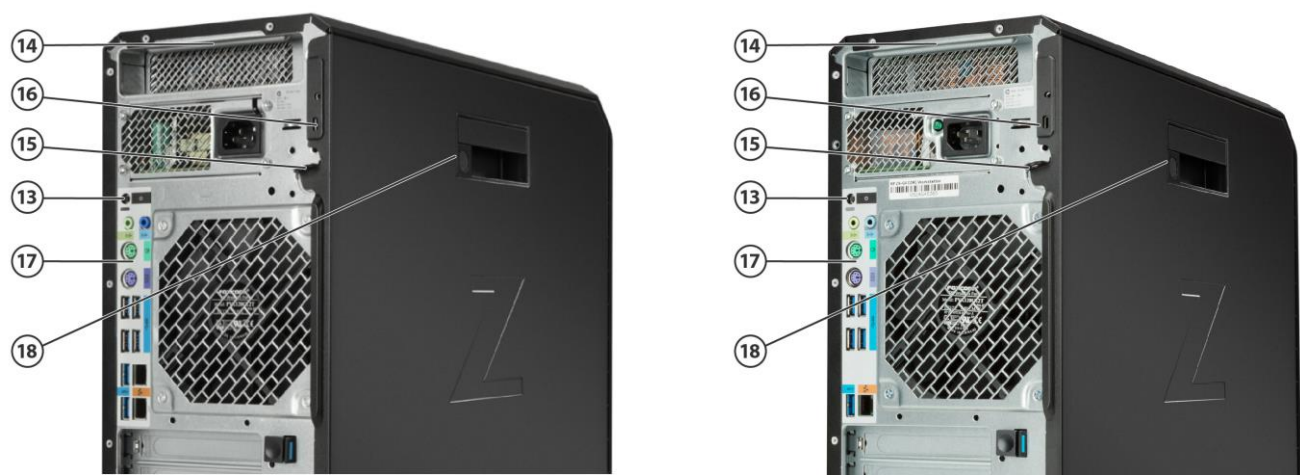

Rear view

Intel® Xeon® W Processors

Intel® Core™ X-series Processors

- 13.
- 14.
- 15.
- 16.
- 17. Rear I/O (top to bottom):
 - Audio in/out,
 - Keyboard/Mouse PS/2
 - USB: 6 USB 3.1 G1 Type-A
 - 2x 1GbE ports
- 18.

- Rear power button
- Rear handle
- Padlock loop
- Kensington lock slot
- 17. Rear I/O (top to bottom):
 - Audio in/out,
 - Keyboard/Mouse PS/2
 - USB: 5 USB 3.1 G1 Type-A
 - 1x 1GbE port
- Side panel barrel keylock (optional)

Supported Components

Overview

Form Factor Operating Systems

Minitower

Intel® Xeon® W Processors

Preinstalled:

- Windows 10 Pro for Workstations*
- Ubuntu 20.04 LTS
- HP Linux-ready (minimal OS ready for customer OS installation)
- Red Hat® Enterprise Linux® Desktop Workstation (Paper license with 1-year support; no preinstalled OS)

Tested and Documented:

- Red Hat® Enterprise Linux® Workstation 6, 7, 8
- SUSE Linux® Enterprise Desktop 12, 15
- Ubuntu 16.04, 18.04, 20.04 LTS

Intel® Core™ X-series Processors

Preinstalled:

- Windows 10 Pro*
- HP Linux-ready (minimal OS ready for customer OS installation)
- Red Hat® Enterprise Linux® Desktop Workstation (Paper license with 1-year support; no preinstalled OS)

Tested and Documented:

- Red Hat® Enterprise Linux® Workstation 6, 7, 8
- SUSE Linux® Enterprise Desktop 12, 15
- Ubuntu 16.04, 18.04, 20.04 LTS

Notes: For detailed Linux® OS/hardware support information, see:
http://www.hp.com/support/linux_hardware_matrix

* Not all features are available in all editions or versions of Windows. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS update to take full advantage of Windows functionality. Windows 10 is automatically updated, which is always enabled. ISP fees may apply and additional requirements may apply over time for updates. See <http://www.windows.com>.

*Not all features are available in all editions or versions of Ubuntu. Systems may require upgraded and/or separately purchased hardware, drivers, software or BIOS to take full advantage of Ubuntu functionality. Ubuntu may be automatically updated. ISP fees may apply, and additional requirements may apply over time for updates.

Note: In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows® 7 operating system on products configured with Intel® and AMD 7th Generation and forward processors or provide any Windows® 8 or Windows® 7 drivers on <http://www.support.hp.com>

Supported Components

Available Processors

Name	Cores	Clock Speed (GHz)	Cache (MB)	Memory Speed (MT/s)	ECC memory support	Max memory support	Hyper-Threading	Featuring Intel® vPro™ Technology	Intel® Turbo Boost Technology 2.0 (GHz) ¹	Intel® Turbo Boost Max Technology 3.0 (GHz) ²	TDP (W)
Intel® Xeon® W Processors											
Intel® Xeon® W-2295 processor	18	3.0	24.75	2933	YES	512GB	YES	YES	3.8, 4.6	4.8	168
Intel® Xeon® W-2275 processor	14	3.3	19.25	2933	YES	512GB	YES	YES	4.1, 4.6	4.8	165
Intel® Xeon® W-2265 processor	12	3.5	19.25	2933	YES	512GB	YES	YES	4.3, 4.6	4.8	165
Intel® Xeon® W-2255 processor	10	3.7	19.25	2933	YES	512GB	YES	YES	4.3, 4.5	4.7	165
Intel® Xeon® W-2245 processor	8	3.9	16.5	2933	YES	512GB	YES	YES	4.5, 4.5	4.7	155
Intel® Xeon® W-2235 processor	6	3.8	8.25	2933	YES	512GB	YES	YES	4.3, 4.6	N/A	130
Intel® Xeon® W-2225 processor	4	4.1	8.25	2933	YES	512GB	YES	YES	4.5, 4.6	N/A	105
Intel® Xeon® W-2223 processor	4	3.6	8.25	2666	YES	512GB	YES	YES	3.7, 3.9	N/A	120
Intel® Xeon® W-2145 processor	8	3.7	11.00	2666	YES	512GB	YES	YES	4.3, 4.5	N/A	140
Intel® Xeon® W-2133 processor	6	3.6	8.25	2666	YES	512GB	YES	YES	3.8, 3.9	N/A	140
Intel® Xeon® W-2125 processor	4	4.0	8.25	2666	YES	512GB	YES	YES	4.4, 4.5	N/A	120
Intel® Xeon® W-2123 processor	4	3.6	8.25	2666	YES	512GB	YES	YES	3.7, 3.9	N/A	120
Intel® Xeon® W-2104 processor	4	3.2	8.25	2400	YES	512GB	NO	YES	N/A	N/A	120
Intel® Xeon® W-2102 processor	4	2.9	8.25	2400	YES	512GB	NO	YES	N/A	N/A	120
Intel® Core™ X-Series Processors											
Intel® Core™ i9-10980XE Extreme Edition processor	18	3.0	24.75	2933	NO	256GB	YES	NO	3.8, 4.6	4.8	165
Intel® Core™ i9-10940X X-series processor	14	3.3	19.25	2933	NO	256GB	YES	NO	4.1, 4.6	4.8	165
Intel® Core™ i9-10920X X-series processor	12	3.5	19.25	2933	NO	256GB	YES	NO	4.3, 4.6	4.8	165
Intel® Core™ i9-10900X X-series processor	10	3.7	19.25	2933	NO	256GB	YES	NO	4.3, 4.5	4.7	165
Intel® Core™ i7-9800X processor	8	3.8	16.5	2666	NO	128GB	YES	NO	4.4	4.5	165
	¹ For Intel® Xeon® W processors, the specifications shown in this column represent the following: all core maximum turbo frequency, dual core maximum turbo frequency). For Intel® Core™ processors, the specifications shown in this column refer to dual core maximum turbo frequency.										

Supported Components

²Intel Turbo Boost Max Technology 3.0 identifies the best performing core(s) on a processor and provides increased performance on those cores by taking advantage of power and thermal headroom. Intel® Turbo Boost Max Technology 3.0 frequency is the clock frequency of the CPU when running in this mode.

NOTE: Processors that do not have certain turbo functionality are denoted as N/A.

Available Processors

Disclaimers

Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

Color

Black

Convertibility

No

Expansion Slots (see system board section for more details)

Intel® Xeon® W Processors

Intel® Core™ X-series Processors

Slot 0: Mechanical-only, for use with devices that require only rear bulkhead mounting

Slot 1: PCI Express Gen3 x16 (from CPU)

Slot 2: PCI Express Gen3 x4 (from PCH) with open-ended connector*

Slot 3:

PCI Express Gen3 x16 (from CPU)

Slot 3:

Core i9-X and Core i7-9800X configs: PCI Express Gen3 x16 (from CPU)

Other Core i7-X configs: PCI Express Gen3 x16(mechanical) x8(electrical) (from CPU)

Slot 4: PCI Express Gen3 x4 (from PCH) with open-ended connector*

Slot 5:

PCI Express Gen3 x8 (from CPU) with open-ended connector*

Slot 5:

- Core i9-X and Core i7-9800X configs: PCI Express Gen3 x8 (from CPU) with open-ended connector*

- Other Core i7-X configs: PCI Express Gen3 x8 (mechanical-only, no data) with open-ended connector*

M.2 Slot 1: M.2 PCIe Gen 3 x4 (from CPU) up to 80mm storage devices

M.2 Slot 2:

M.2 PCIe Gen 3 x4 (from CPU) up to 80mm storage devices

M.2 Slot 2:

No 2nd M.2 connector/slot available

* Open-ended connector allows a greater bandwidth (e.g. x16) card to be installed physically into a lower bandwidth connector/slot.

Expansion Bays (see storage section for more details)

2 internal 3.5" bays (with acoustic dampening drive carriers pre-installed). Optional 2.5" adapter available.

2 external 5.25" bays

- 3rd and 4th 3.5" HDD each occupy one external bay
- 3rd and 4th 2.5" HDD/SSD occupy a single external bay within a 2:1 carrier

Front I/O

- Base: Power button with power/fault LED, 1 Headset audio port, 4 USB 3.1 G1 Type A (1 charging, provides 1.5A at 5V)
- Premium (optional): Power button with power/fault LED, Drive activity LED, 1 Headset audio port, 2 USB 3.1 G1 Type-A (1 charging, provides 1.5A at 5V), 2 USB 3.1 G2 Type-C™ (each provides 3A at 5V)
- Optional: SD reader



Supported Components

Internal I/O	1 USB 3.1 G1 single-port header, 1 USB 2.0 single-port header and 1 USB 2.0 dual-port header	
Rear I/O	Intel® Xeon® W Processor Family 6x USB 3.1 G1 Type-A* 2x 1GbE LAN ports (1x supporting Intel AMT) Audio: 1 Line out, 1 Line in (Line in can be retasked as microphone), 1 PS/2 mouse port, 1 PS/2 keyboard port, 1 Rear power button Optional: 1 serial port (cable up to rear bulkhead), 2 Thunderbolt 3**	Intel® Core™ X- Series Processor Family 5x USB 3.1 G1 Type-A 1x 1GbE LAN ports Audio: 1 Line out, 1 Line in (Line in can be retasked as microphone), 1 PS/2 mouse port, 1 PS/2 keyboard port, 1 Rear power button Optional: 1 serial port (cable up to rear bulkhead), 2 Thunderbolt 3**
	*All rear I/O motherboard USB-A ports are 0.9A at 5V **HP's add-in Thunderbolt card provides two USB-C ports which provide 3A at 5V each	
Interfaces Supported	SD card reader (optional) 6-channel SATA interface (6 @ 6.0 Gb/s) 6 channels are eSATA configurable for use with eSATA CTO/AMO Kit (No hot plug / hot swap supported) Thunderbolt 3 (optional) USB 2.0, USB 3.1 G1 (aka USB 3.0), USB 3.1 G2 (optional)	
On-board RAID Support	SATA RAID 0 Striped Array Configuration SATA RAID 1 Mirrored Array Configuration SATA RAID 5 Striped/Parity Configuration SATA RAID 10 Striped/Mirrored Configuration	
Chassis Dimensions (H x W x D)	H: 15.2" (386mm) W: 6.65" (169mm) D: 17.5" (445mm)	
Packaged Dimensions	H: 22.5" (572mm) W: 12.4" (314mm) D: 22.2" (563mm)	
Palletization Profile	6 units x 3 layers = 18 units per pallet 1200x1000x1836mm (pallet included)	
Rack Dimensions	4U	
Weight	Exact weights depend upon configuration (System weight only). Minimum: 10.2 kg (22.4 lbs.) Standard: 11.3 kg (24.9 lbs.) Maximum: 17.3 kg (38.2 lbs.)	
Temperature	Non-operating: -40° to 60° C (-40° to 140° F) Operating: 5° to 35° C (40° to 95° F) Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation Maximum rate of change: 10 °C/hr No direct sustained sunlight	
Humidity	Operating: 10% to 85% relative humidity, non-condensing, 35° C maximum wet bulb Non-operating: 10% to 90% relative humidity, non-condensing, 35° C maximum wet bulb	
Maximum Altitude (non-pressurized)	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet) Operating (with only Solid-State Drives): 5,000 m (16,404 feet) Non-operating: 12,192 m (40,000 feet) Maximum operating temperature is reduced as altitude increases. See Temperature for details.	
Power Supply	Processor Support XW ENTRY	

Supported Components

465 watts wide-ranging, active Power Factor Correction, 90% Efficient, with no 6-pin graphics power cables.

The Z4 G4 465W power supply efficiency report can be found at this link:

https://plugloadsolutions.com/psu_reports/HP%20INC_DPS-465AB-3%20A_465W_ECOS%204939_Report.pdf

XW **MID_RANGE**

750 watts wide-ranging, active Power Factor Correction, 90% Efficient, with 2x 6-pin graphics power cables.

The Z4 G4 750W power supply efficiency report can be found at this link:

https://plugloadsolutions.com/psu_reports/HP%20INC_DPS-750AB-3%20A_750W_ECOS%204938_Report.pdf

HIGH-END

XW, 1000 watts wide-ranging, active Power Factor Correction, 90% Efficient.
CX (i9) Includes 4x 6+2-pin graphics power cables: also includes a Front Fan and Card Guide kit to enable support for dual high end graphics solutions.

CX (i7) 1000 watts wide-ranging, active Power Factor Correction, 90% Efficient.
Includes 2x 6+2-pin graphics power cables.

The Z4 G4 1000W power supply efficiency report can be found at this link:

https://plugloadsolutions.com/psu_reports/HP_D15-1K0P1A_1000W_ECOS%204838_Report.pdf

NOTE: 1000 W internal power supply, up to 90% efficiency, active PFC available the first half of 2018

Workstation ISV Certifications

See the latest list of certifications at
<http://www8.hp.com/us/en/campaigns/workstations/industries-and-partners.html>

Supported Components

Processors

	Factory Configure d	Option Kit	Option Kit Part Number	Support Notes
Intel® Xeon® W-Series CPU				
Intel® Xeon® W-2295 3.0 2933 18C CPU	Y	N		
Intel® Xeon® W-2275 3.3 2933 14C CPU	Y	N		
Intel® Xeon® W-2265 3.5 2933 12C CPU	Y	N		
Intel® Xeon® W-2255 3.7 2933 10C CPU	Y	N		
Intel® Xeon® W-2245 3.9 2933 8C CPU	Y	N		
Intel® Xeon® W-2235 3.8 2933 6C CPU	Y	N		
Intel® Xeon® W-2225 4.1 2933 4C CPU	Y	N		
Intel® Xeon® W-2223 3.6 2933 4C CPU	Y	N		
Intel® Xeon® W-2145 3.7 2666 8C CPU	Y	N		
Intel® Xeon® W-2133 3.6 2666 6C CPU	Y	N		
Intel® Xeon® W-2125 4.0 2666 4C CPU	Y	N		
Intel® Xeon® W-2123 3.6 2666 4C CPU	Y	N		
Intel® Xeon® W-2104 3.2 2400 4C CPU	Y	N		
Intel® Xeon® W-2102 2.9 2400 4C CPU	Y	N		
Intel® Core™ X-Series CPU				
Intel® Core™ i9-10980XE 3.0 2933 18C CPU	Y	N		
Intel® Core™ i9-10940X 3.3 2933 14C CPU	Y	N		
Intel® Core™ i9-10920X 3.5 2933 12C CPU	Y	N		
Intel® Core™ i9-10900X 3.7 2933 10C CPU	Y	N		
Intel® Core™ i7-9800X 3.8 2666 8C CPU	Y	N		

Multicore is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. Performance and clock frequency will vary depending on application workload and your hardware and software configurations. Intel's numbering, branding and/or naming is not a measurement of higher performance.

Monitors / Displays

	Processor Supports	Factory Configure d	Option Kit	Option Kit Part Number	Support Notes
HP Z Display Z22n G2	XW, CX		Y	1JS05AA	
HP Z Display Z23n G2	XW, CX		Y	1JS06AA	
HP Z Display Z24i G2	XW, CX		Y	1JS08AA	
HP Z Display Z24n G2	XW, CX		Y	1JS09AA	
HP Z Display Z24nf G2	XW, CX		Y	1JS07AA	
HP Z Display Z27n G2	XW, CX		Y	1JS10AA	
HP Z Display Z27s (4K display)	XW, CX		Y	J3G07AA	

Supported by all operating systems available from HP

Supported Components

Screen size measured diagonally

Storage / Hard Drives*

SAS Hard Drives

SAS Hard Drives for HP Workstations	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 300GB 15k SAS SFF	XW	Y	Y	L5B74AA	

NOTE: Only available on Xeon W configs SAS controller add-in card required

*For storage drives, GB = 1 billion bytes. TB = 1 trillion bytes. Actual formatted capacity may be less. Up to 32GB (for Windows 10) is reserved for system recovery software.

SATA Hard Drives

SATA (Serial ATA) Hard Drives for HP Workstations	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
500GB SATA 7200RPM 6Gb/s 3.5" HDD	XW, CX	Y	Y	LQ036AA	
500GB SATA 7200RPM 6Gb/s OPAL2 SFF 3.5" HDD	XW, CX	Y	Y	D8N29AA	
1TB SATA 7200RPM 3.5" HDD	XW, CX	Y	Y	LQ037AA	
1TB SATA 7200RPM Ent 3.5" HDD	XW, CX	Y	Y	W0R10AA	
2TB SATA 7200RPM 3.5" CMR HDD	XW, CX	Y	Y	QB576AA	
2TB SATA 7200RPM 3.5" SMR HDD	XW, CX	Y	Y	8VE04AA/AT	
2TB 7200RPM SATA 3.5in Enterprise		Y	Y	2Z274AA	
4TB SATA 7200RPM Ent 3.5" HDD	XW, CX	Y	Y	K4T76AA	
6TB SATA 7200RPM Ent 3.3" HDD	XW, CX	Y	Y	3DH90AA	
8TB 7200RPM SATA 3.5in Enterprise		Y	Y	2Z273AA	

NOTES: Up to (4) 3.5-inch 7200 rpm SATA drives: 500 GB, 1.0, 2.0, 4.0, 16TB max total

SATA Solid State Drives

HP Solid State Drives (SSDs) for Workstations	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 256GB SATA SSD	XW, CX	Y	Y	A3D26AA/AT	
HP 512GB SATA SSD	XW, CX	Y	Y	D8F30AA	
HP 1TB SATA SSD	XW, CX	Y	Y	F3C96AA/AT	
HP 2TB SATA SSD	XW, CX	Y	Y	Y6P08AA/AT	
HP 256GB SATA SED OPAL2 SSD	XW, CX	Y	Y	G7U67AA	
HP 512GB SATA SED OPAL2 SSD	XW, CX	Y	Y	N8T26AA	
HP 240GB SATA Enterprise SSD	XW, CX	Y	Y	T3U07AA	

Supported Components

HP 480GB SATA Enterprise SSD	XW, CX	Y	Y	T3U08AA
HP 960GB 2.5in Enterprise SATA-3 SSD		Y	Y	1W6P8AA
1920GB 2.5in Enterprise SATA-3 SSD		Y	Y	1W6P9AA

PCIe Solid State Drives

	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
PCIe SSDs for HP Workstations					
HP Z Turbo Drive 256GB MLC Z4/Z6 G4 SSD Kit	XW, CX	N	N	EOL	
HP Z Turbo Drive 512GB MLC Z4/Z6 G4 SSD Kit	XW, CX	N	N	EOL	
HP Z Turbo Drive 1TB MLC Z4/Z6 G4 SSD Kit	XW, CX	N	N	EOL	
HP Z Turbo Drive 256GB TLC Z4/Z6 G4 SSD Kit	XW, CX	Y	Y	1PD59AA/AT	
HP Z Turbo Drive 512GB TLC Z4/Z6 G4 SSD Kit	XW, CX	Y	Y	1PD60AA	
HP Z Turbo Drive 1TB TLC Z4/Z6 G4 SSD Kit	XW, CX	Y	Y	1PD61AA	
HP Z Turbo Drive 2TB TLC Z4/Z6 G4 SSD Kit	XW, CX	Y	Y	3KP39AA	
HP Z Turbo Drive 256GB Z4/Z6 G4 SED Kit	XW, CX	Y	Y	4YZ41AA	
HP Z Turbo Drive 512GB Z4/Z6 G4 SED Kit	XW, CX	Y	Y	4YZ44AA/AT	
HP Z Turbo Drive 1TB SED TLC Z4/Z6 G4 SSD Kit	XW, CX	Y	Y	6YT76AA	
HP Z Turbo Drive 1TB SED TLC Z4/Z6 G4 SSD Module	XW, CX	Y	Y	6YT79AA	2
HP Z Turbo 2TB SED OPAL2 TLC M.2 Z4/Z6 SSD	XW, CX	Y	Y	2Y7W6AA	
HP 256GB M.2 2280 PCIe NVMe TLC SSD Z2/Z4/Z6 Kit	XW, CX	Y	Y	8PE68AA	
HP 512GB M.2 2280 PCIe NVMe TLC SSD Z2/Z4/Z6 Kit	XW, CX	Y	Y	8PE69AA	
HP 1TB M.2 2280 PCIe NVMe TLC SSD Z2/Z4/Z6 Kit	XW, CX	Y	Y	8PE70AA	
HP 256GB M.2 2280 PCIe NVMe TLC SSD Module	XW, CX	N	Y	8PE62AA	2
HP 512GB M.2 2280 PCIe NVMe TLC SSD Module	XW, CX	N	Y	8PE63AA	2
HP 1TB M.2 2280 PCIe NVMe TLC SSD Module	XW, CX	N	Y	8PE64AA	2
HP 2TB PCIe NVMe TLC M.2 Z4/6 G4 SSD	XW, CX	Y	Y	35F74AA	
HP Z Turbo Drive Quad Pro					
HP Z Turbo Drive Quad Pro 2x256GB TLC PCIe® SSD	XW, CX (i9)	Y	Y	4YZ38AA	1, 3
HP Z Turbo Drive Quad Pro 2x512GB TLC PCIe® SSD	XW, CX (i9)	Y	Y	4YZ39AA/AT	1, 3
HP Z Turbo Drive Quad Pro 2x1TB TLC PCIe® SSD	XW, CX (i9)	Y	Y	4YZ40AA	1, 3
HP Z Turbo Drive Quad Pro 2x2TB PCIe® SSD	XW, CX (i9)	Y	Y	3KP42AA	
HP Z Turbo Drive Quad Pro 256GB TLC SSD module	XW, CX (i9)	N	Y	4YZ35AA	1, 2, 3
HP Z Turbo Drive Quad Pro 512GB TLC SSD module	XW, CX (i9)	N	Y	4YZ36AA/AT	1, 2, 3
HP Z Turbo Drive Quad Pro 1TB TLC SSD module	XW, CX (i9)	N	Y	4YZ37AA	1, 2, 3
HP Z Turbo Drive Quad Pro 2TB TLC SSD module	XW, CX (i9)	N	Y	3KP43AA	2
HP Z Turbo Drive Dual Pro					
HP Z Turbo Drive Dual Pro 256GB TLC SSD		Y	Y	4YF60AA	
HP Z Turbo Drive Dual Pro 512GB TLC SSD		Y	Y	4YF61AA	
HP Z Turbo Drive Dual Pro 1TB TLC SSD		Y	Y	4YF62AA	
HP Z Turbo Drive Dual Pro 2TB TLC SSD		Y	Y	4YF63AA	
HP 256GB M.2 2280 PCIe NVMe TLC SSD Dual Pro Kit	XW, CX	Y	Y	8PE74AA	
HP 512GB M.2 2280 PCIe NVMe TLC SSD Dual Pro Kit	XW, CX	Y	Y	8PE75AA	

Processor Supports: XW: Configurations with Intel® Xeon® -W Processor Family CX: Configurations with Intel® Core™ X-series Processor Family CX (i7): Core i7-X series only CX (i9): Core i9-X series only



Supported Components

HP 1TB M.2 2280 PCIe NVMe TLC SSD Dual Pro Kit	XW, CX	Y	Y	8PE76AA	
Intel® 905p Series SSD (Optane SSD)					
Intel® Optane SSD 905p 280GB AiC**		Y	Y	2SC47AA	
Intel® Optane SSD 905p 480GB AiC**		Y	Y	2SC48AA	
Intel® Optane SSD 905P 380GB M.2 PCIe Dual		Y	Y	6LA63AA	1
Intel® Optane SSD 905P 2x380GB M.2 PCIe Quad		Y	Y	6LA65AA	1
Intel® Optane SSD 905P 380GB M.2 SSD Module		Y	Y	6LA66AA	2, 3

Note 1: All HP Z Turbo Drive Quad Pro modules require the Z4 G4 Fan & Front Card Kit, available as CTO (1MY89AV) and AMO (1XM33AA)

Note 2: M.2 SSD module only, designed to be installed into the Z Turbo Drive Quad Pro or Dual Pro carrier

Note 3: Z Turbo Drive Quad Pro is not supported on Core i7-X configurations

** PCIe card installed in standard PCIe x4 slot

Intel® Virtual RAID on CPU (Intel® VROC) for NVMe	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Intel® VROC NVMe SSD Standard Controller Module		N	Y	3FJ80AA	1,3
Intel® VROC NVMe SSD Premium Controller Module		N	Y	3FJ81AA	2,3

NOTE 1: Enables RAID 0, 1 & 10

NOTE 2: Enables RAID 0, 1 & 10 plus RAID 5 with write hole closure options.

NOTE 3: Xeon processor required

Hard Drive Controllers

SAS Controller	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
MicroSemi SmartHBA2100-4i4e SAS Controller	XW	Y	Y	1FV90AA	

NOTE: Only available on Xeon W configurations

Graphics

Graphics Cable Adapters	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported # of cards
HP DisplayPort to HDMI Adapter	XW, CX	Y	Y	K2K92AA		
HP DisplayPort to Dual Link DVI Adapter	XW, CX	Y	Y	NR078AA		
HP DisplayPort to DVI-D Adapter	XW, CX	Y	Y	FH973AA		
HP DisplayPort to DVI-D Adapter (2-pack)	XW, CX	Y	N			
HP DisplayPort to DVI-D Adapter (4-pack)	XW, CX	Y	N			
HP DisplayPort to DVI-D Adapter (6-pack)	XW, CX	Y	N			
HP miniDP-to-DP Adapter	XW, CX	Y	Y	2MY05AA		
HP miniDP-to-DP Adapter (2-pack)	XW, CX	Y	N			

Supported Components

HP miniDP-to-DP Adapter (4-pack)	XW, CX	Y	N			
HP miniDP-to-DP Adapter (8-pack)	XW, CX	Y	N			
Graphics Card Connectors						
NVIDIA® SLI 2-slot Graphics Connector	XW, CX	Y	Y	2YY84AA		
Quadro® RTX NVLink 2-slot Bridge (RTX 5000)	XW, CX	N	Y	6FY12AA		
Quadro® RTX NVLink High-Bandwidth 2-slot Bridge (RTX 6000 & 8000)	XW, CX	N	Y	6FY11AA		
NVIDIA NVLink 2-Slot Bridge		N	Y	340L2AA		2
Entry 3D						
NVIDIA® Quadro® P400 2GB Graphics	XW, CX	Y	Y	1ME43AA	4	2
NVIDIA® Quadro® P620 2GB Graphics	XW, CX	Y	Y	3ME25AA	4	2
Mid-range 3D						
NVIDIA® Quadro® P1000 4GB Graphics	XW, CX	Y	Y	1ME01AA	3, 4	2
NVIDIA® Quadro® P2000 5GB Graphics	XW, CX	N	Y	1ME41AA	3, 4	2
NVIDIA® Quadro® P2200 5GB Graphics	XW, CX	Y	Y	6YT67AA	3, 4	2
AMD Radeon™ Pro WX 3100 4GB Graphics	XW, CX	Y	Y	2TF08AA	3, 4	2
AMD Radeon™ Pro WX 3200 4GB Graphics	XW, CX	Y	Y	6YT68AA	3, 4	2
AMD Radeon™ Pro WX 4100 4GB Graphics	XW, CX	N	Y	Z0B15AA	3, 4	2
High-End 3D						
NVIDIA® Quadro® P4000 8GB Graphics	XW, CX	Y	Y	1ME40AA	1, 2, 5	2
NVIDIA® Quadro® RTX 4000 8GB Graphics	XW, CX	Y	Y	5JV89AA	1, 2	2
AMD Radeon™ Pro W5500 8GB 4DP GFX	XW, CX	Y	Y	9GC16AA		2
AMD Radeon™ Pro W5700 8GB 5mDP+USBc GFX	XW, CX	Y	Y	9GC15AA/AT		2
AMD Radeon™ Pro WX 7100 8GB Graphics	XW, CX	Y	Y	Z0B14AA	1, 2	2
Ultra High-End 3D						
NVIDIA® Quadro® GP100 16GB Graphics	XW, CX	N		1ZE81AA	1, 2, 5	2
NVIDIA® Quadro® GV100 32GB Graphics	XW, CX	Y		3ME26AA	1, 2, 5	2
NVIDIA® Quadro® P5000 16GB Graphics	XW, CX	Y	Y	Z0B13AA	1, 2, 5	2
NVIDIA® Quadro® P6000 24GB Graphics	XW, CX	Y	Y	Z0B12AA	1, 2, 5	2
NVIDIA® Quadro® RTX 5000 16GB Graphics	XW, CX	Y	Y	5JH81AA	1, 2	2
NVIDIA® Quadro® RTX 6000 24GB Graphics	XW, CX	Y	Y	5JH80AA	1, 2	2
NVIDIA® Quadro® RTX 8000 48 GB Graphics	XW, CX	Y	Y	6NB51AA	1, 2	2
NVIDIA® RTX A6000 48GB Graphics	XW, CW	Y	Y	2S6U3AA	1, 2	2
AMD Radeon™ Pro WX 9100 16GB Graphics	XW, CX	Y		2TF01AA	1, 2	1
NVIDIA® Quadro® Sync II	XW, CX	N	Y	1WT20AA		

NOTE 1: Single graphics configuration requires the HP Z4 G4 Fan and Front Card Guide Kit, which is available both CTO (1MY89AV) and AMO (1XM33AA).

NOTE 2: Single graphics configuration requires the 750W chassis or 1000W chassis.

NOTE 3: Dual graphics configuration requires the HP Z4 G4 Fan and Front Card Guide Kit, which is available both CTO (1MY89AV) and AMO (1XM33AA).

NOTE 4: Dual graphics configuration requires the 750W chassis or 1000W chassis.

NOTE 5: Dual graphics configuration requires the 1000W chassis.

Supported Components

Memory	CTO	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
	HP 8GB (1x8GB) DDR4-2666 ECC Reg RAM	XW	Y	Y	1XD84AA/AT	1
	16GB (1x16GB) DDR4-2666 ECC Reg RAM	XW	Y	Y	1XD85AA/AT	1
	32GB (1x32GB) DDR4-2666 ECC Reg RAM	XW	Y	Y	1XD86AA/AT	1,2
	HP 8GB (1x8GB) DDR4- 2933 ECC Reg RAM	XW	Y	Y	5YZ56AA /AT	1,3
	16GB (1x16GB) DDR4- 2933 ECC Reg RAM	XW	Y	Y	5YZ54AA/AT	1,3
	32GB (1x32GB) DDR4- 2933 ECC Reg RAM	XW	Y	Y	5YZ55AA / AT	1,3
	64GB (1x64GB) DDR4- 2933 ECC Reg RAM	XW	Y	Y	5YZ57AA / AT	1,3,4
	HP 8GB (1x8GB) DDR4-2933 nECC RAM	CX	Y	Y	7ZZ64AA /AT	1,3
	HP 16GB (1x16GB) DDR4-2933 nECC RAM	CX	Y	Y	7ZZ65AA / AT	1,3
	HP 32GB (1x32GB) DDR4-2933 nECC RAM	CX	Y	Y	7ZZ66AA/AT	1,3,4

NOTE 1: ONLY DDR4 DIMMs are supported.

NOTE 2: Memory configurations using Xeon Skylake (W-21xx) processors and 32GB Registered DIMMs require the HP Z4 Memory Cooling Solution, which is available both CTO (1MY90AV) and AMO (8TC68AA).

NOTE 3: Intel® Core™ i9-10900X/XE and with Intel® Xeon® W-2200 family processors only support 2933speed memory.

NOTE 4:

- 32GB nECC Memory is only available with Intel® Core™ i9-10900X/XE family processors.
- 64GB Registered Memory is only available with Intel® Xeon® W-2200 family processors.

NOTE 5: Discontinued Core i7X, Core i9-7900X/XE, and Core i9-9000X/XE family processors are only compatible with Memory Option Kit 7ZZ64AA/AT 8GB (1x8GB) DDR4 2933 NECC UDIMM Memory Option Kit 7ZZ65AA/AT 16GB (1x16GB) DDR4 2933 NECC UDIMM Memory has transitioned to newer 16Gbit DRAM and is incompatible with these discontinued Core X processors.

NOTE: Factory-configured CTO (xxxxxAV) and aftermarket AMO (xxxxxAA, xxxxxAT) HP memory part numbers designated as "2666" may ship with "2933" or "3200" speed memory components. Similarly, HP Memory part numbers designated as "2933" may ship with "3200" speed memory. This does not affect HP part number availability, nor does it affect system performance or operation. All hardware configurations currently supporting HP memory part numbers designated as "2666" or 2933 have been fully qualified to work with fast speed memory and are fully supported by HP under standard support terms.

Supported Components

Factory Configured System Memory Solutions	Available with Intel Xeon Processor & Registered Memory	Available with Intel Core X Processor & nECC Memory
8GB (1x8GB) DDR4	Yes	Yes
16GB (1x16GB) DDR4	Yes	Yes
16GB (2x8GB) DDR4	Yes	Yes
24GB (3x8GB) DDR4	Yes	Yes
32GB (2x16GB) DDR4	Yes	Yes
32GB (4x8GB) DDR4	Yes	Yes
64GB (2x32GB) DDR4	Yes	Yes (Note 1)
64GB (4x16GB) DDR4	Yes	Yes
64GB (8x8GB) DDR4	Yes	Yes
128GB (2x64GB) DDR4	Yes (Note 2)	No
128GB (4x32GB) DDR4	Yes	Yes (Note 1)
128GB (8x16GB) DDR4	Yes	Yes
192GB (6x32GB) DDR4	Yes	Yes (Note 1)
256GB (4x64GB) DDR4	Yes (Note 2)	No
256GB (8x32GB) DDR4	Yes	Yes (Note 1)
384GB (6x64GB) DDR4	Yes (Note 2)	No
512GB (8x64GB) DDR4	Yes (Note 2)	No

NOTE 1: 32GB nECC Memory Configurations are only available with Intel® Core™ i9-10900X/XE family processors.

NOTE 2: 64GB Registered Memory Configurations are only available with Intel® Xeon® W-2200 family processors.

Supported Components

Multimedia and Audio Devices

	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Realtek HD ALC221 Audio	XW, CX	Y	N		

Optical and Removable Storage

	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP SlimTray Optical Drives					
HP 9.5mm Slim Blu Ray Disc Writer	XW, CX	Y	Y	K3R65AA	1
HP 9.5mm Slim DVD ROM	XW, CX	Y	Y	K3R63AA	1
HP 9.5mm Slim DVD Writer*	XW, CX	Y	Y	K3R64AA	1
HP HH DVD Writer (16x RW DVD-R)	XW, CX	Y	Y	4AR67AA	
HP SD Card Reader					
HP SD 4 Card Reader	XW, CX	Y	Y	2VK54AA	
NVMe Frame/Carrier					
HP QX310 Removable NVMe Frame/Carrier w/PCIe card	XW, CX	Y	N		
HP QX310 Removable Carrier only	XW, CX	N	Y	8GQ91AA/AT	2

NOTE 1: Installing an optical drive into Z4 G4 requires a 5.25" external bay adapter (Option Kit Part number NQ099A).

NOTE 2: Only approved HP Z Turbo storage devices are supported.

*Actual speeds may vary. No support for DVD-RAM (DVD Writer). Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

With Blu-ray, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

Networking and Communications

	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Intel® i350-T2 PCIe Dual Port Gigabit NIC	XW, CX	Y	Y	V4A91AA	
Intel® i350-T4 PCIe 4-Port Gigabit NIC	XW, CX	N	Y	W8X25AA	
Intel® Ethernet I210-T1 PCIe x1 Gb NIC	XW, CX	Y	Y	E0X95AA	
Aquantia® AQN-108 Single-Port 5GbE NIC	XW, CX	N	Y	1PM63AA	
Intel® X550-T2 10GbE Dual Port NIC	XW, CX	Y	Y	1QL46AA	
Intel® X710-DA2 10GbE SFP+ Dual Port NIC	XW, CX	Y	Y	1QL47AA	1

Supported Components

HP 10GbE SFP+ SR Transceiver	XW, CX	Y	Y	C3N53AA
Intel 8265 802.11 a/b/g/n/ac + BT PCIe WLAN	XW, CX	N	Y	1QL48AA
Intel® Wi-Fi 6 AX200 & BT PCIe	XW, CX	N	Y	7CE01AA
Allied Telesis AT-2914SX/LC-901 1GB LC Fiber NIC		Y	Y	1C7Q2AA

Note 1: Windows 7 is NOT supported

Racking and Physical Security

Supported Components

Racking and Physical Security

	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Z4/Z6 Side Panel Barrel Keylock	XW, CX	Y	N		
HP Solenoid Lock / Hood Sensor	XW, CX	Y	N		
HP Z4/Z6 G4 Depth Adjustable Fixed Rail Rack Kit	XW, CX	N	Y	2HW42AA	
HP Z2 Mini/Z2 TWR/Z4/Z6 Depth Adj Rail Rak Kit			Y	2A8Y5AA	
HP Keyed Cable Lock 10mm	XW, CX	N	Y	T1A62AA	

Input Devices

	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Wireless Business Slim Keyboard and Mouse	XW, CX	Y	Y	N3R88AA	
Business Slim PS/2 Wired Keyboard	XW, CX	Y	Y	N3R86AA	
USB Business Slim Wired Keyboard	XW, CX	Y	Y	N3R87AA	
USB Premium Wired Keyboard	XW, CX	Y	Y	Z9N40AA/AT	
USB Wired SmartCard CCID Keyboard	XW, CX	Y	Y	E6D77AA	
3Dconnexion CADMouse	XW, CX	Y	Y	M5C35AA	
3DConnexion 3 Button Wired CAD Mouse Pro	XW, CX	N	Y	2H5H5AA	
HP Optical USB Mouse	XW, CX	Y	Y	QY777AA/AT	
HP PS/2 Mouse	XW, CX	Y	Y	QY775AA/AT	
HP USB Hardened Mouse	XW, CX	Y	Y	P1N77AA/AT	

Other Hardware

	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP ENERGY STAR® Certified Configuration	XW, CX	Y			
HP Z Premium Front I/O 2xUSB-A 2xUSB-C	XW, CX	Y	Y	1XM32AA	
HP Thunderbolt 3 PCIe 2 Port I/O Card	XW, CX	Y	Y	3UU05AA	
HP Z4 G4 Memory Cooling Solution	XW, CX	Y	Y	8TC68AA	Note 1
HP Z4 G4 Fan and Front Card Guide Kit	XW, CX	Y	Y	1XM33AA	Note 2
HP Internal USB Port Kit	XW, CX	N	Y	EM165AA	Note 3
HP eSATA 2 port PCIe Bulkhead Kit	XW, CX	Y	Y	GM110AA	
HP Serial Port Adapter	XW, CX	Y	Y	PA716A	
HP Workstation Mouse Pad	XW, CX	Y			

Note 1: The HP Z4 G4 Memory Cooling Solution is available to add to any configuration for improved system cooling, but is required for memory configurations using Xeon Processors and 32GB Registered DIMMs.

Note 2: Fan and Front Card Guide required with the following components:

Supported Components

- Specific graphics configurations (see Graphics section above)
- Any HP Z Turbo Quad Pro configuration

Note 3: The HP Internal USB Port kit has a single USB 2.0 type A connector.

Software	Processor Supports	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Sobey Video Editing SW	XW, CX	Y	N		China only
SW HP RGS for Z	XW, CX	Y	N		
HP Sure Start Gen3	XW, CX	Y	N		1

Note 1: Available on products equipped with Intel® 7th generation processors.

Supported Components

Operating Systems

	Processor Supports	Support Notes
Windows 10 Pro for Workstations	XW	Note 1
Windows 10 Pro	CX	
Windows 7 Professional 64-bit	XW	Note 3
Ubuntu 20.04 LTS	XW	
HP Linux® Ready	XW, CX	Note 4
Red Hat® Enterprise Linux® (RHEL) Workstation - Paper License (1yr)	XW, CX	Note 5
*only available in China through June 2019.		

NOTE 1: Only applicable to Xeon W configurations

NOTE 2: Not supported for Core X configurations. For detailed Windows 7 OS hardware support information see <http://h10032.www1.hp.com/ctg/Manual/c05857891.pdf>.

NOTE 3: For detailed Linux® OS/hardware support information, see: http://www.hp.com/support/linux_hardware_matrix

NOTE 4: This second OS must be ordered with the HP Linux® Installer Kit as the first OS.

System Technical Specifications

System Board

System Board Form Factor

Main System Board:
27.7 x 28.0 cm
10.9 x 11.0 inches
Single LGA2066 R4

Processor Socket Chipset

Intel® Xeon® W Processor Family
Intel® C422 Chipset

Intel® Core™ X-series Processors
Intel® X299 chipset

Super I/O Controller

Nuvoton NPCD315HA0DX (SIO-15)

Memory Expansion Slots

8 DDR4 memory slots

Memory Type Supported

DDR4, RDIMM (Registered), ECC

DDR4, UDIMM, non-ECC

Memory Modes

Channel Interleaved

Memory Speed Supported

2933MT/s, 2666MT/s, 2400MT/s, and 2133MT/s

Memory Protection

ECC available on data, parity on address and command

N/A

Maximum Memory

Supports up to 512GB


Supports up to 256GB

Memory Configuration (Supported)

Only Registered DIMMs are supported.

Only non-ECC unbuffered DIMMs are supported

Memory Load Order

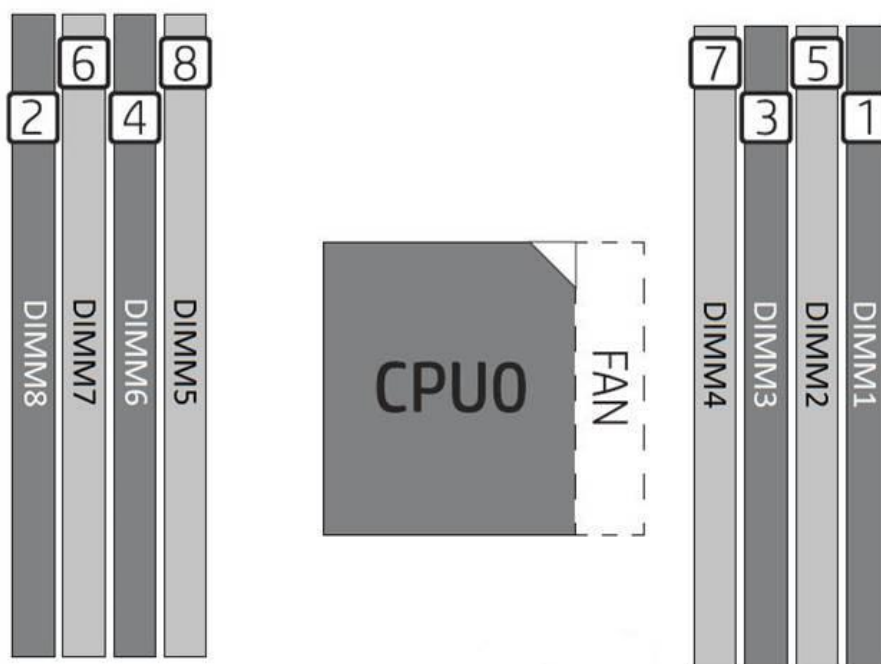

Note on Maximum Memory

Maximum memory capacities assume 64-bit operating systems such as Windows 10 Pro, Windows 7 Professional 64-bit.

System Technical Specifications

For systems installed with Microsoft Windows 7 (Ultimate, Enterprise or Pro), the maximum accessible system memory is 192GB

PCI Express Connectors

Intel® Xeon® W Processor Family

Intel® Core™ X-series Processors

Slot 1 (top): PCI Express Gen3 x16 supplied by CPU.

Slot 2 (PCH): PCI Express Gen3 x4 supplied by PCH with open-ended connector. **

Slot 3:

PCI Express Gen3 x16 supplied by CPU

Slot 3:

Core i9-X and Core i7-9800X configs: PCI Express Gen3 x16 supplied by CPU

Core i7-X configs: PCI Express Gen3 x16 (mechanical)/ x8 (electrical) supplied by CPU

Slot 4 (PCH): PCI Express Gen3 x4 supplied by PCH with open-ended connector**

Slot 5:

PCI Express Gen3 x8 supplied by CPU with open-ended connector**

Slot 5:

- Core i9-X and Core i7-9800X configs: PCI Express Gen3 x8 supplied by CPU with open-ended connector**

- Other Core i7-X configs: PCI Express Gen3 x8 (mechanical-only, no data) with open-ended connector**

NOTE: Slots 1 through 5 support full-height, full-length cards (with extender)

M.2 Slot 1: PCI Express Gen3 x4 supplied by CPU

Socket Type 3, Key M, H4.2, sizes 2260-D5-M, 2280-D5-M, 22110-D5-M

M.2 Slot 2:

PCI Express Gen3 x4 supplied by CPU
Socket Type 3, Key M, H4.2, sizes 2260-D5-M, 2280-D5-M, 22110-D5-M

M.2 Slot 2:

No 2nd M.2 connector/slot available

** Open-ended connector allows a greater bandwidth (e.g. x16) card to be installed physically into a lower bandwidth connector/slot.

System Technical Specifications

Supported Drive Interfaces

SATA

6 SATA @ 6GB/s, supports RAID 0, 1, 5, and 10
Factory integrated Intel® SATA RAID is Microsoft Windows only

Serial Attached SCSI

Intel® Xeon® W Processor Family

Requires Optional PCIe card

Intel® Core™ X-series Processors

not supported

Factory Configured RAID

- RAID 0 striped array
- RAID 1 mirrored array
- RAID 10 striped and mirrored array

*HW RAID functionality not supported by Linux®. Use SW RAID functionality provided in the Red Hat® Operating system instead.

Integrated Graphics

No

Network Controller

Intel® Xeon® W Processor Family

Intel® I219-LM PCIe GbE LAN

Intel® I210-AT PCIe GbE LAN

Supports the following management functionalities:

Intel AMT11.1x, TXT, DASH 1.1, WOL, VLAN, Teaming and PXE 2.1

Intel® Core™ X-series Processors

Intel® I219-V PCIe GbE LAN

Supports the following management functionalities:

WOL and PXE 2.1

External SATA (eSATA)

Supported on all SATA ports configurable with optional eSATA* cable kit

* hot plug / hot swap not supported with eSATA

IDE connector

No

Floppy connector

No

Serial

1 internal header

2nd Serial

No

Parallel

No

AUX IN (audio)

No

IEEE 1394 Connector(s)

Front

None

Rear

None

Internal

None

USB Connector(s)

Front

Front USB depends on which FIO module is selected:

- Standard: 4 USB 3.1 G1 Type A (1 charging)
- Premium: 2 USB 3.1 G2 Type C™, 2 USB 3.1 G1 Type A (1 charging)

Rear

Intel® Xeon® W Processor Family

6 USB 3.1 G1 Type A

Intel® Core™ X-series Processors

5 USB 3.1 G1 Type-A

Internal

1 USB 3.1 G1 single-port header
1 USB 2.0 single-port header
1x USB 2.0 dual-port header

System Technical Specifications

HD Integrated Audio	Realtek ALC221			
Flash ROM	Yes			
CPU Fan Header	Yes			
Rear Chassis Fan Header	Yes			
Front PCI Fan Header	Yes			
Front Control Panel/Speaker Header	Yes			
CMOS Battery Holder - Lithium	Yes			
Integrated Trusted Platform Module	Trusted Platform Module (TPM) 2.0 (Infineon SLB 9670) Common Criteria EAL4+ Certified Convertible to FIPS 140-2 Certified mode through firmware v7.80 TPM Certified products list: https://trustedcomputinggroup.org/membership/certification/tpm-certified-products/			
Power Supply Headers	Yes			
Power Switch, Power LED & Hard Drive LED Header	Yes			
Clear Password Jumper	Yes			
Serial Port	1 internal header			
Parallel Port	No			
Keyboard/Mouse	USB or PS/2			
Hood Lock Header	Yes			
Hood Sensor Header	Yes			
Memory Fan	1 Memory Fan Header			
AUX IN (audio)	No			
Power Supply				
Power Supply	750W 90% Efficient, Custom PSU (Wide-Ranging, Active PFC)		465W 90% Efficient, Custom PSU (Wide-Ranging, Active PFC)	
Operating Voltage Range	90–269 VAC		90–269 VAC	
Rated Voltage Range	100–240 VAC	118 VAC	100–240 VAC	118 VAC
Rated Line Frequency	50–60 Hz	400 Hz	50–60 Hz	400 Hz
Operating Line Frequency Range	47–66 Hz	393–407 Hz	47–66 Hz	393–407 Hz
Rated Input Current	100–240V @ 10A	118V @ 10A	100–240V @ 6A	118V @ 6A
Heat Dissipation (Configuration and software dependent)	Typical = 1850 btu/hr Max = 3084 btu/hr		Typical = 1147 btu/hr Max = 1912 btu/hr	
Power Supply Fan	80x25 mm variable speed		80x25 mm variable speed	
ENERGY STAR® Certified (Configuration dependent)	Yes		Yes	
	90% Efficient		90% Efficient	
80 PLUS® Compliant	The Z4 G4 750W power supply efficiency report can be found at this link: https://plugloadsolutions.com/psu_reports/HP%20INC_DPS-750AB-36%20A_750W_ECOS%204938_Report.pdf		The Z4 G4 465W power supply efficiency report can be found at this link: https://plugloadsolutions.com/psu_reports/HP%20INC_DPS-465AB-3%20A_465W_ECOS%204939_Report.pdf	

System Technical Specifications

Power Supply	1000W 90% Efficient, Custom PSU (Wide-Ranging, Active PFC)	
Operating Voltage Range	90–269 VAC	
Rated Voltage Range	100–127 VAC 200–240 VAC	118 VAC
Rated Line Frequency	50–60 Hz	400 Hz
Operating Line Frequency Range	47–66 Hz	393–407 Hz
Rated Input Current	12A @100–127 VAC 6.3A @ 200–240 VAC	12A @ 118VAC
Heat Dissipation (Configuration and software dependent)	Typical = 2467 btu/hr Max = 4112 btu/hr	
Power Supply Fan	80x25 mm variable speed	
ENERGY STAR® Certified (Configuration dependent)	Yes	
80 PLUS® Compliant	90% Efficient	
	The Z4 G4 1000W power supply efficiency report can be found at this link: https://plugloadsolutions.com/psu_reports/HP_D15-1K0P1A_1000W_ECOS%204838_Report.pdf	
FEMP Standby Power Compliant @115V <1W in S5 – Power Off)	Yes	Yes
EuP Compliant @ 230V (<0.5 W in S5 – Power Off)	Yes	Yes
CECP Compliant @ 220V (<4W in S3 – Suspend to RAM)	Yes; Configuration dependent	Yes; Configuration dependent
Power Consumption in sleep mode (as defined by ENERGY STAR®) – Suspend to RAM (S3)	TBD	TBD
Built-in Self Test LED	Yes	Yes
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	Yes	Yes

NOTE: 1000 W internal power supply, up to 90% efficiency, active PFC available the first half of 2018

System Technical Specifications

System Configuration

Example Z4 G4 Workstation Configuration #1 ENERGY STAR® Certified	Processor	1x Intel Xeon W-2102 4C 2.9GHz					
	Memory	1x 8GB DDR4-2666 (Registered DIMM)					
	Graphics	1x NVIDIA Quadro P400					
	Disks / Optical	1x 500GB SATA 7200 ; 1x Slim DVD-ROM SATA					
	Power Supply	465W 90% custom PSU					
	Other	N/A					
	Energy Consumption	115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
		Windows Idle (S0)		42.323		41.338	
		Windows Busy Typ(S0)		TBD		TBD	
		Windows Busy Max (S0)		90.231		92.323	
		Sleep (S3)		3.449		3.440	
		Off (S5)		1.041		1.014	
		Zero Power Mode (ErP)		0.187		0.43	
	Heat Dissipation (Btu/hr)	115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
		Windows Idle (S0)		144.406		141.045	
		Windows Busy Typ(S0)		TBD		TBD	
		Windows Busy Max (S0)		307.868		315.006	
		Sleep (S3)		11.767		11.737	
		Off (S5)		3.551		3.459	
		Zero Power Mode (ErP)		0.638		1.467	

Example Z4 G4 Workstation Configuration #2 ENERGY STAR® Certified	Processor	1x Intel Xeon W-2123 4C 3.6GHz					
	Memory	2x 8GB DDR4-2666 (Registered DIMM)					
	Graphics	1x NVIDIA QuadroP1000					
	Disks / Optical	1x 500GB SATA 7200 ; 1x Slim DVD-ROM SATA					
	Power Supply	750W 90% custom PSU					
	Other	N/A					
	Energy Consumption (Watts)	115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
		Windows Idle (S0)		39.947		39.569	
		Windows Busy Typ(S0)		TBD		TBD	
		Windows Busy Max (S0)		149.543		150.789	
		Sleep (S3)		3.615		3.566	
		Off (S5)		1.079		1.016	
		Zero Power Mode (ErP)		0.204		0.430	
	Heat Dissipation	115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
		Windows Idle (S0)		144.406		141.045	
		Windows Busy Typ(S0)		TBD		TBD	
		Windows Busy Max (S0)		307.868		315.006	
		Sleep (S3)		11.767		11.737	
		Off (S5)		3.551		3.459	
		Zero Power Mode (ErP)		0.638		1.467	

System Technical Specifications

(Btu/hr)	Windows Idle (S0)	136.299		135.009		139.741	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	510.241		514.492		504.447	
	Sleep (S3)	12.338	12.167	12.969	12.959	12.399	12.355
	Off (S5)	3.681	3.466	4.913	4.224	4.504	3.992
	Zero Power Mode (ErP)	0.696		1.467		0.651	

Example Z4 G4 Workstation Configuration #3	Processor	1x Intel Xeon W-2133 6C 3.6GHz					
	Memory	4x 8GB DDR4-2666 (Registered DIMM)					
	Graphics	1x NVIDIA QuadroP2000					
	Disks/Optical	2x 1TB SATA7200 ; 1x Slim SuperMulti DVDRW SATA					
	Power Supply	750W 90% custom PSU					
	Other	N/A					

Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	48.759		46.321		46.578	
	Windows Busy Typ(S0)	TBD		199.56		206.055	
	Windows Busy Max (S0)	209.60		208.66		198.82	
	Sleep (S3)	4.360	4.351	4.538	4.508	4.299	4.277
	Off (S5)	1.039	1.017	1.42	1.219	1.015	0.997
	Zero Power Mode (ErP)	0.203		0.399		0.191	

Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows Idle (S0)	166.366		258.047		158.924	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	715.155		711.947		678.373	
	Sleep (S3)	14.876	14.845	15.483	15.381	14.668	14.593
	Off (S5)	3.544	3.470	4.845	4.179	3.463	3.402
	Zero Power Mode (ErP)	0.692		1.361		0.651	

Example Z4 G4 Workstation Configuration #4	Processor	1x Intel Xeon W-2155 10C 3.3GHz					
	Memory	8x 32GB DDR4-2666 (Registered DIMM)					
	Graphics	1x NVIDIA QuadroP6000					
	Disks / Optical	4x 2TB SATA 7200 ; 0x ODD					
	Power Supply	750W 90% custom PSU					
	Other	N/A					

Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	65.959		69.321		68.635	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	463.23		456.95		503.125	

System Technical Specifications

Heat Dissipation (Btu/hr)	Sleep (S3)	6.336	6.102	6.971	6.189	6.266	6.264
	Off (S5)	1.047	1.036	1.254	1.222	1.014	0.995
	Zero Power Mode (ErP)	0.203		0.399		0.191	
		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows Idle (S0)	225.052		236.523		234.183	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	1580.541		1559.113		1716.663	
	Sleep (S3)	21.618	20.821	23.785	21.117	21.379	21.372
	Off (S5)	3.572	3.534	4.278	4.169	3.459	3.394
	Zero Power Mode (ErP)	0.692		1.361		0.652	

Example Z4 G4 Workstation Configuration #5	Processor	1x Intel Core i7-7800X 3.5GHz 6C					
	Memory	2x 8GB DDR4-2666 (non-ECC DIMM)					
	Graphics	1x NVIDIA Quadro P1000					
	Disks / Optical	1x 1TB SATA 7200 : 1x Slim DVD-ROM SATA					
	Power Supply	1000W 90% custom PSU					
	Other	N/A					

Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	46.909		47.175		46.909	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	201.83		199.97		203.41	
	Sleep (S3)	3.041	2.971	3.165	3.041	2.971	3.165
	Off (S5)	0.978	0.898	1.159	0.978	0.898	1.159
	Zero Power Mode (ErP)	0.199		0.379		0.187	

Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows Idle (S0)	160.053		160.961		160.053	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	688.644		682.297		694.035	
	Sleep (S3)	10.376	10.137	10.799	10.376	10.137	10.799
	Off (S5)	3.337	3.064	3.954	3.337	3.064	3.954
	Zero Power Mode (ErP)	0.678		1.293		0.638	

Example Z4 G4 Workstation Configuration #6	Processor	1x Intel Core i7-7920X 2.9GHz 12C					
	Memory	4x 16GB DDR4-2666 (non-ECC DIMM)					
	Graphics	1x NVIDIA Quadro P4000					
	Disks / Optical	2x 2TB SATA 7200 : 1x Slim DVD-ROM SATA					
	Power Supply	1000W 90% custom PSU					

System Technical Specifications

	Other	N/A					
Energy Consumption (Watts)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	53.392		51.332		53.367	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	318.58		307.82		319.71	
	Sleep (S3)	3.558	3.486	3.694	3.558	3.486	3.694
	Off (S5)	0.972	0.895	1.160	0.972	0.895	1.160
	Zero Power Mode (ErP)	0.201		0.391		0.186	
Heat Dissipation (Btu/hr)		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Enabled	LAN Disabled	LAN Enabled
	Windows Idle (S0)	182.174		175.144		182.088	
	Windows Busy Typ(S0)	TBD		TBD		TBD	
	Windows Busy Max (S0)	1086.994		1050.281		1090.851	
	Sleep (S3)	12.139	11.894	12.604	12.139	11.894	12.604
	Off (S5)	3.316	3.054	3.957	3.316	3.054	3.957
	Zero Power Mode (ErP)	0.685		1.334		0.634	

NOTE: Power consumption measurements do not take advantage of the Intel Turbo Boost Technology. As a result, power consumption measurements may be higher.

DECLARED NOISE EMISSIONS

Declared Noise Emissions (Entry-level and High-end configurations)		
System Configuration (Entry level)	Processor Info	Intel® Xeon® W-2125 4.0 2666 4C CPU
	Memory Info	32GB (4x8GB) DDR4-2666 ECC Reg RAM
	Graphics Info	1-NVIDIA® Quadro® P400 2GB
	Disks/Optical	1-500GB SATA 7200RPM 3.5" HDD / 1-HP 9.5mm Slim Blu Ray Disc Writer
	Power Supply	465 W

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.2	13
	Hard drive Operating (random reads)	3.4	15

System Configuration (High end)	Processor Info	Intel® Xeon® W-2155 3.3 2666 10C
	Memory Info	128GB (8x16GB) DDR4-2666 ECC Reg RAM
	Graphics Info	1-NVIDIA® Quadro® P6000 24GB
	Disks/Optical	2-4TB SATA 7200RPM Ent 3.5" / 1-HP 9.5mm Slim Blu Ray Disc Writer
	Power Supply	750 W

System Technical Specifications

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.5	22
	Hard drive Operating (random reads)	3.7	23

System Configuration (Entry Level 2)	Processor Info	Intel® Core i9-7900X 3.3 2666 10C
	Memory Info	32GB (4x8GB) DDR4-2666 nECC RAM
	Graphics Info	1-NVIDIA® Quadro® P400 2GB
	Disks/Optical	1-500GB SATA 7200RPM Ent 3.5" / 1-HP 9.5mm Slim Blu Ray Disc Writer
	Power Supply	1000 W

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.4	16
	Hard drive Operating (random reads)	3.5	17

System Configuration (High end 2)	Processor Info	Intel®Core i9-7980XE 2.6 2666 18C
	Memory Info	128GB (8x16GB) DDR4-2666 nECC RAM
	Graphics Info	1-NVIDIA® Quadro® P6000 24GB
	Disks/Optical	2-4TB SATA 7200RPM Ent 3.5" / 1-HP 9.5mm Slim Blu Ray Disc Writer
	Power Supply	1000 W

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure (LpAm, decibels)
	Idle	3.5	20
	Hard drive Operating (random reads)	3.7	21

NOTE: Higher noise levels may be experienced with non-HP approved graphic card(s). Some consumer graphics cards have side blowing fans that may heat up thermal sensor(s) on the mother board causing fans to ramp.

ENVIRONMENTAL DATA

Environmental Requirements	Temperature	Non-operating: -40° to 60° C (-40° to 140° F) Operating: 5° to 35° C (40° to 95° F) Above 1524 m (5,000 feet) altitude, the maximum operating temperature is reduced by 1° C (1.8° F) for every 305 m (1,000 feet) increase in elevation Maximum rate of change: 10 °C/hr No direct sustained sunlight
	Humidity	Operating: 10% to 85% RH, non-condensing, 35° C maximum wet bulb

System Technical Specifications

	Non-operating: 10% to 90% RH, non-condensing, 35° C maximum wet bulb
Maximum Altitude	Operating (with Rotational Hard Drives): 3,048 m (10,000 feet) Operating (with only Solid-State Drives): 5,000 m (16,404 feet) Non-operating: 12,192 m (40,000 feet) Maximum operating temperature is reduced as altitude increases. See Temperature for details.
Shock (non-repetitive)	Operating: ½-sine: 40g, 2-3ms (~62 cm/sec) Non-operating: ½-sine: 160 cm/s, 2-3ms (~105g) Non-operating square: 422 cm/s, 20g
Vibration	Operating random: 0.5g (rms), 5-300 Hz, up to 0.0025g ² /Hz Non-operating random: 2.0g (rms), 5-500 Hz, up to 0.0150 g ² /Hz

Physical Security and Serviceability

Access Panel	Tool-less Includes system board and memory information.
Hard Drives	Tool-less
Expansion Cards	Tool-less
Processor Socket	Tool-less
Blue User Touch Points	Yes, on primary serviceable components.
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Screw-In
Dual Color Power/Failure LED	Yes
HDD Activity LED	Yes Note: HDD Activity LED is not dual-color
Configuration Record SW	Yes
Over-Temp Warning on Screen	Yes, at POST screen on reboot
Restore CD/DVD Set	Restores the computer to its original factory shipping image; can be obtained via HP Support.
Dual Function Front Power Switch	Yes, causes a fail-safe power off when held for 4 seconds
Padlock Support	Yes (optional): Locks side cover and secures chassis from theft 7.0 mm (0.2756 in) diameter padlock loop at rear of system
Cable Lock Support	Yes, Kensington Cable Lock (optional): Locks side cover and secures chassis from theft 3 mm x 7 mm slot at rear of system
Universal Chassis Clamp Lock Support	Yes (optional): Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable Threaded feature at rear of system
Solenoid Lock and Hood Sensor	Yes (optional) The Solenoid Hood Lock eliminates the need for a physical key by making the chassis lockable through software and a password. You can also lock and unlock the chassis remotely over the network. The Sensor Kit detects when the access panel has been removed

System Technical Specifications

Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Yes, enables or disables serial, USB, audio, and network ports	
Removable Media Write/Boot Control	Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media)	
Power-On Password Setup Password	Yes, prevents an unauthorized person from booting up the workstation	
3.3V Aux Power LED on System PCA	Yes, prevents an unauthorized person from changing the workstation configuration	
NIC LEDs (integrated) (Green & Amber)	Yes	
CPUs and Heatsinks	A T-15 Torx or flat blade screwdriver is needed to remove the CPU heatsink before the CPU can be removed. CPU removal is tool-less	
Power Supply Diagnostic LED	Yes	
Front Power Button	Yes, ACPI multi-function	
Rear Power Button	Yes	
Front Power LED	Yes, white (normal), red (fault)	
Front Hard Drive Activity LED	Yes, white	
Front ODD Activity LED	Yes, on device	
Internal Speaker	Yes	
System/Emergency ROM Flash Recovery	Recovers corrupted system BIOS.	
Cooling Solutions	Air cooled forced convection heatsinks	
Power Supply Fans	80 mm x 80 mm x 25 mm (non-serviceable)	
CPU Heatsink Fan	Intel® Xeon® W Processor Family	Intel® Core™ X-series Processors
	CPU configs <= 140W: 92 mm x 92 mm x 25 mm, 5-wire, PWM	CPU configs <= 140W: 92 mm x 92 mm x 25 mm, 5-wire, PWM
	CPU configs > 140W: 92 mm x 92 mm x 25 mm, 6-wire, PWM (includes 6-to-5pin cable adapter)	CPU configs > 140W: 92 mm x 92 mm x 25 mm, 6-wire, PWM (includes 6-to-5pin cable adapter)
Chassis Fan	Front: (Optional) 92 mm x 92mm x 25 mm, 4-wire, PWM	
	Rear: 120 mm x 120mm x 25 mm, 4-wire, PWM	
Memory Heatsink Fan	Dual 60 mm x 60 mm x 25 mm, 6-wire, PWM, Blindmate (optional based on configuration)	
HP PC Hardware Diagnostics UEFI	HP PC Hardware Diagnostics (UEFI) enables hardware level testing outside the operating system on many components. The diagnostics can be invoked by pressing ESC then F2 upon the PC reboot, and is available as a download from HP Support.	
Access Panel Key Lock	Yes, side panel barrel keylock (optional from the factory only)	
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI).	
	Allows the system to wake from a low-power mode.	

System Technical Specifications

- Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system

Trusted Platform Module Chip Infineon TPM 2.0 Certified

Integrated Chassis Handles Yes, Front handle and dedicated rear recess

Power Supply Requires T15 Torx or flat blade screwdriver

PCIe Card Retention Yes, rear (all), middle (all), front (full-length cards with extender, using HP Z4 G4 Fan and Front Card Guide Kit)

Flash ROM Yes

Diagnostic Power Switch LED on board Yes

Clear Password Jumper Yes

Clear CMOS Button Yes

CMOS Battery Holder Yes

DIMM Connectors Yes

BIOS

BIOS 32-bit Services Standard BIOS 32-bit Service Directory Proposal v0.4

PCI 3.0 Support Full BIOS support for PCI Express through industry standard interfaces.

ATAPI ATAPI Removable Media Device BIOS Specification Version 1.0.

BBS BIOS Boot Specification v1.01.

WMI Support WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.

BIOS Boot Spec 1.01+ Provides more control over how and from what devices the workstation will boot.

BIOS Power On Users can define a specific date and time for the system to power on.

ROM Based Computer Setup Utility (F10) Review and customize system configuration settings controlled by the BIOS.

System/Emergency ROM Flash Recovery with Video Recovers system BIOS in corrupted Flash ROM.

Replicated Setup Saves BIOS settings to USB flash device in human readable file (HpSetup.txt). BiosConfigUtility.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).

SMBIOS System Management BIOS 2.8, for system management information.

Boot Control Disables the ability to boot from removable media on supported devices.

Memory Change Alert Alerts management console if memory is removed or changed.

Thermal Alert Monitors the temperature state within the chassis. Three modes:

- NORMAL - normal temperature ranges.
- ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.
- SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.

Remote ROM Flash Provides secure, fail-safe ROM image management from a central network console.

ACPI (Advanced Configuration and Power Management Interface) Allows the system to enter and resume from low power modes (sleep states).

Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system.

System Technical Specifications

Ownership Tag	Supports ACPI 5.0 for full compatibility with 64-bit operating systems.
Remote Wakeup/Remote Shutdown	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen. System administrators can power on, restart, and power off a client computer from a remote location with Intel Xeon W Processors. For systems with Intel Core X-Series Processors, Wake on LAN is supported, however to remotely restart or shutdown a system, a remote desktop application must be used to manually Restart or Shutdown.
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time.
Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system.
ROM revision levels	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS and WMI) so that management SW applications can use and report this information.
System board revision level	Allows management SW to read revision level of the system board. Revision level is digitally encoded into the HW and cannot be modified.
Start-up Diagnostics (Power-on Self-Test)	Assesses system health at boot time with selectable levels of testing.
Auto Setup when new hardware installed	System automatically detects addition of new hardware.
Keyboard-less Operation	The system can be booted without a keyboard.
Localized ROM Setup	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 14 languages with local keyboard mappings.
Asset Tag	The user or MIS to set a unique tag string in non-volatile memory.
Per-slot Control	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually.
Adaptive Cooling	Control parameters are set according to detected hardware configuration for optimal acoustics.
Pre-boot Diagnostics	(Pre-video) critical errors are reported via beeps and blinks on the power LED.
Industry Standard Specification Support	
Industry Standard UEFI Specification Revision	Revision Supported by the BIOS 2.6
ACPI	Advanced Configuration and Power Management Interface, Version 5.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
CD Boot	"El Torito" Bootable CD-ROM Format Specification Version 1.0
EDD	- Enhanced Disk Drive Specification Version 1.1 - BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	PCI Express Base Specification, Revision 2.0 PCI Express Base Specification, Revision 3.0
PMM	POST Memory Manager Specification, Version 1.01
SATA	Serial ATA Specification, Revision 1.0a Serial ATA 3 Gb/s: Serial ATA Specification, Revision 2.5 Serial ATA 6 Gb/s: Serial ATA Specification, Revision 3.0
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Platform Module (TPM) 2.0 (Infineon SLB 9670)

System Technical Specifications

UHCI	Common Criteria EAL4+ Certified
	FIPS 140-2 Certified
USB	TCG TPM Certified products list: http://www.trustedcomputinggroup.org/certification/tpm-certified-products/
	Universal Host Controller Interface Design Guide, Revision 1.1
SMBIOS	Universal Serial Bus Revision 1.1 Specification
	Universal Serial Bus Revision 2.0 Specification
SMBIOS	Universal Serial Bus Revision 3.1 G1 Specification
	Universal Serial Bus Revision 3.1 G2 Specification
System Management BIOS Reference Specification, Version 2.8	
External BIOS simulator found at: http://h20464.www2.hp.com/index.html	

Social and Environmental Responsibility

Eco-Label Certifications & Declarations This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- ENERGY STAR® (energy-saving features available on selected configurations-Windows only)
- US Federal Energy Management Program (FEMP)
- China Energy Conservation Program
- The ECO declaration (TED)

The Z4 G4 is registered EPEAT® Silver in the US and Canada. EPEAT® registration varies by country. See <http://www.epeat.net> for registration status by country. Search keyword generator on HP's 3rd party option store for solar generator accessories at <http://www.hp.com/go/options>

Batteries The battery in this product complies with EU Directive 2006/66/EC
Battery mass: 3g
Battery type: Lithium Metal

The battery in this product does not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 40ppm by weight

Restricted Material Usage This product meets the material restrictions specified in HP's General Specification for the Environment.

HP Inc. is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis

Low Halogen Statement This product is low-halogen except for power cords, external cables and peripherals. Service parts obtained after purchase may not be low-halogen.

End-of-Life Management and Recycling HP Inc. offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. This product is greater than 90% recyclable by weight when properly disposed of at end of life.

System Technical Specifications

HP Inc. Corporate Environmental Information

Additional Information

For more information about HP's commitment to the environment:

[Sustainability Report](#)

[Eco-label certifications ISO 14001 certificates](#)

- This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC. [Product Disassembly Instructions](#)
- Plastic parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

Packaging

HP Workstation product packaging meets the [HP's General Specification for the Environment](#)

- Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment
- Does not contain ozone-depleting substances (ODS)
- Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed
- Maximizes the use of post-consumer recycled content materials in packaging materials
- All packaging material is recyclable
- All packaging material is designed for ease of disassembly
- Reduced size and weight of packages to improve transportation fuel efficiency
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards formatting
- A multi-unit eco packaging option is available to institutional customers that uses less packaging material or has a lower volume footprint than conventional single-unit packaging. Please contact your sales representative for additional details.

Packaging Materials

Internal

External

Cushions and plastic bags made of low density polyethylene (LDPE).

Outer carton, accessories carton, and insert made of corrugated paper board.

Manageability

Industry Standard Specifications

Intel® Xeon® W Processor Family

This product meets the following industry standard specifications for manageability functionality:

- DASH 1.1 (via Intel® LAN on motherboard)

Intel Active Management Technology (AMT)

Intel® Active Management Technology (AMT) 11.1x

An advanced set of remote management features and functionality providing IT administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 11.1x includes the following advanced management functions:

- Power Management (on, off, reset, graceful shutdown, sleep and hibernate)
 - Support in Max Power Savings (Shutdown and Hibernate Modes)
- Hardware Inventory (includes BIOS and firmware revisions)
- Hardware Alerting
- Agent Presence
- System Defense Filters
- Serial Over LAN (SOL)

Intel® Core™ X-series Processors

None apply

System Technical Specifications

- USB Redirect (Media Redirection)
- ME Wake-on-LAN (WOL), even with Maximum Power Savings Enabled
- DASH 1.1 compliance
- IPv6 Support
- Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection
- Remote Scheduled Maintenance - pre-schedule when the system connects to the IT or service provider console for maintenance.
- Remote Alerts - automatically alert IT or service provider if issues arise
- Access Monitor - Provides oversight into Intel® AMT actions to support security requirements
- PC Alarm Clock
- Microsoft NAP Support
- Host Base set-up and configuration
- Management Engine (ME) firmware roll back
- Local Time Sync to UTC
- Remote Memory Dump Command – Creates memory dump for debug

Intel® vPro™ Technology The HP Z4 G4 Workstation supports Intel® vPro™ technology when configured as outlined below:

Not supported

- Intel® Xeon® processor W-2100 product family featuring Intel® vPro™ Technology
- Intel® C422 chipset
- Intel® I219LM GbE LAN

Remote Manageability Software Solutions

The HP Z4 G4 Workstation is supported on the following optional remote manageability software consoles:

- Microsoft System Center Configuration Manager

- LANDesk Management Suite (HP recommended solution)
- Microsoft System Center Configuration Manager

For questions or support for manageability needs, please visit <http://www.hp.com/go/easydeploy>

System Software Manager

For easydeploy questions or support for SSM, please visit: <http://www.hp.com/go/ssm>

Service, Support, and Warranty

On-site Warranty and Service ([Note 1](#)): Three-years, limited warranty and service offering delivers on-site, next business-day ([Note 2](#)) service for parts and labor and includes free telephone support ([Note 3](#))

System Technical Specifications

8am - 5pm. Global coverage ([Note 2](#)) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering. 24/7 operation will not void the HP warranty.

NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.

NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.

NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries.

HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Service levels and response times for HP Care Packs may vary depending on your geographic location.

Product Change Notification

- Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.
- PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.
- Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.

Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers-no special programs, no additional cost-no kidding. Simply select your hardware components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

Processors

Intel® Xeon® W-2125 4.0 2666 4C CPU
Intel® Xeon® W-2123 3.6 2666 4C CPU

Hard Drives

1TB SATA 7200 RPM

Graphics

AMD Radeon™ Pro WX 3100 4GB Graphics
NVIDIA® Quadro® P400 2GB Graphics
NVIDIA® Quadro® P1000 4GB Graphics
NVIDIA® Quadro® P2000 5GB Graphics

Technical Specifications - Processors

Intel® Xeon® W-Series CPU

Intel® Xeon® W-2295 3.0 2933 18C CPU
Intel® Xeon® W-2275 3.3 2933 14C CPU
Intel® Xeon® W-2265 3.5 2933 12C CPU
Intel® Xeon® W-2255 3.7 2933 10C CPU
Intel® Xeon® W-2245 3.9 2933 8C CPU
Intel® Xeon® W-2235 3.8 2933 6C CPU
Intel® Xeon® W-2225 4.1 2933 4C CPU
Intel® Xeon® W-2223 3.6 2933 4C CPU
Intel® Xeon® W-2145 3.7 2666 8C CPU
Intel® Xeon® W-2133 3.6 2666 6C CPU
Intel® Xeon® W-2125 4.0 2666 4C CPU
Intel® Xeon® W-2123 3.6 2666 4C CPU
Intel® Xeon® W-2104 3.2 2400 4C CPU
Intel® Xeon® W-2102 2.9 2400 4C CPU

Intel® Core™ X-Series CPU

Intel® Core™ i9-10980XE 3.0 2933 18C CPU
Intel® Core™ i9-10940X 3.3 2933 14C CPU
Intel® Core™ i9-10920X 3.5 2933 12C CPU
Intel® Core™ i9-10900X 3.7 2933 10C CPU
Intel® Core™ i7-9800X 3.8 2666 8C CPU

Technical Specifications - Hard Drives

STORAGE/HARD DRIVES

HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations	HP 300GB SAS 15K SFF HDD	Capacity	300GB	
		Height	5.9 in; 15 cm	
		Width	Media Diameter	3.5 in; 8.9 cm
		Interface	12Gb/s SAS	
		Synchronous Transfer Rate (Maximum)	Up to 1200 MB/s (SAS single port)*	
		Buffer	128MB	
		Seek Time (typical reads, includes controller overhead, including settling)	Average	2.0ms *
		Rotational Speed	15K rpm	
		Operating Temperature	41° to 131° F (5° to 55° C)	
		*Actual performance may vary.		

Technical Specifications - Hard Drives

SATA (Serial ATA) Hard Drives for HP Workstations

500GB SATA 7200 rpm 6Gb/s 3.5" HDD

Capacity	500GB
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (6.0Gb/s), NCQ enabled
Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
Buffer	16MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms*
	Average 11 ms*
	Full Stroke 21 ms*
Rotational Speed	7,200 rpm
Logical Blocks	976,773,168
Operating Temperature	41° to 131° F (5° to 55° C)

*Actual performance may vary.

1TB SATA 7200 rpm 6Gb/s 3.5" HDD

Capacity	1TB
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (6.0Gb/s), NCQ enabled
Synchronous Transfer Rate (Maximum)	Up to 600 MB/s*
Buffer	64MB
Cache	Adaptive
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms*
	Average 11 ms*
	Full Stroke 21 ms*
Rotational Speed	7,200 rpm
Operating Temperature	41° to 131° F (5° to 55° C)

*Actual performance may vary.

2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD CMR

Capacity	2.0TB
Height	1 in; 2.54 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.17 cm
Interface	Serial ATA (6.0 Gb/s), NCQ Enabled
Synchronous Transfer Rate (Maximum)	Up to 600 MB/s*
Buffer	64MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1.0 ms*
	Average 11 ms*
	Full Stroke 18 ms*

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD SMR	Rotational Speed	7,200 rpm		
	Logical Blocks	3,907,029,168		
	Operating Temperature	41° to 131° F (5° to 55° C)		
	*Actual performance may vary.			
	Capacity	2.0TB		
	Height	1 in; 2.54 cm		
	Width	Media Diameter	3.5 in; 8.9 cm	
		Physical Size	4 in; 10.17 cm	
	Interface	Serial ATA (6.0 Gb/s), NCQ Enabled		
	Synchronous Transfer Rate (Maximum)	Up to 600 MB/s*		
Buffer	64MB			
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	1.2 ms*		
	Average	12 ms*		
	Full Stroke	21 ms*		
Rotational Speed	7,200 rpm			
Logical Blocks	3,907,029,168			
Operating Temperature	41° to 140° F (5° to 60° C)			
*Actual performance may vary.				
1TB SATA 7200 rpm 6Gb/s 3.5" HDD (Enterprise Class)	Capacity	1TB		
	Protocol	SATA		
	Form Factor	3.5"		
	Controller	AHCI		
	Reliability (MTBF)	2.0M hours		
	Rated Power On Hours	8760/yr		
	Annualized Failure Rate (based on Rated POH)	<0.62%		
	Rated for 24/7/365 operation	YES		
	Physical Size (Height)	1 in; 2.54 cm		
	Physical Size (Width)	4 in; 10.17 cm		
	Media Diameter	3.5 in; 8.9 cm		
	Interface	Serial ATA (6Gb/s), NCQ enabled		
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*		
	Buffer	128MB		
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.32ms*	
		Average	7.45ms*	
		Full Stroke	14.2ms*	
	Operating Temperature	41° to 140° F (5° to 60° C)		
	Performance	Sequential Read	up to 226MB/s*	

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

	Sequential Write	up to 226MB/s*
Enterprise Class Features	High Reliability	
*Actual performance may vary.		

Technical Specifications - Hard Drives

4TB SATA 7200 rpm 6Gb/s 3.5" HDD (Enterprise Class)

Capacity	4TB
Height	0.275 in; 0.7 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 2.75 in; 6.99 cm
Interface	Serial ATA (6Gb/s), NCQ enabled
Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
Buffer	128MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 0.7ms*
	Average 8.5ms*
	Full Stroke 15.7ms*
Rotational Speed	7,200 rpm
Operating Temperature	32° to 140° F (0° to 60° C)

*Actual performance may vary.

500GB SATA 7.2K SED SFF HDD

Capacity	500GB
Height	0.275 in; 0.7 cm
Width	Media Diameter 2.5 in; 6.36 cm
	Physical Size 2.75 in; 6.99 cm
Interface	Serial ATA (6Gb/s)
Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
Buffer	32MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 1ms*
	Average 4.2ms*
	Full Stroke 25ms (typical)*
Rotational Speed	7,200 rpm
Operating Temperature	32° to 140° F (0° to 60° C)

*Actual performance may vary.

Technical Specifications - Hard Drives

SATA SSDs for HP Workstations

HP 256GB SATA 6Gb/s SSD

Capacity	256GB
Protocol	SATA
Form Factor	2.5"
Controller	AHCI
NAND Type	3D TLC
Endurance	192TBW (TB Written)
Reliability (MTTF)	1.5M hours
Physical Size (Height)	0.28 in; 0.7 cm
Physical Size (Width)	2.5 in; 6.36 cm
Interface	SATA 6Gb/s
Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 530MB/s (max)* Sequential Write 500MB/s (max)* Random Read 55K IOPS (max)* Random Write 83K IOPS (max)*

*Actual performance may vary.

HP 256GB SATA 6Gb/s SED Opal 2 SSD

Capacity	256GB
Protocol	SATA
Form Factor	2.5"
Controller	AHCI
NAND Type	3D TLC
Endurance	192TBW (TB Written)
Reliability (MTTF)	1.5M hours
Physical Size (Height)	0.28 in; 0.7 cm
Physical Size (Width)	2.5 in; 6.36 cm
Interface	6Gb/s SATA
Synchronous Transfer Rate (Maximum)	Up to 550MB/s (Sequential Read)*
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 530MB/s* Sequential Write 500 MB/s* Random Read 55K IOPS* Random Write 83K IOPS*
Self-Encrypting Drive Support	OPAL 2

*Actual performance may vary.

HP 512GB SATA 6Gb/s SSD

Capacity	512GB
Protocol	SATA
Form Factor	2.5"
Controller	AHCI
NAND Type	3D TLC

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Endurance	388TBW (TB Written)	
Reliability (MTTF)	1.5M hours	
Physical Size (Height)	0.28 in; 0.7 cm	
Physical Size (Width)	2.5 in; 6.36 cm	
Interface	SATA 6Gb/s	
Synchronous Transfer Rate (Maximum)	Up to 550MB/s (Sequential Read)*	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	530 MB/s*
	Sequential Write	500 MB/s*
	Random Read	95K IOPS*
	Random Write	83K IOPS*

*Actual performance may vary.

HP 512GB SATA SED SSD	Capacity	512GB	
	Protocol	SATA	
	Form Factor	2.5"	
	Controller	AHCI	
	NAND Type	3D TLC	
	Endurance	388TBW (TB Written)	
	Reliability (MTTF)	1.5M hours	
	Physical Size (Height)	0.28 in; 0.7 cm	
	Physical Size (Width)	2.5 in; 6.36 cm	
	Interface	SATA 6Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	530 MB/s*
		Sequential Write	500 MB/s*
		Random Read	95K IOPS*
		Random Write	83K IOPS*
	Self-Encrypting Drive Support	OPAL 1 and 2	

*Actual performance may vary.

HP 1TB SATA 6Gb/s SSD	Capacity	1TB
	Protocol	SATA
	Form Factor	2.5"
	Controller	AHCI
	NAND Type	3D TLC
	Endurance	400TBW (TB Written)
	Reliability (MTTF)	1.5M hours
	Physical Size (Height)	0.28 in; 0.7 cm
	Physical Size (Width)	2.5 in; 6.36 cm
	Interface	SATA 6Gb/s

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Synchronous Transfer Rate (Maximum)	Up to 550MB/s (Sequential Read)*	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	530 MB/s*
	Sequential Write	500 MB/s*
	Random Read	95K IOPS*
	Random Write	83K IOPS*

*Actual performance may vary.

HP 2TB SATA 6Gb/s SSD	Capacity	2TB	
	Protocol	SATA	
	Form Factor	2.5"	
	Controller	AHCI	
	NAND Type	3D TLC	
	Endurance	400TBW (TB Written)	
	Reliability (MTTF)	1.5M hours	
	Physical Size (Height)	0.28 in; 0.7 cm	
	Physical Size (Width)	2.5 in; 6.36 cm	
	Interface	SATA 6Gb/s	
	Synchronous Transfer Rate (Maximum)	Up to 550MB/s (Sequential Read)*	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	530 MB/s*
		Sequential Write	500 MB/s *
		Random Read	95K IOPS*
Random Write		83K IOPS*	

*Actual performance may vary.

HP Enterprise Class 240GB SATA SSD	Capacity	240GB	
	Protocol	SATA	
	Form Factor	2.5"	
	Controller	AHCI	
	NAND Type	3D TLC	
	Endurance	2,200TBW (TB Written)	
	Reliability (MTTF)	2.0M hours	
	Physical Size (Height)	0.28 in; 0.7 cm	
	Physical Size (Width)	2.5 in; 6.36 cm	
	Interface	6Gb/s SATA	
	Synchronous Transfer Rate (Maximum)	Up to 600MB/s*	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	540 MB/s*
		Sequential Write	310 MB/s*
		Random Read	93K IOPS*
		Random Write	48K IOPS*

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Enterprise Class Features High Endurance NAND
Power Loss Protection
End-to-End Data Protection

**Actual performance may vary.*

HP Enterprise Class 480GB SATA SSD

Capacity	480GB
Protocol	SATA
Form Factor	2.5"
Controller	AHCI
NAND Type	3D TLC
Endurance	4,400TBW (TB Written)
Reliability (MTTF)	2.0M hours
Physical Size (Height)	0.28 in; 0.7 cm
Physical Size (Width)	2.5 in; 6.36 cm
Interface	6Gb/s SATA
Synchronous Transfer Rate (Maximum)	Up to 600MB/s*
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 540 MB/s* Sequential Write 460 MB/s* Random Read 93K IOPS* Random Write 74K IOPS*

Enterprise Class Features High Endurance NAND
Power Loss Protection
End-to-End Data Protection

**Actual performance may vary.*

Performance PCIe SSDs for HP Workstations

HP Z Turbo Drive 256GB M.2 2280 TLC SSD

Capacity	256GB
Protocol	PCIe
Form Factor	M.2
Controller	NVMe
NAND Type	3D TLC
SED Support	Opal 2
Endurance	200TB
Reliability (MTBF)	1.5M hours
Interface	PCI Express 3.0 x4 electrical x4 physical
Operating Temperature	32° to 158° F (0° to 70° C)
Performance	Sequential Read 3500 MB/s * Sequential Write 2200 MB/s * Random Read 240K IOPS * Random Write 480K IOPS *

**Actual performance may vary.*

HP Z Turbo Drive 512GB M.2 2280 TLC SSD

Capacity	512GB
Protocol	PCIe

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Form Factor	M.2	
Controller	NVMe	
NAND Type	3D TLC	
SED Support	Opal 2	
Endurance	300TB	
Reliability (MTBF)	1.5M hours	
Interface	PCI Express 3.0 x4 electrical x4 physical	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	3500 MB/s*
	Sequential Write	2900 MB/s*
	Random Read	460 K IOPS*
	Random Write	500K IOPS*

*Actual performance may vary.

HP ZTurbo Drive 1TB M.2 2280 TLC SSD	Capacity	1TB	
	Protocol	PCIe	
	Form Factor	M.2	
	Controller	NVMe	
	NAND Type	3 D TLC	
	SED Support	Opal 2	
	Endurance	400TB	
	Reliability (MTBF)	1.5M hours	
	Interface	PCI Express 3.0 x4 electrical x4 physical	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3500 MB/s*
		Sequential Write	3000 MB/s*
Random Read		580K IOPS*	
Random Write		500K IOPS*	

*Actual performance may vary.

HP ZTurbo Drive 2TB M.2 2280 TLC SSD	Capacity	2TB	
	Protocol	PCIe	
	Form Factor	M.2	
	Controller	NVMe	
	NAND Type	3 D TLC	
	SED Support	Opal 2	
	Endurance	500TB	
	Reliability (MTTF)	1.5M hours	
	Interface	PCI Express 3.0 x4 electrical x4 physical	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3300 MB/s*
		Sequential Write	2400 MB/s*
		Random Read	500K IOPS*

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

HP Z Turbo Drive Quad Pro 2x256GB PCIe TLC SSD		Random Write	440K IOPS*
	*Actual performance may vary.		
	Capacity	512GB	
	Protocol	PCIe	
	Form Factor	PCIe Card, Full Height PCIe Slot	
	Controller	NVMe	
	NAND Type	3D TLC	
	SED Support	Opal 2	
	Endurance	200TB	
	Reliability (MTBF)	1.5M hours	
	Interface	PCIe Gen3 x4 architecture	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3500 MB/s*
		Sequential Write	2200 MB/s*
		Random Read	240K IOPS*
		Random Write	480K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Quad Pro 2x512GB PCIe TLC SSD	Capacity	1TB	
	Protocol	PCIe	
	Form Factor	PCIe Card, Full Height PCIe Slot	
	Controller	NVMe	
	NAND Type	3D TLC	
	SED Support	Opal 2	
	Endurance	300TB	
	Reliability (MTBF)	1.5M hours	
	Interface	PCIe Gen3 x4 architecture	
	Operating Temperature	32° to 158° F (0° to 70° C)	
	Performance	Sequential Read	3500 MB/s*
		Sequential Write	2900 MB/s*
		Random Read	460 K IOPS*
		Random Write	500K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Quad Pro 2x1TB PCIe TLC SSD	Capacity	2TB	
	Protocol	PCIe	
	Form Factor	PCIe Card, Full Height PCIe Slot	
	Controller	NVMe	
	NAND Type	3D TLC	
	SED Support	Opal 2	
	Endurance	400TB	
	Interface	PCI Express 3.0 x4 electrical x4 physical	
	Operating Temperature	32° to 158° F (0° to 70° C)	

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Performance	Sequential Read	3500 MB/s*
	Sequential Write	3000 MB/s*
	Random Read	580K IOPS*
	Random Write	500K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Dual Pro 256GB SSD

Capacity	256GB	
Protocol	PCIe	
Form Factor	M.2 in Half-height, half-length card	
Controller	NVMe	
NAND Type	3D TLC	
Endurance	200TBW (TB Written)	
Reliability (MTBF)	1.5M hours	
Interface	PCI Express 3.0 x4 electrical x4 physical	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	3500 MB/s*
	Sequential Write	2200 MB/s*
	Random Read	240K IOPS*
	Random Write	480K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Dual Pro 512GB SSD

Capacity	512GB	
Protocol	PCIe	
Form Factor	M.2 in Half-height, half-length card	
Controller	NVMe	
NAND Type	3D TLC	
Endurance	300TBW (TB Written)	
Reliability (MTBF)	1.5M hours	
Interface	PCI Express 3.0 x4 electrical x4 physical	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	3500 MB/s*
	Sequential Write	2900 MB/s*
	Random Read	460 K IOPS*
	Random Write	500K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Dual Pro 1TB SSD

Capacity	1TB
Protocol	PCIe
Form Factor	M.2 in Half-height, half-length card
Controller	NVMe
NAND Type	3D TLC
Endurance	400TBW (TB Written)

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Reliability (MTBF)	1.5M hours	
Interface	PCI Express 3.0 x4 electrical x4 physical	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	3500 MB/s*
	Sequential Write	3000 MB/s*
	Random Read	580K IOPS*
	Random Write	500K IOPS*

*Actual performance may vary.

HP Z Turbo Drive Dual Pro 2TB SSD

Capacity	2TB	
Protocol	PCIe	
Form Factor	M.2 in Half-height, half-length card	
Controller	NVMe	
NAND Type	3D TLC	
Endurance	500TBW (TB Written)	
Reliability (MTBF)	1.5M hours	
Interface	PCI Express 3.0 x4 electrical x4 physical	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	3500 MB/s*
	Sequential Write	3000 MB/s *
	Random Read	600K IOPS*
	Random Write	500K IOPS*

*Actual performance may vary.

Mainstream PCIe SSDs for HP Workstations

HP 256GB M.2 2280 TLC SSD

Capacity	256GB	
Protocol	PCIe	
Form Factor	M.2	
Controller	NVMe	
NAND Type	3D TLC	
Endurance	200TB	
Reliability (MTBF)	1.5M hours	
Interface	PCI Express 3.0 x4 electrical x4 physical	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	3100 MB/s *
	Sequential Write	1400 MB/s *
	Random Read	200 K IOPS *
	Random Write	320 K IOPS *

*Actual performance may vary.

HP 512GB M.2 2280 TLC SSD

Capacity	512GB
Protocol	PCIe
Form Factor	M.2
Controller	NVMe
NAND Type	3D TLC
Endurance	300TB

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Reliability (MTBF)	1.5M hours	
Interface	PCI Express 3.0 x4 electrical x4 physical	
Operating Temperature	32° to 158° F (0° to 70° C)	
Performance	Sequential Read	3300 MB/s*
	Sequential Write	2500 MB/s*
	Random Read	225 K IOPS*
	Random Write	430 K IOPS*

*Actual performance may vary.

HP 1TB M.2 2280 TLC SSD	Capacity	1TB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3D TLC
	Endurance	400TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	3300 MB/s*
	Sequential Write	2500 MB/s*
	Random Read	400 K IOPS*
	Random Write	440 K IOPS*

*Actual performance may vary.

HP 2TB M.2 2280 TLC SSD	Capacity	2TB
	Protocol	PCIe
	Form Factor	M.2
	Controller	NVMe
	NAND Type	3 D TLC
	Endurance	500TB
	Reliability (MTBF)	1.5M hours
	Interface	PCI Express 3.0 x4 electrical x4 physical
	Operating Temperature	32° to 158° F (0° to 70° C)
	Performance	
	Sequential Read	3300 MB/s*
	Sequential Write	2700 MB/s*
	Random Read	430 K IOPS*
	Random Write	500 K IOPS*

*Actual performance may vary.

**Intel® 905p Series AIC
PCIe SSD**

**Intel® 905p Series AIC
280GB PCIe SSD**

Capacity	280GB
Protocol	PCIe
Form Factor	PCIe Card, Half Height
Controller	NVMe

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Hard Drives

Intel® 905p Series AIC 480GB PCIe SSD	NVM Type	3DXPoint
	Endurance	5.11 PBW (PB Written)
	Reliability (MTBF)	1.6M hours
	Operating Temperature	32° to 185° F (0° to 85° C)
	Performance	Sequential Read 2730 MB/s*
		Sequential Write 2280 MB/s*
		Random Read 587K IOPS*
		Random Write 559K IOPS*
	*Actual performance may vary.	
	Capacity	480GB
	Protocol	PCIe
	Form Factor	PCIe Card, Half Height
	Controller	NVMe
	NVM Type	3DXPoint
	Endurance	8.76 PBW (PB Written)
	Reliability (MTBF)	1.6M hours
	Operating Temperature	32° to 185° F (0° to 85° C)
	Performance	Sequential Read 2710 MB/s*
		Sequential Write 2280 MB/s*
		Random Read 582K IOPS*
		Random Write 561K IOPS*
	*Actual performance may vary.	

Technical Specifications - Hard Drive Controllers

HARD DRIVE CONTROLLERS

MicroSemi 2100-4i4e 8-port SAS 12Gb/s RAID Card	PCI Bus	8 lanes, PCI Express 3.0	
	RAID Levels	Offers Integrated RAID (0, 1, and 10)	
	PCI Data Burst Transfer Rate	Half Duplex x8, PCIe, 8000 MB/s	
	SAS Bandwidth	Half Duplex	1200 MB/s per lane
	PCI Card Type	3.3V Add-in Card	
	PCI Voltage	12 V $\pm$ 10%	
	PCI Power	9.8W typical, Airflow min 200 LFM	
	Bracket	Full height and low profile	
	Certification Level	PCI Express 3.0 compliant	
	SAS Processor	MicroSemi Series 8 SAS Controller	
	Internal Connectors	One x4 internal mini-SASHD (SFF-8643)	
	External Connectors	One x4 external mini-SASHD (SFF-8644)	
	Maximum Number of SCSI Devices	256 Non-RAID SAS/SATA devices	
	LED Indicators	Connector for Drive Activity Light	

NOTE: RAID 5 is not supported on MicroSemi 2100-4i4e 8-port SAS 12Gb/s RAID Card

Technical Specifications - Graphics

GRAPHICS

NVIDIA® Quadro® P400 2GB Graphics	Form Factor	Dimensions: 2.713" H x 5.7" L Single Slot, Low Profile Weight: 129 grams
	Graphics Controller	NVIDIA® Quadro® P400 Graphics Card GPU: 256 CUDA cores Power: 30 Watts Cooling: Active
	Bus Type	PCI Express 3.0 x16
	Memory	Size: 2 GB GDDR5, 2000 MHz Memory Interface: 64-bit Memory Bandwidth: 32 GB/s
	Connectors	3mDP Outputs*
	Maximum Resolution	DisplayPort™ 1.4: - up to 3x 5120 x 2880 x 24 bpp @ 60Hz - supports Multi-Stream Transport (MST)
	Image Quality Features	10-bit internal display processing pipeline 10-bit scan-out support
	Display Output	3 mDP Connectors
	Shading Architecture	Full Microsoft DirectX 12 Shader Model 5.1
	Supported Graphics APIs	OpenGL 4.5 DirectX 12 Vulkan 1.0 API support includes: CUDA C, CUDA C++, DirectCompute , OpenCL
	Available Graphics Drivers	Microsoft Windows 10 Microsoft Windows 8.1 Microsoft Windows 7 Linux
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Notes	*P400, P600 and P1000 only have mini-DisplayPort™ (mDP) video ports. Factory Configured (Z4 G4/ Z6 G4/ Z8 G4 Workstations): No adapters included After market option kit: Two mDP-to-DP Adapters included Additional mDP-to-DP Adapters are available as Factory Configuration or Option Kit accessories: - 2MY05AA - HP miniDP-to-DP Adapter Cables - 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables

Form Factor

Dimensions: 2.713" H x 5.7" L

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

NVIDIA® Quadro® P620 2GB Graphics

Single Slot, Low Profile
Weight: 129 grams

Graphics Controller	NVIDIA® Quadro® P620 Graphics Card GPU: 512 CUDA cores Power: 40 Watts Cooling: Active
Bus Type	PCI Express 3.0 x16
Memory	Size: 2 GB GDDR5, 2000 MHz Memory Interface: 128-bit Memory Bandwidth: 64 GB/s
Connectors	4mDP Outputs *
Maximum Resolution	DisplayPort™ 1.4: - up to 4x 5120 x 2880 x 24 bpp @ 60Hz - supports Multi-Stream Transport (MST)
Image Quality Features	10-bit internal display processing pipeline 10-bit scan-out support
Display Output	4 mDP Connectors
Shading Architecture	Full Microsoft DirectX 12 Shader Model 5.1
Supported Graphics APIs	OpenGL 4.5 DirectX 12 Vulkan 1.0 API support includes: CUDA C, CUDA C++, DirectCompute , OpenCL
Available Graphics Drivers	Microsoft Windows 10 Microsoft Windows 8.1 Microsoft Windows 7 Linux

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Notes *P620 only have mini-DisplayPort™ (mDP) video ports.

Factory Configured (Z4 G4/ Z6 G4/ Z8 G4 Workstations): No adapters included

After market option kit: Two mDP-to-DP Adapters included

Additional mDP-to-DP Adapters are available as Factory Configuration or Option Kit accessories:

- 2MY05AA - HP miniDP-to-DP Adapter Cables
- 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables

NVIDIA® Quadro® P1000 4GB Graphics

Form Factor

Dimensions: 2.713" H x 5.7" L
Single Slot, Low Profile
Weight: 129 grams

Graphics Controller

NVIDIA® Quadro® P1000 Graphics Card
GPU: 640 CUDA cores

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Power: 47 Watts
Cooling: Active

Bus Type	PCI Express 3.0 x16
Memory	Size: 4 GB GDDR5, 2500 MHz Memory Interface: 128-bit memory interface Memory Bandwidth: 80 GB/s memory bandwidth
Connectors	4mDP Outputs*
Maximum Resolution	DisplayPort 1.4: - up to 4x 5120 x 2880 x 24 bpp @ 60Hz - supports Multi-Stream Transport (MST)
Image Quality Features	10-bit internal display processing pipeline 10-bit scan-out support
Display Output	4 mDP Connectors
Shading Architecture	Full Microsoft DirectX 12 Shader Model 5.1
Supported Graphics APIs	OpenGL 4.5 DirectX 12 Vulkan 1.0 API support includes: CUDA C, CUDA C++, DirectCompute , OpenCL
Available Graphics Drivers	Microsoft Windows 10 Microsoft Windows 8.1 Microsoft Windows 7 Linux

Notes
HP qualified drivers may be preloaded or available from the HP support Web site:
<http://welcome.hp.com/country/us/en/support.html>

*P400, P600 and P1000 only have mini-DisplayPort™ (mDP) video ports.

Factory Configured (Z4 G4/ Z6 G4/ Z8 G4 Workstations): No adapters included

After market option kit: Two mDP-to-DP Adapters included

Additional mDP-to-DP Adapters are available as Factory Configuration or Option Kit accessories:

- 2MY05AA - HP miniDP-to-DP Adapter Cables
- 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables

NVIDIA® Quadro® P2000 5GB Graphics

Form Factor	Dimensions: 4.4"H x 7.9"L Single Slot Weight: 260 grams
Graphics Controller	NVIDIA® Quadro® P2000 Graphics Card Power: 75 Watts Cooling: Active
Bus Type	PCI Express 3.0 x16
Memory	Size: 5GB GDDR5 Memory Bandwidth: 140 GB/s

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Connectors	Memory Width: 160-bit 4x DisplayPort™ 1.4
Maximum Resolution	Factory Configured Option: No adapter included with card After Market Option: No video cable adapter included Additional DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories. DisplayPort™: - up to 5120 x 2880 x 24 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) DP 1.3 & 1.4 ready. DL-DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60 Hz Single Link-DVI(I) output: - up to 1920 x 1200 x 32 bpp @ 60Hz
Image Quality Features	HDMI 2.0 (requires DP to HDMI adapter): 5120 x 2880 x 24 bpp @ 60Hz 12-bit internal display pipeline (hardware support for 12-bit scanout on supported panels, applications and connection)
Display Output	Stereoscopic 3D display support including NVIDIA® 3D Vision™ technology, NVIDIA® Mosaic and nView. Maximum number of displays - 4 direct attached monitors Maximum number of monitors across all available NVIDIA® Quadro® P2000 outputs is 4.
Shading Architecture Supported Graphics APIs	Shader Model 5.1 OpenGL® 4.5 DirectX® 12 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran software
Available Graphics Drivers	Microsoft Windows 10 Microsoft Windows 7 Professional 64bit Linux® - Full OpenGL® implementation, complete with NVIDIA® Quadro® and ARB extensions HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Notes	1. Quadro P2000 offered as Factory Configured Option does not include a video cable adapter. Video cable adapters must be ordered separately. 2. Quadro P2000 offered as an After Market Option does not include video cables. Video cable adapters must be ordered separately.

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

NVIDIA® Quadro® P2200 5GB Graphics	Form Factor	Dimensions: 4.4"H x 7.9"L Single Slot, Full Height Weight: 260 grams
	Graphics Controller	NVIDIA® Quadro® P2200 Graphics Card GPU: 1280 CUDA cores Power: 75 Watts Cooling: Active
	Bus Type	PCI Express 3.0 x16
	Memory	Size: 5GB GDDR5X Memory Bandwidth: 200 GB/s Memory Width: 160-bit
	Connectors	4x DisplayPort™ 1.4
		Factory Configured Option: No adapter included with card After Market Option: No video cable adapter included
	Maximum Resolution	Additional DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories. DisplayPort™: - up to 5120 x 2880 x 24 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) DP 1.3 & 1.4 ready. DL-DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60 Hz Single Link-DVI(I) output: - up to 1920 x 1200 x 32 bpp @ 60Hz
	Image Quality Features	HDMI 2.0 (requires DP to HDMI adapter): 5120 x 2880 x 24 bpp @ 60Hz 12-bit internal display pipeline (hardware support for 12-bit scanout on supported panels, applications and connection)
	Display Output	Stereoscopic 3D display support including NVIDIA® 3D Vision™ technology, NVIDIA® Mosaic and nView. Maximum number of displays - 4 direct attached monitors Maximum number of monitors across all available NVIDIA® Quadro® P2200 outputs is 4.
	Shading Architecture Supported Graphics APIs	Shader Model 5.1 OpenGL® 4.5 DirectX® 12 API support includes:

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

	Available Graphics Drivers	CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran software Microsoft Windows 10 Microsoft Windows 7 Professional 64bit Linux® - Full OpenGL® implementation, complete with NVIDIA® Quadro® and ARB extensions
	Notes	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html 1. Quadro P2200 offered as Factory Configured Option does not include a video cable adapter. Video cable adapters must be ordered separately. 2. Quadro P2200 offered as an After Market Option does not include video cables. Video cable adapters must be ordered separately.
Radeon™ Pro WX 3100 4GB Graphics	Form Factor	Low-Profile Single Slot (6.6" Length)
	Graphics Controller	Radeon™ Pro WX 3100 Graphics Card GPU: 512 Stream Processors organized into 8 Compute Units Power: 50 Watts Cooling: Active
	Memory	4GB GDDR5 memory Memory Bandwidth: 6 Gbps / 96 GB/s Memory Width: 128 bit
	Connectors	2x Mini DisplayPort™ 1.4 plus 1x DisplayPort™ 1.4 – HDR ready connectors with HBR3 and MST support. Factory Configured: No adapters included After market option kit: One mDP-to-DP cable adapters included Additional Mini DisplayPort™-to-DisplayPort™, DisplayPort™-to-VGA or DisplayPort™-to-DVI adapters are available as Factory Configuration or Option Kit accessories.
	Maximum Resolution	5K support @ 60Hz • 1x single-cable 5K monitor, or 2x dual-cable 5K monitors 3x 4K support @ 60Hz
	Image Quality Features	Advanced support for 8-bit and 10-bit per RGB color component. High bandwidth scaler for high quality up and downscaling
	Display Output	3 full physical DP1.3 HBR3 / DP1.4 HDR outputs FreeSync support
	GPU Architecture	Polaris
	Supported Graphics APIs	DirectX® 12 OpenGL® 4.5 OpenCL™ 2.0 Vulkan™ 1.0
	Available Graphics Drivers	Windows 10 (Windows® 7 64-bit available from AMD)

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Linux® 64-bit (selected Enterprise distributions)

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Notes

1. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.
2. AMD PowerTune and AMD ZeroCore Power are technologies offered by certain FirePro™ and Radeon™ Pro products, which are designed to intelligently manage GPU power consumption in response to certain GPU load conditions.
3. As of September 2016, certified for DisplayPort™ 1.4 HBR3 and ready for DisplayPort™ 1.4 HDR based on independent verification by DisplayPort™ testing authority. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.

Radeon™ Pro WX 3200 4GB Graphics	Form Factor	Low-Profile Single Slot (2.75 "H x 6.6" L)
	Graphics Controller	Radeon™ Pro WX 3200 Graphics Card GPU: 640 Stream Processors organized into 8 Compute Units Power: 56 Watts Cooling: Active
	Memory	4GB GDDR5 memory Memory Bandwidth: 96 GB/s Memory Width: 128 bit
	Connectors	4x Mini DisplayPort™ 1.4 – HDR ready connectors with HBR3 and MST support. Factory Configured: No adapters included After market option kit: One mDP-to-DP cable adapters included Additional Mini DisplayPort™-to-DisplayPort™, DisplayPort™-to-VGA or DisplayPort™-to-DVI adapters are available as Factory Configuration or Option Kit accessories.
	Maximum Resolution	5K support @ 60Hz • 1x single-cable 5K monitor, or 2x dual-cable 5K monitors 4x 4K support @ 60Hz
	Image Quality Features	Advanced support for 8-bit and 10-bit per RGB color component. High bandwidth scaler for high quality up and downscaling
	Display Output	4 full physical DP1.3 HBR3 / DP1.4 HDR outputs FreeSync support

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

GPU Architecture	Polaris
Supported Graphics APIs	DirectX® 12 OpenGL® 4.6 OpenCL™ 2.0 Vulkan™ 1.0
Available Graphics Drivers	Windows 10 Linux® 64-bit (selected Enterprise distributions)

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Notes

4. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.
5. AMD PowerTune and AMD ZeroCore Power are technologies offered by certain FirePro™ and Radeon™ Pro products, which are designed to intelligently manage GPU power consumption in response to certain GPU load conditions.
6. As of September 2016, certified for DisplayPort™ 1.4 HBR3 and ready for DisplayPort™ 1.4 HDR based on independent verification by DisplayPort™ testing authority. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.

Radeon™ Pro WX 4100 4GB Graphics

Form Factor Graphics Controller

Low-Profile Single Slot (6.6" Length)
Radeon™ Pro WX 4100 Graphics card
GPU: 1024 Stream Processors organized into 16 Compute Units
Power: 50 Watts
Cooling: Active

Memory

4GB GDDR5 memory
Memory Bandwidth: 6 Gbps / 96 GB/s
Memory Width: 128 bit

Connectors

4x Mini DisplayPort™ 1.4 – HDR ready connectors with HBR3 and MST support.

Factory Configured: Four mDP-to-DP cable adapters included
After market option kit: Four mDP-to-DP cable adapters included

Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories.

Maximum Resolution

5K support @ 60Hz

- 1x single-cable 5K monitor, or 2x dual-cable 5K monitors

4x 4K support @ 60Hz

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Image Quality Features Advanced support for 8-bit and 10-bit per RGB color component. High bandwidth scaler for high quality up and downscaling

Display Output 4 full physical DP1.3 HBR3 / DP1.4 HDR outputs
FreeSync support

GPU Architecture GCN 4th Generation

Supported Graphics APIs DirectX®12
OpenGL® 4.5
OpenCL™ 2.0
Vulkan™ 1.0

Available Graphics Drivers Windows 10
Windows® 7 64-bit
Linux® 64-bit (selected Enterprise distributions)

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Notes

7. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.
8. AMD PowerTune and AMD ZeroCore Power are technologies offered by certain FirePro™ and Radeon™ Pro products, which are designed to intelligently manage GPU power consumption in response to certain GPU load conditions.
9. As of September 2016, certified for DisplayPort™ 1.4 HBR3 and ready for DisplayPort™ 1.4 HDR based on independent verification by DisplayPort™ testing authority. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windows mode content requires operating system support.

Factory Configured (Z4 G4/ Z6 G4/ Z8 G4 Workstations): No adapters included

After market option kit: Four mDP-to-DP Adapters included

Additional mDP-to-DP Adapters are available as Factory Configuration or Option Kit accessories:

10. 2MY05AA - HP miniDP-to-DP Adapter Cables
11. 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables

NVIDIA® Quadro® P4000 8GB Graphics **Form Factor**

Dimensions: 4.4"H x 9.5"L
Single-slot, full-height
Weight: 475 grams (without extender)

Graphics Controller

NVIDIA® Quadro® P4000 Graphics Card
GPU: 1792 CUDA cores
Power: 120 Watts

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

	Cooling: Active
Bus Type	PCI Express 3.0 x16
Memory	Size: 8GB GDDR5 Memory Bandwidth: 243 GB/s Memory Width: 256-bit
Connectors	4 x DisplayPort 1.4 3-pin mini-DIN connector via optional bracket 1 x 6-pin auxiliary power connector 4-pin header for stereo signal SYNC connector for Quadro® Sync II 2 x SLI connectors Factory Configured Option: No video cable adapter included After Market Option: No video cable adapter included Additional DisplayPort-to-VGA, DisplayPort-to-HDMI, or DisplayPort-to-DVI adapters are available as accessories
Maximum Resolution	Dual-link internal TMDS (DVI 1.0): - up to 2560 x 1600 x 32 bpp @ 60 Hz Single-link internal TMDS (DVI 1.0): - up to 1920 x 1200 x 32 bpp @ 60 Hz HDMI™ 2.0b (requires DP to HDMI adapter): - up to 5120 x 2880 x 24 bpp @ 60Hz DisplayPort: - up to 4096 x 2160 x 30 bpp @ 60Hz - up to 2560 x 1600 x 30 bpp @ 120 Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST) Using two DP outputs, the P4000 can drive one dual DP input display with 5120 x 2880 x 30 bpp @ 60Hz resolution.
Image Quality Features	Advanced support for 8-bit, 10-bit, and 12-bit per RGB color component. HDCP 2.2 support over DisplayPort, DVI, and HDMI connectors NVIDIA 3D Vision™ and other 3D stereo technologies NVIDIA Mosaic and nView
Display Output	Maximum number of displays - 4 direct attached monitors Maximum number of monitors across all available Quadro P4000 outputs is 4.
Shading Architecture	Shader Model 5.1
Supported Graphics APIs	OpenGL 4.5 DirectX 12 Vulkan 1.0 API support includes:

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

	Available Graphics Drivers	CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
		Microsoft Windows 10 Microsoft Windows 7 Linux® - Full OpenGL implementation, complete with NVIDIA and ARB extensions
	Notes	HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
		1. Quadro P4000 offered as Factory Configured Option does not include a video cable adapter. Video cable adapters must be ordered separately. 2. Quadro P4000 offered as an After Market Option does not include video cables. Video cable adapters must be ordered separately.
NVIDIA® Quadro® P5000 16GB Graphics	Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 815 grams / 1.80 lbs
	Graphics Controller	NVIDIA® Quadro® P5000 graphics GPU: 2560 NVIDIA® CUDA® Parallel Processing Cores Power: 180 Watts Cooling: Active
	Memory	16GB GDDR5X memory Memory Bandwidth: Up to 288 GB/s Memory Width: 256 bit ECC Memory (disabled by default)
	Connectors	DP (x4) with HDR support DL-DVI(D) 3-pin mini-DIN connector SLI connector NVIDIA® Quadro® Sync connector (compatible with NVIDIA® Quadro® II Sync) One 8-pin auxiliary power connector
	Maximum Resolution	5K support @ 60Hz 1x single-cable 5K monitor, or 2x dual-cable 5K monitors

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Image Quality Features	Advanced support for 8-bit, 10-bit, and 12-bit per RGB color component. HDCP 2.2 support over DisplayPort™, DVI, and HDMI connectors NVIDIA® 3D Vision™ and other 3D stereo technologies NVIDIA Mosaic and nView Desktop Management
Display Outputs¹	4x DP1.4 HDR outputs (up to 3840x2160 UHD @ 120Hz refresh, or up to 8K at 30Hz) 1x Dual-link DVI-D output (up to 2560 x 1600 @ 60 Hz and 1920x1200 @ 120 Hz)
GPU Architecture	NVIDIA Pascal™
Supported Graphics APIs	DirectX® 12, OpenGL® 4.5, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
Available Graphics Drivers	Windows 10 Windows® 7 64-bit Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Notes	1- Supports up to a total of 4 displays

NVIDIA® Quadro® P6000 24GB Graphics

Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 967 grams / 2.14 lbs
Graphics Controller	NVIDIA® Quadro® P6000 graphics GPU: 3840 NVIDIA® CUDA® Parallel Processing Cores Power: 250 Watts Cooling: Active
Memory	24GB GDDR5X memory Memory Bandwidth: Up to 432 GB/s Memory Width: 384 bit ECC Memory (disabled by default)

Technical Specifications - Graphics

Connectors	DP (x4) with HDR support DL-DVI(D) 3-pin mini-DIN connector SLI connector Quadro Sync connector (compatible with Quadro II Sync) One 8-pin auxiliary power connector Factory configured option: No video cable adaptor included with card. After market option Kit: No video cable adaptor included with card. DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories.
Maximum Resolution	5K support @ 60Hz 1x single-cable 5K monitor, or 2x dual-cable 5K monitors
Image Quality Features	Advanced support for 8-bit, 10-bit, and 12-bit per RGB color component. HDCP 2.2 support over DisplayPort, DVI, and HDMI connectors NVIDIA 3D Vision™ and other 3D stereo technologies NVIDIA Mosaic and nView
Display Outputs¹	4x DP1.4 HDR outputs (up to 3840x2160 UHD @ 120Hz refresh, or up to 8K at 30Hz) 1x Dual-link DVI-D output (up to 2560 x 1600 @ 60 Hz and 1920x1200 @ 120 Hz)
GPU Architecture	NVIDIA Pascal™
Supported Graphics APIs	DirectX® 12, OpenGL® 4.5, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
Available Graphics Drivers	Windows® 10 64-bit Windows® 7 64-bit Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Notes	1- Supports up to a total of 4 displays

NVIDIA® Quadro® GP100 16GB Graphics

Form Factor

Dual Slot (4.4" Height x 10.5" Length)
Weight: 989 grams +72 grams extender

Technical Specifications - Graphics

Graphics Controller	NVIDIA® QUADRO® GP100 GPU: 3584 NVIDIA CUDA® Parallel Processing Cores Power: 235 Watts Cooling: Active
Memory	16GB HBM2 Memory Bandwidth: Up to 717 GB/s Memory Width: 4096-bit ECC Memory (disabled by default)
Connectors	DP (x4) with HDR support DL-DVI(D) 3-pin mini-DIN connector via optional bracket 4-pin header for stereo signal Quadro Sync connector (compatible with Quadro II Sync) One 8-pin auxiliary power connector (2x) NVLink connectors Factory configured option: 8-pin power adapter included with card. After market option Kit: 8-pin power adapter included with card. DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories.
Maximum Resolution	5K support @ 60Hz 1x single-cable 5K monitor, or 2x dual-cable 5K monitors
Image Quality Features	HDR support over DisplayPort™ 1.4 (SMPTE 2084/2086, BT. 2020) (4K @ 60 Hz 10b/12b HEVC Decode, 4K @ 60 Hz 10b HEVC Encode) HDCP 2.2 support over DisplayPort™, DVI, and HDMI connectors NVIDIA 3D Vision™ technology NVIDIA Mosaic and nView Desktop Management
Display Outputs	4x DP1.4 MST & HDR2 outputs (up to 5120 x 2880 @ 60Hz) 1x Dual-link DVI-D output (up to 2560 x 1600 @ 60 Hz) 1x Single-link DVI-D output (up to 1920 x 1200 @ 60 Hz) HDMI™ 2.0b (up to 5120 x 2880 @ 60Hz)* *requires DP to HDMI adapter
GPU Architecture	NVIDIA Pascal™
Supported Graphics APIs	DirectX®12 , OpenGL® 4.5, Vulkan™ 1.0

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

Available Graphics Drivers

Windows® 10
Windows® 7 Professional 64-bit
Linux®

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Factory Configured (Z4 G4/ Z6 G4/ Z8 G4 Workstations): No adapters included

After market option kit: No adapters included

NVIDIA® Quadro® GV100 32GB Graphics

Form Factor

Dual Slot (4.4" Height x 10.5" Length)
Weight: 980 grams + 72 grams extender

Graphics Controller

NVIDIA® QUADRO® GV100
GPU: 5120 NVIDIA® CUDA® Parallel Processing Cores
Power: 250 Watts
Cooling: Active

Memory

32GB HBM2 memory
Memory Bandwidth: Up to 870 GB/s
Memory Width: 5120-bit
ECC Memory (disabled by default)

Connectors

DP (x4) with HDR support
3-pin mini-DIN connector via optional bracket
4-pin header for stereo signal
Quadro Sync connector (compatible with Quadro II Sync)
One 8-pin auxiliary power connector
(2x) NVLink for GV100 connectors (via optional kit)

After market option Kit: no power adapter included with card.

DisplayPort™ to VGA, DisplayPort™ to DVI (single-link and dual-link), and DisplayPort™ to HDMI adapters available as accessories.

Maximum Resolution

5K support @ 60Hz
1x single-cable 5K monitor, or 2x dual-cable 5K monitors

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Image Quality Features	HDR support over DisplayPort™ 1.4 (SMPTE 2084/2086, BT. 2020) (4K @ 60 Hz 10b/12b HEVC Decode, 4K @ 60 Hz 10b HEVC Encode) HDCP 2.2 support over DisplayPort™ and HDMI connectors NVIDIA 3D Vision™ technology NVIDIA Mosaic and nView Desktop Management
Display Outputs	4x DP1.4 HDR2 outputs (up to 5120 x 2880 @ 60Hz)
GPU Architecture	NVIDIA® Volta™
Supported Graphics APIs	DirectX®12, OpenGL® 4.5 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
Available Graphics Drivers	Windows® 10 64-bit Windows® 8 & 8.1 64-bit Windows® 7 64-bit Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Factory Configured (Z4/Z8 G4 Workstation): No adapters included After market option kit: No adapters included

NVIDIA® Quadro® RTX 4000 8GB Graphics

Form Factor	Full-Height Single Slot (4.4" Height x 9.5" Length) Weight: 550 grams / 1.21 lbs
Graphics Controller	NVIDIA® Quadro® RTX 4000 Graphics IGPU: 2304 NVIDIA® CUDA® Parallel Processing Cores Power: 160 Watts Cooling: Active
Memory	8GB GDDR6 memory Memory Bandwidth: Up to 416 GB/s Memory Width: 384 bit

Technical Specifications - Graphics

Connectors	3x DP 1.4a and VirtualLink Quadro Sync connector (compatible with Quadro II Sync) One 8-pin auxiliary power connector Factory configured option: No video cable adapter included with card. After market option Kit: No video cable adaptor included with card. DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories.
Maximum Resolution	7680x4320 @ 60Hz
Image Quality Features	Advanced support for 8-bit, 10-bit, and 12-bit per RGB color component. HDCP 2.2 support over DisplayPort™, DVI, and HDMI connectors NVIDIA® 3D Vision™ and other 3D stereo technologies NVIDIA® Mosaic and nView
Display Outputs¹	3x DP 1.4a and VirtualLink ² (7680x4320 @ 60Hz)
Supported Graphics APIs	DirectX®12, OpenGL® 4.5, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
Available Graphics Drivers	Windows® 10 64-bit Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
Notes	1- Supports up to a total of 4 displays 2- VirtualLink's USB-C™ (data) cannot be disabled at a hardware level

NVIDIA® Quadro® RTX 5000 16GB Graphics	Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length)
		Weight: 975 grams + 75 grams extender
	Graphics Controller	NVIDIA® QUADRO® RTX 5000 GPU: 3072 CUDA cores Power: 265 Watts Cooling: Active
	Memory	16GB HBM2 memory Memory Bandwidth: Up to 448 GB/s ECC Memory (disabled by default)

Technical Specifications - Graphics

Connectors	DP (x4) with HDR support 3-pin mini-DIN connector via optional bracket 4-pin header for stereo signal Quadro Sync connector (compatible with Quadro II Sync) One 8-pin auxiliary power connector (2x) NVLink for RTX 5000 connectors (via optional kit) After market option Kit: no power adapter included with card.
Maximum Resolution	DisplayPort™ to VGA, DisplayPort™ to DVI (single-link and dual-link), and DisplayPort™ to HDMI adapters available as accessories. DisplayPort™ 1.4: 7680x4320 @ 60Hz
Image Quality Features	HDR support over DisplayPort™ 1.4 (SMPTE 2084/2086, BT. 2020) (4K @ 60 Hz 10b/12b HEVC Decode, 4K @ 60 Hz 10b HEVC Encode) HDCP 2.2 support over DisplayPort™ and HDMI connectors NVIDIA 3D Vision™ technology NVIDIA Mosaic and nView Desktop Management
Display Outputs	4x DP1.4 HDR2 outputs (up to 7680x4320 @ 60Hz)
GPU Architecture	NVIDIA® Volta™
Supported Graphics APIs	DirectX®12, OpenGL® 4.5 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
Available Graphics Drivers	Windows® 10 64-bit Windows® 8 & 8.1 64-bit Windows® 7 64-bit Linux® 64-bit

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Factory Configured (Z4/Z6/Z8 G4 Workstation): No adapters included

After market option kit: No adapters included

***VirtualLink's USB-C™ (data) cannot be disabled at a hardware level**

Technical Specifications - Graphics

NVIDIA® Quadro® RTX 6000 24GB Graphics	Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 995 grams + 75 grams extender
	Graphics Controller	NVIDIA® QUADRO® RTX 6000 GPU: 4608 CUDA cores Power: 295 Watts Cooling: Active
	Memory	24GB HBM2 memory Memory Bandwidth: Up to 672 GB/s ECC Memory (disabled by default)
	Connectors	DP (x4) with HDR support 3-pin mini-DIN connector via optional bracket 4-pin header for stereo signal Quadro Sync connector (compatible with Quadro II Sync) One 8-pin auxiliary power connector (2x) NVLink for RTX 5000 connectors (via optional kit) After market option Kit: no power adapter included with card.
	Maximum Resolution	DisplayPort™ 1.4: 7680x4320 @ 60Hz
	Image Quality Features	HDR support over DisplayPort™ 1.4 (SMPTE 2084/2086, BT. 2020) (4K @ 60 Hz 10b/12b HEVC Decode, 4K @ 60 Hz 10b HEVC Encode) HDCP 2.2 support over DisplayPort™ and HDMI connectors NVIDIA 3D Vision™ technology NVIDIA Mosaic and nView Desktop Management
	Display Outputs	4x DP1.4 HDR2 outputs (up to 7680x4320 @ 60Hz)
	GPU Architecture	NVIDIA® Volta™
	Supported Graphics APIs	DirectX®12, OpenGL® 4.5 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
	Available Graphics Drivers	Windows® 10 64-bit Windows® 8 & 8.1 64-bit Windows® 7 64-bit Linux® 64-bit

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Factory Configured (Z4/Z6/Z8 G4 Workstation): No adapters included

After market option kit: No adapters included

*VirtualLink's USB-C™ (data) cannot be disabled at a hardware level

NVIDIA® RTX™ A6000 48GB Graphics	Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 1230 grams / 2.71 lbs (with extender)
	Graphics Controller	NVIDIA® RTX™ A6000 Graphics GPU: 10752 NVIDIA® CUDA® Parallel Processing Cores Power: 300 Watts Cooling: Active
	Memory	48GB GDDR6 memory ECC optional Memory Bandwidth: Up to 768 GB/s Memory Width: 384 bit
	Connectors	4x DP 1.4a Quadro Sync II connector Ampere NVLink® Stereo Sync Requires 8-pin CPU auxiliary power
	Maximum Resolution	5120x2880 @ 60Hz (up to 4 displays)
	Display Outputs	4x DP 1.4 (7680x4320 @ 60Hz)
	Supported Graphics APIs	DirectX®12, OpenGL® 4.6, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran™
	Available Graphics Drivers	Windows® 10 64-bit Linux® 64-bit
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

NVIDIA® Quadro® RTX 8000 48GB Graphics	Form Factor	Full-Height Dual Slot (4.4" Height x 10.5" Length) Weight: 1070 grams / 2.35 lbs
	Graphics Controller	NVIDIA® Quadro® RTX 8000 Graphics GPU: 4608 NVIDIA® CUDA® Parallel Processing Cores Power: 295 Watts Cooling: Active
	Memory	48GB GDDR6 memory Memory Bandwidth: Up to 672 GB/s Memory Width: 384 bit
	Connectors	4x DP 1.4a and VirtualLink Quadro Sync connector (compatible with Quadro II Sync) One 8-pin + 6-pin auxiliary power connector Factory configured option: No video cable adapter included with card. After market option Kit: No video cable adaptor included with card. DVI to VGA, DisplayPort™ to VGA, DisplayPort™ to DVI, and DisplayPort™ to Dual-Link DVI adapters available as accessories.
	Maximum Resolution	7680x4320 @ 60Hz
	Image Quality Features	Advanced support for 8-bit, 10-bit, and 12-bit per RGB color component. HDCP 2.2 support over DisplayPort™, DVI, and HDMI connectors NVIDIA® 3D Vision™ and other 3D stereo technologies NVIDIA® Mosaic and nView
	Display Outputs¹	4x DP 1.4a and VirtualLink (7680x4320 @ 60Hz)
	Supported Graphics APIs	DirectX® 12, OpenGL® 4.5, OpenCL™ 1.0, Vulkan™ 1.0 Developer API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL™, Java, Python, and Fortran
	Available Graphics Drivers	Windows® 10 64-bit Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Notes	1- Supports up to a total of 4 displays 2- VirtualLink's USB-C™ (data) cannot be disabled at a hardware level

Form Factor	Full-Height Single Slot (9.5" Length)
--------------------	--

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Radeon™ Pro WX 7100 8GB Graphics	Graphics Controller	Radeon™ Pro WX 7100 graphics GPU: 2304 Stream Processors organized into 36 Compute Units Power: 130 Watts Cooling: Active
	Memory	8GB GDDR5 memory Memory Bandwidth: 7 Gbps / 224 GB/s Memory Width: 256 bit
	Connectors	4x Display Port 1.4 – HDR ready connectors with HBR3 and MST support. Factory Configured: No video cable adapter included After market option kit: No video cable adapter included Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories.
	Maximum Resolution	5K support @ 60Hz 1x single-cable 5K monitor, or 2x dual-cable 5K monitors
	Image Quality Features	Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component. High bandwidth scaler for high quality up and downscaling
	Display Output	4 full physical DP1.3 HBR3 / DP1.4 HDR outputs FreeSync support
	GPU Architecture	GCN 4th Generation
	Supported Graphics APIs	DirectX® 12 OpenGL® 4.5 OpenCL™ 2.0 Vulkan™ 1.0
	Available Graphics Drivers	Windows 10 Windows® 7 64-bit Linux® 64-bit HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	Notes	- HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support. - Radeon VR Ready Creator Products are select Radeon Pro and AMD FirePro™ GPUs that meet or exceed the Oculus Rift or HTC Vive recommended specifications for video cards/GPUs. Other hardware (including CPU) and system requirements

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

recommended by Oculus Rift or HTC Vive should also be met in order to operate the applicable HMDs as intended. As VR technology, HMDs and other VR hardware and software evolve and/or become available, these criteria may change without notice.

14. AMD PowerTune and AMD ZeroCore Power are technologies offered by certain FirePro™ and Radeon™ Pro products, which are designed to intelligently manage GPU power consumption in response to certain GPU load conditions.
15. As of September 2016, certified for DisplayPort™ 1.4 HBR3 and ready for DisplayPort™ 1.4 HDR based on independent verification by DisplayPort™ testing authority. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.

Radeon™ Pro WX 9100 16GB Graphics	Form Factor	Dual Slot (4.4" Height x 10.5" Length)
	Graphics Controller	Radeon™ Pro WX 9100 graphics GPU: 4096 Stream Processors Power: 250 Watts Cooling: Active
	Memory	16GB HBM2 memory Memory Bandwidth: Up to 483 GB/s Memory Width: 2048 bit
	Connectors	6x Mini DisplayPort 1.4 – HDR ready connectors with HBR3 and MST support. Factory Configured: No video cable adapter included After market option kit: No video cable adapter included Additional DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as Factory Configuration or Option Kit accessories.
	Maximum Resolution	8K support @ 60Hz Single monitor, single or dual-cable
	Image Quality Features	Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component. High bandwidth scaler for high quality up and downscaling
	Display Output	6 full physical mDP 1.4 HDR Ready outputs FreeSync support
	GPU Architecture	Vega™

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Graphics

Supported Graphics APIs DirectX® 12.1
OpenGL® 4.5
OpenCL™ 2.0
Vulkan™ 1.0

Available Graphics Drivers Windows 10
Windows 7 available from AMD
Linux® 64-bit

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

Notes

1. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.
2. Radeon VR Ready Creator Products are select Radeon Pro and AMD FirePro™ GPUs that meet or exceed the Oculus Rift or HTC Vive recommended specifications for video cards/GPUs. Other hardware (including CPU) and system requirements recommended by Oculus Rift or HTC Vive should also be met in order to operate the applicable HMDs as intended. As VR technology, HMDs and other VR hardware and software evolve and/or become available, these criteria may change without notice.
3. AMD PowerTune and AMD ZeroCore Power are technologies offered by certain FirePro™ and Radeon™ Pro products, which are designed to intelligently manage GPU power consumption in response to certain GPU load conditions.
4. As of September 2016, certified for DisplayPort™ 1.4 HBR3 and ready for DisplayPort™ 1.4 HDR based on independent verification by DisplayPort™ testing authority. HDR content requires that the system be configured with a fully HDR-ready content chain, including: graphics card, monitor/TV, graphics driver and application. Video content must be graded in HDR and viewed with an HDR-ready player. Windowed mode content requires operating system support.

Factory Configured (Z4 G4/ Z6 G4/ Z8 G4 Workstations): No adapters included

After market option kit: Two mDP-to-DP Adapters included

Additional mDP-to-DP Adapters are available as Factory Configuration or Option Kit accessories:

- 2MY05AA - HP miniDP-to-DP Adapter Cables
- 2KW87A6 - HP (Bulk 12) miniDP-to-DP Adapter Cables

Technical Specifications - Graphics

NVIDIA® Quadro® Sync II	Part number	1WT20AA
	Dimensions (HxD)	6.0 inches × 4.2 inches
	Devices Supported	NVIDIA® Quadro® P4000 NVIDIA® Quadro® P5000 NVIDIA® Quadro® P6000
	Bus Type	Requires one free mechanical PCIe bus slot. 6-pin PCI or SATA power connector
	PCI Form Factor	Full Height, half length, single slot
	Ports	2 RJ45 connectors for carrying frame lock signals over CAT5 cables. BNC Connector for external house synchronization.
	Internal Connectors	6 NVIDIA SLI® style edge fingers for connection to compatible GPUs • Included with the board are 4 12-Inch Short Sync Cables to connect to GPU's • Included with the board are 2 24-Inch Long Sync Cables to connect to GPU's
	System Requirements	Requires one free mechanical PCIe bus slot. 6-pin PCI or SATA power connector Must be used with NVIDIA Quadro P4000, P5000 or P6000 graphics cards. Requires Quadro driver version R375 or later.
	Temperature - Operating	0° to 55° C
	Temperature - Storage	-40° to 60° C
	Relative Humidity - Operating	10% to 80%
	Power Requirements	Board power dissipation: <15W
	Operating Systems Supported	Windows 10 Windows 7 64-bit Linux® 64-bit
	Kit Contents	Contains: • Quadro Sync II Card • 4 x 12-Inch Short Sync Cables • 2 x 24-Inch Long Sync Cables (Two) • Quick Start Guide

Technical Specifications – Optical and Removable Storage

OPTICAL AND REMOVABLE STORAGE

HP 9.5mm Slim DVD Writer	Description	9.5mm height, tray-load	
	Mounting Orientation	Either horizontal or vertical	
	Interface Type	SATA/ATAPI	
	Dimensions (WxHxD)	128 x 9.5 x 127mm	
	Supported Media Types	DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW	
	Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard
		Full Stroke DVD	< 200 ms (seek)
		Full Stroke CD	< 200 ms (seek)
	Maximum Data Transfer Rates	CD ROM Read	CD-ROM, CD-R Up to 24X CD-RW Up to 24X
		DVD ROM Read	DVD+RW Up to 8X DVD-RW Up to 8X DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 8X DVD-ROM DL Up to 8X DVD+R Up to 8X DVD-R Up to 8X
	Power	Source	SATA DC power receptacle
		DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p
		DC Current	5 VDC -< 800 mA typical, <1600 mA maximum
	Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 80%
		Maximum Wet Bulb Temperature	84° F (29° C)
	Kit Contents	HP SATA DVD Writer drive, installation guide.	

HP 9.5mm Slim DVD-ROM Drive	Description	9.5mm height, tray-load	
	Mounting Orientation	Either horizontal or vertical	
	Interface Type	SATA / ATAPI	
	Dimensions (WxHxD)	128 x 9.5 x 127mm	
	Disc Capacity	DVD-ROM	Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications – Optical and Removable Storage

Access Times	DVD-ROM Single Layer	< 110 ms (typical)
	CD-ROM Mode 1	< 110 ms (typical)
	Full Stroke DVD	< 230 ms (typical)
	Full Stroke CD	< 220 ms (typical)
Power	Source	SATA DC power receptacle
	DC Power Requirements	5 VDC $\pm$ 5%-100 mV ripple p-p
	DC Current	5 VDC – <800mA typical, < 1600 mA maximum
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)
Kit Contents	9.5mm Slim DVD-ROM Drive, 5.25" ODD Bay adapter/carrier, slim SATA data/power cable, installation guide	

HP HH DVD Writer (16X RW DVD-R)

Description	HP Half Height DVD Writer	
Mounting Orientation	Either Horizontal or vertical	
Interface Type	SATA	
Dimensions (WxHxD)	146x42x165mm	
Supported Media Types	DVD+R	
	DVD+RW	
	DVD+R DL	
	DVD-R DL	
	DVD-R	
	DVD-RW	
	CD-R	
	CD-RW	
Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard
	Full Stroke DVD	145ms (seek)
	Full Stroke CD	120ms (seek)
Maximum Data Transfer Rates	CD ROM Read	CD-ROM, CD-R Up to 24X
		CD-RW Up to 24X
	DVD ROM Read	DVD+RW Up to 13X
		DVD-RW Up to 13X
		DVD+R DL Up to 12X
		DVD-R DL Up to 12X
		DVD-ROM Up to 12X
		DVD-ROM DL Up to 12X
		DVD+R Up to 16X
Power		DVD-R Up to 16X
	Source	SATA DC power receptacle
	DC Power Requirements	5 VDC $\pm$ 5% -100 mV ripple p-p 12 VDC $\pm$ 10% -200 mV ripple p-p
	DC Current	5 VDC -<1500mA typical, <2000 mA maximum.
	Temperature	41° to 122° F (5° to 50° C)

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications – Optical and Removable Storage

Operating Environmental (all conditions non-condensing)	Relative Humidity	10% to 90% (Non-Condensing)
Operating Systems Supported	Windows 10, Windows 7 Professional 64-bit. Red Hat Enterprise Linux WS4**,5,6 Desktop/Workstation.	
	No driver is required for this device, Native support is provided by operating system.	
Kit Contents	HP SATA DVD Writer drive, Installation guide.	

HP 9.5mm Slim BDXL Blu-Ray Writer	Description	9.5mm height, tray-load	
	Mounting Orientation	Either horizontal or vertical	
	Interface Type	SATA/ATAPI	
	Dimensions (WxHxD)	128 x 9.5 x 127mm	
	Supported Media Types	BD-ROM BD-R BD-RE DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW	
	Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard
		Blu-ray	25 GB (single-layer) 50 GB (dual-layer) 100/128 GB (BDXL)
		Full Stroke DVD	< 230 ms (seek)
		Full Stroke CD	< 220 ms (seek)
		Blu-ray	< 230 ms (seek) (Full Stroke Blu-ray)
		Startup Time	(Time to drive ready from tray loading) BD-ROM (SL/DL) 25S / 28S BD-R (SL/DL) 25S / 28S BD-RE (SL/DL) 25S / 28S DVD-ROM (SL/DL) 18S / 18S DVD-R (SL/DL) 25S / 25S DVD-RW 25S DVD+R (SL/DL) 25S / 25S DVD+RW 25S CD-ROM 15S
	Maximum Data Transfer Rates	CD ROM Read	CD-ROM, CD-R Up to 24X CD-RW Up to 24X
		DVD ROM Read	DVD+RW Up to 8X DVD-RW Up to 8X

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications – Optical and Removable Storage

		DVD+R DL Up to 8X DVD-R DL Up to 8X DVD-ROM Up to 8X DVD-ROM DL Up to 8X DVD+R Up to 8X DVD-R Up to 8X
	Blu-ray	BD-ROM Up to 6X BD-ROM DL Up to 6X BD-R Up to 6X BD-R DL Up to 6X BD-R Up to 6X BD-RE SL/DL Up to 6X
Power	Source	SATA DC power receptacle
	DC Power Requirements	5 VDC $\pm$ 5%-100 mV ripple p-p
	DC Current	5 VDC -900 mA typical, 2000mA maximum
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 80%
	Maximum Wet Bulb Temperature	84° F (29° C)
Kit Contents	9.5mm Slim BDXL Blu-Ray Writer, 5.25" ODD Bay adapter/carrier, slim SATA data/power cable, installation guide	
	As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.	

HP SD Card Reader	Description	Supports hardware ECC (Error Correction Code) function Supports hardware CRC (Cyclic Redundancy Check) function Supports SD 4-bit parallel transfer mode
	Interface Type	USB 3.1 G1 High-speed interface
	Dimensions (WxHxD)	1.15 x .9 x .15 in (29.00 x 23.6 x 3.15 mm) Fits conveniently in the Front IO Bay
	Supported Media Types	Secure Digital Card (SD) Secure Digital High Capacity (SDHC) SD Extended Capacity Memory Card (SDXC) SD Ultra High Speed II (SD UHSII)
		These additional media types are supported with a card adapter.
		miniSD miniSD High Capacity Micro SD Memory Card (MicroSD) Micro SD High Capacity Memory Card (MicroSDHC)
		Test Parameters/Conditions - Power applied, unit operating on system $\pm$5%
	Kit Contents	SD card reader

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications – Optical and Removable Storage

Approvals	USB-IF, WHQL, Compliant with USB Mass Storage Class Bulk only Transport Specification Rev. 1.0, Compliant Intel Front Panel I/O Connectivity Design Guide V. 1.3, FCC, CE, BSMI, C-Tick, VCCI, MIC, cUL, TUVT
Weight	0.35 lbs. (0.16 kg)

Technical Specifications - Controller Cards

CONTROLLER CARDS

HP Thunderbolt-3 Dual Port2 PCIe 1-port I/O Card	Data Transfer Rate	Supports up to 40 Gb/s (40,000 Mb/s)
	Devices Supported	Thunderbolt™, Thunderbolt™ 2 and Thunderbolt™ 3 certified for Windows devices
	Bus Type	PCIe Slot. Slot 4 only
	Ports	Two Thunderbolt™ 3 external USB type-C output connectors (Rear) Two full size DisplayPort input connectors (Rear)
	Internal Connectors	One 2x5-Pin header connector
	System Requirements	Genuine Windows 10 Professional, slot 4 PCH PCIe slot.
	Temperature - Operating	50° to 131° F (10° to 55° C)
	Temperature - Storage	-22° to 140° F (-30° to 60° C)
	Relative Humidity - Operating	20% to 80%
	Compliances	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	Operating Systems Supported	Genuine Windows 10 Professional.
	Kit Contents	HP Thunderbolt™ 3 Dual Port PCIe I/O Card, 2- DisplayPort cables, GPIO (General-Purpose Input/Output) cables, Installation documentation and warranty card.

*Maximum speed requires DisplayPort™ and PCIe aggregation.

Technical Specifications - Networking and Communications

NETWORKING AND COMMUNICATIONS

Integrated Intel I219 PCIe GbE Connector Controller	Controller	RJ-45
	Data Rates Supported	Intel I219 GbE platform LAN connect networking controller
	Boot ROM Support	10/100/1000 Mbps
	Connect Speed LED Indicators	PXE, UEFI
		Link/Activity LED - Off = No link - Blinking = Activity Speed LED - Off = 10Mbps - Amber = 100Mbps - Green = 1000Mbps
Management Capabilities Wake-On-LAN, Intel® Active Management Technology™ (AMT) 11.1x		
NOTE: Intel® AMT™ is not available on Intel Core X configs.		

Integrated Intel I210 (not available on Intel Core X configs)	Connector	RJ-45
	Controller	Intel® I210
	Data Rates Supported	10/100/1000 Mbps
	Boot ROM Support	PXE, UEFI
	Connect Speed LED Indicators	Link/Activity LED - Off = No link - Blinking = Activity Speed LED - Off = 10Mbps - Amber = 100Mbps - Green = 1000Mbps
Management Capabilities Wake-On-LAN		

Intel® I210-T1	Networking Interface	RJ-45
	System Interface	PCI Express 2.1 x1
	Networking Speeds Supported	10Mbps, 100Mbps, 1Gbps
	Cabling (up to 100m)	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps
	Power Consumption (active-typical)	0.81W
Physical Dimensions		Length: 6.7cm (2.64 inches) (Bracket) Width: 1.8cm (0.709 inches) Full-height end bracket: 12.07cm (4.755 inches) Low-profile end bracket: 8cm (3.15 inches)

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Networking and Communications

Connect Speed LED Indicators	Link/Activity LED • Off = No link • Blinking = Activity Speed LED • Off = 10Mbps • Green = 100Mbps • Amber = 1Gbps
Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003

Intel® I350-T2	Networking Interface	2 x RJ-45
	System Interface	PCI Express 2.1 x4
	Networking Speeds Supported	10Mbps, 100Mbps, 1Gbps
	Cabling (up to 100m)	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps
	Power Consumption (active-typical)	4.4W
	Physical Dimensions	Length: 13.54cm (5.33 inches) Width: 6.89 (2.71 inches) Full-height end bracket: 12.0cm (4.725 inches) Low-profile end bracket: 7.92cm (3.117 inches)
	Connect Speed LED Indicators	Link/Activity LED • Off = No link • Blinking = Activity Speed LED • Off = 10Mbps • Green = 100Mbps • Amber = 1Gbps
	Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
	Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003

Intel® I350-T4	Networking Interface	4 x RJ-45
-----------------------	-----------------------------	-----------

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Networking and Communications

System Interface	PCI Express 2.1 x4
Networking Speeds Supported	10Mbps, 100Mbps, 1Gbps
Cabling (up to 100m)	Cat3 (or higher) for 10Mbps Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps
Power Consumption (active-typical)	5W
Physical Dimensions	Length: 13.54cm (5.33 inches) Width: 6.89 (2.71 inches) Full-height end bracket: 12.0cm (4.725 inches) Low-profile end bracket: 7.92cm (3.117 inches)
Connect Speed LED Indicators	Link/Activity LED - Off = No link - Blinking = Activity Speed LED - Off = 10Mbps - Green = 100Mbps - Amber = 1Gbps
Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
Hardware Certifications	USA: FCC B, EU: UL CE, Japan: VCCI, Taiwan: BSMI, Australia/New Zealand: CTICK, Korea: KCC, Canada: ICES-003/NMB-003

Intel® X550-T2	Networking Interface	2 x RJ-45
	System Interface	PCI Express 3 x4
	Networking Speeds Supported	100Mbps, 1Gbps, 2.5Gbps, 5Gbps, 10Gbps
	Cabling (up to 100m)	Cat5 (or higher) for 100Mbps Cat5e (or higher) for 1Gbps, 2.5Gbps, or 5Gbps Cat6a (or higher) for 10Gbps
	Power Consumption (active-typical)	3.9W at 100Mbps 5.5W at 1Gbps 11.2W at 10Gbps
	Physical Dimensions	5.2 in x 2.7 in (without bracket)
	Connect Speed LED Indicators	Link/Activity LED - Off = No link - Blinking = Activity Speed LED - Off = No link - Amber = <10Gbps - Green = 10Gbps

Note: Features and supported configurations will differ between the Z4 G4 Workstations with Intel® Xeon® W processors and with Intel® Core™ X-Series processors.

See the Supported Configuration section for supported configurations.

c05527757 — DA — 15954 — Worldwide — Version 30 — April 21, 2021



Technical Specifications - Networking and Communications

Operating Temperature 0 °C to 55 °C (32 °F to 131 °F)

Hardware Certifications USA: FCC B,
EU: UL CE,
Japan: VCCI,
Taiwan: BSMI,
Australia/New Zealand: CTICK,
Korea: KCC,
Canada: ICES-003/NMB-003

Allied Telesis AT-2914SX/LC-901 1GB LC Fiber NIC

Network Interface System Interface Networking Speeds Supported Cabling

1Gb LC Fiber 850 nm
PCIeG2 x1, Half Height, Half Length
1000Base-X (1 Gbps)

50/125 µm (core/cladding) multimode fiber optic cable up to 500m
62.5/125 µm (core/cladding) multimode fiber optic cable up to 220m

Power Consumption (active- typical)

1.5 Watts

Physical Dimensions

8.8 cm x 6.9 cm (3.5 in x 2.7 in)

Connect Speed LED

ON: 1Gbps Link OFF: Link down

Indicators

Operating Temperature

-25°C to 70°C (-13°F to 158°F)

Hardware Certifications

IEEE 802.1p (Quality of Service), IEEE 802.1Q (VLANs), IEEE 802.2 (LLC),
IEEE 802.3ac (MAC), IEEE 802.3x (Flow control auto-negotiation), IEEE
802.3z (1000 Base-X), IEEE 802.3ad (Link aggregation)
RoHS, UL, FCC/EN55022 Class A, TUV, EN55024, CE, C-TICK, VCCI

Intel® X710-DA2 10GBASE-SR Converged Network Adapter

Networking Interface System Interface Networking Speeds Supported

2 SFP+ Ports for LC SFP+ Transceivers
PCI Express 3.0 x8
1Gbps, 10Gbps

Cabling

LC fiber optic cabling with LC SFP+ Transceivers

Power Consumption (active-typical)

4.3W

Physical Dimensions

6.578 in x 2.703 in

Connect Speed LED

Indicators

Link/Activity LED

- Off = No link
- Blinking = Activity

Speed LED

- Off = 10Mbps
- Green = 100Mbps
- Amber = 1Gbps

Operating Temperature 0 °C to 55 °C (32 °F to 131 °F)

Technical Specifications - Networking and Communications

Hardware Certifications USA: FCC B,
EU: UL CE,
Japan: VCCI,
Taiwan: BSMI,
Australia/New Zealand: CTICK,
Korea: KCC,
Canada: ICES-003/NMB-003

Note: Windows 7 is NOT supported

10GbE SFP+ SR Transceiver	Connector Type	LC
	Cable Type	62.5/125um or 50/125um (core/cladding), graded-index, low metal content, multimode fiber optic, complying with ITU-T G.651 and ISO/IEC 793-2 Type A1b or A1a, respectively.
	Cable Length	2-300m
	Wavelength	850nm
	Form Factor	SFP+
	Physical Dimensions	0.47(h) x 0.54(w) x 2.19(d) inches (1.19 x 1.38 x 5.57 cm)
	Operating Temperature	0C to 45C (32F to 113F)
	Operating Humidity	0% to 85%, noncondensing

Intel® 8265 WLAN	Networking Speeds	802.11ac MU-MIMO (up to 867 Mbps) Bluetooth 4.2
	IEEE WLAN Standard	IEEE 802.11a/b/g/n/ac, 802.11d, 802.11e, 802.11h, 802.11i, 802.11w; 802.11r, 802.11k, 802.11v pending
	Bluetooth	4.2
	System Interface	PCI Express 2.1 x1
	Antenna	2x2

Summary of Changes

SUMMARY OF CHANGES

Date of change:	Version History:		Description of change:
November 1, 2017	From v1 to v2	Added	HP DisplayPort to HDMI Adapter, NVIDIA SLI 2-slot Graphics Connector and NVIDIA Quadro Sync II to Graphics section
		Changed	Graphics, Storage / Hard Drives and Memory sections, changed Front and internal view info on the Overview section, changed Operating Systems section, changed System Board section, changed System Configuration, DECLARED NOISE EMISSIONS and Physical Security and Serviceability sections
November 29, 2017	From v2 to v3	Added	Processors, hard drives and graphics to offerings, added Intel Xeon W-2195 to Processors section
		Changed	Wattage links on power supply section updated and Voltage links on efficiency section updated
February 5, 2018	From v3 to v4	Added	Features and Supported Configurations for Intel® Core™ X- Series Processor Family
		Changed	Formatting
February 27, 2018	From v4 to v5	Added	Intel Core i9-X processors footnotes added to processors pre-installed section
March 27, 2018	From v5 to v6	Added	NVIDIA Quadro GP100 16GB Graphics, NVIDIA Quadro GV100 32GB Graphics and AMD Radeon Pro WX 9100 16GB Graphics as High End 3D in Graphics section
August 13, 2018	From v6 to v7	Added	Footnote to Networking and Communications section
		Changed	Operating Systems section
August 24, 2018	From v7 to v8	Changed	Format
September 21, 2018	From v8 to v9	Added	Intel Optane SSD 905p AiC 280GB & 480GB
September 26, 2018	From v9 to v10	Changed	NVIDIA Quadro P6000 Graphics specs
February 11, 2019	From v10 to v11	Added	NVIDIA Quadro RTX 5000 16GB and NVIDIA Quadro RTX 6000 24GB Graphics, added Intel Core i9-9980XE, Intel Core i9-9920X, Intel Core i9-9820X and Intel Core i7-9800X processors
		Changed	Storage section and Format changes
May 8, 2019	From v11 to v12	Changed	Storage and Graphics sections
June 12, 2019	From v12 to v13	Changed	Storage section
June 24, 2019	From v13 to v14	Changed	RAID Support
July 15, 2019	From v14 to v15	Changed	Corrected Intel 905p Series AiC 480GB PCIe SSD
July 18, 2019	From v15 to v16	Changed	HP SD 4 Card Reader part number
July 23, 2019	From v16 to v17	Changed	Windows 10 Pro High End added to Processors and under Intel Core X-series Processors Preinstalled Power supply-high end section re-arranged
September 1, 2019	From v17 to v18	Added	Footnote to Memory section, Added HP Z Turbo Drive 1TB SED TLC Z4/Z6 G4 SSD Kit & module to Storage section, Added Intel® Wi-Fi 6 AX200 & BT PCIe to Networking section
October 26, 2019	From v18 to v19	Changed	Graphics section
November 1, 2019	From v19 to v20	Added	HP QX310 Removable NVMe Frame/Carrier w/PCIe card to Optical and Removable Storage section
December 5, 2019	From v20 to v21	Added	Intel Xeon W-2200, Intel Core i9-10900X X-series processors and added new HP Z4 G4 Memory Cooling Solution on Other Hardware section
		Changed	Storage / Hard Drives, Memory and System Board sections
January 2, 2020	From v21 to v22	Changed	Front I/O and Rear I/O Overview subsections and changed Storage section
February 6, 2020	From v22 to v23	Changed	Storage / Hard Drives, Optical and Removable Storage and Physical Security and Serviceability
June 5, 2020	From v23 to v24	Added	AMD Radeon Pro W5500 and AMD Radeon Pro W5700 to Graphics section
		Changed	HARD DRIVE CONTROLLERS section

Summary of Changes

January 5, 2021	From v24 to v25	Changed	Processors, Memory, Graphics, Racking and Physical Security, Operating Systems and Hard Drives sections
January 7, 2021	From v25 to v26	Changed	Hard Drives section
February 1, 2021	From v26 to v27	Changed	NETWORKING AND COMMUNICATIONS section
March 1, 2021	From v27 to v28	Changed	Overview and Memory sections
April 13, 2021	From v28 to v29	Changed	Graphics, Social and Environmental Responsibility sections
April 21, 2021	From v29 to v30	Changed	Memory section

© 2021 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and Thunderbolt are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation. Red Hat is a registered trademark of Red Hat, Inc. in the United States and other countries. Firewire is a trademark of Apple Inc. Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries. ENERGY STAR® is a registered trademark of the U.S. Environmental Protection Agency. USB Type-C™ and USB-C™ are trademarks of USB Implementers Forum. AMD and Radeon are trademarks of Advanced Micro Devices, Inc. Bluetooth is a trademark of its proprietor and used by HP Inc. under license. NVIDIA, Cuda, Pascal, and Quadro are trademarks and/or registered trademarks of NVIDIA Corporation in the U.S. and other countries. DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.