

## stroller












FIGURE 1 - 5




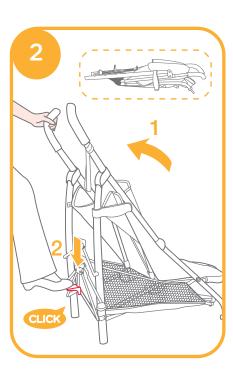























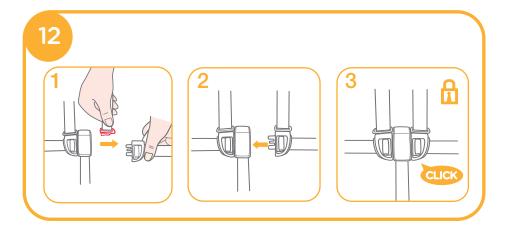










FIGURE 12 - 16

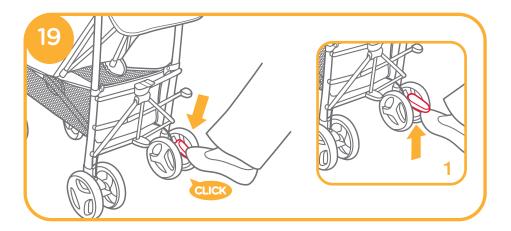
















FIGURE 22- 27

















Accessories (not included in purchase)





## GB Welcome to Joie™

Congratulations on becoming part of the Joie family! We are so excited to be part of your journey with your little one. While traveling with the Joie Nitro™, you are using a high quality, fully certified stroller, complies with Australian Trade Practices Act 1974 Consumer Protection Notice No 8 of 2007 and AS NZS 2088:2013. This product is suitable for use with children weighing under 22kg. Please carefully read this manual and follow each step to ensure a comfortable ride and best protection for your child.

IMPORTANT - Keep these instructions for future reference. Visit us at joiebaby.com to download manuals and see more exciting Joie products!

### **Contents**

Figures	1-6
Product Information	8
Parts List	9
WARNING	10-12
Stroller Assembly	13
Open Stroller	13
Assemble Front Wheels	13
Assemble Rear Wheels	13
Assemble Hood	13
Stroller Operation	14
Adjust Recline	14
Use Buckle	14
Use Shoulder & Waist Harnesses	14
Adjust Calf Support	15
Use Front Swivel Lock	15
Use Brake	15
Use Hood	16
Use Tether Strap	16
Fold Stroller	16
Use Carry Strap	16
Accessories	16
Care and Maintenance	18

## **Emergency**

In case of emergency or accident, it is most important to have your child taken care of with first aid and medical treatment immediately.

### **Product Information**

Read all the instructions in this manual before using this product. If you have any further questions, please consult the retailer. Some features may vary depending on model.

Product Nitro Stroller

Suitable for Child weighing under 22kg (birth - 48 months)

Materials Plastics, metal, fabrics

Patent No. Patents pending

Made in China

**Brand Name** Joie

Website www.joiebaby.com

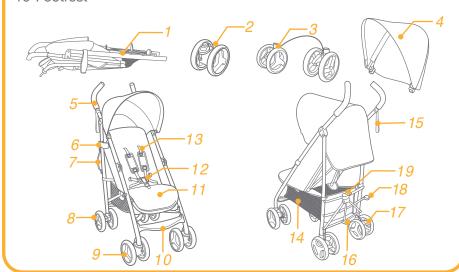
Manufacturer Allison Baby UK Ltd

## **Parts List**

Make sure all parts are available before assembly. If any part is missing, please contact local retailer. No tools are required for assembly.


- 1 Stroller Frame
- 2 Front Wheel (x2)
- 3 Rear Wheels
- 4 Hood
- 5 Handle
- 6 Storage Latch
- 7 Carry Strap
- 8 Rear Wheel
- 9 Front Wheel
- 10 Footrest

- 11 Calf Support
- 12 Buckle
- 13 Safety Harness
- 14 Storage Basket
- 15 Tether Strap
- 16 Foot Plate
- 17 Brake Lever
- 18 Folding Pedal
- 19 Folding Plate



# Accessories (May not be included)

- 1 Rain Cover (on certain models)
- 2 Armbar Cover (on certain models)



## **MARNING**

- ! TO AVOID INJURY OR DEATH: ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.
- ! DO NOT LEAVE CHILDREN UNATTENDED. ALWAYS KEEP CHILD IN VIEW WHILE IN STROLLER.
- ! ALWAYS USE THE CROTCH COMBINATION WITH THE WAIST BELT. IT IS SUGGESTED THAT THE SHOULDER HARNESSES BE USED AS WELL
- ! DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS STROLLER.
- ! MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE STROLLER.
- ! TO AVOID SERIOUS INJURY FROM FALLING OR SLIDING OUT, ALWAYS USE SEAT BELT.
- ! USE THIS TETHER STRAP TO STOP THE STROLLER ROLLING AWAY.
- ! ENSURE THAT ALL THE LOCKING DEVICES ARE ENGAGED BEFORE USE.
- ! DO NOT LET YOUR CHILD PLAY WITH THIS PRODUCT.
- ! NEVER LEAVE THE HARNESS BUCKLED WHEN NOT FITTED TO A CHILD IN THE STROLLER BECAUSE THE HARNESS CAN FORM LOOPS WHICH MAY POSE A STRANGULATION HAZARD.
- ! IT IS UNSAFE TO USE ACCESSORIES OTHER THAN THOSE APPROVED BY THE PRODUCT MANUFACTURER.
- ! ADULT ASSEMBLY REQUIRED.
- ! USE THE STROLLER WITH A CHILD WEIGHING LESS THAN 22KG. IT WILL CAUSE DAMAGE TO THE STROLLER WITH AN UNFITTED CHILD.
- ! TO PREVENT A HAZARDOUS, UNSTABLE CONDITION, DO NOT PLACE MORE THAN 4.5KG IN THE STORAGE BASKET.
- ! THE PRODUCT NOT BE USED NEAR AN OPEN FIRE OR EXPOSED FLAME.
- ! USE THE STROLLER WITH ONLY ONE CHILD AT A TIME. NEVER PLACE PURSES, SHOPPING BAGS, PARCELS OR ACCESSORY ITEMS ON THE HANDLE OR HOOD.

- ! OVERLOADING, FOLDING INCORRECTLY, OR USING COMPONENT PARTS FROM OTHER MANUFACTURERS MAY CAUSE THE STROLL-ER TO BE DAMAGED, BROKEN OR UNSAFE. PLEASE READ THE INSTRUCTION MANUAL CAREFULLY.
- ! PLEASE READ ALL THE INSTRUCTIONS IN THE MANUAL BEFORE USING THE PRODUCT. PLEASE SAVE INSTRUCTION MANUAL FOR FUTURE USE. FAILURE TO FOLLOW THESE WARNINGS AND INSTRUCTIONS MAY RESULT IN SERIOUS INJURY OR DEATH.
- ! SAFETY BELTS AND RESTRAINT SYSTEMS MUST BE USED COR-RECTLY.
- ! CHILD MAY SLIP INTO LEG OPENINGS AND BE STRANGLED IF THE HARNESS IS NOT USED.
- ! NEVER USE STROLLER ON STAIRS OR ESCALATORS.
- ! KEEP AWAY FROM HIGH TEMPERATURE OBJECTS, LIQUIDS, AND ELECTRONICS.
- ! NEVER ALLOW YOUR CHILD TO STAND ON THE STROLLER OR SIT IN THE STROLLER WITH HEAD TOWARD FRONT OF STROLLER.
- ! NEVER PLACE THE STROLLER ON ROADS, SLOPES OR DANGER-OUS AREAS.
- ! DO MAKE SURE ALL MECHANISMS ARE FIXED BEFORE USING THE STROLLER.
- ! TO AVOID STRANGULATION, DO NOT PLACE ITEMS WITH A STRING AROUND YOUR CHILD'S NECK, SUSPEND STRINGS FROM THIS PRODUCT, OR ATTACH STRINGS TO TOYS.
- ! DO NOT LIFT STROLLER WHILE CHILD IS IN STROLLER.
- ! DO NOT USE STORAGE BASKET AS A CHILD CARRIER.
- ! TO PREVENT TIPPING, NEVER LET CHILD CLIMB THE STROLLER. ALWAYS LIFT THE CHILD IN AND OUT OF THE STROLLER.
- ! TO AVOID FINGER ENTRAPMENT, USE CARE WHEN FOLDING AND UNFOLDING THE STROLLER.
- ! PLEASE KEEP THE STORAGE LATCH LOCKING CORRECTLY WHEN LIFT AND MOVE THE UNIT.
- ! PLEASE TRANSPORT THE FOLDED STROLLER SAFELY.
- ! TO AVOID STRANGULATION, DO MAKE SURE YOUR CHILD IS CLEAR FROM THE HOOD.

- ! THE STROLLER IS DESIGNED FOR USE ON FLAT OR GENTLY SLOP-ING SURFACES AND MAY BE UNSTABLE ON HIGHER SLOPING AND UNEVEN SURFACES, AND USERS SHOULD BE MADE AWARE OF THE POSSIBILITY OF THE STROLLER TIPPING OVER.
- ! DISCONTINUE USING STROLLER IF IT IS DAMAGED OR BROKEN.
- ! THIS PRODUCT IS NOT SUITABLE FOR RUNNING OR SKATING.
  STROLLER TO BE USED ONLY AT WALKING SPEED. THIS PRODUCT
  IS NOT INTENDED FOR USE WHILE JOGGING.
- ! TO AVOID SUFFOCATION, REMOVE PLASTIC BAG AND PACKAG-ING MATERIALS BEFORE USING THIS PRODUCT. THE PLASTIC BAG AND PACKAGING MATERIALS SHOULD THEN BE KEPT AWAY FROM BABIES AND CHILDREN.
- ! STROLLER DESIGNED TO BE USED FROM BIRTH SHALL RECOM-MEND THE USE OF THE MOST RECLINED POSITION FOR NEW BORN BABIES.
- ! ALWAYS APPLY THE BRAKES WHENEVER THE STROLLER IS STATIONARY.
- ! EXTRA CARE IS NEEDED IF USED ON MOVING VEHICLES AND CHILD SHOULD NOT BE LEFT UNATTENDED, EVEN WITH BRAKES ENGAGED.
- ! USE THIS HARNESS AT ALL TIMES.
- ! SECURE THE CHILD IN THE HARNESS AT ALL TIMES.

## Stroller Assembly

Please read all the instructions in this manual before assembling and using this product.

## **Open Stroller**

Separate storage latch from storage mount 1, and then lift the handle upwards 2 - 1, push the foot plate downwards with foot 2 - 2, a click sound means the stroller is open completely.

! Check that the stroller is completely open before continuing.

#### **Assemble Front Wheels**

Assemble front wheels to front legs. Check that wheels are securely attached by pulling on wheel assemblies. 3

To disassemble front wheel, the front wheels can be disassembled by pressing the snap buttons. 4

#### **Assemble Rear Wheels**

Assemble rear wheels to rear legs 5. Check that wheels are securely attached by pulling on wheel assemblies.

Snap the brake cable into the fixing tabs under square tubes to fix it. 6

#### **Assemble Hood**

Align the holes of the hood mounts with the posts on the tubes, and then insert to assemble the hood 7, stick the hook and loop fasteners, snap the buttons to attach the rear hood to backrest. (3)

The completely assembled stroller is shown as 9

## **Stroller Operation**

## **Adjust Recline**

There are 5 angles for the backrest.

Squeeze the adjust button 10 - 1, and then adjust the backrest to a desired angle. 10 - 2

To raise the backrest, push up.

! Make sure the recline is set properly for use.

#### **Use Buckle**

#### Release Buckle

Press the center button to release the buckle.

#### Lock Buckle

Match the waist belt buckle with the shoulder buckle 12 - 1, and click into the center buckle. 12 - 2 A "click" sound means the buckle is locked completely. 12 - 3

- ! To avoid serious injury from falling or sliding out, always secure your child with harness.
- ! Make sure your child is snugly secured. The space between the child and the shoulder harness is about the thickness of one hand.
- ! Do not cross the shoulder belts. This will cause pressure on child's neck.

## **Use Shoulder & Waist Harnesses**

- ! In order to protect your child from falling out, after your child is placed into the seat, check whether the shoulder and waist harnesses are at proper height and length.
  - 1 Shoulder harness anchor A
  - 6 2 Shoulder harness anchor B
  - 13 Slide adjuster

For larger child, use shoulder harness anchor A and the highest shoulder slots. For smaller child, use shoulder harness anchor B and the lowest shoulder slots.

To adjust the position of the shoulder harness anchor, turn the anchor to be level with the side facing forward. Thread it through the shoulder harness slot from back to front. 4 Rethread it through the slot that is closest to child's shoulder height. 45

Use slide adjuster to change the harness length. 66 - 1

Press the button 6 - 2, while pulling the waist harness to proper length. 6 - 3

## **Adjust Calf Support**

The calf support has 2 positions.

Raise Calf Support

To raise the calf support, just push it upwards.

Lower Calf Support

Press the adjustment buttons on both sides of the calf support  $\overline{\mathbf{0}}$  - 1, and rotate the calf support downwards.  $\overline{\mathbf{0}}$  - 2

#### **Use Front Swivel Lock**

Push up the front swivel locks to maintain the moving direction. (13)

Tip It is recommended to use swivel locks on uneven surfaces.

## **Use Brake**

To lock wheels, step the brake lever downwards. 19

To release wheels, just lift the brake lever upwards. 19 -1

- Tip Always apply brake when stroller is in stopped position.
- Tip Clean brake system regularly to ensure fully functional. See care and maintenance section.
- Tip To ensure brake is fully on, gently rock the stroller backwards and forwards before releasing the handle.

#### **Use Hood**

To open the hood, pull hood toward front. 20 To fold the hood, pull hood toward back.

## **Use Tether Strap**

Use the tether strap to prevent the stroller inadvertently rolling away. Check that when your hand is through the loop, it allows you to easily control the stroller.

#### **Fold Stroller**

! Please fold the hood before folding the stroller.

Lift the folding plate ②, step the folding pedal downwards ③ - 1, push the stroller forward to fold ③ - 2. The storage latch will automatically hook onto the storage mount, then the stroller is folded and locked completely.

## **Use Carry Strap**

You can carry the stroller with ease by lifting the carry strap. 25

#### Accessories

Accessories may be sold separately or may not be available depending on region.

#### **Use Rain Cover**

To assemble the rain cover, place it over the stroller, and then attach the 2 pairs of hook and loop fasteners and 2 pairs of snaps on the rain cover. 29

- ! When using the rain cover, please always check its ventilation.
- ! When not in use, please check that the rain cover has been cleaned and dried before folding.
- ! Do not fold the stroller after assembling the rain cover.
- ! Do not place your child into the stroller assembled with rain cover during hot weather.

#### **Use Armbar**



Align the armbar ends with the armbar mounts, and then insert to lock. 29

The completely assembled armbar is shown as 30

To disassemble armbar, press armbar release button 3 -1, and then pull out the armbar. 3 -2

## **Care and Maintenance**

- ! Removable seat pad may be washed in cold water and drip-dried. No bleach.
- ! To clean stroller frame, use only household soap and warm water. No bleach or detergent.
- ! From time to time, check your stroller for loose screws, worn parts,torn material or stitching. Replace or repair the parts as needed.
- ! Excessive exposure to sun or heat could cause fading or warping of parts.
- ! If stroller becomes wet, open hood and allow to dry thoroughly before storing.
- ! If wheels squeak, use a light oil (e.g., Silicon Spray, antirust oil, or sewing machine oil). It is important to get the oil into the axle and wheel assembly. 25
- ! If brake pedal stiff/hard to fully engage, flush any debris from brake system with clean water first before lubricating.
- ! When using your stroller at the beach or areas of high dust/sand, completely clean your stroller after use to remove sand and salt from brake mechanisms and wheel assemblies.



Allison Baby UK Ltd, Venture Point, Towers Business Park Rugeley, Staffordshire, WS15 1UZ

