

PACKAGED HEAT PUMP

LRP15HPK

ELITE® SERIES

Two-Stage Compressor | Variable-Speed Blower | Single-Phase | **R-454B** | 60Hz

RESIDENTIAL PRODUCT SPECIFICATIONS (EHB)

SEER2 - Up to 16.0

HSPF2 - 7.2

2 to 5 Tons

Cooling Capacity - 23,000 to 57,000 Btuh

Heating Capacity - 21,400 to 58,000 Btuh

Optional Electric Heat - 5 to 20 kW



ELITE® SERIES



2025 COMPLIANT
REFRIGERANT



MODEL NUMBER IDENTIFICATION

L R P 15 H P K 36 V P - 1 - A

Brand
L = Lennox

Product Type
RP = Residential Packaged Unit

Nominal SEER2

Unit Type
HP = Packaged Heat Pump

Refrigerant Type
K = R-454B

Minor Revision Sequence
A = 1st Generation

Major Revision Sequence
1 = 1st Generation

Voltage
P = 208/230V-1phase-60Hz

Blower
V = Variable Speed Blower Motor

Nominal Cooling Capacity
24 = 2 tons
36 = 3 tons
48 = 4 tons
60 = 5 tons

CONTENTS

Approvals and Warranty	2
Blower Data	15
Cooling Ratings	9
Dimensions	17
- Accessories	18
- Unit	17
Electrical Data	8
Electric Heat Capacities	14
Electric Heat Data	14
Features	3
Field Wiring	16
Heating Ratings	12
Installation Clearances	16
Model Number Identification.	1
Optional Accessories - Order Separately	13
Specifications	8

APPROVALS AND WARRANTY

APPROVALS

- AHRI Standard 210/240-2023 Certified
- Design Certified by ETL Intertek
- ENERGY STAR® certified units are designed to use less energy, help save money on utility bills, and help protect the environment
- Cooling/Heating system rated according to DOE test procedures
- Heating ratings are according to Department of Energy (DOE) test procedures and Federal Trade Commission (FTC) labeling regulations and are Certified by AHRI
- Units are ETL Certified for the U.S. and Canada
- All models meet UL 60335-2-40 Refrigerant Detector Requirements
- All models with the Optional Seismic Strapping Kit installed have Seismic Certification for 2018 International Building Code (IBC) and 2019 California Building Code (CBC) ASCE 7
- Unit and components are UL bonded for grounding to meet safety standards for servicing
- Optional electric heaters are ETL listed for the US and Canada and are rated and tested according to DOE test procedures and FTC labeling regulations
- Test operated at the factory before shipment ensuring dependable operation at start-up
- Seismic Certification (with Seismic Strapping Kit applied): Latest Edition of International Building Code, California Building Code, and ASCE 7-16

WARRANTY

- Compressor:
 - Limited ten years in residential installations
 - Limited five years in non-residential installations
- All other covered components:
 - Limited five years in residential installations
 - Limited one year in non-residential installations

NOTE - Refer to Lennox® Basic Limited Warranty at www.Lennox.com for additional details.

FEATURES

APPLICATIONS

- Designed for outdoor installations at ground level or rooftop for residential applications.

NOTE - Units are not approved for zoning applications.

REFRIGERATION SYSTEM

R-454B Refrigerant

- Low GWP (Global Warming Potential)
- Zero ODP (Ozone Depletion Potential)
- Low Toxicity/Lower Flammability - A2L
- Unit is factory pre-charged

Indoor and Outdoor Coils

- Copper tube with aluminum fin coils

Anti-Microbial Indoor Coil Drain Pan

- Anti-Microbial additive resists growth of mold and mildew on drain pan which improves indoor air quality and reduces drain line blockage
- Drain pan overflow switch monitors condensate level in drain pan and shuts down unit if drain becomes clogged
- Fully insulated to reduce condensation

Outdoor Coil Fan

- Weather protected heavy duty condenser fan motor
- Coated steel fan blades for long life
- Corrosion-resistant coated steel fan guard
- Internally mounted
- Totally enclosed fan motor

Four-Way Reversing Valve

- Rapid changeover of refrigerant flow direction from cooling to heating and vice versa
- Operates on pressure differential between outdoor unit and indoor coil
- Factory installed

High Pressure Switch

- Protects the system from high pressure conditions
- Automatic reset

Loss of Charge Switch

- Shuts off unit if suction pressure falls below setting
- Loss of charge and freeze-up protection

Service Valves

- Fully serviceable brass valves installed in discharge and liquid lines

LOW GWP REFRIGERANT DETECTION SYSTEM (RDS)

- Complies with UL 60335-2-40 approved standard
- Required for all systems using R-454B refrigerant
- Factory installed on all units
- Consists of a leak detection sensor(s) and a mitigation control
- Ensures safe operation for systems equipped with R-454B refrigerant
- Sensor(s) monitors indoor coil area for any refrigerant leaks if they occur
- If a leak is detected the refrigerant detection system will prevent compressor and heating operation until a leak is no longer detected
- Refrigeration detection system energizes blower while a leak is detected to mitigate any concentrations of refrigerant from the unit and the system

FEATURES

COMPRESSOR

Two-Stage Scroll Compressor

- High volumetric efficiency
- Uniform suction flow
- Constant discharge flow
- Quiet operation

Compressor Operation

- Two involute spiral scrolls matched together generate a series of crescent shaped gas pockets between them
- During compression, one scroll remains stationary while the other scroll orbits around it
- Gas is drawn into the outer pocket, the pocket is sealed as the scroll rotates
- As the spiral movement continues, gas pockets are pushed to the center of the scrolls
- Volume between the pockets is simultaneously reduced
- When the pocket reaches the center, gas is now at high pressure and is forced out of a port located in the center of the fixed scrolls
- During compression, several pockets are compressed simultaneously resulting in a smooth continuous compression cycle
- Continuous flank contact, maintained by centrifugal force, minimizes gas leakage and maximizes efficiency
- Compressor is tolerant to the effects of slugging and contaminants
- If this occurs, scrolls separate, allowing liquid or contaminants to be worked toward the center and discharged
- During the compression process, there are several pockets in the scroll that are compressing gas
- Modulation is achieved by venting a portion of the gas in the first suction pocket back to the low side of the compressor thereby reducing the effective displacement of the compressor
- A 24-volt DC solenoid valve inside the compressor controls staging
- When the 3-way solenoid is energized it moves the lift ring assembly to block the ports and the compressor operates at full-load or 100% capacity
- When the solenoid is de-energized the lift ring assembly moves to unblock the compressor ports and the compressor operates at part-load or approximately 67% of its full-load capacity
- The "loading" and "unloading" of the two stage scroll is done "on the fly" without shutting off the single-speed compressor motor between stages
- Low gas pulses during compression reduces operational sound levels
- Compressor motor is internally protected from excessive current and temperature
- Compressor is installed in the unit on specially formulated, resilient rubber mounts for better sound dampening and vibration free operation

Optional Accessories

Compressor Crankcase Heater

- Protects against refrigerant migration that can occur during low ambient operation

Compressor Hard Start Kit

- A PSC compressor motor does not normally need a potential relay and start capacitor
- In cases of low voltage, kit may be required to increase the compressor starting torque

Compressor Timed-Off Control

- Prevents compressor short-cycling
- Allows time for suction and discharge pressure to equalize
- Permits compressor start-up in an unloaded condition
- Automatic reset
- Five minute delay between compressor shut-off and start-up

Low Ambient Kit (40°F)

- Cycles the outdoor fan while allowing compressor operation in the cooling cycle
- This intermittent fan operation allows the system to operate without icing the evaporator coil and losing capacity
- Designed for use in ambient temperatures no lower than 40°F

NOTE - A crankcase heater must be installed on the compressor.

SUPPLY AIR BLOWER

Direct Drive Blower

- Blower wheel statically and dynamically balanced
- Multi-speed operation is achieved by the use of an ECM (Electronically Commutated Motor) variable speed motor
- Blower assembly easily removed for servicing

ECM Variable Speed Blower Motor

- Variable speed motor maintains specified air volume from 0 though 0.80 in. w.g. static range
- Motor is controlled by the blower control
- Change in blower speed is easily accomplished by simple jumper pin change on blower control
- Motor is resiliently mounted

FEATURES

INDOOR AIR QUALITY (Option)

Healthy Climate® PCO Accessory

- The Healthy Climate® PCO Accessory uses photocatalytic oxidation (PCO) technology to significantly reduce levels of airborne volatile organic compounds, cooking odors and common household odors
- Lennox' Healthy Climate® PCO Accessory is mounted internally to the unit cabinet for superior indoor air quality
- Kit contains PCO cartridge, UVA lamp, UVA lamp holder assembly, ballast box, wiring harness and all necessary hardware

NOTE - The Healthy Climate® PCO Accessory cannot be used with the Internal Filter Rack Kit. High efficiency filtration external to the return air inlet and the PCO accessory in the unit is required and must be field supplied.

Internal Filter Rack Kits

- Available for 1 in. thick filters. Kit contains filter rails for mounting filters internal to unit
- Filters are not furnished and must be field provided

NOTE - The Internal Filter Rack Kit cannot be used with the Healthy Climate® PCO Accessory.

NOTE - Maximum acceptable filter efficiency is MERV 11.

ELECTRIC HEAT (Option)

- Field install internal to unit cabinet
- 5 - 20 kW sizes
- Helix wound nichrome heating elements exposed directly in air stream resulting in instant heat transfer, low element temperatures and long service life
- Cutoff limit control provides positive protection in case of excessive temperatures.
- Factory assembled with controls installed and wired.

Optional Accessories

Single Point Power Supply Kits

- Control Box used with optional electric heat
- For single power supply connected to multi-circuit electric heat

NOTE - Side power entry only.

FEATURES

CONTROLS

Refrigerant Detection System (RDS) Control

- Monitors leak detection sensor
- Connections for external RDS alarm system (not furnished)
- LED for power, monitoring and sensor status
- Test/Reset button for troubleshooting

Electronic Blower Control

- **Two Stages** - HEAT and COOL (with four different air volume selections for each) are made by simple jumper pins
- ADJUST jumper pin allows approximately 10% higher, normal or 10% lower motor speed selection within (COOL) speeds selected for fine tuning air volume
- See Blower Data tables

NOTE - HEAT speeds are not affected by jumper change.

- **Cooling Airflow Ramp Up** - At the beginning of a call for cooling, the blower will run at 82% of full airflow for 7.5 minutes
- Improves the system's moisture removal and saves blower power during cooling start
- **Reduced Airflow Operation** - For situations where humidity control is an issue, the variable speed motor can be connected to operate at a 25% reduction of the normal airflow rate
- Variable speed motor interface provides for connection of a thermostat with humidity control or a humidistat on the HUM terminal

NOTE - When connected, the dehumidifier resistor on the interface must be cut.

- The control should be wired to open during high humidity, which will reduce blower airflow

Defrost Control

- Defrost Control
- Furnished as standard
- Provides a demand defrost cycle whenever system heating performance falls below optimum levels
- Sensing element on coil determines when defrost cycle is required and when to terminate cycle
- Anti-short cycle (5 minutes) incorporated into the control
- Diagnostic LEDs furnished as an aid in troubleshooting
- Conveniently located in control box

24 Volt Transformer

- 40VA transformer furnished and factory installed in control area

Optional Accessories


E30 Smart Wi-Fi Thermostat

- Wi-Fi enabled, electronic 7-day, universal, multi-stage, programmable, touchscreen thermostat
- 3 Heat/2 Cool
- Auto-changeover
- Controls dehumidification during cooling mode and humidification during heating mode
- Offers enhanced capabilities including humidification / dehumidification / dewpoint measurement and control, Humiditol® control, and equipment maintenance reminders
- Easy to read 7 in. color touchscreen (measured diagonally)
- LCD display with backlight shows the current and set temperature, time, inside relative humidity, system status (operating mode and schedules) and outside temperature (optional outdoor sensor required)
- Smooth Setback Recovery starts system early to achieve setpoint at start of program period
- Compressor short-cycle protection (5 minutes)
- Up to four separate schedules are available plus Schedule IQ™
- One-Touch Away Mode - A quick and easy way to set the cooling and heating setpoints while away
- Smart Away™ - Uses geo-fencing technology to determine when the homeowner is within a predetermined distance from the home to operate the system when leaving, away and arriving
- Wi-Fi remote monitoring and adjustment through a home wireless network for desktop PCs, laptops and apps for smartphones or tablets
- Smart home automation compatible with Apple HomeKit™, Amazon Alexa®, Google Assistant and IFTTT
- Service Dashboard features online real-time monitoring of installed Lennox® thermostats
- High Definition Color Display with Subbase, Smart Hub Controller, wallplate (for retrofit installations) furnished for easy installation
- See the E30 Smart Wi-Fi Thermostat Product Specifications document for more information



Remote Outdoor Temperature Sensor

- Used with the E30 Smart Wi-Fi Thermostat
- When installed outdoors, sensor allows thermostat to display outdoor temperature
- Sensor is auto-detected when connected to thermostat



Thermostat

- Thermostat is not furnished with unit
- See Lennox Price Book or [Lennox Pros](#) for selection

FEATURES

CONTROLS (continued)

Indoor Blower Off Delay Relay

- Delays the indoor blower-off time during the cooling cycle

Low Ambient Kit

- Air conditioners can operate down to 45°F outdoor air temperature without additional controls
- Allows unit to operate properly down to 30°F

NOTE - Crankcase heater and freezestat should be installed on compressors equipped with a low ambient kit.

NOTE - A compressor lock-out thermostat should be added to terminate compressor operation below recommended operation conditions.

CABINET

- Conditioned areas insulated with foil faced insulation
- Minimizes heat loss and reduce operating sound levels
- Powder paint for maximum durability
- Easy service access
- Steel louvered panels provides complete coil protection
- Full perimeter heavy-gauge galvanized steel base rail
- Base rails have rigging holes
- Two sides of the base rail have forklift slots
- Raised edges around duct and power entry openings in the bottom of the unit for water protection

Airflow Choice

- Units are shipped with all air openings sealed
 - For downflow (vertical) applications, remove the downflow duct covers
 - For horizontal applications, remove the horizontal duct covers

Electrical Inlets and Service Valves

- Standard field wiring electrical inlets are located in one central area of the cabinet
- See dimension drawing
- Gauge ports are located inside the cabinet

Optional Accessories

Base Rail Opening Closure Kit

- Kit consists of panels and hardware to cover base rail rigging holes and forklift slot openings

Bottom Gas Entry Kit

- Allows gas piping through the unit base pan

Bottom Power Entry Kit

- Allows field wiring through the unit base pan

Rectangular to Round Duct Adaptor Kits

- Downflow or horizontal kits available
- Converts rectangular supply and return air openings on unit cabinet to round diameter
- Several sizes available

Clip Curb (Full Perimeter)

- Interlocking tabs fasten corners together
- No tools required
- Fully gasketed around curb perimeter and supply and return openings
- Available in 8, 14, 18 and 24 inch heights
- Shipped knocked down

Adjustable Pitch Roof Curb (Full Perimeter)

- Fully adjustable pitch curb provides a level platform for packaged units
- Allows flexible installations on roofs with sloped or uneven angles
- Adjustable from 2/12 to 6/12 pitch
- Fully gasketed around curb perimeter and supply and return openings
- Clip Curb (knock-down) and Welded models available

All Curbs

- IBC 2018 compliant
- CBC 2019 compliant
- Seismic rating - SDS 2.0g, z/h=1, Ip=1.5
- Wind rating - 240 mph (Lateral), 214 mph (Uplift)
- Maximum load rating - 800 lbs.

Adaptor Curbs (not shown)

- Curbs are regionally sourced
- Dimensions vary based upon the source

NOTE - Contact your local sales representative for a detailed cut sheet with applicable dimensions.

Strapping Kit - Seismic

- Heavy-gauge galvanized steel
- Kit contains 4 brackets and mounting hardware

SPECIFICATIONS

Size			24	36	48	60
Nominal Tonnage			2	3	4	5
Cooling / Heating Performance	Cooling	Total capacity - Btuh	23,000	34,200	45,000	57,000
		¹ SEER2 (Btuh/Watt)	16.0	15.2	15.2	15.2
		¹ EER2 (Btuh/Watt)	12.0	11.5	11.5	11.5
		Total unit watts	1875	3025	3910	4950
	High Temperature Heat	Total capacity - Btuh	21,400	33,200	45,500	58,000
		¹ HSPF2 (Region IV)	7.2	7.2	7.2	7.2
		¹ COP	3.70	3.50	3.88	3.71
		Total unit watts	1800	2960	3930	5030
	Low Temperature Heat	Total capacity - Btuh	11,900	18,900	24,700	35,700
		¹ COP	2.10	2.20	2.09	2.34
Total unit watts		1660	2520	3460	4470	
² Sound Rating Number		dBA	71	71	74	74
Refrigerant		Type	R-454B	R-454B	R-454B	R-454B
		Charge	4 lbs. 8 oz.	6 lbs. 13 oz.	8 lbs. 15 oz.	9 lbs. 4 oz.
Compressor Type (number)			Two-Stage Scroll (1)			
Outdoor Coil	Net face area - ft. ²		16.3	15.5	18.6	18.6
	Tube diameter - in.		5/16	5/16	5/16	5/16
	Rows		1	2	2	2
	Fins - in.		22	22	22	22
Outdoor Fan	HP		1/2	1/2	1/2	1/2
	Diameter - in.		22	22	24	24
	Blades		3	3	3	3
Indoor Coil	Net face area - ft. ²		4.4	4.4	6.8	6.8
	Tube Diameter - in.		5/16	3/8	3/8	3/8
	Rows		3	3	3	3
	Fins - in.		15	15	15	15
	Condensate drain size (NPT) - in.		3/4	3/4	3/4	3/4
Indoor Blower		HP	1/2	1/2	3/4	1
		Blower wheel size dia. x width - in.	(1) 10 x 6	(1) 10 x 8	(1) 10 x 10	(1) 12 x 10
Net weight of basic unit - lbs.			411	446	526	541
Shipping weight of basic unit - lbs.			421	456	536	551

ELECTRICAL DATA

Line voltage data (Volts-Phase-Hz)		208/230V-1-60			
³ Maximum overcurrent protection (MOCP) amps		25	40	50	60
⁴ Minimum Circuit Ampacity (MCA)		17.1	25.1	31.7	39.7
Compressor	Rated load amps	10.2	15.3	19.5	25.2
Outdoor Coil Fan Motor	Full load amps	2.3	2.3	3.6	3.6
Indoor Blower Motor	Full load amps	2.0	3.7	3.8	4.6

¹ AHRI Certified to AHRI Standard 210/240:

Cooling Ratings - 95°F outdoor air temperature and 80°F db/67°F wb entering indoor coil air.

High Temperature Heating Ratings - 47°F db/43°F wb outdoor air temperature and 70°F entering indoor coil air.

Low Temperature Heating Ratings - 17°F db/15°F wb outdoor air temperature and 70°F entering indoor coil air.

² Sound Rating Number rated in accordance with test conditions included in AHRI Standard 270.

³ HACR type circuit breaker or fuse.

⁴ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

OPTIONAL ACCESSORIES - ORDER SEPARATELY

Item	Order Number	Size				
		24	36	48	60	
CONTROLS						
E30 Smart Wi-Fi Thermostat	20A65	•	•	•	•	
¹ Remote Outdoor Temperature Sensor	X2658	•	•	•	•	
COOLING SYSTEM						
Compressor Crankcase Heater	27U17	•	•			
	27P79			•	•	
Compressor Hard Start Kit	10J42	•	•			
	12J90			•	•	
Compressor Timed-Off Control	47J28	•	•	•	•	
Low Ambient Kit (40°F)	21D20	•	•	•	•	
CABINET						
Base Rail Opening Closure Kit	21J84	•	•	•	•	
Rectangular to Round Duct Adaptor Kits	Downflow - 14 in. dia.	20X82	•	•		
	- 14 in. dia.	21D26			•	•
	Horizontal - 14 in. dia.	21J92	•	•		
	- 14 in. dia.	21D24			•	•
	- 16 in. dia.	22U78			•	•
	- 18 in. dia.	22U79			•	•
ELECTRICAL						
Bottom Power Entry Kit	21J78	•	•	•	•	
ELECTRIC HEAT						
Electric Heat Size - 208/240V-1ph	5 kW	10W47	•	•	•	•
	7.5 kW	10W48	•	•	•	•
	10 kW	10W49	•	•	•	•
	15 kW	10W50		•	•	•
	20 kW	10W51			•	•
SINGLE POINT POWER SUPPLY KITS (FOR ELECTRIC HEAT) - SIDE POWER ENTRY ONLY						
Single Point Power Kits	For 5 kW Electric Heat	13W88	•	•	•	•
	For 7.5 kW Electric Heat	13W89	•	•	•	•
	For 10 kW Electric Heat	13W90	•	•	•	•
	For 15-20 kW Electric Heat	13W91		•	•	•
INDOOR AIR QUALITY						
² Healthy Climate® PCO Accessory	Y7960	•	•	•	•	
Healthy Climate® PCO Accessory Maintenance Kit (Includes PureAir™ Cartridge and UVA lamp)	Y7972	•	•	•	•	
³ Internal Filter Rack Kit (filters not furnished)	(1) 20 x 20 + (1) 14 x 20	11U73	•	•		
	(2) 20 x 20	11U74			•	•
ROOF CURBS						
Clip Curbs						
	8 in. height	21J13	•	•		
		21J17			•	•
	14 in. height	21J14	•	•		
		21J19			•	•
	18 in. height	21J15	•	•		
		21J20			•	•
	24 in. height	21J16	•	•		
		21J25			•	•
Adjustable Pitch Roof Curbs						
Welded Curbs	22V54	•	•			
	22V55			•	•	
Clip Curbs	21J26	•	•			
	21U04			•	•	
Strapping Kits for Roof Curbs						
Strapping Kit - Seismic	21J75	•	•	•	•	

¹ Allows the thermostat to display outdoor temperature.

² Filter Rack Kit cannot be used with the Healthy Climate® PCO Accessory. High efficiency filtration between the return air inlet and the PCO accessory is required and must be field supplied.

³ Filters are not furnished and must be field provided.

COOLING RATINGS

NOTE – For Temperatures and Capacities not shown in tables, see bulletin – Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

2 TON - LRP15HPK24

STAGE 1

Entering Wet Bulb Temperature	Total Air Vol- ume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F					
59°F	520	17.1	.78	.96	1.00	1.00	16.5	.92	.98	1.00	1.00	15.9	1.07	1.00	1.00	1.00	15.2	1.25	1.00	1.00	1.00				
	575	17.7	.77	.99	1.00	1.00	17.1	.91	1.00	1.00	1.00	16.4	1.07	1.00	1.00	1.00	15.6	1.24	1.00	1.00	1.00				
	630	18.3	.76	1.00	1.00	1.00	17.6	.91	1.00	1.00	1.00	16.9	1.06	1.00	1.00	1.00	16.0	1.24	1.00	1.00	1.00				
63°F	520	17.7	.77	.79	.93	1.00	17.0	.91	.80	.95	1.00	16.2	1.07	.82	.98	1.00	15.3	1.24	.85	1.00	1.00				
	575	18.1	.77	.82	.96	1.00	17.4	.91	.83	.99	1.00	16.5	1.07	.86	1.00	1.00	15.6	1.24	.89	1.00	1.00				
	630	18.5	.76	.84	1.00	1.00	17.7	.91	.86	1.00	1.00	16.9	1.06	.89	1.00	1.00	16.1	1.24	.92	1.00	1.00				
67°F	520	18.9	.76	.63	.77	.90	18.1	.90	.64	.78	.92	17.2	1.06	.66	.80	.95	16.2	1.24	.68	.83	.98				
	575	19.3	.75	.65	.79	.93	18.5	.90	.66	.81	.96	17.6	1.06	.68	.84	.99	16.5	1.23	.70	.87	1.00				
	630	19.6	.75	.67	.82	.97	18.8	.90	.68	.84	.99	17.9	1.05	.70	.87	1.00	16.8	1.23	.72	.90	1.00				
71°F	520	19.9	.75	.48	.62	.75	19.1	.89	.49	.63	.76	18.2	1.05	.50	.64	.78	17.2	1.23	.52	.67	.81				
	575	20.4	.74	.50	.64	.77	19.5	.89	.50	.65	.79	18.5	1.05	.51	.67	.82	17.5	1.22	.53	.69	.85				
	630	20.6	.74	.51	.66	.80	19.8	.89	.51	.67	.82	18.8	1.04	.53	.69	.85	17.9	1.22	.54	.71	.88				

2 TON - LRP15HPK24

STAGE 2

Entering Wet Bulb Temperature	Total Air Volume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F					
59°F	750	22.8	1.33	.98	1.00	1.00	22.0	1.52	1.00	1.00	1.00	21.0	1.73	1.00	1.00	1.00	20.2	1.98	1.00	1.00	1.00				
	850	23.6	1.33	1.00	1.00	1.00	22.8	1.52	1.00	1.00	1.00	21.8	1.74	1.00	1.00	1.00	21.0	1.99	1.00	1.00	1.00				
	950	24.4	1.33	1.00	1.00	1.00	23.4	1.53	1.00	1.00	1.00	22.6	1.74	1.00	1.00	1.00	21.6	1.99	1.00	1.00	1.00				
63°F	750	23.4	1.33	.80	.95	1.00	22.4	1.52	.82	.97	1.00	21.2	1.73	.84	1.00	1.00	20.2	1.98	.87	1.00	1.00				
	850	23.8	1.33	.84	1.00	1.00	22.8	1.52	.86	1.00	1.00	21.8	1.74	.89	1.00	1.00	20.8	1.98	.91	1.00	1.00				
	950	24.4	1.33	.87	1.00	1.00	23.4	1.53	.90	1.00	1.00	22.6	1.74	.92	1.00	1.00	21.6	1.99	.96	1.00	1.00				
67°F	750	24.6	1.33	.64	.78	.92	23.6	1.53	.65	.80	.95	22.6	1.74	.67	.82	.97	21.4	1.99	.69	.85	1.00				
	850	25.2	1.33	.67	.82	.96	24.2	1.53	.68	.84	.99	23.0	1.75	.70	.87	1.00	21.8	1.99	.72	.90	1.00				
	950	25.6	1.33	.69	.86	1.00	24.6	1.53	.71	.88	1.00	23.4	1.75	.73	.91	1.00	22.2	1.99	.75	.94	1.00				
71°F	750	26.0	1.33	.50	.63	.76	25.0	1.53	.50	.65	.78	23.8	1.75	.51	.66	.80	22.6	2.00	.52	.68	.83				
	850	26.4	1.33	.51	.66	.80	25.4	1.53	.52	.68	.82	24.4	1.75	.53	.69	.85	23.2	2.00	.54	.71	.88				
	950	27.0	1.34	.52	.69	.84	25.8	1.54	.53	.70	.86	24.8	1.76	.54	.72	.89	23.4	2.00	.55	.74	.92				

COOLING RATINGS

NOTE – For Temperatures and Capacities not shown in tables, see bulletin – Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

3 TON - LRP15HPK36

STAGE 1

Entering Wet Bulb Temperature	Total Air Vol- ume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
	cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F				
59°F	780	26.8	1.36	.97	1.00	1.00	26.0	1.57	.99	1.00	1.00	24.8	1.80	1.00	1.00	1.00	23.8	2.06	1.00	1.00	1.00				
	875	27.8	1.35	1.00	1.00	1.00	27.0	1.56	1.00	1.00	1.00	25.8	1.80	1.00	1.00	1.00	24.8	2.06	1.00	1.00	1.00				
	960	28.8	1.35	1.00	1.00	1.00	27.8	1.56	1.00	1.00	1.00	26.6	1.79	1.00	1.00	1.00	25.4	2.06	1.00	1.00	1.00				
63°F	780	27.8	1.35	.80	.94	1.00	26.6	1.56	.81	.96	1.00	25.2	1.80	.84	.98	1.00	24.0	2.06	.86	1.00	1.00				
	875	28.4	1.35	.83	.98	1.00	27.2	1.56	.85	1.00	1.00	25.8	1.80	.87	1.00	1.00	24.6	2.06	.90	1.00	1.00				
	960	29.0	1.34	.85	1.00	1.00	27.8	1.56	.88	1.00	1.00	26.6	1.79	.91	1.00	1.00	25.4	2.06	.94	1.00	1.00				
67°F	780	29.4	1.34	.64	.78	.91	28.2	1.55	.65	.79	.93	26.8	1.79	.66	.82	.95	25.6	2.06	.69	.84	.98				
	875	30.0	1.34	.67	.81	.95	28.8	1.55	.68	.83	.98	27.4	1.79	.69	.85	1.00	26.2	2.05	.71	.88	1.00				
	960	30.6	1.33	.69	.84	.99	29.4	1.55	.70	.86	1.00	28.0	1.78	.71	.89	1.00	26.6	2.05	.74	.92	1.00				
71°F	780	31.0	1.33	.51	.63	.76	29.8	1.54	.50	.64	.77	28.6	1.78	.52	.65	.80	27.0	2.05	.52	.67	.82				
	875	31.8	1.33	.52	.66	.79	30.6	1.54	.52	.67	.81	29.0	1.78	.53	.68	.83	27.6	2.04	.54	.71	.86				
	960	32.2	1.32	.53	.68	.82	31.0	1.54	.54	.69	.84	29.6	1.77	.54	.71	.87	28.0	2.04	.56	.73	.90				

3 TON - LRP15HPK36

STAGE 2

Entering Wet Bulb Temp- erature	Total Air Vol- ume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
				75°F	80°F	85°F			75°F	80°F	85°F			75°F	80°F	85°F			75°F	80°F	85°F	75°F	80°F	85°F	
cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F					
59°F	1050	34.2	2.21	.96	1.00	1.00	33.0	2.48	.98	1.00	1.00	31.8	2.81	1.00	1.00	1.00	30.2	3.18	1.00	1.00	1.00				
	1200	35.8	2.22	1.00	1.00	1.00	34.2	2.49	1.00	1.00	1.00	33.0	2.81	1.00	1.00	1.00	31.6	3.19	1.00	1.00	1.00				
	1300	36.6	2.22	1.00	1.00	1.00	35.0	2.50	1.00	1.00	1.00	33.8	2.82	1.00	1.00	1.00	32.2	3.20	1.00	1.00	1.00				
63°F	1050	35.4	2.22	.79	.93	1.00	34.0	2.49	.81	.95	1.00	32.2	2.81	.83	.98	1.00	30.4	3.19	.85	1.00	1.00				
	1200	36.4	2.22	.83	.98	1.00	34.8	2.50	.85	1.00	1.00	33.0	2.81	.87	1.00	1.00	31.6	3.19	.90	1.00	1.00				
	1300	37.0	2.23	.85	1.00	1.00	35.2	2.50	.88	1.00	1.00	33.8	2.82	.90	1.00	1.00	32.2	3.20	.93	1.00	1.00				
67°F	1050	37.2	2.23	.64	.77	.90	36.0	2.50	.65	.79	.92	34.2	2.82	.67	.81	.95	32.4	3.20	.68	.84	.98				
	1200	38.0	2.23	.67	.81	.95	36.6	2.51	.68	.83	.97	35.0	2.83	.70	.86	1.00	33.0	3.21	.71	.89	1.00				
	1300	39.0	2.24	.68	.84	.98	37.2	2.51	.70	.86	1.00	35.4	2.83	.72	.89	1.00	33.6	3.21	.73	.92	1.00				
71°F	1050	39.5	2.24	.50	.63	.75	37.6	2.51	.50	.64	.77	36.0	2.84	.52	.66	.79	34.2	3.21	.53	.68	.82				
	1200	40.5	2.25	.52	.66	.80	38.5	2.52	.52	.67	.81	36.8	2.84	.54	.69	.84	35.0	3.22	.55	.71	.87				
	1300	41.0	2.25	.52	.68	.82	39.0	2.53	.54	.69	.84	37.4	2.85	.54	.71	.87	35.4	3.22	.56	.73	.90				

COOLING RATINGS

NOTE – For Temperatures and Capacities not shown in tables, see bulletin – Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

4 TON - LRP15HPK48

STAGE 1

Entering Wet Bulb Temperature	Total Air Vol- ume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
	cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F				
59°F	950	34.0	1.62	.92	1.00	1.00	32.6	1.90	.95	1.00	1.00	31.2	2.21	.97	1.00	1.00	29.6	2.55	1.00	1.00	1.00				
	1050	35.2	1.62	.95	1.00	1.00	34.0	1.90	.98	1.00	1.00	32.4	2.21	1.00	1.00	1.00	30.6	2.55	1.00	1.00	1.00				
	1150	36.4	1.61	.99	1.00	1.00	34.8	1.89	1.00	1.00	1.00	33.4	2.20	1.00	1.00	1.00	31.4	2.54	1.00	1.00	1.00				
63°F	950	35.4	1.61	.76	.89	1.00	33.6	1.90	.78	.92	1.00	32.0	2.21	.80	.94	1.00	30.0	2.55	.83	.97	1.00				
	1050	36.4	1.61	.79	.93	1.00	34.6	1.90	.81	.95	1.00	32.8	2.20	.83	.98	1.00	30.6	2.55	.86	1.00	1.00				
	1150	37.2	1.61	.81	.95	1.00	35.2	1.89	.83	.98	1.00	33.6	2.20	.86	1.00	1.00	31.4	2.54	.89	1.00	1.00				
67°F	950	37.8	1.60	.62	.74	.86	36.0	1.89	.63	.76	.89	34.2	2.20	.64	.78	.91	32.0	2.54	.65	.81	.94				
	1050	38.5	1.60	.63	.77	.89	36.8	1.89	.64	.78	.92	35.0	2.20	.66	.80	.95	32.8	2.54	.67	.83	.98				
	1150	39.5	1.60	.65	.79	.93	37.6	1.89	.66	.81	.95	35.6	2.19	.67	.83	.98	33.4	2.54	.69	.86	1.00				
71°F	950	40.0	1.60	.48	.60	.72	38.5	1.88	.49	.62	.74	36.4	2.19	.49	.63	.75	34.2	2.54	.49	.64	.78				
	1050	41.0	1.60	.49	.62	.74	39.0	1.88	.50	.63	.76	37.2	2.19	.50	.65	.78	35.0	2.54	.51	.66	.81				
	1150	42.0	1.59	.50	.63	.77	40.0	1.88	.50	.65	.79	38.0	2.19	.51	.66	.81	35.4	2.54	.52	.69	.84				

4 TON - LRP15HPK48

STAGE 2

Entering Wet Bulb Temperature	Total Air Vol- ume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
	cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F				
59°F	1400	46.0	2.71	.95	1.00	1.00	44.5	3.05	.97	1.00	1.00	42.5	3.45	.99	1.00	1.00	41.0	3.90	1.00	1.00	1.00				
	1540	47.5	2.72	.98	1.00	1.00	46.0	3.07	1.00	1.00	1.00	44.0	3.46	1.00	1.00	1.00	42.0	3.91	1.00	1.00	1.00				
	1700	49.0	2.74	1.00	1.00	1.00	47.5	3.09	1.00	1.00	1.00	45.0	3.47	1.00	1.00	1.00	43.0	3.93	1.00	1.00	1.00				
63°F	1400	47.5	2.72	.78	.92	1.00	45.5	3.07	.80	.94	1.00	43.5	3.45	.82	.96	1.00	41.0	3.90	.84	.99	1.00				
	1540	48.5	2.74	.81	.95	1.00	46.5	3.08	.83	.97	1.00	44.0	3.46	.84	1.00	1.00	42.0	3.91	.87	1.00	1.00				
	1700	49.5	2.75	.83	.99	1.00	47.0	3.09	.86	1.00	1.00	45.0	3.47	.88	1.00	1.00	43.0	3.93	.91	1.00	1.00				
67°F	1400	50.0	2.76	.63	.76	.89	48.5	3.10	.64	.78	.92	46.0	3.48	.65	.80	.94	43.5	3.93	.67	.82	.97				
	1540	51.5	2.77	.65	.79	.93	49.0	3.11	.65	.81	.95	47.0	3.49	.67	.83	.97	44.5	3.94	.69	.85	1.00				
	1700	52.0	2.78	.66	.81	.96	50.0	3.12	.68	.84	.98	47.5	3.50	.69	.86	1.00	45.0	3.95	.71	.89	1.00				
71°F	1400	53.5	2.80	.48	.62	.74	51.0	3.13	.49	.63	.76	48.5	3.52	.49	.64	.78	46.0	3.96	.50	.66	.80				
	1540	54.0	2.81	.49	.64	.77	52.0	3.14	.50	.65	.79	49.5	3.53	.51	.66	.81	47.0	3.97	.51	.68	.83				
	1700	55.0	2.82	.50	.66	.80	53.0	3.16	.51	.67	.82	50.0	3.54	.52	.69	.85	48.0	3.98	.53	.71	.88				

COOLING RATINGS

NOTE – For Temperatures and Capacities not shown in tables, see bulletin – Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

5 TON - LRP15HPK60

STAGE 1

Entering Wet Bulb Temperature	Total Air Vol- ume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F					
59°F	1130	40.5	2.13	.92	1.00	1.00	39.0	2.47	.94	1.00	1.00	37.4	2.84	.97	1.00	1.00	35.4	3.25	1.00	1.00	1.00				
	1260	42.5	2.13	.95	1.00	1.00	40.5	2.46	.97	1.00	1.00	39.0	2.83	1.00	1.00	1.00	36.8	3.25	1.00	1.00	1.00				
	1400	44.0	2.12	.98	1.00	1.00	42.0	2.46	1.00	1.00	1.00	40.0	2.83	1.00	1.00	1.00	38.0	3.25	1.00	1.00	1.00				
63°F	1130	42.5	2.12	.76	.89	1.00	40.5	2.46	.78	.91	1.00	38.5	2.84	.80	.93	1.00	36.0	3.25	.82	.97	1.00				
	1260	44.0	2.12	.78	.92	1.00	42.0	2.46	.80	.94	1.00	39.5	2.83	.82	.97	1.00	36.8	3.25	.85	1.00	1.00				
	1400	44.5	2.12	.81	.96	1.00	42.5	2.45	.83	.98	1.00	40.5	2.83	.85	1.00	1.00	38.0	3.25	.89	1.00	1.00				
67°F	1130	45.5	2.11	.62	.74	.86	43.5	2.45	.62	.75	.88	41.0	2.83	.63	.77	.91	38.5	3.25	.65	.80	.94				
	1260	46.5	2.11	.63	.76	.89	44.5	2.45	.64	.78	.91	42.0	2.83	.65	.80	.94	39.5	3.24	.67	.83	.97				
	1400	47.5	2.10	.65	.79	.92	45.5	2.44	.66	.81	.95	43.0	2.82	.67	.83	.98	40.5	3.24	.70	.86	1.00				
71°F	1130	48.0	2.10	.48	.60	.72	46.0	2.44	.48	.61	.73	43.5	2.82	.49	.62	.75	41.0	3.24	.50	.64	.77				
	1260	49.0	2.10	.49	.61	.74	47.0	2.44	.49	.63	.76	44.5	2.82	.50	.64	.78	42.0	3.24	.51	.66	.81				
	1400	50.0	2.09	.49	.63	.77	48.0	2.43	.50	.65	.79	45.5	2.81	.51	.66	.81	42.5	3.24	.52	.69	.84				

5 TON - LRP15HPK60

STAGE 2

Entering Wet Bulb Temperature	Total Air Vol- ume	Outdoor Air Temperature Entering Outdoor Coil																							
		85°F						95°F						105°F						115°F					
		Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)			Total Cool Cap.	Comp. Motor Input	Sensible To Total Ratio (S/T)						
				Dry Bulb					Dry Bulb					Dry Bulb					Dry Bulb						
				75°F	80°F	85°F			75°F	80°F	85°F			75°F	80°F	85°F			75°F	80°F	85°F				
cfm	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F	kBtuh	kW	75°F	80°F	85°F					
59°F	1600	55.0	3.58	.93	1.00	1.00	53.5	4.03	.94	1.00	1.00	51.0	4.55	.97	1.00	1.00	48.5	5.15	1.00	1.00	1.00				
	1800	57.5	3.60	.96	1.00	1.00	55.0	4.06	.98	1.00	1.00	53.0	4.58	1.00	1.00	1.00	51.0	5.18	1.00	1.00	1.00				
	2000	59.0	3.62	.99	1.00	1.00	57.0	4.08	1.00	1.00	1.00	55.0	4.61	1.00	1.00	1.00	52.0	5.20	1.00	1.00	1.00				
63°F	1600	57.5	3.60	.77	.90	1.00	55.0	4.05	.78	.92	1.00	52.5	4.58	.80	.94	1.00	50.0	5.16	.82	.97	1.00				
	1800	58.5	3.62	.79	.94	1.00	56.5	4.07	.81	.96	1.00	54.0	4.59	.83	.98	1.00	51.0	5.18	.86	1.00	1.00				
	2000	60.0	3.63	.82	.97	1.00	57.5	4.09	.84	.99	1.00	54.5	4.61	.86	1.00	1.00	52.0	5.20	.89	1.00	1.00				
67°F	1600	61.0	3.64	.62	.74	.87	58.0	4.10	.63	.76	.89	56.0	4.62	.64	.78	.91	53.0	5.21	.66	.80	.94				
	1800	62.5	3.65	.64	.78	.91	60.0	4.12	.65	.79	.93	57.0	4.63	.66	.81	.96	53.5	5.22	.68	.84	.98				
	2000	64.0	3.67	.66	.80	.95	61.0	4.13	.67	.82	.97	58.0	4.65	.68	.85	1.00	55.0	5.24	.71	.87	1.00				
71°F	1600	64.5	3.67	.48	.61	.73	61.5	4.13	.48	.62	.74	58.5	4.66	.49	.63	.76	55.5	5.25	.49	.64	.78				
	1800	66.0	3.69	.49	.63	.76	63.0	4.15	.50	.64	.77	60.0	4.68	.50	.65	.79	56.5	5.26	.51	.67	.82				
	2000	67.0	3.70	.50	.65	.79	64.5	4.17	.51	.66	.80	61.0	4.69	.51	.68	.83	58.0	5.29	.52	.70	.86				

HEATING RATINGS

Model	Outdoor Temp - DB/WB °F											
	0/0		5/4		17/15		35/33		47/43		62/56	
	Btuh	kW	Btuh	kW	Btuh	kW	Btuh	kW	Btuh	kW	Btuh	kW
LRP15HPK24	6,800	1.99	8,400	2.46	12,000	3.52	18,000	5.28	22,000	6.45	27,000	7.91
LRP15HPK36	13,600	3.99	15,500	4.54	19,900	5.83	28,500	8.35	34,100	9.99	41,200	12.07
LRP15HPK48	19,100	5.60	21,800	6.39	28,300	8.29	40,200	11.78	48,100	14.10	58,000	17.00
LRP15HPK60	22,500	6.59	26,700	7.82	36,800	10.79	51,400	15.06	61,100	17.91	73,300	21.48

NOTE - Values based on 0.50 in. w.g. external static pressure.

ELECTRIC HEAT DATA

Model			LRP15HPK24		LRP15HPK36		LRP15HPK48		LRP15HPK60	
Voltage			208V	240V	208V	240V	208V	240V	208V	240V
¹ Maximum Overcurrent Protection (MOCP)	5 kW	Circuit 1	30	30	30	35	30	35	30	35
	7.5 kW	Circuit 1	40	45	40	45	40	45	40	45
	10 kW	Circuit 1	50	60	50	60	50	60	60	60
	15 kW	Circuit 1	---	---	50	60	50	60	60	60
		Circuit 2	---	---	25	30	25	30	25	30
	20 kW	Circuit 1	---	---	---	---	50	60	60	60
		Circuit 2	---	---	---	---	50	60	50	60
¹ Maximum Overcurrent Protection (MOCP) with Optional Single Point Power Supply	5 kW		45	45	50	60	60	70	80	80
	7.5 kW		60	60	60	70	70	80	90	90
	10 kW		70	70	80	80	80	90	100	100
	15 kW		---	---	100	110	100	110	125	110
	20 kW		---	---	---	---	125	150	150	150
² Minimum Circuit Ampacity (MCA)	5 kW	Circuit 1	25.1	28.5	27.2	30.7	27.3	30.8	28.3	31.8
	7.5 kW	Circuit 1	36.4	41.6	38.5	43.7	38.6	43.8	39.6	44.8
	10 kW	Circuit 1	47.6	54.6	49.8	56.7	49	56.8	50.9	57.8
	15 kW	Circuit 1	---	---	49.8	56.7	49	56.8	50.9	57.8
		Circuit 2	---	---	22.6	26	22.6	26	22.6	26
	20 kW	Circuit 1	---	---	---	---	49	56.8	50.9	57.8
		Circuit 2	---	---	---	---	45.1	52.1	45.1	52.1
² Minimum Circuit Ampacity (MCA) with Optional Single Point Power Supply	5 kW		39.7	43.1	47.7	51.2	54.3	57.8	62.3	65.7
	7.5 kW		51.0	56.2	59.0	64.2	65.6	70.8	73.6	78.8
	10 kW		62.2	69.2	70.3	77.2	76.9	83.8	84.8	91.8
	15 kW		---	---	92.8	103.2	99.5	109.9	107.4	117.8
	20 kW		---	---	---	---	122.0	135.9	130.0	143.9

NOTE - All units have a minimum Short Circuit Current Rating (SCCR) of 5000 amps.

NOTE - Circuit 1 Minimum Circuit Ampacity includes the Blower Motor Full Load Amps.

NOTE- Extremes of operating range are plus and minus 10% of line voltage.

¹ HACR type breaker or fuse.

² Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

ELECTRIC HEAT CAPACITIES

Input Voltage	5 kW			7.5 kW			10 kW			15 kW			20 kW		
	No of Steps	kW Input	KBtuh Output	No of Steps	kW Input	KBtuh Output	No of Steps	kW Input	KBtuh Output	No of Steps	kW Input	KBtuh Output	No of Steps	kW Input	KBtuh Output
208	1	3.8	12.8	1	5.6	19.2	1	7.5	25.6	1	11.2	38.2	1	15	51.2
220	1	4.2	14.3	1	6.3	21.5	1	8.4	28.7	1	12.6	43	1	16.8	57.3
230	1	4.6	15.7	1	6.9	23.5	1	9.2	31.3	1	13.8	47	1	18.4	62.7
240	1	5	17.1	1	7.5	25.6	1	10	34.1	1	15	51.2	1	20	68.2

BLOWER DATA

LRP15HPK24 Blower Performance

0 through 0.80 in. w.g. External Static Pressure Range

“ADJUST” Jumper Setting	Blower Control Jumper Speed Positions											
	“COOL” Speed - cfm				“HEAT” Speed - cfm				“CONTINUOUS FAN” Speed - cfm			
	A	¹ B	C	D	A	¹ B	C	D	A	B	C	D
+	1100	880	660	440	1150	1035	690	690	550	440	330	220
NORM	1000	800	600	400	1000	900	600	600	500	400	300	200
—	900	720	540	360	1000	900	600	600	450	360	270	180

LRP15HPK36 Blower Performance

0 through 0.80 in. w.g. External Static Pressure Range

“ADJUST” Jumper Setting	Blower Control Jumper Speed Positions											
	“COOL” Speed - cfm				“HEAT” Speed - cfm				“CONTINUOUS FAN” Speed - cfm			
	A	¹ B	C	D	A	¹ B	C	D	A	B	C	D
+	1430	1320	1100	880	1495	1380	1150	1150	715	660	550	440
NORM	1300	1200	1000	800	1300	1250	1000	1000	650	600	500	400
—	1170	1080	900	720	1300	1200	1000	1000	585	540	450	360

LRP15HPK48 Blower Performance

0 through 0.80 in. w.g. External Static Pressure Range

“ADJUST” Jumper Setting	Blower Control Jumper Speed Positions											
	“COOL” Speed - cfm				“HEAT” Speed - cfm				“CONTINUOUS FAN” Speed - cfm			
	A	¹ B	C	D	A	¹ B	C	D	A	B	C	D
+	1980	1760	1540	1320	2070	1840	1610	1610	990	880	770	660
NORM	1800	1600	1400	1200	1800	1600	1400	1400	900	800	700	600
—	1620	1440	1260	1080	1800	1600	1400	1400	810	720	630	540

LRP15HPK60 Blower Performance

0 through 0.80 in. w.g. External Static Pressure Range

“ADJUST” Jumper Setting	Blower Control Jumper Speed Positions											
	“COOL” Speed - cfm				“HEAT” Speed - cfm				“CONTINUOUS FAN” Speed - cfm			
	A	¹ B	C	D	A	¹ B	C	D	A	B	C	D
+	2200	1980	1760	1540	2300	2070	1840	1840	1100	990	880	770
NORM	2000	1800	1600	1400	2000	1800	1600	1600	1000	900	800	700
—	1800	1620	1440	1260	2000	1800	1600	1600	900	810	720	630

¹ Factory Settings.


NOTE - All air data is measured external to unit without air filters.

NOTE - 1st Stage airflow is 70% of 2nd Stage airflow (full capacity) in cooling mode.

ACCESSORY AIR RESISTANCE DATA - in. w.g.

Air Volume cfm	Rectangular to Round Duct Adaptor Kits					
	Downflow			Horizontal		
	14 in. Diameter		14 in. Diameter		16 in. Diameter	18 in. Diameter
	24, 36	48, 60	24, 36	48, 60	48, 60	48, 60
500	0.03	---	0.04	---	---	---
600	0.05	---	0.07	---	---	---
700	0.08	0.13	0.08	0.13	---	---
800	0.10	0.17	0.12	0.16	---	---
900	0.12	0.21	0.15	0.21	---	---
1000	0.17	0.24	0.19	0.25	0.11	0.03
1100	0.18	0.30	0.23	0.30	0.11	0.03
1200	0.20	0.36	0.29	0.37	0.13	0.03
1300	0.26	0.43	0.31	0.43	0.17	0.03
1400	0.31	0.50	0.39	0.51	0.20	0.03
1500	---	0.57	---	0.57	0.21	0.05
1600	---	0.63	---	0.65	0.26	0.05
1700	---	0.71	---	0.72	0.30	0.06
1800	---	0.80	---	0.81	0.30	0.06
1900	---	0.91	---	0.90	0.40	0.06
2000	---	0.99	---	1.01	0.41	0.06

FIELD WIRING

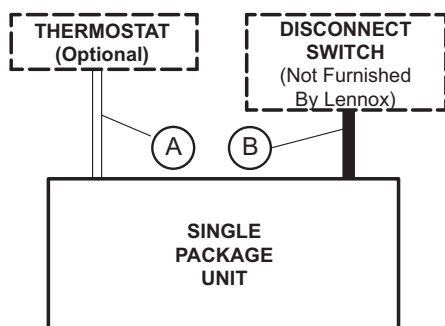

A – Seven Wire Low Voltage (Electronic)

B – Two Wire Power (See Electrical Data Table)

If multiple disconnects are used on units with electric heat; there must be two-wire power provided for each disconnect

– Field Wiring Not Furnished –






INSTALLATION CLEARANCES

	in.	mm
Front	24	610
Right Side (blower access)	24	610
Left Side (evaporator coil access)	24	610
Back	0	0
Top	48	1219

DIMENSIONS


UNIT

Size	CORNER WEIGHTS								CENTER OF GRAVITY			
	AA		BB		CC		DD		EE		FF	
	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	kg	in.	mm	in.	mm
24	96	44	107	49	117	53	105	48	21	533	21-1/2	546
36	104	47	116	53	126	57	114	52	21	533	21-1/2	546
48	124	56	134	61	147	67	135	61	25-1/4	641	21-1/2	546
60	127	58	138	63	151	68	139	63	25-1/4	641	21-1/2	546

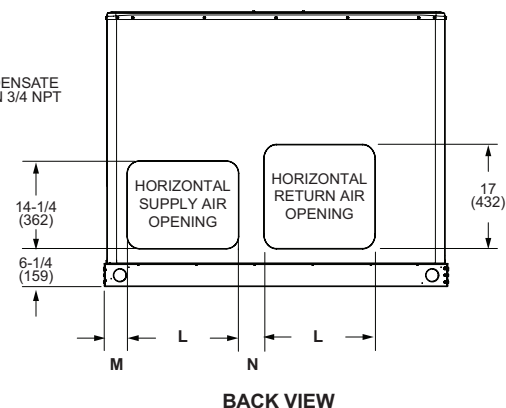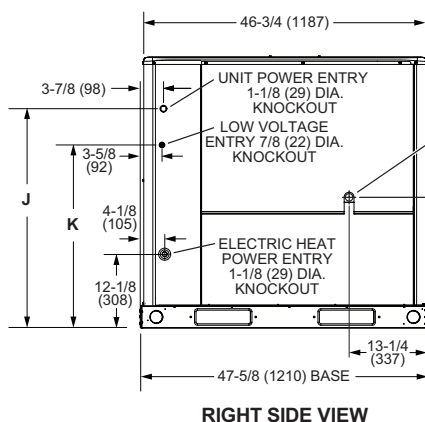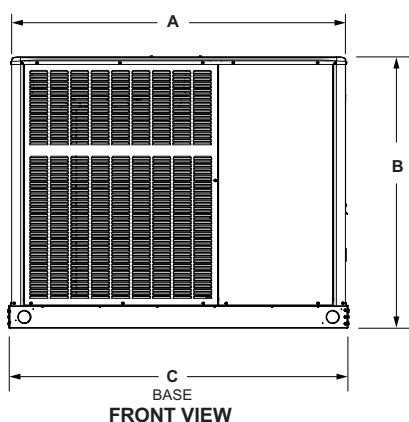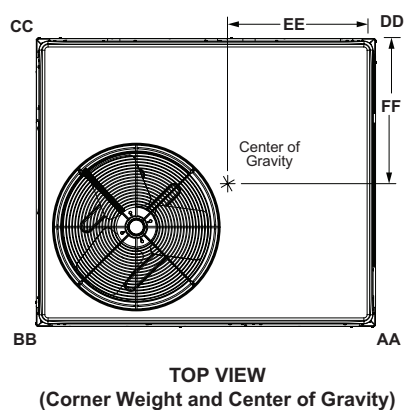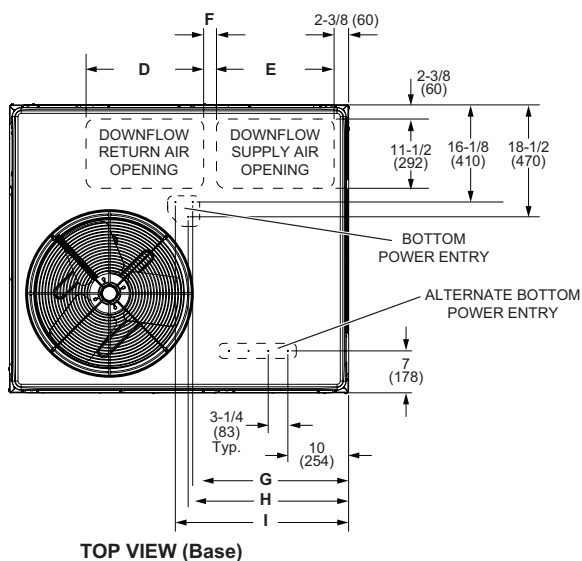


Size	A		B		C		D		E		F		G	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
24, 36	47-5/8	1210	40-7/8	1038	47-5/8	1210	16-3/4	425	14	356	2	51	20-1/4	514
48, 60	55-1/4	1403	44-7/8	1140	56-1/8	1426	19-1/2	495	19-1/2	495	2-1/8	54	25-7/8	657
Size	H		I		J		K		L		M		N	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
24, 36	21	533	23-1/4	591	32-1/4	819	26-1/4	667	13-1/2	343	3-1/8	79	5-7/8	149
48, 60	26-1/2	673	26-3/4	679	36-1/4	921	30-1/4	768	18-1/4	463	3-3/4	95	4-3/8	111

CLIP CURB

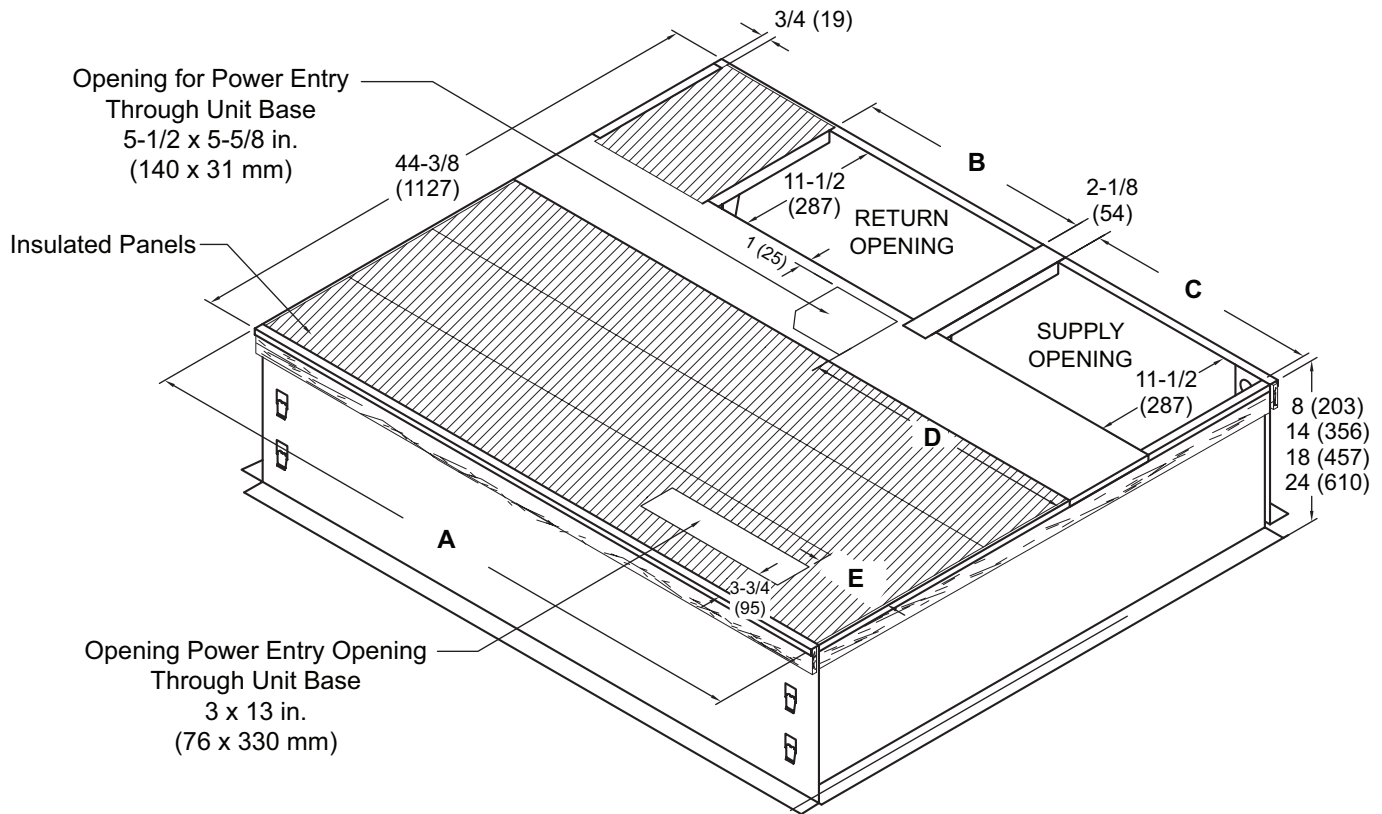


NOTE - Roof deck may be omitted within confines of curb.

TYPICAL FLASHING DETAIL FOR ROOF CURB


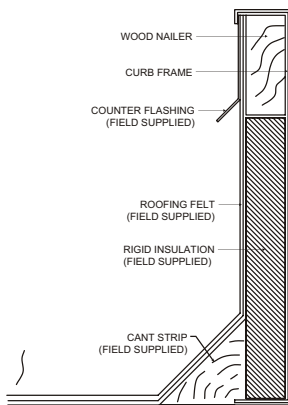


DETAIL ROOF CURB

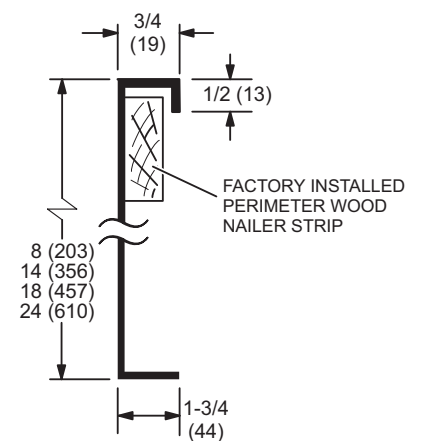


Usage	A		B		C		D		E	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
24, 36	44-3/8	1127	16-7/8	429	13-7/8	352	17-1/4	438	1-1/4	32
48, 60	52-7/8	1343	19-1/2	380	19-1/2	352	23-1/8	587	7	178

ADJUSTABLE PITCH ROOF WELDED CURB

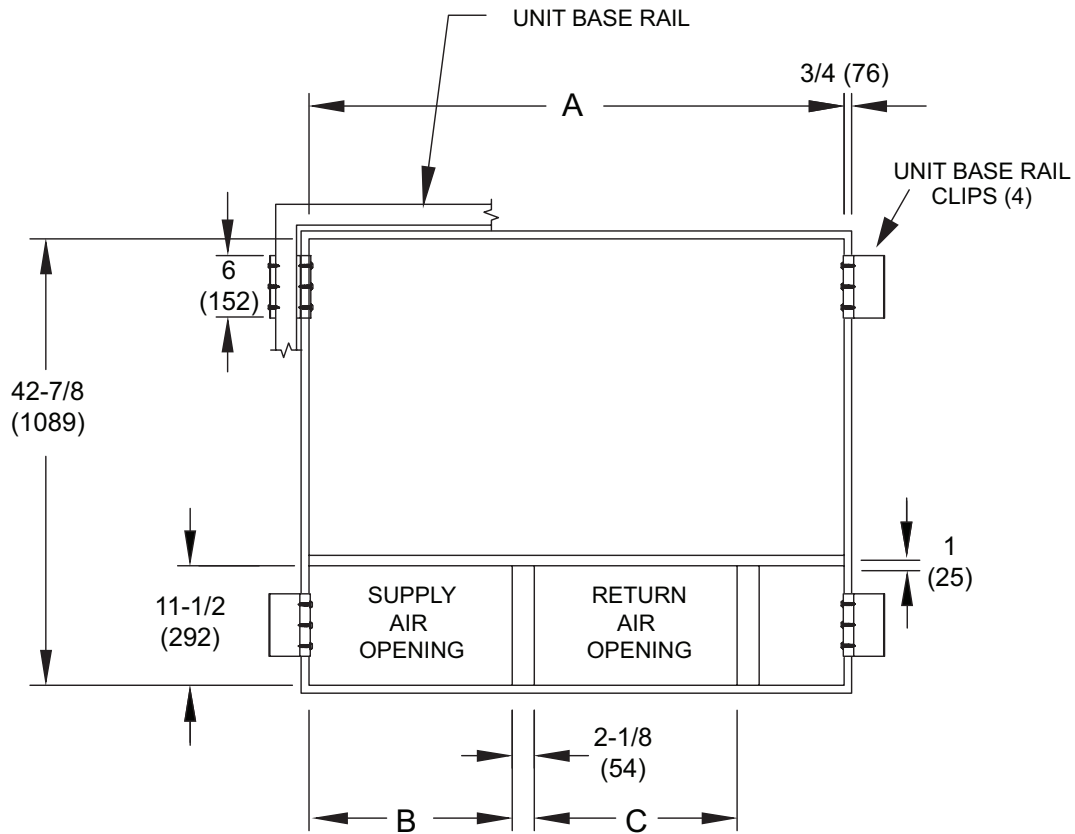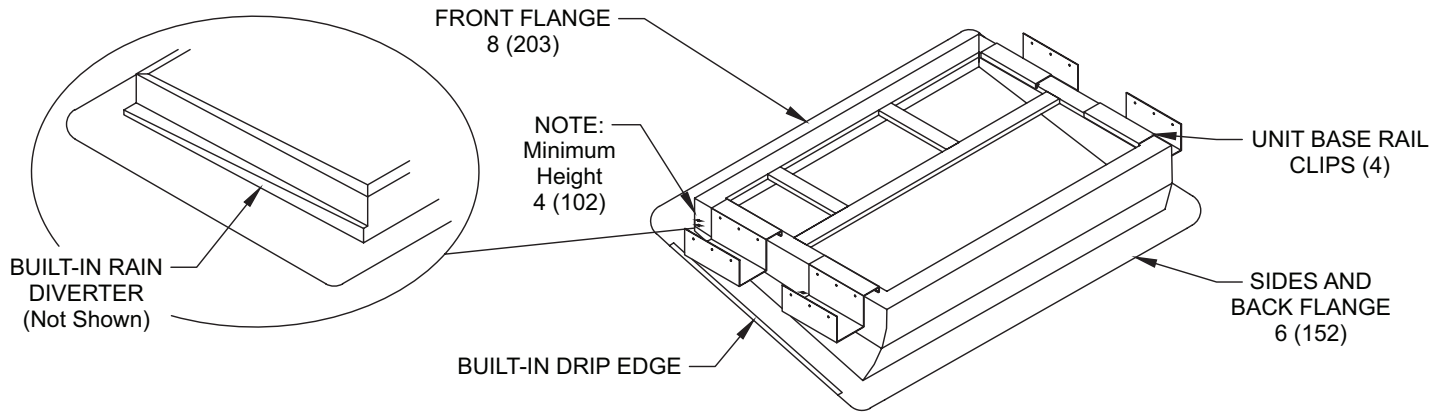


Usage	A		B		C	
	in.	mm	in.	mm	in.	mm
24, 36	42-7/8	1089	13-7/8	352	16-7/8	429
48, 60	51-3/8	1305	19-1/2	495	19-1/2	495

ADJUSTABLE PITCH ROOF CLIP CURB

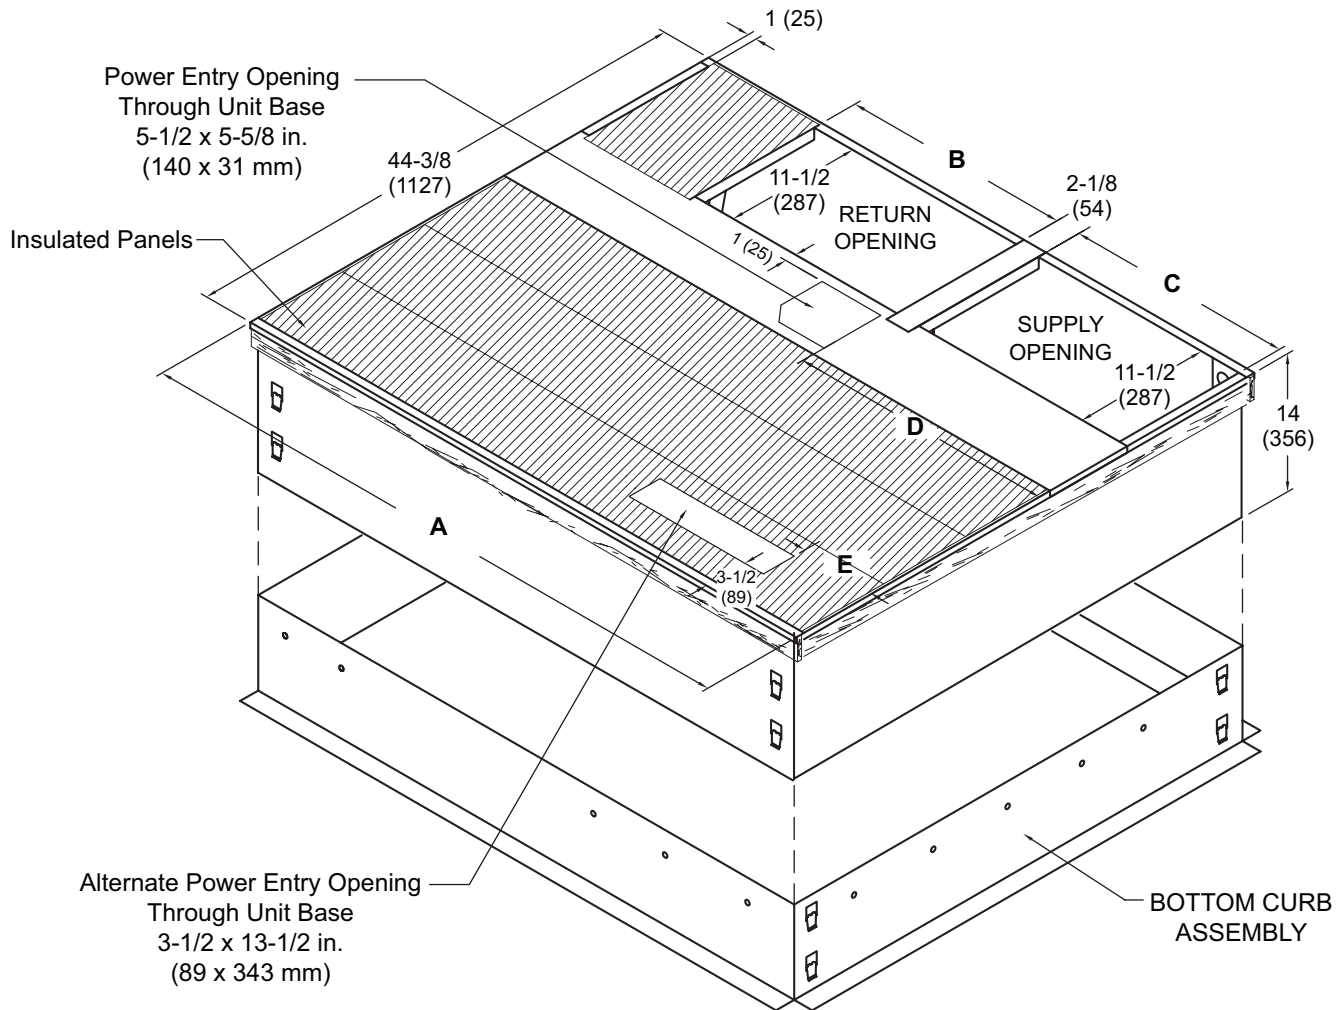


NOTE - Roof deck may be omitted within confines of curb.

TYPICAL FLASHING DETAIL FOR ROOF CURB

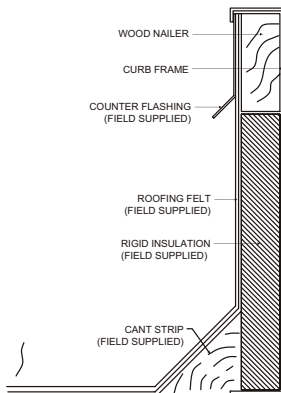

DETAIL ROOF CURB

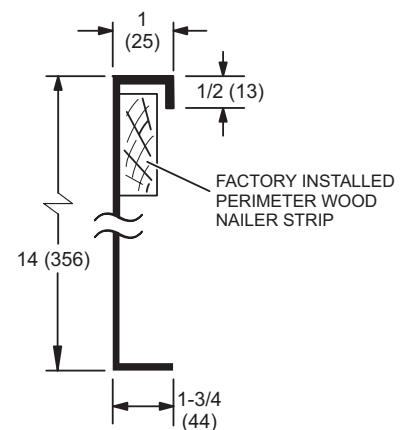

Usage	A		B		C		D		E	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
24, 36	44-3/8	1127	16-7/8	429	13-7/8	352	17-1/4	438	1-1/4	32
48, 60	52-7/8	1343	19-1/2	380	19-1/2	352	23-1/8	587	7	178

REVISIONS

Sections	Description of Change
Optional Accessories	Removed Hurricane Strapping Kits.



Visit us at www.Lennox.com

For the latest technical information, www.LennoxPros.com

Contact us at 1-800-9-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2025 Lennox Industries, Inc.