



# Compact 4L ERRP

## CONDENSATE REMOVAL PUMP

Our Compact 4L Economy Retail Refrigeration Pump is designed exclusively to fit underneath retail refrigeration cabinets allowing for the removal of defrost and contaminated water.



190L/h max. flow




35m max. head

### Key Features

- Lightweight & slim
- Low voltage at point of use
- 2-stage filter to prevent growth and spread of biofilm
- Plug & Play


### Suitability

- Refrigeration units; cold store cabinets
- **Perfect for...** Single & multiple refrigeration units

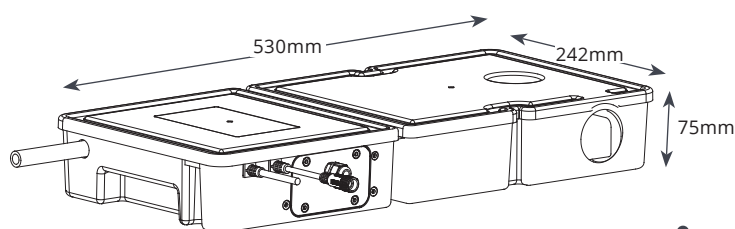

2.82  
kg

@ 230 VAC 50Hz	
Max. flow	190 L/h @ 0 head
Max. rec. head	35m
Tank capacity	4.2L
Sound level @ 1m	60 dB(A)
Power supply Input:	100~240V AC 50/60Hz
Rated	Non continuous
Class	II appliance
Max. ambient temp.	40°C / 104°F
Inlet/Outlet	40mm in, 10mm out
IP Protection	IPX4
Safety Switch	3A NC/NO
Thermal protection	✓
Flammable refrigerant compatibility	Designed to minimise spark risk
Equipment communication	Modbus RTU (option extra: FP3555)

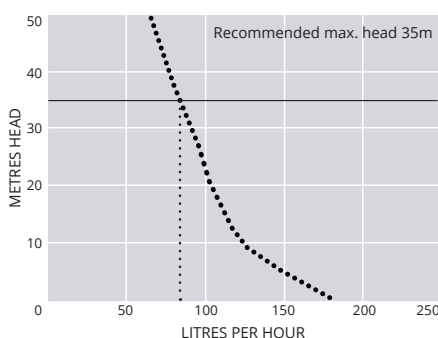

OPTIONS	
Side inlet	FP3550
Top inlet	FP3551

Download manual at [aspenpumps.com](http://aspenpumps.com)

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
Vinyl Tube Braided 3/8" (10 mm)	AX5101
Jallystrips	S010371



For more installation accessories take a look at our Aspen Xtra range

### IN THE BOX

Low Profile ERRP pump • 2m Plug & Play power cable • 11/2" BSP connector (for 40mm ID waste pipe) • Install manual