## **ZUOLOG INC**

## INSTALLATION INSTRUCTIONS

ONE PIECE





INEXPERIENCED INSTALLER MAY RESULT IN PERSONAL INJURY OR DEATH!

We reserves the right to change, update, modify, after, redesign this manualiproduct or its policies without prior notice! It is your responsibility to visit the website to download or contact customer service for the most updated version of the installation instructions.

INSTALLATION OF THIS PRODUCT BY AN

We shall not be liable for any injuries or property damages in connection with this product during installation or use of this product!

Silicone

2)

+ We are not responsible for providing any compliance certifications.

Level

We are not responsible to provide any type of certifications for this product.

ATTENTION!

Trouble shooting:

+ Limited warranty is void on any commercial installation. We are not responsible for local code compliance for this product. + Building and plumbing codes may vary from state-to-state in accordance to your location.



Safety Glass

Putty Knife

2 PEOPLE ARE REQUIRED TO LIFT AND DURING

ENTIRE INSTALLATION OF THIS PRODUCT


 Under no circumstances we shall not be liable for any and all incidental damages sustained in connection with this product Neither manufacture, nor distributor, nor retailer is responsible for water damage or flood caused due to use of this product. Under no circumstances We shall not be liable for any and all fees, cost of installation/re-installation/removal, subsequent damage or transportation in case of the product defect.

TOOLS REQUIRED FOR INSTALLATION


Socket extension



Tape Measure

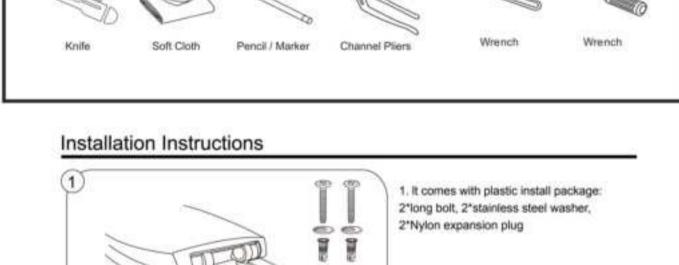



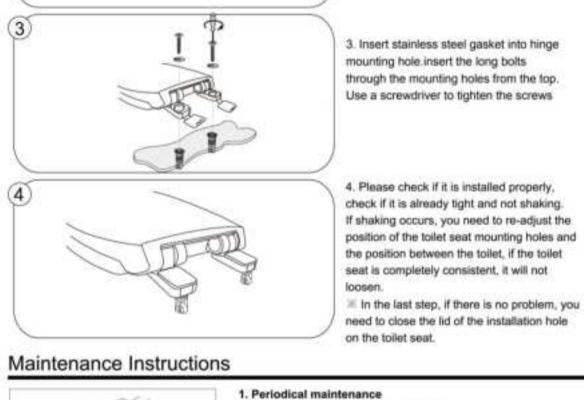

4. Please check if it is installed properly, check if it is already tight and not shaking. If shaking occurs, you need to re-adjust the position of the toilet seat mounting holes and the position between the toilet, if the toilet seat is completely consistent, it will not

2.Put the nylon pop plug into the toilet mounting hole.

Place the toilet seat onto the toilet bowl with the hinge base overlapping the bolt

holes in the bowl.

. Wash the toilet seat with soft wet cloth.

Use neutral detergent(e.g. soap powder) to wipe softly, then

 Do not use eradicator, abrasive powder, diluent, volatile oil, acid or alkali liquid detergent and nylon brush to clean the

Dry with soft dry cloth.

2. Removal of stains

product, to avoid damage.

dry with clean cloth.

Please read carefully the following maintenance manual in order to avoid component Keep the maintenance manual available for future maintenance or reference. PRECAUTIONS: Follow all safety precautions to avoid personal injury or property damage.


WAX RING

SEALANT



Care Instructions:

damage or injury to the installer.

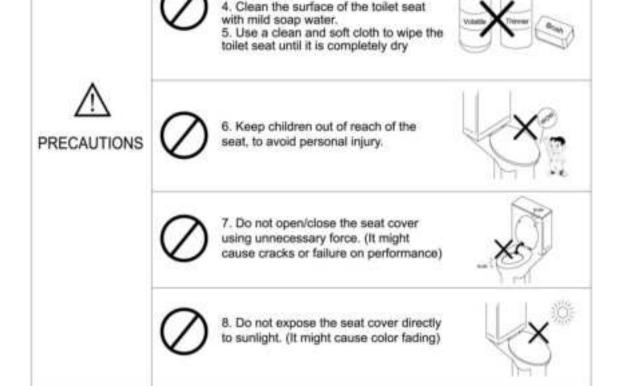

TOILET INSTALLATION

using unnecessary force. (It might cause cracks or failure on performance) 2. Heavy loading may damage the seat


cover and may cause a fall.

Do not use strong abrasive

to the surface

cleansers, which might cause damage

## CLOSET

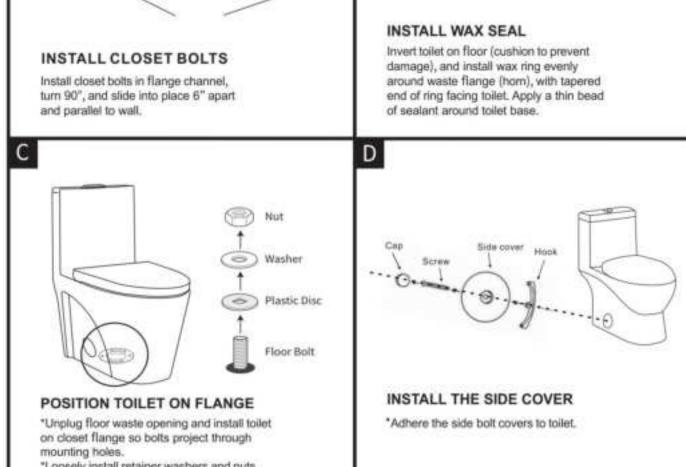

CLOSET FLANGE

\*Loosely install retainer washers and nuts. \*Position toilet squarely to wall and, with a rocking motion, press bowl down fully on wax ring and flange. Alternately tighten nuts until toilet is firmly seated on floor.