

Product Technical Sheet

Omnicare Ultra

Thermostatic Electric Shower

Product Codes

Omnicare Ultra 8.7kW	CINCULT08W
Omnicare Ultra 9.8kW	CINCULT09W

Installation

- Multiple pipe and cable entry points, a generous footprint, the Omnicare is designed with ease of replacement in mind
- The Omnicare connects to both analogue and digital waste pumps

Commissioning

- Simple 2 minute commissioning process

End User

- Large soft press start/stop button and low resistance control dial
- Power on illumination along with audible feedback allows ease of use for all users
- Tactile temperature dial with soft grey tones offers helpful visual contrast
- Safe-set™ allows the maximum temperature to be set internally whilst allowing full rotation of temperature dial
- Constantly regulating water temperature within +/- 1°C, (BEAB Care standard)
- Set the duration of the shower ranging from 5 minutes to 30 minutes
- 1.5m hose and large easy clean 5 spray pattern shower head, with removable faceplate (no tools required)



SAFETY CRITICAL
TRITON ACCESSORY



TRITON | THE UK'S
SHOWER COMPANY

www.tritonshowers/specifiers

See you first thing Britain

Product Technical Sheet

Omnicare Ultra

Thermostatic Electric Shower

Shower

Temperature stability	Thermostatic $\pm 1^{\circ}\text{C}$ with Tri-Therm™ (1)
Power ratings	8.7kW & 9.8kW (at 240V)
Finish	White
Adjustable max temperature	41°C, BEAB Care or Max (43°C) with Safe-Set™ (2)
Timed auto shutdown	5, 10, 20 or 30 mins (default 20 mins)
Start/stop type	Electronic soft press button
Controls	Start/stop button & temperature control dial
Audible feedback	Start/stop and timer end confirmation
Visual indicators	Power-on/timer/low flow illumination
Water connection	1/2" BSP male thread for 15mm compression fitting (swivel inlet (up/down))
Terminal block	16mm ² max cable
Waste pump connection(s)	Analogue
Water supply	Mains cold water
Water pressure min	1 bar (running at 8 l/min) (3)
Water pressure max	10 bar (static)
Removable pipe/cable trims	Top & bottom
Other installation aid(s)	Wall mounting template

Diagram Key:



Water Entry Points




Cable Entry Points

Dimensions:

H: 400mm

W: 213mm

D: 117mm

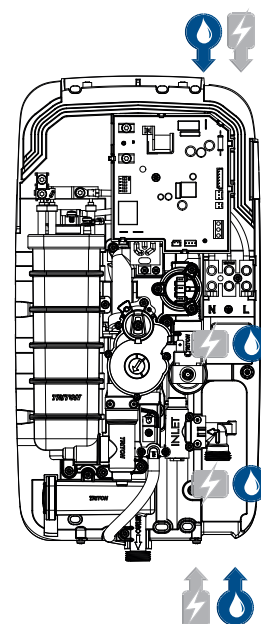

Riser Rail Kit

Standard version

Length	680mm
Diameter	25mm
Material	Stainless Steel
Finish	Polished
Hose	1.5m Anti-twist Chrome



Remote Start / Stop
CSGPRSS



1.5m Anti-twist Hose - Chrome
REHOSE150C



Inclusive Showerhead
(5 Spray Pattern)
TSHECAREWHT

IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Omnicare unit will aid optimum performance and keep the unit within the allocated guarantee period

Contact our specification team

Call: 02476 324 776 | Email: specification@tritonshowers.co.uk | Web: www.tritonshowers/specifiers

(1) Tri-Therm™ constantly regulating flow, blending water and adjusting the power to precisely control the showering temperature.

(2) Safe-Set™ tamper proof maximum temperature setting whilst allowing full rotation of the temperature dial.

(3) The shower will operate down to 0.5 bar at reduced flow rates.