Flydigi Direwolf 3/3Pro Game Controller

User Manual




Scan QR code to read the user manual




Connect to Computer

Wireless dongle connection

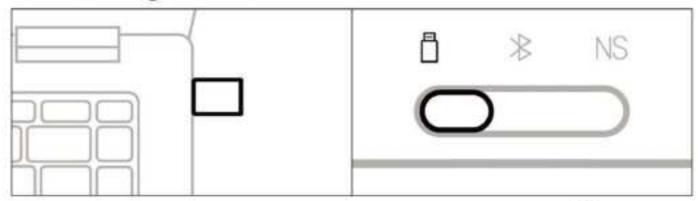

- 1 Plug the dongle into the computer's USB port
- 2 Switch the mode gear to

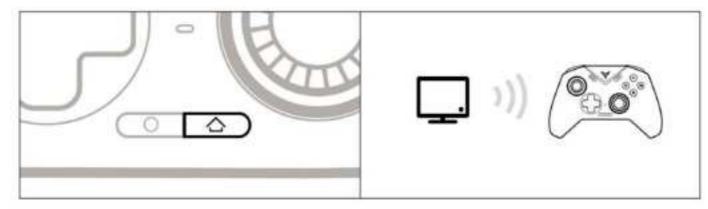

3 press the button, the controller will be connected automatically, and the indicator light keep in white

4 The next time you use it, press the button once, and the controller will be connected automatically

Wired connection

Connect the computer and the controller through the USB cable, and the indicator light keep in white, which indicate the connection is successful

BT connection

Switch the mode gear to \gg , press the \bigtriangleup button to wake up the controller, and connect Xbox Wireless Controller in the computer's BT settings

Connect to Switch



- 1 Click the controller icon on the Switch homepage to enter [Change grip/order]
- 2 Switch the mode gear to NS




- 3 Press the 🛆 button, the controller will be connected automatically, and the indicator light keeps in blue
- 4 The next time you use it, press the 🛆 button once and the controller will automatically connect

In Switch mode, the key and key-value mapping relationship is as follows

	0	\triangle	START	SELECT	Y	Х	В	Α
Switch	Screenshot	Home	+		Х	Υ	А	В

Connect to Android/iOS device



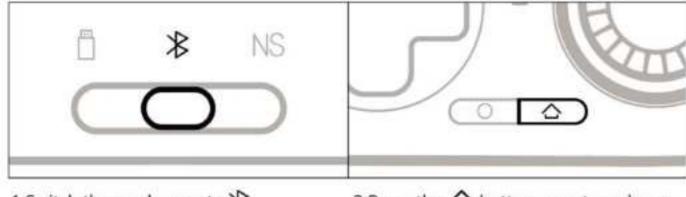

- 1 Switch the mode gear to 🔀
- 2 Press the button once to wake up the controller



- 3 Turn on the device's Bluetooth, connect to Xbox Wireless Controller, and the controller indicator light keeps in white
- 4 The next time you use it, press the button once and the controller will automatically connect

More Customizable Settings in the Flydigi Space Station

Visit our official website www.flydigi.com to download "Flydigi Space Station". You can customize buttons, macros, motion sensing, joystick and other functions.

Flydigi Space Station **Button mapping** III Macro definition You can set up Tubo, record Button can be mapped as the controller button, mouse joystick and button input, simplify tedious operation and keyboard button Adjustable Joystick Gyro mapping Settings Set the dead zone and Gyro can be mapped to a sensitivity curve joystick/mouse, making shooting

Keybinding Turbo/ Marco

games more accurate

Direwolf 3/3Pro, turbo and marco functions can be set through key combinitions.

Please scan the QR code on the homepage for specific setup methods.

Basic operations

Power on: Press the button once

Power off: switch back gear; The controller will automatically turn off if inactive

for 15 minutes.

Low Power: The indicator light flashes red

Charging when the power is off: the indicator light keeps in red Fully charged when powered off: the indicator light keeps in green

Specification

mode Platforms		Indicator Light	Connection Type	System Requirements	
	PC	Hold O+X to switch to XInput mode, the indicator light	Dongle/ Wired	Win 7 and Above	
*	PC/Android /iOS	turning white Hold O +A to switch to Dinput mode, the indicator light turning blue	ВТ	Win 7 and Above Android 10 and Above iOS 14 and Above	
NS	Switch	Blue	BT/Wired	Switch	

Note: Most games on PC support XInput mode,

but some older games may only support Dinput mode.

Wireless RF: BT 5.0

Service distance: less than 10 meters


Battery information: rechargeable lithium-ion battery, battery capacity 800mAh,


charging time 2 hours, charging voltage 5V, charging current 800mA

Operating current: less than 40mA when in use, less than 10µA in standby

Temperature range: use and storage at -10 °C ~ 50 °C

Appearance

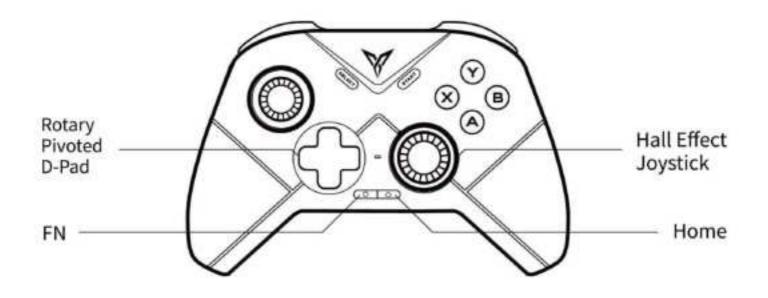

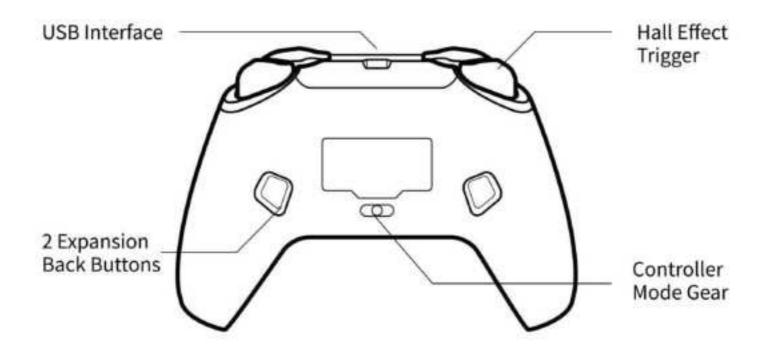

Q & A

Q: Any delays or disconnections occurs when the dongle is connected to the computer
A: The issue is generally caused by signal interference. It is recommended to add a USB extension cable between the dongle and the computer. For more details, please consult customer service

Q: How to upgrade the controller firmware?

A: Install the Flydigi Space Station on computer, or install the Flydigi Game Hall on mobile phone, and upgrade the firmware according to the software boot

Q: Any abnormalities in the joystick/trigger/motion sensing?

A: Install the Flydigi Space Station on computer, enter the test page, adjust the controller under the guidance

The name and content of harmful substances in the product

	Toxic or Hazardous Substances and Elements						
Part Name	Pb	Hg	Cd	Cr	PBB	PBDE	
PCB Borad	0	0	0	0	0	0	
Shell	0	0	0	0	0	0	
Packaging	0	0	0	0	0	0	
Wire	0	0	0	0	0	0	
Polymer battery	0	0	0	0	0	0	
Silicone	0	0	0	0	0	0	
Small structural parts such as metal and tape	0	0	0	0	0	0	

This form has been prepared in accordance with the provisions of SJ/T 11364

0	Indicates that the content of the hazardous substance in all homogeneous materials of this part is within the limit specified in GB/T 26572-2011 Require the following
	within the limit specified in GB/T 26572-2011 Require the following

Indicates that the content of the hazardous substance in at least one homogeneous material of the component exceeds the provisions of GB/T 26572-2011 The limited requirements

FCC Statement

FCC StatementThis device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1)This device may not cause harmful interference.

(2)This device must accept any interference received, including interference that may cause undesired operation.

 Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequence energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver.
- Connect the equipment into an autlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement, This equipment should be installed and operated with a minumum distance of 20 cm between the radiator and your body.