



# LE

Wireless mortise lock  
LEB – mobile enabled  
LE – standard



## Overview

The Schlage® LE wireless mortise lock is designed to affordably extend electronic access control deeper into the building beyond traditional perimeter and high security openings. And now Schlage offers the LE wireless lock with a mobile enabled option that gives users the security and convenience of using a smart device to gain access<sup>1</sup>.

LE wireless locks simplify installation by combining the lock, credential reader, door position sensor, and request-to-exit switch all in one unit. Installation requires only minor modifications to existing mechanical mortise prep with no wires to run to the lock or additional components necessary.

LE wireless locks can be set up and configured wirelessly with a connected smartphone or tablet - no proprietary device needed. With the ENGAGE™ cloud-based web and mobile apps, it's easy to configure lock settings, add users, and view audits and alerts from virtually anywhere. And using the built-in Wi-Fi® allows for automated daily updates to lock configuration and user access rights.

The open architecture design allows for advanced capabilities including networked real-time communication. Using the ENGAGE Gateway and an integrated solution from one of our physical access control software (PACS) providers,<sup>2</sup> Schlage offers organizations the freedom to use the solution of their choice.

The LE is ideal for office and suite entries, conference rooms, common area doors, resident units, and sensitive storage areas with mortise door prep. LE suites with most Schlage L Series decorative levers, keyways, and finishes, providing attractive options to meet the requirements of nearly any environment.

## Features and benefits

- Ready for the future with the ability to read Bluetooth (LEB) and NFC (LE, LEB) mobile credentials
- Available with indicator, interior push button, or deadbolt for storeroom, privacy, apartment, and office applications
- Wireless configuration from connected smartphones and tablets
- Built-in Wi-Fi® enables automated daily updates sent directly from host software
- Networked real-time communication available with the ENGAGE Gateway and PACS provider solutions
- Designed to be easy to install, connect, manage, and use
- Innovative integrated door position switch requires no additional door prep<sup>3</sup>
- Weather-resistant design for use on perimeter doors
- Suites with Schlage mechanical L Series with 31 levers and two knobs
- Up to 2 years of battery life

<sup>1</sup> Use of mobile credential on the LEB mobile enabled lock is dependent on availability of compatible mobile credential

<sup>2</sup> Integration with LEB mobile enabled wireless locks required for operation. For information on PACS providers and their capabilities visit [us.allegion.com/alliances](http://us.allegion.com/alliances).


<sup>3</sup> Door position switch requires additional prep for mortise deadbolt (MD) applications

## CYBERSECURITY


Learn about Allegion's commitment

## Exterior of the lock

### Addison

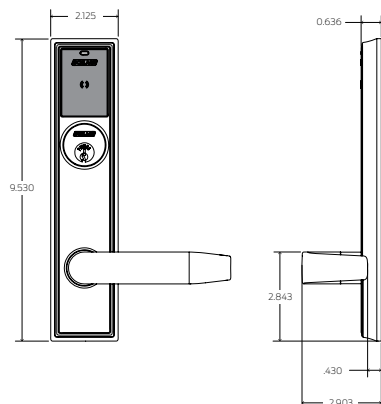


### Greenwich

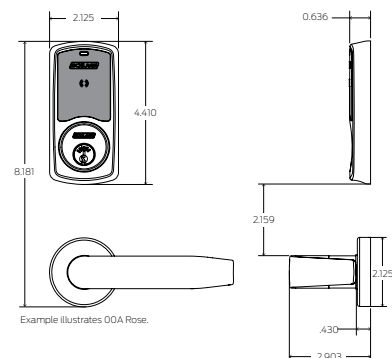


## Interior of the lock

### Addison

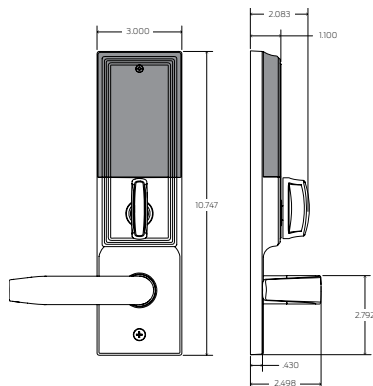

### Greenwich

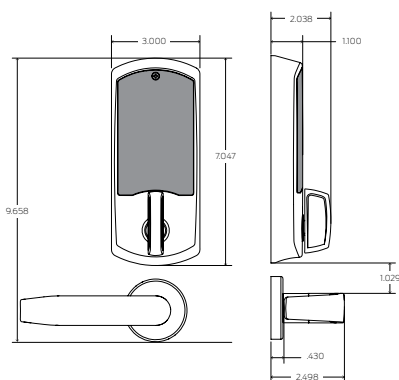

Schlage · LE

## LE wireless lock specifications

|                                           |                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Users                                     | Up to 5,000 <sup>1</sup>                                                                                                                                                                                                                                                                                                   |
| Audits                                    | Up to 2,000 <sup>2</sup>                                                                                                                                                                                                                                                                                                   |
| Credential verification time <sup>3</sup> | Smart and proximity: ≤ 1 second<br>Mobile: mobile device dependent                                                                                                                                                                                                                                                         |
| Visual communications                     | Exterior LED (red, amber, green); Interior LED (red, green)                                                                                                                                                                                                                                                                |
| Audible communications                    | Audible indicator (field configurable)                                                                                                                                                                                                                                                                                     |
| Communication standards                   | <ul style="list-style-type: none"> <li>2.4 GHz Wi-Fi® (IEEE 802.11b/g/n)</li> <li>WPA2, WPA, WEP, 802.1x</li> <li>Bluetooth® low energy (version 4.2)</li> <li>Transport Layer Security (TLS) version 1.2</li> <li>Advanced Encryption Standard (AES), 256-bit</li> </ul>                                                  |
| Gateway communication range               | Up to 30' in typical building environments. A detailed site survey is recommended using the ENGAGE Test Kit (TKE). Reference ENGAGE™ Gateway Data Sheet for additional detail.                                                                                                                                             |
| Wake-Up on Radio                          | Responds to command from host in less than 5 seconds when linked to ENGAGE Gateway (requires PACS provider system)                                                                                                                                                                                                         |
| Data rate:                                | 54 Mbps via Wi-Fi                                                                                                                                                                                                                                                                                                          |
| Connectivity options                      | <ul style="list-style-type: none"> <li>Mobile device (send updates at the lock)</li> <li>Wi-Fi access point (automatic daily updates<sup>7</sup>)</li> <li>No-Tour<sup>8</sup></li> <li>ENGAGE Gateway (real-time communication) <ul style="list-style-type: none"> <li>RS-485 to ACP or IP to host</li> </ul> </li> </ul> |
| Battery life <sup>4</sup>                 | Uses 4 AA batteries<br>Up to 2 years                                                                                                                                                                                                                                                                                       |
| Operating temperature                     | Exterior: -31° to 151°F (-35° to 66°C)<br>Interior: 32° to 120°F (0° to 49°C) (battery)                                                                                                                                                                                                                                    |
| Operating humidity                        | 0 - 100% non-condensing                                                                                                                                                                                                                                                                                                    |
| Certifications                            | ANSI/BHMA A156.25-2013 (Indoor/Outdoor), ANSI/BHMA A156.13-2012, Series 1000, Grade 1, UL 294, ULC S319, UL10C (3-hour fire rated), FCC Part 15, IC RSS-210, ADA, ICC ANSI A117.1, FL3905, FL12400 and FL14482                                                                                                             |

### Chassis/functions

- MS mortise with indicator:
  - Storeroom
- MB mortise with push button:
  - Privacy
  - Office
  - Apartment
- MD mortise deadbolt:
  - Privacy
  - Apartment

Note: All functions available for LEB and LE Series

### Available status signals

- Request-to-exit
- Door position
- Interior cover tamper<sup>5</sup>
- Battery status
- Lock/unlock status<sup>6</sup>
- Communication status<sup>5</sup>
- Deadbolt position status (MD only)<sup>5</sup>
- Interior pushbutton status (MB only)<sup>5</sup>

### Flexible solutions

LE wireless locks offer connectivity options to fit any size budget or business.

- 1 Mobile
- 2 Wi-Fi
- 3 Real-time with ENGAGE Gateway
- 4 No-Tour<sup>8</sup>

## ENGAGE™ cloud-based web and mobile applications



The ENGAGE cloud-based web and mobile applications deliver simple and convenient site set-up with basic access management for users and locks. Please refer to the ENGAGE data sheet for additional detail.



- 1 Maximum database storage capacity of lock. Can vary by access control software database capacity.
- 2 Maximum audit storage capacity of lock. Can vary by access control software audit storage capacity.
- 3 Response time does not include latency time of host when linked with an ENGAGE Gateway or when using No-Tour.
- 4 Assuming indoor application, default settings, 80 actuations, interior LED disabled and one Wi-Fi update per day.

- 5 Consult your access control software provider for specific scope of support.
- 6 Software indicates lock/unlock status based on sequence of events.
- 7 Daily update will occur within 24 hours as scheduled by the host.
- 8 With MT20W and smart credential or mobile credential (consult your access control software provider for specific support)

## Mechanical specifications

|                                     |                                                                                                                                                                                                                                                            |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Chassis                             | MS mortise with LED indicator; MB mortise with push button and LED; MD mortise with deadbolt and LED                                                                                                                                                       |
| Handing                             | Handed to order, field reversible                                                                                                                                                                                                                          |
| ANSI standard<br>(Meets or exceeds) | ANSI/BHMA A156.25-2013 (Indoor/Outdoor)<br>ANSI/BHMA A156.13-2012, Series 1000, Grade 1<br>With interchangeable core cylinders: Grade 2 Security                                                                                                           |
| Door thickness                      | Standard: 1 3/4" (44 mm) Optional: 1 3/4" (44 mm) to 2 1/4" (57 mm) optional (SFIC limited to 2" max)                                                                                                                                                      |
| Backset                             | Standard: 2 3/4" (70mm)                                                                                                                                                                                                                                    |
| Latch bolt                          | Standard: 3/4" (19 mm) throw stainless steel latch bolt with anti-friction tongue                                                                                                                                                                          |
| Deadbolt                            | Standard: 1" (25 mm) throw stainless steel deadbolt                                                                                                                                                                                                        |
| Levers                              | Forged brass or bronze                                                                                                                                                                                                                                     |
| Strike                              | Standard: ANSI 1 1/4" x 4 7/8" (32 mm x 124 mm) x 1 3/16" (30 mm) curved lip strike with dust box<br>Optional: Additional strike lip lengths and ANSI strike box available                                                                                 |
| Cylinder<br>and keys                | Standard: Patented Schlage 6-pin Everest 29 S123 keyway. Additional keying options available: Conventional and interchangeable cores, master keying, and grand master keying. Compatible with competitor cylinders and cams that support the L9000 Series. |
| Armored front                       | 1 1/4" x 8" x 7/32" (32mm x 203 mm x 6 mm) only                                                                                                                                                                                                            |

### Compatible cylinders

|                   | Mortise cylinder | Full size interchangeable core - FSIC | Small format interchangeable core - SFIC |
|-------------------|------------------|---------------------------------------|------------------------------------------|
| With cylinder     | P, P6, Z         | M, R                                  | G7                                       |
| Less cylinder     | L                | J*                                    | B*                                       |
| Construction core | —                | T                                     | H                                        |
| Disposable core   | —                | —                                     | BDC                                      |

\*Sold with cylinder housing - less core.

Note: Available in formats to support residential customers - 5-pin cylinder with C keyways. Need to specify keyway and pinning needs. Standard if not specified - P, 6-pin Everest 29 with S123 keyway.

## LE to LEB Retrofit Kits

Retrofit kits are available allowing the upgrade of existing LE locks to the LEB model, enabling them to read BLE mobile credentials.

- Kit includes: Complete interior escutcheon with PCBA\*

\* Kit requires reuse of exterior of lock, lock chassis, existing levers/spring cages, battery cover, mounting screws and interior mounting plate.

## Multi-technology reader specifications

|                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Credential technologies                     | Proximity (125 kHz), Smart (13.56 MHz), Bluetooth Low Energy (BLE) (2.4 GHz), and Near Field Communication (NFC)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Standards                                   | ISO standard 15693 and ISO 14443                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Maximum read range                          | Proximity: up to 1.25"<br>Smart: up to .75"<br>Bluetooth Low Energy: up to 15'<br>NFC: mobile device dependent                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Proximity credential compatibility          | <b>Compatibility:</b> Schlage <sup>®</sup> ™, ISONAS <sup>™</sup> , HID <sup>®</sup> , GE/CASI ProxLite <sup>®</sup> , AWID <sup>®</sup> and LenelProx <sup>®</sup><br><b>Schlage credential style formats:</b> Clamshell, ISO card, ISO card with magnetic stripe, keyfob, thin keyfob, PVC adhesive disk                                                                                                                                                                                                                                                                                                                |
| Smart credential compatibility <sup>1</sup> | <b>Secure sector compatibility:</b> Schlag MIFARE Classic <sup>®</sup> , Schlage MIFARE Plus <sup>®</sup> , Schlage MIFARE <sup>®</sup> DESFire <sup>®</sup> EV1 and EV2 with PACSA<br><b>CSN only compatibility:</b> DESFire, HID iClass <sup>®</sup> , Inside Contactless Pico Tag <sup>®</sup> , MIFARE, MIFARE DESFire EV1 and EV2 <sup>3</sup> , ST Microelectronics <sup>®</sup> , Texas Instruments Tag-It <sup>®</sup> , Phillips I-Code <sup>®</sup><br><b>Schlage credential style formats:</b> Clamshell, ISO card, ISO card with magnetic stripe, keyfob, thin keyfob, wearable wristband, PVC adhesive patch |
| Mobile credential compatibility             | Schlage Mobile Access Credential with Bluetooth <sup>2</sup> , Integrated PACS mobile credential with Bluetooth <sup>3</sup> , NFC-enabled mobile devices <sup>4</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

<sup>1</sup> No-Tour applications require a 1K Byte Schlage smart credential

<sup>2</sup> Supported through ENGAGE

<sup>3</sup> Dependent on PACS provider capabilities. Visit [us.allegion.com/alliances](https://us.allegion.com/alliances) for more information

<sup>4</sup> See minimum supported guidelines

<sup>5</sup> Specify CE-5901-0402 for ISONAS credential parity

## Ordering information

LEB- MS - GRW - P6 - 07 - 626 - 00A - 17 - 612 - 00A - LH - 10-136- 134 - S123

| Series | Chassis/<br>function | Style | Cylinder<br>type | Outside        |        |                    | Inside (optional) |        |                    | Handling | Strike lip | Door<br>thickness | Key system | Additional<br>options |
|--------|----------------------|-------|------------------|----------------|--------|--------------------|-------------------|--------|--------------------|----------|------------|-------------------|------------|-----------------------|
|        |                      |       |                  | Lever<br>style | Finish | Rose<br>(GRW only) | Lever<br>style    | Finish | Rose<br>(GRW only) |          |            |                   |            |                       |
| 1      | 2                    | 3     | 4                | 5              | 6      | 7                  | 8                 | 9      | 10                 | 11       | 12         | 13                | 14         | 15                    |

Selections correspond with the numbers above

Standards options are indicated in bold. See price book for specific configuration options.

### 1 Series / 2 Chassis/Function

|       |                                                  |
|-------|--------------------------------------------------|
| LEBMS | Mobile enabled mortise with indicator only       |
| LEBMB | Mobile enabled mortise with interior push button |
| LEBMD | Mobile enabled mortise with deadbolt             |
| LEMS  | Mortise with indicator only                      |
| LEMB  | Mortise with interior push button                |
| LEMD  | Mortise with deadbolt                            |

Prior to ordering LEB mobile enabled wireless locks please confirm integration status of lock with preferred PACS provider. Integration is required for lock operation within a PACS solution. For information on PACS providers and their capabilities visit [us.allegion.com/alliances](http://us.allegion.com/alliances).

### 3 Style

|     |                       |
|-----|-----------------------|
| GRW | Greenwich (sectional) |
| ADD | Addison (escutcheon)  |

### 4 Cylinder type

|    |                                     |
|----|-------------------------------------|
| P6 | Schlage 6-pin Conventional cylinder |
|----|-------------------------------------|

See price book for other mortise cylinder, SFIC, FSIC and Less Cylinder options.

### 5/8 Lever style

Available in 31 levers and two knob styles including most M Series decorative lever options. Examples:

|     |                     |
|-----|---------------------|
| 03  | Suites with Tubular |
| 06  | Suites with Rhodes  |
| 07  | Suites with Athens  |
| 17  | Suites with Sparta  |
| LAT | Latitude            |

### 6/9 Finish

|       |                            |
|-------|----------------------------|
| 626   | Satin chrome               |
| 605   | Bright brass               |
| 606   | Satin brass                |
| 612   | Satin bronze               |
| 619   | Satin nickel               |
| 622   | Matte black                |
| 625   | Bright chrome              |
| 643e  | Aged bronze                |
| 626AM | Satin chrome antimicrobial |

### 7/10 Rose (GRW style only)

|     |                                                                     |
|-----|---------------------------------------------------------------------|
| 00A | 2 1/8" (54 mm) diameter                                             |
| 00B | 2 9/16" (65 mm) diameter                                            |
| 00C | 2 5/8" (66 mm) diameter with bevel<br>(not available in 612 finish) |

MER and AVA decorative rose options are also available, but only with MER and ACC lever styles. Inside rose will default to outside unless specified.

### 11 Handling

|           |                    |
|-----------|--------------------|
| <b>RH</b> | <b>Right hand</b>  |
| LH        | Left hand          |
| RHR       | Right hand reverse |
| LHR       | Left hand reverse  |

Defaulted to Right Hand, if not specified. The chassis can be changed in the field, with some exceptions. See pricebook for additional details.

### 12 Strike plate/lip length

|               |                                       |
|---------------|---------------------------------------|
| <b>10-136</b> | <b>1 3/16" lip length (MS and MB)</b> |
| <b>10-072</b> | <b>1 3/16" lip length (MD)</b>        |

Additional lip length options 7/8" to 1 3/4". See price book for details.

### 13 Door thickness

|            |                       |
|------------|-----------------------|
| <b>134</b> | <b>1 3/4" (44 mm)</b> |
|------------|-----------------------|

Optional: 1 3/4" (44 mm) to 2 1/4" (57 mm). 2" maximum door thickness on SFIC cylinders. See price book for additional details.

### 14 Keying type

|             |                   |
|-------------|-------------------|
| <b>S123</b> | <b>Everest 29</b> |
|-------------|-------------------|

See price book for other available keyway options including restricted keyways in Primus XP high security cylinders and master keying.

### 15 Additional options

## Finishes

#### Warm tone finishes



605  
Bright brass



606  
Satin brass



612  
Satin bronze



643e  
Aged bronze

#### Cool tone finishes



619  
Satin nickel



622  
Matte black



625  
Bright chrome



626  
Satin chrome



626AM  
Satin chrome with  
antimicrobial

Allegion, the Allegion logo, ENGAGE technology, the ENGAGE technology logo, Schlage and the Schlage logo are trademarks of Allegion plc, its subsidiaries and/or affiliates in the United States and other countries. All other trademarks are the property of their respective owners.

## About Allegion

Allegion (NYSE: ALLE) is a global pioneer in safety and security, with leading brands like CISA®, Interflex®, LCN®, Schlage®, SimonsVoss® and Von Duprin®. Focusing on security around the door and adjacent areas, Allegion produces a range of solutions for homes, businesses, schools and other institutions. Allegion is a \$2 billion company, with products sold in almost 130 countries. For more, visit [www.allegion.com](http://www.allegion.com).

KRYPTONITE ■ LCN ■ **SCHLAGE** ■ STEELCRAFT ■ VON DUPRIN



© 2021 Allegion  
011389, Rev. 03/21  
[www.allegion.com/us](http://www.allegion.com/us)