



LED Floodlight

- 10/20/30/50W Genuine replacement for Halogen Floodlights
- 70/100/150/200W Genuine replacement for Metal Halide Floodlights
- Marine Grade Aluminium body
- Fully encapsulated IP65 TUV certified driver
- PIR Over-ride function
- Average 8M detection range for PIR Floods
- Separately tested IP65 PIR

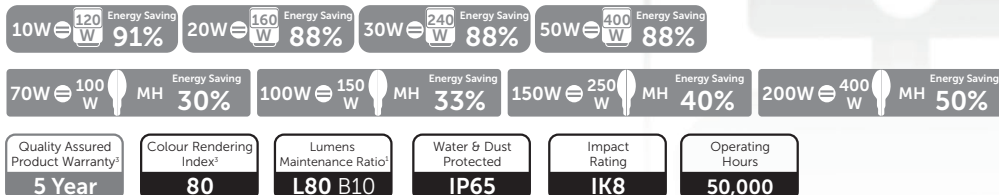

Technical Specification	
Construction	Die Cast LM6 Marine Grade Aluminium body, Stainless Steel screws and fixings
Driver	BELL
LED Chip	Phillips
Input Voltage	240V
Power Factor	> 0.9
Operating Temp	-20°C - +25°C (Outdoor use only)
Standard	CE & UKCA





5 Year Silver Warranty

Code	W	Description	Lm	Temp	Lm/W	Weight	Windage	WxHxD (mm)
10980	10	LED Floodlight	1200	4000K	120	0.3Kg	0.009M ²	112x134x31
10981	20	LED Floodlight	2400	4000K	120	0.4Kg	0.010M ²	120x142x33
10982	30	LED Floodlight	3600	4000K	120	0.5Kg	0.014M ²	136x158x34
10983	50	LED Floodlight	6000	4000K	120	0.8Kg	0.022M ²	172x200x44
10984	70	LED Floodlight	8400	4000K	120	1.1Kg	0.043M ²	229x259x48
10990	100	LED Floodlight	12000	4000K	120	3.1Kg	0.062M ²	276x318x60
10991	150	LED Floodlight	18000	4000K	120	3.8Kg	0.080M ²	300x357x60
10992	200	LED Floodlight	24000	4000K	120	5.0Kg	0.112M ²	355x410x60
10985	10	PIR LED Floodlight	1200	4000K	120	0.4Kg	0.009M ²	112x176x68
10986	20	PIR LED Floodlight	2400	4000K	120	0.5Kg	0.010M ²	120x185x68
10987	30	PIR LED Floodlight	3600	4000K	120	0.6Kg	0.014M ²	137x200x72
10988	50	PIR LED Floodlight	6000	4000K	120	1.0Kg	0.022M ²	172x239x72
10989	70	PIR LED Floodlight	8400	4000K	120	1.2Kg	0.043M ²	229x300x72
10995	50	Asymmetric LED Floodlight	6000	4000K	120	0.8Kg	0.044M ²	194x231x48
10996	70	Asymmetric LED Floodlight	8400	4000K	120	1.1Kg	0.074M ²	235x315x60
10977	100	Asymmetric LED Floodlight	11000	4000K	110	3.2Kg	0.062M ²	277x315x60
10978	150	Asymmetric LED Floodlight	16500	4000K	110	3.8Kg	0.080M ²	302x351x60
10979	200	Asymmetric LED Floodlight	22000	4000K	110	5.0Kg	0.112M ²	352x408x60