



THE ASSORTMENT AT A GLANCE

LEDVANCE LED LUMINAIRES

AUGUST 2018



LEDVANCE.COM



LEDVANCE

LEDVANCE: ADVANCING LIGHT

BAD LIGHT MAKES YOU ANGRY? WE'VE GOT A SOLUTION FOR THAT!

As a trusted partner for general lighting products, we stand for the fight against bad light in everything we do. At LEDVANCE, we combine traditional general illumination with modern, ground-breaking lighting technologies, building on longstanding customer relationships and a powerful distribution network. We are experts in general illumination worldwide, trending technologies and changing needs. We are also a strong local partner in over 140 countries, catering to specific demands and assisting customers with our teams of experts. Our extensive luminaire portfolio covers virtually every professional and residential application – from basic to advanced lighting products.

The LEDVANCE product range boasts leading-edge performance. To express this in our product design, we have developed our new design language known as “Scale”, instantly signifying brightness, confidence and agility.

Each and every new addition to our portfolio will always adhere to our core philosophy of providing intelligent easy-to-use lighting solutions created with human health in mind to support concentration and well-being.


Since all our product developments are shaped by these lasting principles, we are set to continue developing high-demand products and generating new opportunities in the future.

We are strongly committed to help you in your personal fight against bad light.



CONTENTS

LEDVANCE: ADVANCING LIGHT	02
FULL RANGE, FULL BENEFITS	04
APPLICATIONS	06
INDUSTRY	06
OFFICE	08
SHOP	10
HOSPITALITY	12
THE FULL LUMINAIRE ASSORTMENT AT A GLANCE	14

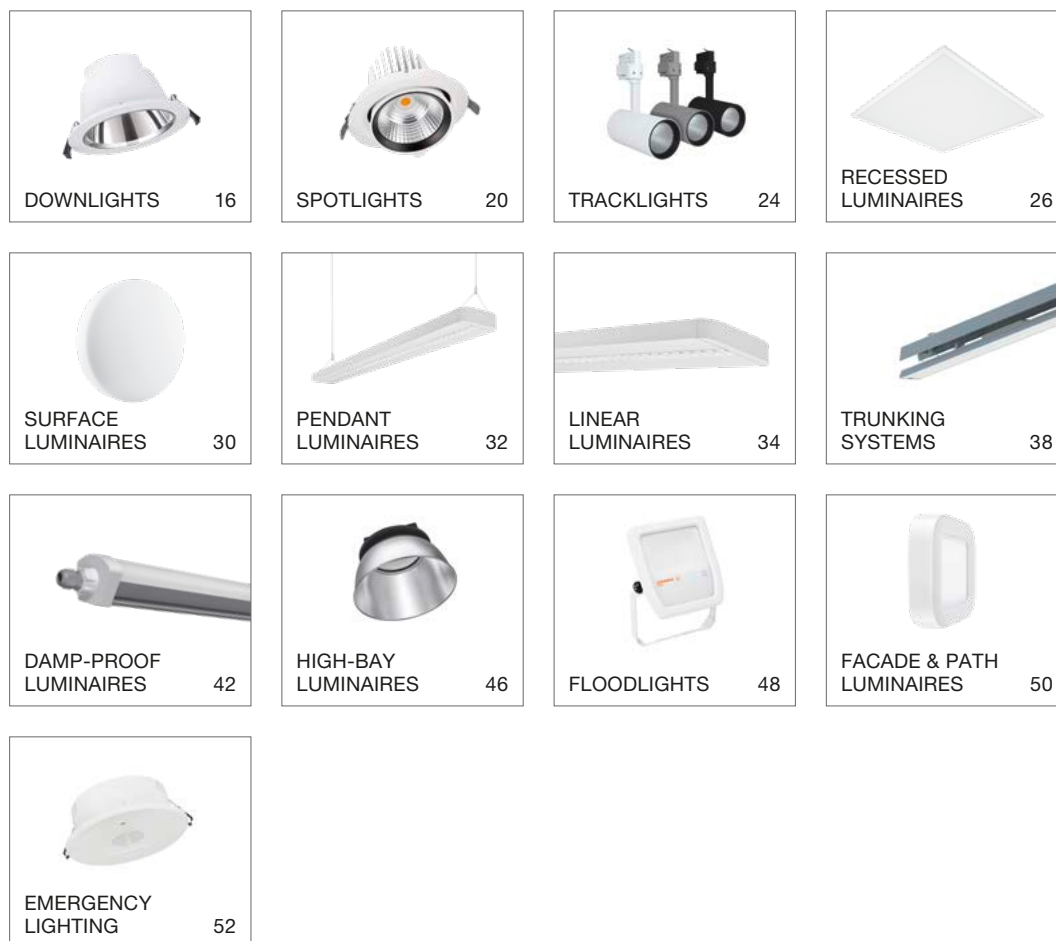

ALWAYS WELL INFORMED – VIRTUAL BACKGROUND	54
ENERGY SAVING MADE EASY – LIGHTING CONTROL FROM OSRAM	56
TAILORED TO EVERY SECTOR AND APPLICATION – KEY ACCOUNT MANAGEMENT IN PROJECTS	58
SOMETHING TO LOOK FORWARD TO	59

FULL RANGE, FULL BENEFITS – OUR NEW LED LUMINAIRE PORTFOLIO

Step aside, bad light!

We're coming for you with a wide range of LED luminaires for standard applications that meet a wide range of requirements. As an installer, you will be happy to hear that we have developed numerous new product features to make your day-to-day work easier. Case in point? With our Downlight Comfort luminaires you can now easily set any of three different light colors simply by using a DIP switch.

So what about those peculiar lighting situations? No worries, our range of luminaires is now even more strongly geared to the special requirements in various areas of application: from shops to hotels, office buildings to hospital floors, industrial plants to parks. With our significantly expanded range, we're confident that we can offer the right lighting solution for virtually any environment.

And three things remain unchanged:

You can always expect simple installation, good value and high potential energy savings from LEDVANCE.


In short, our new expanded portfolio of LED luminaires truly raises the bar to a new level.

Good news for you, bad news for bad light.



AESTHETIC, INDIVIDUAL, FUNCTIONAL – OUR NEW DESIGN LANGUAGE

LEDVANCE stands for innovation. This innovation is manifested in our new SCALE design language. SCALE combines ambitious design with tangible value in every product – and makes our luminaires instantly recognizable at first glance.



UNCOMPLICATED GUARANTEES – NO NEED TO REGISTER

Isn't it good when you can rely on something in business? Like the LEDVANCE guarantee. We now offer a five-year guarantee on almost all our luminaires. And there's even more good news. You can make a claim under the guarantee without having to register. All the information on the LEDVANCE guarantee is available any time online at www.ledvance.com/guarantee.



¹

¹ Refer to www.ledvance.com/guarantee for precise conditions

INDUSTRY

HARD WORKERS – INDUSTRY LUMINAIRES FROM LEDVANCE

Light is a key raw material for industry. The right light can boost concentration, eliminate errors and improve efficiency. Lighting in industrial facilities has to operate reliably and ideally automatically even in dusty, damp, hot or vibrating environments – and needs to meet the highest demands in terms of cost management.

Our portfolio for the industry segment contains a large selection of LED luminaires perfectly matched to the requirements of the specific work environment. Products for automated lighting control with sensors, DALI and ZigBee connectivity also boost efficiency. At the same time, simple installation, low operating costs and minimal maintenance mean that the systems quickly pay for themselves.



DAMP PROOF COMPACT
Product details: page 43



TRUSYS®
Product details: page 39



DAMP PROOF HOUSING
Product details: page 44



This picture shows several lighting solutions in one room in order to demonstrate the variety of LEDVANCE products.



HIGH BAY DALI
Product details: page 46



DAMP PROOF SPECIAL
Product details: page 42



LINEAR ULTRA OUTPUT
Product details: page 36

OFFICE

LIGHT AS A FACTOR FOR SUCCESS: OFFICE LUMINAIRES FROM LEDVANCE

Modern office lighting is more than just part of the fixtures and fittings. Light in offices should not only provide illumination but also boost concentration and a feeling of well-being among employees – and, with a view to costs, should allow smart and efficient control.

Our office portfolio therefore includes LED luminaires in a wide range of versions – Panel, Linear and Downlight. And automatic control ensures that the lights are on only where they are needed. Other benefits of LEDVANCE office luminaires include simple installation, low operating costs and minimal maintenance – and therefore very short payback times.



DOWNLIGHT COMFORT
Product details: page 16



DOWNLIGHT ALU
Product details: page 17



PANEL 600/625
Product details: page 27



This picture shows several lighting solutions in one room in order to demonstrate the variety of LEDVANCE products.



LINEAR INDIVILED®
Product details: page 33



LINEAR COMPACT
Product details: page 37



EMERGENCY EXIT SIGN
Product details: page 53

SHOP

AESTHETICS MEET FUNCTION – SHOP LUMINAIRES FROM LEDVANCE

Good lighting means good business because only optimum lighting can create a relaxing atmosphere for customers, help them find their way around a shop and display merchandise to best effect. And of course the lighting costs have to be offset as quickly as possible – through simple installation, low operating costs and minimal maintenance.

LEDVANCE offers a very wide variety of suitable lighting solutions for all areas of a shop – from the facade and the shop window to the sales floor itself. Our portfolio of luminaires provides the right light in the right place, whatever the setting – and always with optimum LED color rendering. The attractive and functional designs of our spotlights make them ideal additions to any shop environment from basic to high-class. And track systems offer variable lighting even in large retail areas.



TRACKLIGHT SPOT
Product details: page 25



SPOT VARIO
Product details: page 20



SPOT MULTI
Product details: page 21



This picture shows several lighting solutions in one room in order to demonstrate the variety of LEDVANCE products.



HOSPITALITY

WELL-BEING INCLUDED – HOSPITALITY LUMINAIRES FROM LEDVANCE

In the hospitality sector the right lighting is an important factor in the well-being of guests and staff. Our hospitality portfolio shows how this feel-good atmosphere can be achieved despite the ever-present cost pressures.

LEDVANCE offers you a wide selection of LED lighting solutions as part of atmospheric and energy-efficient room designs as well as smart lighting controls to cover all demands. The use of high-quality materials ensures excellent durability – and thanks to lower electricity costs, upgrading to our LED products will very quickly pay for itself. With hospitality luminaires from LEDVANCE everything will appear in the best possible light – from conferences to gala dinners.



SPOT ROUND ADJUST (DALI)
Product details: page 23



SPOT MULTI
Product details: page 21



SPOT SQUARE ADJUST
Product details: page 21

TY

This picture shows several lighting solutions in one room in order to demonstrate the variety of LEDVANCE products.



SURFACE COMPACT IK10
Product details: page 30



EMERGENCY EXIT SIGN
Product details: page 53



EMERGENCY DOWNLIGHT
Product details: page 52

LUMINAIRES IN THEIR MOST ATTRACTIVE FORM: OUR ASSORTMENT AT A GLANCE

DOWNLIGHTS

16

Downlight Comfort	16
Downlight Alu	17
Downlight Slim Alu	17
Downlight Slim	18



GENERAL LIGHTING APPLICATIONS:

Public areas | Shops | Stairways
Corridors | Foyers | Bathrooms | Kitchens

SURFACE LUMINAIRES

30

Surface Compact IK10	30
Surface Circular	31



GENERAL LIGHTING APPLICATIONS:

Public areas | Corridors | Stairways | Bathrooms | Foyers

SPOTLIGHTS

20

Spot Vario	20
Spot Multi	21
Spot Square Adjust	21
Spot Round Fix	22
Spot Round Adjust	23
Spot Kit LEDr GU10	23



GENERAL LIGHTING APPLICATIONS:

Shops | Hotels | Entrances | Cafés | Bars
Restaurants | Galleries | Museums | Residential

PENDANT LUMINAIRES

32

Linear IndiviLED® Direct/Indirect	33
Linear IndiviLED® Accessories	33



GENERAL LIGHTING APPLICATIONS:

General indoor lighting | Offices | Conference rooms
Schools | Libraries | Foyers | Corridors | Entrance areas

TRACKLIGHTS

24

Tracklight Spot	25
-----------------	----



GENERAL LIGHTING APPLICATIONS:

Shop | Department stores | Hotels | Cafés
Galleries | Showrooms | Salesrooms

LINEAR LUMINAIRES

34

Linear IndiviLED®	34
Linear IndiviLED® Accessories	36
Linear Ultra Output	36
Linear Compact	37
Linear Housing	37



GENERAL LIGHTING APPLICATIONS:

General indoor lighting | Offices
Libraries | Schools | Corridors | Entrance areas
Stairwells | Cove lighting | Shelving

RECESSED LUMINAIRES

26

Panel	27
Panel Value	28
Panel Accessories	29



GENERAL LIGHTING APPLICATIONS:

General indoor lighting | Public buildings
Offices | Conference rooms | Corridors
Stairways | Entrances | Reception areas | Foyers

TRUNKING SYSTEMS

38

TruSys®	39
TruSys® DALI	39
TruSys® Energy Rail & Accessories	40



GENERAL LIGHTING APPLICATIONS:

Factories | Warehouses | Discounters | Workshops

DAMP-PROOF LUMINAIRES

42

Damp Proof Special	42
Damp Proof Compact	43
Damp Proof	43
Damp Proof Slim Value	44
Damp Proof Housing	44



GENERAL LIGHTING APPLICATIONS:

Industrial and storage facilities | Car parks | Underpasses
Garages | Workshops | Assembly lines

HIGH-BAY LUMINAIRES

46

High Bay DALI	46
High Bay	47



GENERAL LIGHTING APPLICATIONS:

Warehouses | Logistics facilities | Industry | High ceilings (e.g. airports)

FLOODLIGHTS

48

Floodlight	48
Floodlight Sensor	49
Floodlight Asymmetrical	49



GENERAL LIGHTING APPLICATIONS:

Building facades | Public areas
Construction areas | Car parks | Underpasses

FACADE & PATH LUMINAIRES

50

Facade & path luminaires	50
--------------------------	----



GENERAL LIGHTING APPLICATIONS:

Residential lighting | Hotels | Office parks

EMERGENCY LIGHTING

52

Emergency Downlight	52
Emergency Exit Sign	53



GENERAL LIGHTING APPLICATIONS:

Escape routes (corridors) | Open areas (anti-panic)
Public buildings | Shops | Offices

All the LED luminaires are equipped with high-quality LED modules in the highest energy efficiency classes (A, A+ and A++). Energy efficiency class (EEC) on a scale of A++ (highest efficiency) to E (lowest efficiency). The luminaires contain built-in LED modules. They cannot be changed in the luminaire.

All the following values for the IP and IK protection classes apply exclusively to luminaires (excluding accessories).

DOWNLIGHTS



LEDVANCE DOWNLIGHT COMFORT

- Direct replacement for CFL downlights (1 × 18 W, 2 × 18 W, 2 × 26 W)
- Antiglare luminaire with UGR < 22
- Low-flicker light thanks to special ECG
- 3 CCTs in one luminaire, light color can be selected via DIP switches
- IP54 on room side, suitable for bathrooms, kitchens and sheltered outdoor areas
- Quick-connect terminal, no tools needed



E-number	Product name	GTIN (EAN)	Replacement for ³	lm	lm/W		L70 ⁴	L80 ⁵	L90 ⁶	Ø × H [mm]	Cut out Ø [mm]	RRP ⁸ [EUR]
DOWNLIGHT COMFORT												
NEW	DL COMFORT DN130 13W/3CCT 60DEG WT	4058075104068	1 × 18 W CFLi	1030@3000K 1210@4000K 1110@5700K	85	60	50000	45000	30000	145 × 82	125	
NEW	DL COMFORT DN155 18W/3CCT 60DEG WT	4058075104082	2 × 18 W CFLi	1400@3000K 1620@4000K 1470@5700K	85	60	50000	45000	30000	172 × 95	150	
NEW	DL COMFORT DN205 20W/3CCT 60DEG WT	4058075104105	2 × 26 W CFLi	1720@3000K 1930@4000K 1810@5700K	90	60	50000	45000	30000	228 × 98	200	



ONE LUMINAIRE, THREE OPTIONS:

On the Downlight Comfort you can switch between three light colors (3,000/4,000/5,700 K).

Another benefit:

Wholesalers and installers minimize their stock risks because they always have a luminaire with the right light color in stock.



LEDVANCE DOWNLIGHT ALU

- Direct replacement for CFL downlights (1 × 26 W, 2 × 26 W, 2 × 42 W)
- DALI version available
- Now in IP44 for bathrooms
- Greater flexibility thanks to external driver (included)



E-number	Product name	GTIN (EAN)	Replacement for ³	lm	lm/W	°	L70 ⁴	L80 ⁵	L90 ⁶	Ø × H [mm]	Cut out Ø [mm]	RRP ⁸ [EUR]
DOWNLIGHT ALU												
NEW	DL ALU DN150 14W/3000K WT IP44	4058075091436	1 × 26 W CFLi	1190	85	100	50000	45000	30000	160 × 52	150	
NEW	DL ALU DN150 14W/4000K WT IP44	4058075091450	1 × 26 W CFLi	1260	90	100	50000	45000	30000	160 × 52	150	
NEW	DL ALU DN150 14W/6500K WT IP44	4058075091474	1 × 26 W CFLi	1330	95	100	50000	45000	30000	160 × 52	150	
NEW	DL ALU DN200 25W/3000K WT IP44	4058075091498	2 × 26 W CFLi	2250	90	100	50000	45000	30000	215 × 61	200	
NEW	DL ALU DN200 25W/4000K WT IP44	4058075091511	2 × 26 W CFLi	2370	95	100	50000	45000	30000	215 × 61	200	
NEW	DL ALU DN200 25W/6500K WT IP44	4058075091535	2 × 26 W CFLi	2370	95	100	50000	45000	30000	215 × 61	200	
NEW	DL ALU DN200 35W/3000K WT IP44	4058075091559	2 × 42 W CFLi	2975	85	100	50000	45000	30000	215 × 61	200	
NEW	DL ALU DN200 35W/4000K WT IP44	4058075091573	2 × 42 W CFLi	3150	90	100	50000	45000	30000	215 × 61	200	
NEW	DL ALU DN200 35W/6500K WT IP44	4058075091597	2 × 42 W CFLi	3150	90	100	50000	45000	30000	215 × 61	200	
DOWNLIGHT ALU DALI												
NEW	DL ALU DALI DN200 25W/3000K WT IP44	4058075091610	2 × 26 W CFLi	2250	90	100	50000	45000	30000	215 × 61	200	✓
NEW	DL ALU DALI DN200 25W/4000K WT IP44	4058075091634	2 × 26 W CFLi	2370	95	100	50000	45000	30000	215 × 61	200	✓
NEW	DL ALU DALI DN200 25W/6500K WT IP44	4058075091658	2 × 26 W CFLi	2370	95	100	50000	45000	30000	215 × 61	200	✓
NEW	DL ALU DALI DN200 35W/3000K WT IP44	4058075091672	2 × 42 W CFLi	2975	85	100	50000	45000	30000	215 × 61	200	✓
NEW	DL ALU DALI DN200 35W/4000K WT IP44	4058075091696	2 × 42 W CFLi	3150	90	100	50000	45000	30000	215 × 61	200	✓
NEW	DL ALU DALI DN200 35W/6500K WT IP44	4058075091719	2 × 42 W CFLi	3150	90	100	50000	45000	30000	215 × 61	200	✓



LEDVANCE DOWNLIGHT SLIM ALU

- Slim aluminum housing with height of 23 mm for small mounting depths
- Homogeneous light distribution
- External driver with twist & lock connection (included)
- Light guide made of non-yellowing PMMA



E-number	Product name	GTIN (EAN)	Replacement for ³	lm	lm/W	°	L70 ⁴	L80 ⁵	L90 ⁶	Ø × H [mm]	Cut out Ø [mm]	RRP ⁸ [EUR]
DOWNLIGHT SLIM ALU												
	DL SLIM ALU DN180 17W/3000K IP20	4058075063921	1 × 26 W CFLp	1350	80	120	50000	40000	25000	200 × 23	180	
	DL SLIM ALU DN180 17W/4000K IP20	4058075063945	1 × 26 W CFLp	1400	80	120	50000	40000	25000	200 × 23	180	
	DL SLIM ALU DN205 22W/3000K IP20	4058075064003	2 × 18 W CFLp	1850	85	120	50000	40000	25000	225 × 23	205	
	DL SLIM ALU DN205 22W/4000K IP20	4058075064027	2 × 18 W CFLp	1920	90	120	50000	40000	25000	225 × 23	205	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Except for Downlight Alu DALI | ³ Replacement for usually used traditional equivalent | ⁴ t[h]: L70 @ 25°C (T_a) | ⁵ t[h]: L80 @ 25°C (T_a) | ⁶ t[h]: L90 @ 25°C (T_a) | ⁷ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁸ Recommended retail price excl. VAT



LEDVANCE DOWNLIGHT SLIM

- 25 mm height, suitable for shallow ceiling voids
- Integrated driver for simple installation, connection to next luminaire possible
- Quick-connect box for installation in accordance with safety regulations
- Light guide made of non-yellowing PMMA
- Frame for surface mounting available for round and square luminaires



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	Ø × H [mm] L × W × H [mm]	Cut out Ø [mm] L × W [mm]	RRP ⁶ [EUR]
DOWNLIGHT SLIM ROUND & ACCESSORIES (SURFACED MOUNTING FRAME)												
DL SLIM DN105 6W/3000K WT IP20	4058075078970	1 × 10W CFLp	420	70	120	30000	—	—	—	118 × 30	105	
DL SLIM DN105 6W/4000K WT IP20	4058075078994	1 × 10W CFLp	430	70	120	30000	—	—	—	118 × 30	105	
DL SLIM DN105 6W/6500K WT IP20	4058075079014	1 × 10W CFLp	430	70	120	30000	—	—	—	118 × 30	105	
DL SLIM DN155 12W/3000K WT IP20	4058075079038	1 × 26W CFLp	1020	85	120	30000	—	—	—	169 × 30	155	
DL SLIM DN155 12W/4000K WT IP20	4058075079052	1 × 26W CFLp	1020	85	120	30000	—	—	—	169 × 30	155	
DL SLIM DN155 12W/6500K WT IP20	4058075079076	1 × 26W CFLp	1020	85	120	30000	—	—	—	169 × 30	155	
DL SLIM DN210 18W/3000K WT IP20	4058075079090	2 × 18W CFLp	1530	85	120	30000	—	—	—	225 × 30	210	
DL SLIM DN210 18W/4000K WT IP20	4058075079113	2 × 18W CFLp	1530	85	120	30000	—	—	—	225 × 30	210	
DL SLIM DN210 18W/6500K WT IP20	4058075079137	2 × 18W CFLp	1530	85	120	30000	—	—	—	225 × 30	210	
DL SLIM FRAME DN105 WT	4058075079151	—	—	—	—	—	—	—	—	121 × 54	—	
DL SLIM FRAME DN155 WT	4058075079175	—	—	—	—	—	—	—	—	170 × 38	—	
DL SLIM FRAME DN210 WT	4058075079199	—	—	—	—	—	—	—	—	225 × 38	—	
DOWNLIGHT SLIM SQUARE & ACCESSORIES (SURFACED MOUNTING FRAME)												
DL SLIM SQ105 6W/3000K WT IP20	4058075079212	1 × 10W CFLp	420	70	120	30000	—	—	—	118 × 118 × 30	105 × 105	
DL SLIM SQ105 6W/4000K WT IP20	4058075079236	1 × 10W CFLp	430	70	120	30000	—	—	—	118 × 118 × 30	105 × 105	
DL SLIM SQ105 6W/6500K WT IP20	4058075079250	1 × 10W CFLp	430	70	120	30000	—	—	—	118 × 118 × 30	105 × 105	
DL SLIM SQ155 12W/3000K WT IP20	4058075079274	1 × 26W CFLp	1020	85	120	30000	—	—	—	169 × 169 × 30	155 × 155	
DL SLIM SQ155 12W/4000K WT IP20	4058075079298	1 × 26W CFLp	1020	85	120	30000	—	—	—	169 × 169 × 30	155 × 155	
DL SLIM SQ155 12W/6500K WT IP20	4058075079311	1 × 26W CFLp	1020	85	120	30000	—	—	—	169 × 169 × 30	155 × 155	
DL SLIM SQ210 18W/3000K WT IP20	4058075079335	2 × 18W CFLp	1530	85	120	30000	—	—	—	225 × 225 × 30	210 × 210	
DL SLIM SQ210 18W/4000K WT IP20	4058075079359	2 × 18W CFLp	1530	85	120	30000	—	—	—	225 × 225 × 30	210 × 210	
DL SLIM SQ210 18W/6500K WT IP20	4058075079373	2 × 18W CFLp	1530	85	120	30000	—	—	—	225 × 225 × 30	210 × 210	
DL SLIM FRAME SQ105 WT	4058075079397	—	—	—	—	—	—	—	—	121 × 121 × 54	—	
DL SLIM FRAME SQ155 WT	4058075079410	—	—	—	—	—	—	—	—	170 × 170 × 38	—	
DL SLIM FRAME SQ210 WT	4058075079434	—	—	—	—	—	—	—	—	225 × 225 × 38	—	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)

⁶ Recommended retail price excl. VAT



SPOTLIGHTS



LEDVANCE SPOT VARIO


- Versatile spotlight: 0°–35° tilt/0°–350° swivel
- Very high efficiency (up to 100 lm/W)
- Greater flexibility thanks to external driver (included)
- Twist & lock connection for quick and easy installation



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W	°	L70 ³	L80 ⁴	L90 ⁵	Ø × H [mm]	Cut out Ø [mm]	RRP ⁶ [EUR]
SPOT VARIO												
NEW	SP VARIO DN170 35W/3000K 24DEG WT	4058075104020	1 × 70W HID	3350	95	24	50000	45000	30000	180 × 129	165	
NEW	SP VARIO DN170 35W/4000K 24DEG WT	4058075104044	1 × 70W HID	3550	100	24	50000	45000	30000	180 × 129	165	

CARDAN JOINT FOR ALL-ROUND FLEXIBILITY

The movable heads of the LEDVANCE Spot Vario and LEDVANCE Spot Multi are suspended on cardan joints so they can be adjusted to provide ideal lighting for room or furniture layout. The Spot Vario can therefore be used as a classic downlight (with the luminaire head fully recessed) or as a wallwasher (with the luminaire head extended). The Spot Multi is extremely flexible as well for providing background and accent lighting. Thanks to its closed housing it remains fully mobile even if installed in suspended ceilings.

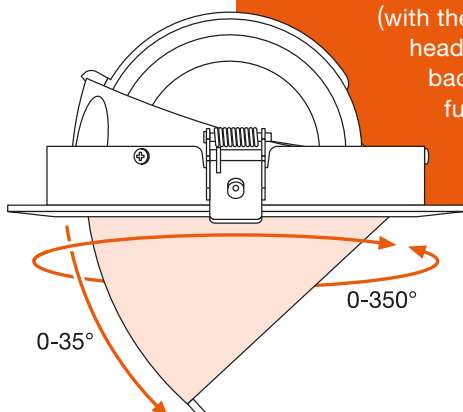



Spot Multi 1 x 30W



Spot Multi 3 x 30W

LEDVANCE SPOT MULTI

- Cassette spotlight with one, two or three luminaire heads
- $\pm 25^\circ$ cardan joints to direct the light
- White recessed frame with black spotlights in a housing closed at the back
- Pleasant light ($UGR < 16$)
- Low-flicker light thanks to special ECG
- Greater flexibility thanks to external driver (included)
- Twist & lock connection for quick and easy installation



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	Cut out L x W [mm]	RRP ⁶ [EUR]
SPOT MULTI												
NEW	SP MULTI 1 x 30W/3000K FL WT/BK	4058075113923	1 x 35W HID	2700	90	38	50000	45000	30000	173 x 173 x 135	164 x 160	
NEW	SP MULTI 1 x 30W/4000K FL WT/BK	4058075113947	1 x 35W HID	2700	90	38	50000	45000	30000	173 x 173 x 135	164 x 160	
NEW	SP MULTI 2 x 30W/3000K FL WT/BK	4058075113961	2 x 35W HID	2 x 2700	90	38	50000	45000	30000	330 x 173 x 135	320 x 160	
NEW	SP MULTI 2 x 30W/4000K FL WT/BK	4058075113985	2 x 35W HID	2 x 2700	90	38	50000	45000	30000	330 x 173 x 135	320 x 160	
NEW	SP MULTI 3 x 30W/3000K FL WT/BK	4058075114005	3 x 35W HID	3 x 2700	90	38	50000	45000	30000	485 x 173 x 135	475 x 160	
NEW	SP MULTI 3 x 30W/4000K FL WT/BK	4058075114029	3 x 35W HID	3 x 2700	90	38	50000	45000	30000	485 x 173 x 135	475 x 160	



Spot Square WT



Spot Square BK


LEDVANCE SPOT SQUARE ADJUST

- Direct replacement for halogen spotlights (75 W)
- Decorative square spotlight with very narrow frame
- Adjustable head: $\pm 25^\circ$ swivel with 30° cut-off
- Greater flexibility thanks to external driver (included); quick and easy installation



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	Cut out L x W [mm]	RRP ⁶ [EUR]
SPOT SQUARE ADJUST												
NEW	SP SQUARE DK ADJ 8W/3000K FL WT	4058075114043	75 W HAL	650	90	36	50000	45000	30000	90 x 90 x 72	83 x 83	
NEW	SP SQUARE DK ADJ 8W/3000K FL BK	4058075114067	75 W HAL	650	90	36	50000	45000	30000	90 x 90 x 72	83 x 83	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Recommended retail price excl. VAT



LEDVANCE SPOT ROUND FIX

- Direct replacement for halogen spotlights (50 W, 75 W)
- Different versions available: IP44 or IP65, dimmable, in white or brushed aluminum, fireproof⁹, darklight with cut-off
- Greater flexibility thanks to external driver (included), quick and easy installation



E-number	Product name	GTIN (EAN)	Replacement for ³	lm	lm/W		L70 ⁴	L80 ⁵	L90 ⁶	Ø x H [mm]	Cut out Ø [mm]		RRP ⁸ [EUR]
SPOT FIREPROOF DIM IP65 (FIRE-RESISTANT UP TO 90 MINUTES)⁹													
	SpotFP LED fix 8W/3000K WT DIM IP65	4058075127432	75 W HAL	620	75	36	50000	40000	20000	81 x 51	68	✓	
	SpotFP LED fix 8W/4000K WT DIM IP65	4058075127555	75 W HAL	670	80	36	50000	40000	20000	81 x 51	68	✓	
	SpotFP LED fix 8W/3000K SI DIM IP65	4058075127371	75 W HAL	620	75	36	50000	40000	20000	81 x 51	68	✓	
	SpotFP LED fix 8W/4000K SI DIM IP65	4058075127494	75 W HAL	670	80	36	50000	40000	20000	81 x 51	68	✓	
SPOT DIM IP44													
	Spot LED fix 8W/3000K WT DIM IP44	4058075127043	75 W HAL	620	75	36	50000	40000	20000	81 x 51	68	✓	
	Spot LED fix 8W/4000K WT DIM IP44	4058075127104	75 W HAL	670	80	36	50000	40000	20000	81 x 51	68	✓	
	Spot LED fix 8W/3000K SI DIM IP44	4058075126923	75 W HAL	620	75	36	50000	40000	20000	81 x 51	68	✓	
	Spot LED fix 8W/4000K SI DIM IP44	4058075127067	75 W HAL	670	80	36	50000	40000	20000	81 x 51	68	✓	
SPOT FIREPROOF IP65 (FIRE-RESISTANT UP TO 90 MINUTES)⁹													
	Spot-FP LED fix 7W/3000K 230V IP65	4058075127333	50 W HAL	530	75	38	50000	40000	20000	90 x 72	68		
SPOT DARK LIGHT IP44 (70° CUT-OFF ANGLE – DEEP RECESSED LIGHT SOURCE FOR REDUCED GLARE)													
	Spot-DK LED fix 7W/3000K 230V IP44	4058075127166	50 W HAL	580	85	36	50000	40000	20000	70 x 58	63		



LEDVANCE SPOT ROUND ADJUST

- Direct replacement for halogen spotlights (35 W, 50 W, 75 W)
- Adjustable spotlight (+/- 20°)
- Different versions (4.5 W, 6.5 W and 8 W) and DALI option available
- Greater flexibility thanks to external driver (included), quick and easy installation



E-number	Product name	GTIN (EAN)	Replacement for ³	lm	lm/W		L70 ⁴	L80 ⁵	L90 ⁶	Ø × H [mm]	Cut out Ø [mm]		RRP ⁸ [EUR]
SPOT ADJUST (ADJUSTABLE ± 20°)													
	Spot LED adjust 4.5W/3000K 230V IP20	4058075126886	35 W HAL	360	80	36	50000	40000	20000	80 × 36	68		
	Spot LED adjust 6.5W/3000K 230V IP20	4058075126909	50 W HAL	550	85	36	50000	40000	20000	80 × 36	68		
	Spot LED adjust 8W/3000K 230V IP20	4058075126848	75 W HAL	660	85	36	50000	40000	20000	90 × 47	83		
	Spot LED adjust 8W/4000K 230V IP20	4058075126862	75 W HAL	720	90	36	50000	40000	20000	90 × 47	83		
SPOT DALI ADJUST (ADJUSTABLE ± 20°)													
	SPOT LED DALI ADJUST 8W/3000K IP20	4058075042155	75 W HAL	660	85	36	50000	40000	20000	90 × 47	83		✓
	SPOT LED DALI ADJUST 8W/4000K IP20	4058075042179	75 W HAL	720	90	36	50000	40000	20000	90 × 47	83		✓



LEDVANCE SPOT KIT LEDr GU10

- Direct replacement for halogen spotlights (65 W)
- Quick and easy installation, with quick-connect terminal and optional daisy chain
- Greater flexibility thanks to replaceable GU10 lamp
- Adjustable spotlight (+/- 20°)






E-number	Product name	GTIN (EAN)	Replacement for ³	lm	lm/W		L70 ⁴	L80 ⁵	L90 ⁶	Ø × H [mm]	Cut out Ø [mm]		RRP ⁸ [EUR]
SPOT KIT LEDr GU10 (INCL. OSRAM GU10 LAMP)													
	SP KIT ADJ 7W/4000K GU10 DIM	4058075156784	65 W HAL	500	70	36	25000	—	—	88.5 × 107	75		✓

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Except for Spot Round Adjust DALI | ³ Replacement for usually used traditional equivalent | ⁴ t[h]: L70 @ 25 °C (T_a) | ⁵ t[h]: L80 @ 25 °C (T_a) | ⁶ t[h]: L90 @ 25 °C (T_a) | ⁷ Phase-cut if DALI not indicated, for DALI: dimmable with DALI interface, for lighting controls see pages 56–57, for list of dimmers please refer to ledvance.com | ⁸ Recommended retail price excl. VAT | ⁹ Up to 90 minutes, tested in accordance with EN 1365-2:2014 "Fire resistance tests for loadbearing elements – Part 2: Floors and roofs"; suitable for use outdoors and in fire protection applications (up to 90 minutes, BS476-20:1987 and BS476-21:1987)

TRACKLIGHTS

ALL CHANGE!

Reflectors with different beam angles can be installed in the Tracklight Spot – 15° and 38° versions are available in addition to the 24° version supplied. Thanks to the practical twist & lock connection and with the aid of a suction cup the lamps can be easily replaced by the user.

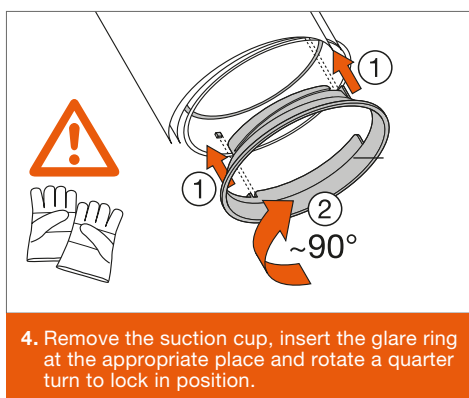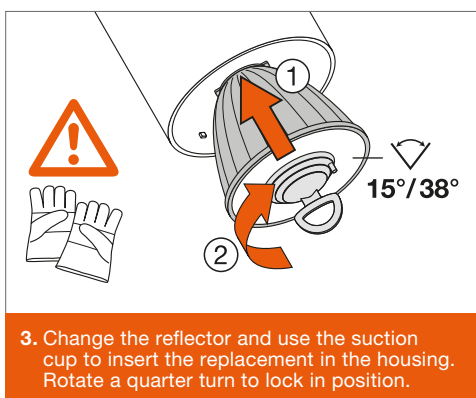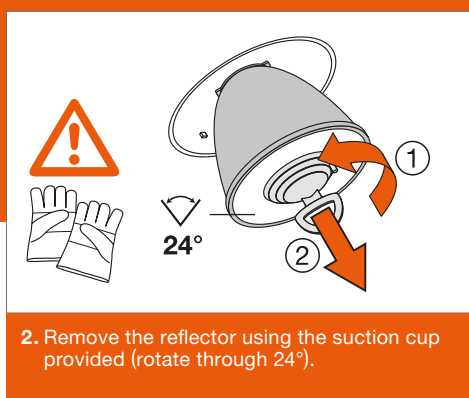



Tracklight Spot White



Tracklight Spot Black



Tracklight Spot Grey



Tracklight Reflector

LEDVANCE TRACKLIGHT SPOT

- Compact spotlight in an elegant and functional design
- 3-phase adapter matched to common tracks
- Greater flexibility thanks to swivel-and-tilt joints (0°–350° swivel, 0°–90° tilt)
- Replaceable reflectors with beam angles of 15°, 24° and 38°
- CRI > 90; SDCM < 3; UGR < 16
- Low-flicker light thanks to special ECG
- New LEDVANCE design in three colors (matt white, matt black and concrete grey)



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	Ø × H [mm]	RRP ⁶ [EUR]
TRACKLIGHT SPOT WHITE											
NEW	TRACK SP D75 25W/3000K 90RA NFL WT	4058075113442	35 W HID	1750	70	24	50000	45000	30000	75 × 255	
NEW	TRACK SP D75 25W/4000K 90RA NFL WT	4058075113466	35 W HID	1900	75	24	50000	45000	30000	75 × 255	
NEW	TRACK SP D85 35W/3000K 90RA NFL WT	4058075113480	50 W HID	2660	75	24	50000	45000	30000	85 × 267	
NEW	TRACK SP D85 35W/4000K 90RA NFL WT	4058075113503	50 W HID	2800	80	24	50000	45000	30000	85 × 267	
NEW	TRACK SP D95 55W/3000K 90RA NFL WT	4058075113527	70 W HID	4000	75	24	50000	45000	30000	95 × 297	
NEW	TRACK SP D95 55W/4000K 90RA NFL WT	4058075113541	70 W HID	4200	75	24	50000	45000	30000	95 × 297	
TRACKLIGHT SPOT BLACK											
NEW	TRACK SP D75 25W/3000K 90RA NFL BK	4058075113565	35 W HID	1750	70	24	50000	45000	30000	75 × 255	
NEW	TRACK SP D75 25W/4000K 90RA NFL BK	4058075113589	35 W HID	1900	75	24	50000	45000	30000	75 × 255	
NEW	TRACK SP D85 35W/3000K 90RA NFL BK	4058075113602	50 W HID	2660	75	24	50000	45000	30000	85 × 267	
NEW	TRACK SP D85 35W/4000K 90RA NFL BK	4058075113626	50 W HID	2800	80	24	50000	45000	30000	85 × 267	
NEW	TRACK SP D95 55W/3000K 90RA NFL BK	4058075113640	70 W HID	4000	75	24	50000	45000	30000	95 × 297	
NEW	TRACK SP D95 55W/4000K 90RA NFL BK	4058075113664	70 W HID	4200	75	24	50000	45000	30000	95 × 297	
TRACKLIGHT SPOT GREY											
NEW	TRACK SP D75 25W/3000K 90RA NFL GY	4058075113688	35 W HID	1750	70	24	50000	45000	30000	75 × 255	
NEW	TRACK SP D75 25W/4000K 90RA NFL GY	4058075113701	35 W HID	1900	75	24	50000	45000	30000	75 × 255	
NEW	TRACK SP D85 35W/3000K 90RA NFL GY	4058075113725	50 W HID	2660	75	24	50000	45000	30000	85 × 267	
NEW	TRACK SP D85 35W/4000K 90RA NFL GY	4058075113749	50 W HID	2800	80	24	50000	45000	30000	85 × 267	
NEW	TRACK SP D95 55W/3000K 90RA NFL GY	4058075113763	70 W HID	4000	75	24	50000	45000	30000	95 × 297	
NEW	TRACK SP D95 55W/4000K 90RA NFL GY	4058075113787	70 W HID	4200	75	24	50000	45000	30000	95 × 297	
TRACKLIGHT REFLECTOR											
NEW	TRACK SP REFLECTOR D75 SP	4058075113800	—	—	—	15	—	—	—	63 × 53	
NEW	TRACK SP REFLECTOR D75 FL	4058075113824	—	—	—	38	—	—	—	63 × 53	
NEW	TRACK SP REFLECTOR D85 SP	4058075113848	—	—	—	15	—	—	—	75 × 63	
NEW	TRACK SP REFLECTOR D85 FL	4058075113862	—	—	—	38	—	—	—	75 × 63	
NEW	TRACK SP REFLECTOR D95 SP	4058075113886	—	—	—	15	—	—	—	82 × 69	
NEW	TRACK SP REFLECTOR D95 FL	4058075113909	—	—	—	38	—	—	—	82 × 69	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)

⁶ Recommended retail price excl. VAT

RECESSED LUMINAIRES




THE RIGHT SURFACE FOR IDEAL LIGHTING


They say you should never judge a book by its cover, but that does not apply to our panel luminaires because the diffuser surface is a major factor in how light is distributed in a room.

The opal (OP) diffusers on the Panel 600/625 made of polystyrene (protection class IP20) or PMMA (protection class IP54) ensure particularly uniform light distribution. The PMMA version is ideal for use in special environments such as bathrooms or hospitals.

In contrast, the polystyrene microprismatic (MP) diffusers on the Panel 600/625 (IP20) provide better light control with reduced glare ($UGR < 19$ in accordance with UNI-EN 12464-1). With beam angles $> 65^\circ$, luminance is limited to $L \leq 3,000 \text{ cd/m}^2$.



Panel 600/625



Panel 1200

LEDVANCE PANEL

- Long life of up to 60,000 hours L80/B50 (at 25 °C)
- Very good performance with an efficiency of up to 120 lm/W (Panel 600/625) and up to 110 lm/W (Panel 1200)
- LED uniformity and good color consistency: SDCM < 4 (Panel 600/625) and SDCM < 6 (Panel 1200)
- Version with higher protection rating on room side (IP54) and PMMA diffuser available for special applications
- Very homogeneous light, UGR < 19 versions available in accordance with UNI-EN 12464-1 (luminance limited to $L \leq 3,000 \text{ cd/m}^2$ for beam angles > 65°)




2

E-number	Product name	GTIN (EAN)	Replacement for ³	lm	lm/W		L70 ⁴	L80 ⁵	L90 ⁶	L x W x H [mm]		RRP ⁸ [EUR]
PANEL 600 x 600 GENERATION 1												
	Panel LED 600 30W/3000K 230V	4058075000483	3 x 18 W/3 x 14 W FL	3000	100	120	50000	40000	20000	595 x 595 x 10.5		
	Panel LED 600 30W/4000K 230V	4058075000506	3 x 18 W/3 x 14 W FL	3000	100	120	50000	40000	20000	595 x 595 x 10.5		
	Panel LED 600 40W/3000K 230V	4058075000544	4 x 18 W/4 x 14 W FL	4000	100	120	50000	40000	20000	595 x 595 x 10.5		
	Panel LED 600 40W/4000K 230V	4058075000568	4 x 18 W/4 x 14 W FL	4000	100	120	50000	40000	20000	595 x 595 x 10.5		
	Panel LED 600 33W/3000K 230V UGR < 19	4058075000605	4 x 18 W/4 x 14 W FL	3100	95	90	50000	40000	20000	595 x 595 x 10.5		
	Panel LED 600 33W/4000K 230V UGR < 19	4058075000629	4 x 18 W/4 x 14 W FL	3600	110	90	50000	40000	20000	595 x 595 x 10.5		
PANEL DALI 600 x 600 GENERATION 1												
	Panel DALI 600 33W/3000K 230V UGR < 19	4058075041837	4 x 18 W/4 x 14 W FL	3100	95	90	50000	40000	20000	598 x 595 x 10.5	✓	
	Panel DALI 600 33W/4000K 230V UGR < 19	4058075041851	4 x 18 W/4 x 14 W FL	3600	110	90	50000	40000	20000	599 x 595 x 10.5	✓	
PANEL 625 x 625 GENERATION 1												
	Panel LED 625 30W/3000K 230V	4058075000643	3 x 18 W/3 x 14 W FL	3000	100	120	50000	40000	20000	620 x 620 x 10.5		
	Panel LED 625 30W/4000K 230V	4058075000667	3 x 18 W/3 x 14 W FL	3000	100	120	50000	40000	20000	620 x 620 x 10.5		
	Panel LED 625 40W/3000K 230V	4058075000681	4 x 18 W/4 x 14 W FL	4000	100	120	50000	40000	20000	620 x 620 x 10.5		
	Panel LED 625 40W/4000K 230V	4058075000704	4 x 18 W/4 x 14 W FL	4000	100	120	50000	40000	20000	620 x 620 x 10.5		
	Panel LED 625 33W/3000K 230V UGR < 19	4058075811065	4 x 18 W/4 x 14 W FL	3100	95	90	50000	40000	20000	620 x 620 x 10.5		
	Panel LED 625 33W/4000K 230V UGR < 19	4058075000728	4 x 18 W/4 x 14 W FL	3600	110	90	50000	40000	20000	620 x 620 x 10.5		
PANEL DALI 625 x 625 GENERATION 1												
	Panel DALI 625 40W/3000K 230V	4058075041875	4 x 18 W/4 x 14 W FL	4000	100	120	50000	40000	20000	620 x 620 x 10.5	✓	
	Panel DALI 625 40W/4000K 230V	4058075041899	4 x 18 W/4 x 14 W FL	4000	100	120	50000	40000	20000	620 x 620 x 10.5	✓	
	Panel DALI 625 33W/3000K 230V UGR < 19	4058075041912	4 x 18 W/4 x 14 W FL	3100	95	90	50000	40000	20000	620 x 620 x 10.5	✓	
	Panel DALI 625 33W/4000K 230V UGR < 19	4058075041936	4 x 18 W/4 x 14 W FL	3600	110	90	50000	40000	20000	620 x 620 x 10.5	✓	
PANEL 1200 x 300												
	Panel LED 1200 40W/4000K 230V	4058075807303	2 x 36 W/2 x 28 W FL	4000	100	120	50000	40000	20000	1195 x 295 x 10.5		
	Panel LED 1200 33W/4000K 230V UGR < 19	4058075807280	2 x 36 W/2 x 28 W FL	3300	100	90	50000	40000	20000	1195 x 295 x 10.5		
PANEL DALI 1200 x 300												
	Panel DALI 1200 40W/4000K 230V	4058075041998	2 x 36 W/2 x 28 W FL	4000	100	120	50000	40000	20000	1195 x 295 x 10.5	✓	
	Panel DALI 1200 33W/4000K 230V UGR < 19	4058075041974	2 x 36 W/2 x 28 W FL	3300	100	90	50000	40000	20000	1195 x 295 x 10.5	✓	
PANEL 600 x 600 GENERATION 2 WITH IMPROVED EFFICIENCY OF 120 LM/W												
NEW	PANEL 600 36W/3000K OP	4058075113060	4 x 18 W/4 x 14 W FL	4320	120	120	70000	60000	35000	595 x 595 x 12.2		
NEW	PANEL 600 36W/4000K OP	4058075113084	4 x 18 W/4 x 14 W FL	4320	120	120	70000	60000	35000	595 x 595 x 12.2		
NEW	PANEL 600 36W/3000K MP (UGR < 19)	4058075113107	4 x 18 W/4 x 14 W FL	4320	120	90	70000	60000	35000	595 x 595 x 12.2		
NEW	PANEL 600 36W/4000K MP (UGR < 19)	4058075113121	4 x 18 W/4 x 14 W FL	4320	120	90	70000	60000	35000	595 x 595 x 12.2		
NEW	PANEL 600 36W/3000K OP IP54	4058075149489	4 x 18 W/4 x 14 W FL	4320	120	120	70000	60000	35000	595 x 595 x 12.6		
NEW	PANEL 600 36W/4000K OP IP54	4058075149502	4 x 18 W/4 x 14 W FL	4320	120	120	70000	60000	35000	595 x 595 x 12.6		
PANEL DALI 600 x 600 GENERATION 2 WITH IMPROVED EFFICIENCY OF 120 LM/W												
NEW	PANEL 600 DALI 36W/3000K OP	4058075113244	4 x 18 W/4 x 14 W FL	4320	120	120	70000	60000	35000	595 x 595 x 12.2	✓	
NEW	PANEL 600 DALI 36W/4000K OP	4058075113268	4 x 18 W/4 x 14 W FL	4320	120	120	70000	60000	35000	595 x 595 x 12.2	✓	
NEW	PANEL 600 DALI 36W/3000K MP (UGR < 19)	4058075113282	4 x 18 W/4 x 14 W FL	4320	120	90	70000	60000	35000	595 x 595 x 12.2	✓	
NEW	PANEL 600 DALI 36W/4000K MP (UGR < 19)	4058075113305	4 x 18 W/4 x 14 W FL	4320	120	90	70000	60000	35000	595 x 595 x 12.2	✓	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Only Panels of Generation 2 | ³ Replacement for usually used traditional equivalent | ⁴ t[h]: L70 @ 25°C (T_a)
⁵ t[h]: L80 @ 25°C (T_a) | ⁶ t[h]: L90 @ 25°C (T_a) | ⁷ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁸ Recommended retail price excl. VAT

E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	 ⁶	RRP ⁷ [EUR]
PANEL 625 x 625 GENERATION 2 WITH IMPROVED EFFICIENCY OF 120 LM/W												
NEW	PANEL 625 36W/3000K OP	4058075113145	4 x 18W/4 x 14 W FL	4320	120	120	70000	60000	35000	620 x 620 x 12.2		
NEW	PANEL 625 36W/4000K OP	4058075113183	4 x 18W/4 x 14 W FL	4320	120	120	70000	60000	35000	620 x 620 x 12.2		
NEW	PANEL 625 36W/3000K MP (UGR < 19)	4058075113206	4 x 18W/4 x 14 W FL	4320	120	90	70000	60000	35000	620 x 620 x 12.2		
NEW	PANEL 625 36W/4000K MP (UGR < 19)	4058075113220	4 x 18W/4 x 14 W FL	4320	120	90	70000	60000	35000	620 x 620 x 12.2		
NEW	PANEL 625 36W/3000K OP IP54	4058075149526	4 x 18W/4 x 14 W FL	4320	120	120	70000	60000	35000	620 x 620 x 12.6		
NEW	PANEL 625 36W/4000K OP IP54	4058075149540	4 x 18W/4 x 14 W FL	4320	120	120	70000	60000	35000	620 x 620 x 12.6		
PANEL DALI 625 x 625 GENERATION 2 WITH IMPROVED EFFICIENCY OF 120 LM/W												
NEW	PANEL 625 DALI 36W/3000K OP	4058075113329	4 x 18W/4 x 14 W FL	4320	120	120	70000	60000	35000	620 x 620 x 12.2	✓	
NEW	PANEL 625 DALI 36W/4000K OP	4058075113343	4 x 18W/4 x 14 W FL	4320	120	120	70000	60000	35000	620 x 620 x 12.2	✓	
NEW	PANEL 625 DALI 36W/3000K MP (UGR < 19)	4058075113381	4 x 18W/4 x 14 W FL	4320	120	90	70000	60000	35000	620 x 620 x 12.2	✓	
NEW	PANEL 625 DALI 36W/4000K MP (UGR < 19)	4058075113404	4 x 18W/4 x 14 W FL	4320	120	90	70000	60000	35000	620 x 620 x 12.2	✓	




LEDVANCE PANEL VALUE

- Value version of Panel 600 for low-budget applications with good quality and an efficiency of up to 90 lm/W
- Direct replacement for traditional louvre luminaires (T8 4 x 18, T5 4 x 14)
- Very homogeneous light, UGR < 19 versions available in accordance with UNI-EN 12464-1
- Greater flexibility thanks to external driver and low-flicker light thanks to special ECG (included)



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	RRP ⁷ [EUR]
PANEL VALUE 600 x 600											
	PanelLED Value 600 40W/3000K	4058075066588	3 x 15W/3 x 18W FL	3300	85	120	50000	40000	30000	595 x 595 x 10.5	
	PanelLED Value 600 40W/4000K	4058075066601	3 x 15W/3 x 18W FL	3600	90	120	50000	40000	30000	595 x 595 x 10.5	
	PanelLED Value 600 40W/6500K	4058075066625	3 x 15W/3 x 18W FL	3600	90	120	50000	40000	30000	595 x 595 x 10.5	
	PanelLED Value 600 40W/3000K UGR<19	4058075066649	3 x 15W/3 x 18W FL	3300	85	90	50000	40000	30000	595 x 595 x 10.5	
	PanelLED Value 600 40W/4000K UGR<19	4058075066663	3 x 15W/3 x 18W FL	3600	90	90	50000	40000	30000	595 x 595 x 10.5	

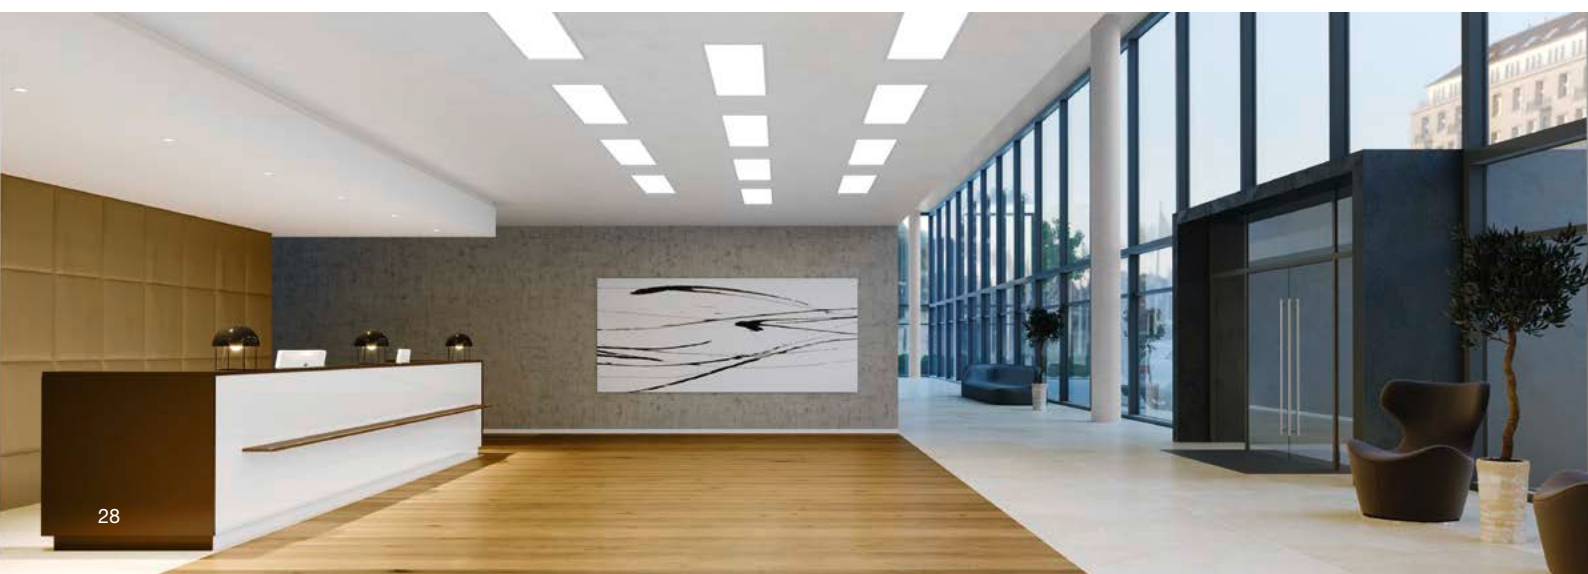



Panel 600/625 Surface Mount Kit

- Ready-to-mount, pre-assembled
- Crossbar for greater stability
- Material: aluminum




Panel 1200 Surface Mount Kit

- Ready-to-mount, pre-assembled
- Crossbar for greater stability
- Material: aluminum




Panel 600/625 Surface Mount Kit Value

- Kit for easy self-assembly with corner-clips
- Economy version for low-budget applications
- Suitable for Panel and Panel Value



Panel 1200 Surface Mount Kit Value

- Kit for easy self-assembly with corner-clips
- Economy version for low-budget applications
- Suitable for Panel and Panel Value




Panel Mounting Clips 1 x 4

- Ceiling thickness: 10 to 20 mm



Panel 600/625 Suspension Kit

- Pendant length: 3,000 mm
- Material: steel



Panel 1200 Suspension Kit

- Pendant length: 3,000 mm
- Material: steel



Panel 1200 Security Bracket

- Safety bracket for Panel 1200

LEDVANCE PANEL ACCESSORIES

- All accessories are suitable for Panel and Panel Value products in the respective sizes
- Versatile options for common mounting options:
 - Surface mounting
 - Suspended mounting
 - Clips for mounting in ceiling cut-outs
- Safety bracket with safety wire available for Panel 1200 for easy installation

E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	RRP ⁷ [EUR]
PANEL ACCESSORIES											
	PANEL 600 SURFACE MOUNT KIT	4058075108769	—	—	—	—	—	—	—	600.5 x 600.5 x 56	
	PANEL 625 SURFACE MOUNT KIT	4058075108783	—	—	—	—	—	—	—	625.5 x 625.5 x 56	
	PANEL 1200 SURFACE MOUNT KIT	4058075108820	—	—	—	—	—	—	—	1200.5 x 300.5 x 56	
	PANEL 600 SURFACE MOUNT KIT VALUE	4058075075795	—	—	—	—	—	—	—	600.5 x 600.5 x 45	
	PANEL 625 SURFACE MOUNT KIT VALUE	4058075091412	—	—	—	—	—	—	—	625.1 x 625.1 x 45	
	PANEL 1200 SURFACE MOUNT KIT VALUE	4058075091429	—	—	—	—	—	—	—	1200.1 x 300.1 x 45	
	PANEL MOUNTING CLIPS 1 x 4	4058075109421	—	—	—	—	—	—	—	—	
	PANEL 600 625 SUSPENSION KIT	4058075108868	—	—	—	—	—	—	—	—	
	PANEL 1200 SUSPENSION KIT	4058075108844	—	—	—	—	—	—	—	—	
	PANEL 1200 SECURITY BRACKET	4058075108882	—	—	—	—	—	—	—	25 x 20 x 20	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)

⁶ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁷ Recommended retail price excl. VAT

SURFACE LUMINAIRES



LEDVANCE SURFACE COMPACT IK10

- Compact surface luminaire for demanding applications
- Highly resistant to vandalism thanks to TORX screws and IK10
- Slim polycarbonate luminaire design
- Simple installation thanks to enclosed IP65 luminaire and rear wiring with quick-connect terminal
- Extremely homogeneous light distribution with a beam angle of 120°
- Glow wire test according to IEC 695-2-1: 850 °C



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/w		L70 ³	L80 ⁴	L90 ⁵	Ø x H [mm]	RRP ⁷ [EUR]
SURFACE COMPACT IK10											
	SF Compact 300 24W/3000K IK10 IP65	4058075062207	32 W CFLp	1800	75	120	50000	30000	15000	300 x 61	
	SF Compact 300 24W/4000K IK10 IP65	4058075062221	32 W CFLp	1920	80	120	50000	30000	15000	300 x 61	



NO SCREW LOOSE

The LEDVANCE Surface Compact has an impact resistance of IK10, which means it can withstand a force of 20 joules, corresponding to a weight of 5 kg falling from a height of 40 cm.

Another benefit: The use of TORX screws provides greater protection for the Surface Compact IK10 against vandalism as it cannot be removed with conventional screwdrivers.



LEDVANCE SURFACE CIRCULAR

- Replacement for conventional compact fluorescent lamps (18 W, 26 W, 32 W)
- Homogeneous light distribution
- Version available with motion and daylight sensor
- Improved lifetime of up to 50,000 switching cycles
- Simple installation thanks to quick-connect terminals
- Replacement cover available separately
- Excellent price/performance ratio



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	Ø × H [mm]	 RRP ⁷ [EUR]
SURFACE CIRCULAR											
NEW	SF CIRCULAR 250 13W/3000K IP44	4058075110120	18W CFLp	920	70	120	30000	—	—	250 × 91	
NEW	SF CIRCULAR 250 13W/4000K IP44	4058075110144	18W CFLp	960	75	120	30000	—	—	250 × 91	
NEW	SF CIRCULAR 250 13W/3000K S IP44	4058075110168	18W CFLp	920	70	120	30000	—	—	250 × 91	✓
NEW	SF CIRCULAR 250 13W/4000K S IP44	4058075110182	18W CFLp	960	75	120	30000	—	—	250 × 91	✓
	SF CIRCULAR 350 18W/3000K IP44	4058075080010	26W CFLp	1440	80	120	30000	—	—	350 × 115	
	SF CIRCULAR 350 18W/4000K IP44	4058075080034	26W CFLp	1440	80	120	30000	—	—	350 × 115	
NEW	SF CIRCULAR 350 18W/3000K S IP44	4058075110205	26W CFLp	1440	80	120	30000	—	—	350 × 115	✓
NEW	SF CIRCULAR 350 18W/4000K S IP44	4058075110229	26W CFLp	1440	80	120	30000	—	—	350 × 115	✓
	SF CIRCULAR 400 24W/3000K IP44	4058075080058	32W CFLp	1920	80	120	30000	—	—	400 × 120	
	SF CIRCULAR 400 24W/4000K IP44	4058075080072	32W CFLp	1920	80	120	30000	—	—	400 × 120	
	SF CIRCULAR 400 24W/3000K S IP44	4058075080096	32W CFLp	1920	80	120	30000	—	—	400 × 120	✓
	SF CIRCULAR 400 24W/4000K S IP44	4058075080119	32W CFLp	1920	80	120	30000	—	—	400 × 120	✓
NEW	SF CIRCULAR 250 Cover	4058075156722	—	—	—	—	—	—	—	250 × 80	
NEW	SF CIRCULAR 350 Cover	4058075156807	—	—	—	—	—	—	—	350 × 104	
NEW	SF CIRCULAR 400 Cover	4058075156821	—	—	—	—	—	—	—	400 × 112	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Daylight and motion sensor | ⁷ Recommended retail price excl. VAT



PENDANT LUMINAIRES

EVERY LED IN THE BEST LIGHT – INDIVILED® OPTICS

Separate lenses or reflectors for each individual LED ensure homogeneous light distribution and reduce glare ($UGR < 16$).

Separate **lens**
for each LED


Separate **reflector**
for each LED



INDIRECT + DIRECT = PERFECT LIGHT FOR THE OFFICE

The Linear IndiviLED® provides an ideal mix of direct (85 %) and indirect (15 %) light: Indirect lighting from the back of the luminaire creates a particularly pleasant light and homogeneous ceiling illumination. Direct light provides uniform illumination of desktops and floors thanks to optimum light distribution.

Indirect light with a relatively broad emission angle (120°) for uniform ceiling illumination




Optimum light distribution for the direct light component provides uniform illumination



LEDVANCE LINEAR INDIVILED® DIRECT/INDIRECT

- Homogeneous light distribution and reduced glare (UGR < 16) thanks to IndiviLED® optics
- Surface or pendant mounting for single luminaire or multiple luminaires as light lines (seamless linear lighting)
- Complete lighting solution with DALI, sensor (S versions), emergency lighting (EM versions) and through-wiring (TH versions)
- Increased light comfort in versions with direct and indirect light emission



LEDVANCE LINEAR INDIVILED® ACCESSORIES

- Suspension Kit: complete kit (socket, plug connection, steel suspension wire and cable) for Linear IndiviLED®
- Suspension Kit DALI: complete kit (socket, plug connection, steel suspension wire and cable) for Linear IndiviLED® DALI
- Suspension Wire: additional steel wire for pendant light line mounting
- Light Line Connector: mechanical connection for light line installation
- Through-wiring Cable Kit: electrical connection for light line installation (cabling with AC plug)

E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W	°	L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm] L x H [mm]	°	°	RRP ⁸ [EUR]
LINEAR INDIVILED DIRECT/INDIRECT 1200													
NEW	LN INDV D/I 1200 42W/3000K	4058075109728	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/4000K	4058075109742	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I DALI 1200 42W/3000K	4058075109001	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40	✓		
NEW	LN INDV D/I DALI 1200 42W/4000K	4058075109025	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40	✓		
NEW	LN INDV D/I 1200 42W/3000K S	4058075109445	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40		✓	
NEW	LN INDV D/I 1200 42W/4000K S	4058075109469	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40		✓	
NEW	LN INDV D/I DALI 1200 42W/3000K S	4058075110045	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40	✓	✓	
NEW	LN INDV D/I DALI 1200 42W/4000K S	4058075110069	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40	✓	✓	
NEW	LN INDV D/I 1200 42W/3000K EM	4058075109841	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/4000K EM	4058075109865	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/3000K TH	4058075109209	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/4000K TH	4058075109223	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40			
LINEAR INDIVILED DIRECT/INDIRECT 1500													
NEW	LN INDV D/I 1500 56W/3000K	4058075109766	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/4000K	4058075110441	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I DALI 1500 56W/3000K	4058075109049	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D/I DALI 1500 56W/4000K	4058075109063	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D/I 1500 56W/3000K S	4058075109483	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D/I 1500 56W/4000K S	4058075109506	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D/I DALI 1500 56W/3000K S	4058075110083	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D/I DALI 1500 56W/4000K S	4058075110106	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D/I 1500 56W/3000K EM	4058075109889	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/4000K EM	4058075109902	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/3000K TH	4058075109247	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/4000K TH	4058075109261	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40			
LINEAR INDIVILED ACCESSORIES													
NEW	LN INDV SUSPENSION KIT	4058075133280	—	—	—	—	—	—	—	1610 x 25			
NEW	LN INDV DALI SUSPENSION KIT	4058075133303	—	—	—	—	—	—	—	1610 x 25			
NEW	LN INDV SUSPENSION WIRE	4058075133327	—	—	—	—	—	—	—	1200 x 1 x 1			
NEW	LN INDV LIGHTLINE CONNECTOR	4058075133341	—	—	—	—	—	—	—	82 x 40 x 12			
NEW	LN INDV 1200 THROUGHWIRING KIT	4058075158030	—	—	—	—	—	—	—	32 x 20 x 7			
NEW	LN INDV 1500 THROUGHWIRING KIT	4058075133365	—	—	—	—	—	—	—	32 x 20 x 7			
NEW	LN INDV DALI 1200 THROUGHWIRING KIT	4058075158016	—	—	—	—	—	—	—	32 x 13 x 7			
NEW	LN INDV DALI 1500 THROUGHWIRING KIT	4058075157996	—	—	—	—	—	—	—	32 x 13 x 7			

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁷ Daylight and motion sensor | ⁸ Recommended retail price excl. VAT

LINEAR LUMINAIRES



LEDVANCE LINEAR INDIVILED®

- Homogeneous light distribution and reduced glare (UGR < 16) thanks to IndiviLED® optics
- Surface or pendant mounting for single luminaire or multiple luminaires as light lines (seamless linear lighting)
- Complete lighting solution with DALI, sensor (S versions), emergency lighting (EM versions) and through-wiring (TH versions)
- Increased light comfort in versions with direct and indirect light emission



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]			RRP ⁶ [EUR]
LINEAR INDIVILED DIRECT 1200													
NEW	LN INDV D 1200 34W/3000K	4058075109605	2 x 28 W T5	3800	110	70	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D 1200 34W/4000K	4058075109629	2 x 28 W T5	4200	120	70	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D DALI 1200 34W/3000K	4058075108806	2 x 28 W T5	3800	110	70	60000	50000	35000	1199 x 120 x 40	✓		
NEW	LN INDV D DALI 1200 34W/4000K	4058075108905	2 x 28 W T5	4200	120	70	60000	50000	35000	1199 x 120 x 40	✓		
NEW	LN INDV D 1200 34W/3000K S	4058075109285	2 x 28 W T5	3800	110	70	60000	50000	35000	1199 x 120 x 40		✓	
NEW	LN INDV D 1200 34W/4000K S	4058075109308	2 x 28 W T5	4200	120	70	60000	50000	35000	1199 x 120 x 40		✓	
NEW	LN INDV D DALI 1200 34W/3000K S	4058075109926	2 x 28 W T5	3800	110	70	60000	50000	35000	1199 x 120 x 40	✓	✓	
NEW	LN INDV D DALI 1200 34W/4000K S	4058075109940	2 x 28 W T5	4200	120	70	60000	50000	35000	1199 x 120 x 40	✓	✓	
NEW	LN INDV D 1200 34W/3000K EM	4058075109520	2 x 28 W T5	3800	110	70	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D 1200 34W/4000K EM	4058075109544	2 x 28 W T5	4200	120	70	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D 1200 34W/3000K TH	4058075109087	2 x 28 W T5	3800	110	70	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D 1200 34W/4000K TH	4058075109100	2 x 28 W T5	4200	120	70	60000	50000	35000	1199 x 120 x 40			
LINEAR INDIVILED DIRECT 1500													
NEW	LN INDV D 1500 25W/3000K	4058075109643	1 x 49 W T5	3100	125	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 25W/4000K	4058075109667	1 x 49 W T5	3300	125	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 48W/3000K	4058075109681	2 x 49 W T5	5300	110	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 48W/4000K	4058075109704	2 x 49 W T5	5700	120	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D DALI 1500 25W/3000K	4058075108929	1 x 49 W T5	3100	125	70	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D DALI 1500 25W/4000K	4058075108943	1 x 49 W T5	3300	125	70	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D DALI 1500 48W/3000K	4058075108967	2 x 49 W T5	5300	110	70	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D DALI 1500 48W/4000K	4058075108981	2 x 49 W T5	5700	120	70	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D 1500 25W/3000K S	4058075109322	1 x 49 W T5	3100	125	70	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D 1500 25W/4000K S	4058075109360	1 x 49 W T5	3300	125	70	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D 1500 48W/3000K S	4058075109384	2 x 49 W T5	5300	110	70	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D 1500 48W/4000K S	4058075109407	2 x 49 W T5	5700	120	70	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D DALI 1500 25W/3000K S	4058075109964	1 x 49 W T5	3100	125	70	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D DALI 1500 25W/4000K S	4058075109988	1 x 49 W T5	3300	125	70	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D DALI 1500 48W/3000K S	4058075110007	2 x 49 W T5	5300	110	70	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D DALI 1500 48W/4000K S	4058075110021	2 x 49 W T5	5700	120	70	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D 1500 25W/3000K EM	4058075109568	1 x 49 W T5	3100	125	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 25W/4000K EM	4058075109582	1 x 49 W T5	3300	125	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 48W/3000K EM	4058075109803	2 x 49 W T5	5300	110	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 48W/4000K EM	4058075109827	2 x 49 W T5	5700	120	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 25W/3000K TH	4058075109124	1 x 49 W T5	3100	125	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 25W/4000K TH	4058075109148	1 x 49 W T5	3300	125	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 48W/3000K TH	4058075109162	2 x 49 W T5	5300	110	70	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D 1500 48W/4000K TH	4058075109186	2 x 49 W T5	5700	120	70	60000	50000	35000	1488 x 120 x 40			

E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]			RRP ⁸ [EUR]
LINEAR INDIVILED DIRECT/INDIRECT 1200													
NEW	LN INDV D/I 1200 42W/3000K	4058075109728	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/4000K	4058075109742	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I DALI 1200 42W/3000K	4058075109001	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40	✓		
NEW	LN INDV D/I DALI 1200 42W/4000K	4058075109025	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40	✓		
NEW	LN INDV D/I 1200 42W/3000K S	4058075109445	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40		✓	
NEW	LN INDV D/I 1200 42W/4000K S	4058075109469	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40		✓	
NEW	LN INDV D/I DALI 1200 42W/3000K S	4058075110045	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40	✓	✓	
NEW	LN INDV D/I DALI 1200 42W/4000K S	4058075110069	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40	✓	✓	
NEW	LN INDV D/I 1200 42W/3000K EM	4058075109841	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/4000K EM	4058075109865	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/3000K TH	4058075109209	2 x 28W T5 + 1 x 14W T5	4650 (= 3800 + 850)	110	70 + 120	60000	50000	35000	1199 x 120 x 40			
NEW	LN INDV D/I 1200 42W/4000K TH	4058075109223	2 x 28W T5 + 1 x 14W T5	5050 (= 4200 + 850)	120	70 + 120	60000	50000	35000	1199 x 120 x 40			
LINEAR INDIVILED DIRECT/INDIRECT 1500													
NEW	LN INDV D/I 1500 56W/3000K	4058075109766	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/4000K	4058075110441	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I DALI 1500 56W/3000K	4058075109049	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D/I DALI 1500 56W/4000K	4058075109063	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40	✓		
NEW	LN INDV D/I 1500 56W/3000K S	4058075109483	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D/I 1500 56W/4000K S	4058075109506	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40		✓	
NEW	LN INDV D/I DALI 1500 56W/3000K S	4058075110083	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D/I DALI 1500 56W/4000K S	4058075110106	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40	✓	✓	
NEW	LN INDV D/I 1500 56W/3000K EM	4058075109889	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/4000K EM	4058075109902	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/3000K TH	4058075109247	2 x 49W T5 + 1 x 14W T5	6150 (= 5300 + 850)	110	70 + 120	60000	50000	35000	1488 x 120 x 40			
NEW	LN INDV D/I 1500 56W/4000K TH	4058075109261	2 x 49W T5 + 1 x 14W T5	6550 (= 5700 + 850)	115	70 + 120	60000	50000	35000	1488 x 120 x 40			

ONE LUMINAIRE – THREE MOUNTING OPTIONS


There are three ways in which you can install Linear IndiviLED® depending on requirements:

- Surface mounting on a ceiling
- Pendant mounting
- Strip lighting with up to 20 luminaires

For more information on light distribution for the Linear IndiviLED® see page 32.



¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁷ Daylight and motion sensor | ⁸ Recommended retail price excl. VAT



LEDVANCE LINEAR INDIVILED® ACCESSORIES

- Suspension Kit: complete kit (socket, plug connection, steel suspension wire and cable) for Linear Indiviled®
- Suspension Kit DALI: complete kit (socket, plug connection, steel suspension wire and cable) for Linear Indiviled® DALI
- Suspension Wire: additional steel wire for pendant light line mounting
- Light Line Connector: mechanical connection for light line installation
- Through-wiring Cable Kit: electrical connection for light line installation (cabling with AC plug)

E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x H [mm] L x W x H [mm]	RRP ⁶ [EUR]
LINEAR INDIVILED ACCESSORIES											
NEW	LN INDV SUSPENSION KIT	4058075133280	—	—	—	—	—	—	—	1610 x 25	
NEW	LN INDV DALI SUSPENSION KIT	4058075133303	—	—	—	—	—	—	—	1610 x 25	
NEW	LN INDV SUSPENSION WIRE	4058075133327	—	—	—	—	—	—	—	1200 x 1 x 1	
NEW	LN INDV LIGHTLINE CONNECTOR	4058075133341	—	—	—	—	—	—	—	82 x 40 x 12	
NEW	LN INDV 1200 THROUGHWIRING KIT	4058075158030	—	—	—	—	—	—	—	32 x 20 x 7	
NEW	LN INDV 1500 THROUGHWIRING KIT	4058075133365	—	—	—	—	—	—	—	32 x 20 x 7	
NEW	LN INDV DALI 1200 THROUGHWIRING KIT	4058075158016	—	—	—	—	—	—	—	32 x 13 x 7	
NEW	LN INDV DALI 1500 THROUGHWIRING KIT	4058075157996	—	—	—	—	—	—	—	32 x 13 x 7	




LEDVANCE LINEAR ULTRA OUTPUT

- Replacement for conventional T8 luminaires with up to 7,100 lm
- High efficiency of up to 125 lm/W
- Robust construction (IK08)
- Reflector available as an optional accessory
- Multiple wiring options for flexible applications



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	RRP ⁶ [EUR]
LINEAR ULTRA OUTPUT											
NEW	LN UO 1200 33W/3000K	4058075122147	2 x 36 W T8	3700	110	110	50000	40000	25000	1168 x 62 x 74	
NEW	LN UO 1200 33W/4000K	4058075122161	2 x 36 W T8	4000	120	110	50000	40000	25000	1168 x 62 x 74	
NEW	LN UO 1500 30W/3000K	4058075122185	1 x 58 W T8	3500	115	110	50000	40000	25000	1458 x 62 x 74	
NEW	LN UO 1500 30W/4000K	4058075122208	1 x 58 W T8	3800	125	110	50000	40000	25000	1458 x 62 x 74	
NEW	LN UO 1500 46W/3000K	4058075122222	2 x 58 W T8	5000	110	110	50000	40000	25000	1458 x 62 x 74	
NEW	LN UO 1500 46W/4000K	4058075122246	2 x 58 W T8	5500	120	110	50000	40000	25000	1458 x 62 x 74	
NEW	LN UO 1500 60W/3000K	4058075122260	2 x 80 W T5	6600	110	110	50000	40000	25000	1458 x 62 x 74	
NEW	LN UO 1500 60W/4000K	4058075122284	2 x 80 W T5	7100	120	110	50000	40000	25000	1458 x 62 x 74	
NEW	LN UO 1500 REFLECTOR	4058075133389	—	—	—	—	—	—	—	1420 x 66 x 20.5	

STRIP LIGHTING – COMPACT AND SEAMLESS



WIRING NOT VISIBLE THANKS TO LINEAR COMPACT BATTEN AS THE INITIAL LUMINAIRE

With the Linear Compact models you can create seamless strip lighting with up to ten luminaires with translucent end caps. The “Linear Compact Batten” luminaire can be used as the initial luminaire in strip lighting. This can be expanded with the High Output or Switch models as required. The result: uninterrupted chains of luminaires with no visible wiring.



LEDVANCE LINEAR COMPACT

- Little space required thanks to compact dimensions
- Seamless connection of up to 10 luminaires in a row
- 3 versions available: Switch, High Output and Batten with wiring at the back
- Low flicker light thanks to special electronic control gear
- All accessories for installation included



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	RRP ⁶ [EUR]
LINEAR COMPACT SWITCH (WITH BUILT-IN SWITCH)											
	LN COMP SWITCH 300 4W/3000K	4058075106079	1 x 9W T8	400	100	140	50000	40000	30000	313 x 28 x 36	
	LN COMP SWITCH 300 4W/4000K	4058075106093	1 x 9W T8	450	110	140	50000	40000	30000	313 x 28 x 36	
	LN COMP SWITCH 600 8W/3000K	4058075106116	1 x 18W T8	800	100	140	50000	40000	30000	573 x 28 x 36	
	LN COMP SWITCH 600 8W/4000K	4058075106130	1 x 18W T8	800	100	140	50000	40000	30000	573 x 28 x 36	
	LN COMP SWITCH 900 12W/3000K	4058075106192	1 x 30W T8	1200	100	140	50000	40000	30000	873 x 28 x 36	
	LN COMP SWITCH 900 12W/4000K	4058075106215	1 x 30W T8	1200	100	140	50000	40000	30000	873 x 28 x 36	
	LN COMP SWITCH 1200 14W/3000K	4058075106154	1 x 36W T8	1400	100	140	50000	40000	30000	1173 x 28 x 36	
	LN COMP SWITCH 1200 14W/4000K	4058075106178	1 x 36W T8	1500	100	140	50000	40000	30000	1173 x 28 x 36	
LINEAR COMPACT HIGH OUTPUT (NO SWITCH, HIGH LUMINOUS FLUX)											
	LN COMP HO 600 10W/3000K	4058075106277	1 x 18W T8	1000	100	140	50000	40000	30000	573 x 24 x 36	
	LN COMP HO 600 10W/4000K	4058075106291	1 x 18W T8	1000	100	140	50000	40000	30000	573 x 24 x 36	
	LN COMP HO 900 15W/3000K	4058075106239	1 x 30W T8	1500	100	140	50000	40000	30000	873 x 24 x 36	
	LN COMP HO 900 15W/4000K	4058075106253	1 x 30W T8	1500	100	140	50000	40000	30000	873 x 24 x 36	
	LN COMP HO 1200 20W/3000K	4058075106314	1 x 36W T8	2000	100	140	50000	40000	30000	1173 x 24 x 36	
	LN COMP HO 1200 20W/4000K	4058075106338	1 x 36W T8	2000	100	140	50000	40000	30000	1173 x 24 x 36	
	LN COMP HO 1500 25W/3000K	4058075106352	1 x 58W T8	2500	100	140	50000	40000	30000	1473 x 24 x 36	
	LN COMP HO 1500 25W/4000K	4058075106376	1 x 58W T8	2500	100	140	50000	40000	30000	1473 x 24 x 36	
LINEAR COMPACT BATTEN (WITH WIRING AT THE BACK)											
NEW	LN COMP Batten 600 10W/3000K	4058075099692	1 x 18W T8	1000	100	140	50000	40000	30000	575 x 27 x 38	
NEW	LN COMP Batten 600 10W/4000K	4058075099715	1 x 18W T8	1000	100	140	50000	40000	30000	575 x 27 x 38	
NEW	LN COMP Batten 1200 20W/3000K	4058075099739	1 x 36W T8	2000	100	140	50000	40000	30000	1175 x 27 x 38	
NEW	LN COMP Batten 1200 20W/4000K	4058075099753	1 x 36W T8	2000	100	140	50000	40000	30000	1175 x 27 x 38	
NEW	LN COMP Batten 1500 25W/3000K	4058075099777	1 x 58W T8	2500	100	140	50000	40000	30000	1475 x 27 x 38	
NEW	LN COMP Batten 1500 25W/4000K	4058075099791	1 x 58W T8	2500	100	140	50000	40000	30000	1475 x 27 x 38	



LEDVANCE LINEAR HOUSING

- Metal housing for T8 LED tubes (G13 base)
- No risk of failure resulting from polarity reversal of the LED tubes
- Little space required thanks to compact dimensions
- Electrical connection at the back or via through-wiring
- Easy connection thanks to push terminal




E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	RRP ⁶ [EUR]
LINEAR HOUSING											
NEW	LN HOUSING 1200 1 x TUBE	4058075144408	—	—	—	—	—	—	—	1234 x 50 x 66	
NEW	LN HOUSING 1200 2 x TUBE	4058075144422	—	—	—	—	—	—	—	1234 x 83 x 66	
NEW	LN HOUSING 1500 1 x TUBE	4058075144446	—	—	—	—	—	—	—	1534 x 50 x 66	
NEW	LN HOUSING 1500 2 x TUBE	4058075144460	—	—	—	—	—	—	—	1534 x 83 x 66	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Recommended retail price excl. VAT

TRUNKING SYSTEMS

THE SYSTEM AT A GLANCE

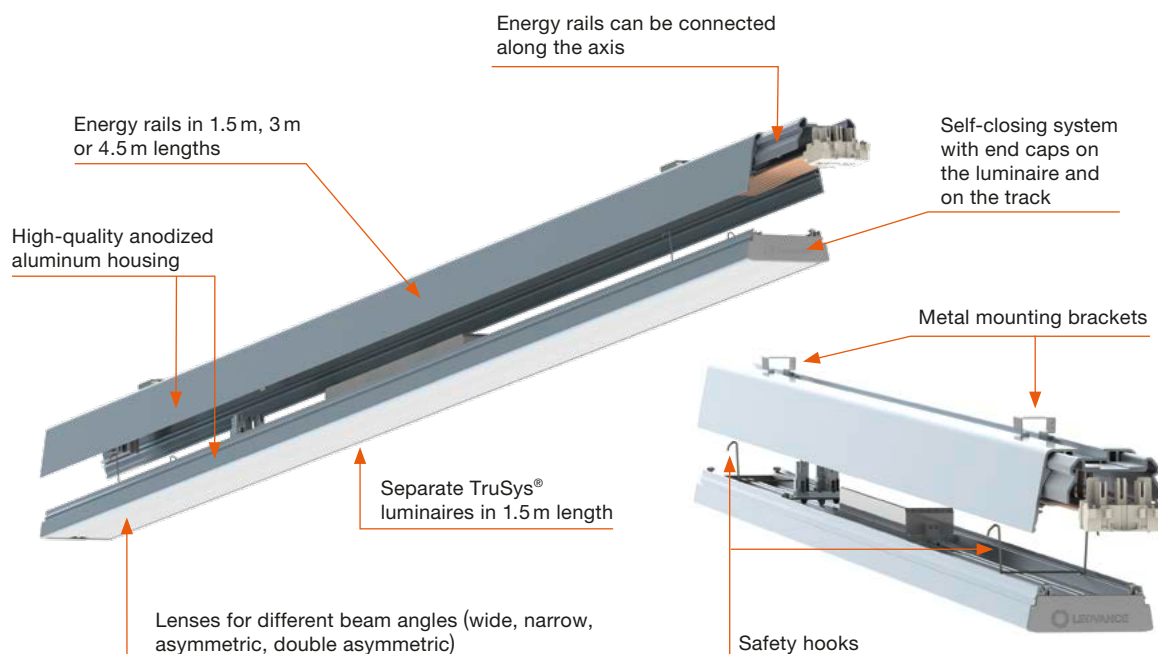



LEDVANCE TRUSYS®

- Very quick and easy luminaire installation thanks to click system
- Internal luminaire holders simplify installation even further
- Efficiency of up to 135 lm/W
- High-quality design thanks to integrated mounting brackets and lens technology
- High-quality anodized aluminum housing



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L × W × H [mm]	RRP ⁷ [EUR]
TRUSYS®											
NEW	TRUSYS® LED 53W 3000K W SI	4058075100459	2 × 80 W FL	6600	125	105	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 4000K W SI	4058075100473	2 × 80 W FL	7200	135	105	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 6500K W SI	4058075100497	2 × 80 W FL	6900	130	105	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 3000K NFL SI	4058075100510	2 × 80 W FL	6200	115	25	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 4000K NFL SI	4058075100534	2 × 80 W FL	6700	125	25	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 6500K NFL SI	4058075100558	2 × 80 W FL	6500	125	25	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 3000K WW SI	4058075100572	2 × 80 W FL	5700	110	45	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 4000K WW SI	4058075100596	2 × 80 W FL	6300	120	45	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 6500K WW SI	4058075100619	2 × 80 W FL	6100	115	45	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 3000K DA SI	4058075100633	2 × 80 W FL	6400	120	2 × 35	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 4000K DA SI	4058075100657	2 × 80 W FL	6900	130	2 × 35	75000	50000	35000	1534 × 71 × 53	
NEW	TRUSYS® LED 53W 6500K DA SI	4058075100671	2 × 80 W FL	6700	125	2 × 35	75000	50000	35000	1534 × 71 × 53	



LEDVANCE TRUSYS® DALI

- Very quick and easy luminaire installation thanks to click system
- Internal luminaire holders simplify installation even further
- Efficiency of up to 135 lm/W
- Controllable luminaires with DALI driver
- High-quality design thanks to integrated mounting brackets and lens technology



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L × W × H [mm]	 RRP ⁷ [EUR]
TRUSYS® DALI											
NEW	TRUSYS® LED DALI 53W 3000K W SI	4058075102460	2 × 80 W FL	6600	125	105	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 4000K W SI	4058075102484	2 × 80 W FL	7200	135	105	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 6500K W SI	4058075102507	2 × 80 W FL	6900	130	105	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 3000K NFL SI	4058075102521	2 × 80 W FL	6200	115	25	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 4000K NFL SI	4058075102545	2 × 80 W FL	6700	125	25	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 6500K NFL SI	4058075102569	2 × 80 W FL	6500	125	25	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 3000K WW SI	4058075102583	2 × 80 W FL	5700	110	45	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 4000K WW SI	4058075102606	2 × 80 W FL	6300	120	45	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 6500K WW SI	4058075102620	2 × 80 W FL	6100	115	45	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 3000K DA SI	4058075102644	2 × 80 W FL	6400	120	2 × 35	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 4000K DA SI	4058075102668	2 × 80 W FL	6900	130	2 × 35	75000	50000	35000	1534 × 71 × 53	✓
NEW	TRUSYS® LED DALI 53W 6500K DA SI	4058075102682	2 × 80 W FL	6700	125	2 × 35	75000	50000	35000	1534 × 71 × 53	✓

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁷ Recommended retail price excl. VAT



LEDVANCE TRUSYS® ENERGY RAIL & ACCESSORIES

- Energy rails for TruSys® luminaires in 1.5 m, 3.0 and 4.5 m lengths
- Overall system length up to 4.5 m
- High-quality anodized aluminum housing
- Accessories available: mounting solutions, end caps, blind covers and electrical connectors
- Tool-free installation



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm] L [mm]	RRP ⁶ [EUR]
TRUSYS® ENERGY RAIL											
NEW	TRUSYS® ENERGY RAIL 1500 5 x 2.5	4058075100299	—	—	—	—	—	—	—	1535 x 67 x 44	
NEW	TRUSYS® ENERGY RAIL 3000 5 x 2.5	4058075100312	—	—	—	—	—	—	—	3068 x 67 x 44	
NEW	TRUSYS® ENERGY RAIL 4500 5 x 2.5	4058075100336	—	—	—	—	—	—	—	4601 x 67 x 44	
NEW	TRUSYS® ENERGY RAIL 1500 7 x 2.5	4058075103450	—	—	—	—	—	—	—	1370 x 67 x 44	
NEW	TRUSYS® ENERGY RAIL 3000 7 x 2.5	4058075103474	—	—	—	—	—	—	—	3070 x 67 x 44	
NEW	TRUSYS® ENERGY RAIL 4500 7 x 2.5	4058075103498	—	—	—	—	—	—	—	4605 x 67 x 44	
TRUSYS® ENERGY RAIL ACCESSORIES											
NEW	TRUSYS® SUSPENSION KIT 3000	4058075100350	—	—	—	—	—	—	—	3000	
NEW	TRUSYS® CHAIN KIT	4058075100374	—	—	—	—	—	—	—	3000	
NEW	TRUSYS® MOUNTING BRACKETS	4058075100435	—	—	—	—	—	—	—	30 x 20 x 15	
NEW	TRUSYS® BLIND COVER 1500	4058075100398	—	—	—	—	—	—	—	1534 x 67 x 12	
NEW	TRUSYS® ENDCAP ENERGY RAIL	4058075100411	—	—	—	—	—	—	—	12 x 67 x 47	
NEW	TRUSYS® ELECTRICAL CONNECTOR 5 x 2.5	4058075155565	—	—	—	—	—	—	—	42.2 x 40.5 x 28.6	
NEW	TRUSYS® ELECTRICAL CONNECTOR 7 x 2.5	4058075155589	—	—	—	—	—	—	—	42.2 x 40.5 x 28.6	


¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)

⁶ Recommended retail price excl. VAT

ALWAYS IN THE RIGHT LIGHT


Light distribution for LEDVANCE TRUSYS® in 3,000, 4,000 and 6,500 K

SCALE
DESIGN




WIDE

The wide beam angle is ideal for illuminating shops, factories and warehouses.




NARROW

The narrow beam angle is ideal for high-ceiling rooms and high bay shelving.



ASYMMETRIC

The oblique beam angle accentuates walls, highlights pictures and enables light to shine in a particular direction.



DOUBLE ASYMMETRIC

Double asymmetric light distribution is recommended for illuminating shops or shelving.



DAMP-PROOF LUMINAIRES



LEDVANCE DAMP PROOF SPECIAL

- Pressure equalization unit for use in changing humidity and temperature range
- Uniform light distribution
- Low flicker light thanks to special ECG
- Easy installation as mounting brackets can be positioned freely on the luminaire
- Quick-connect terminal, no tools needed, pre-installed through-wiring
- Suitable for use in dusty and damp environments thanks to high IP rating



E-number	Product name	GTIN (EAN)	Replacement for ⁴	lm	lm/w		L70 ⁵	L80 ⁶	L90 ⁷	L x W x H [mm]	RRP ⁹ [EUR]
DAMP PROOF SPECIAL											
NEW	DP SPECIAL 1200 36W/4000K IP67	4058075136250	2 x 36W FL	5400	150	120	100000	80000	50000	1302 x 72 x 72	
NEW	DP SPECIAL 1500 48W/4000K IP67	4058075136274	2 x 58W FL	7200	150	120	100000	80000	50000	1602 x 72 x 72	



OPTIMUM PROTECTION IN ANY ENVIRONMENT

The LEDVANCE Damp Proof Special is ideally equipped for use in challenging environments. The PMMA housing with IK06 impact resistance is more resistant to oils and chemical cleaning materials and liquids than polycarbonate housings. It will also withstand knocks and impacts up to 1 joule. With protection to standards IP67 (DIN EN 60529) and IP69K (ISO 20653:2013) the luminaire is also protected against dust, powerful hot jets of water and temporary submersion.



LEDVANCE DAMP PROOF COMPACT

- Easy installation as mounting brackets can be positioned freely on the luminaire
- Easy access to electrical terminal thanks end caps with twist & lock mechanism
- Tool-free electrical connection thanks to pushbutton connector or plug connector
- Efficacy of up to 120 lm/W
- Uniform light with wide beam angle and partly indirect light emission
- Class II through-wiring pre-installed



E-number	Product name	GTIN (EAN)	Replacement for ⁴	lm	lm/W		L70 ⁵	L80 ⁶	L90 ⁷	L x W x H [mm]	RRP ⁸ [EUR]
DAMP PROOF COMPACT											
	DP Compact 1200 23W/4000K GR IP65	4058075062085	1 x 36 W FL	2800	120		50000	35000	20000	1290 x 86 x 68	
	DP Compact 1200 44W/4000K GR IP65	4058075062108	2 x 36 W FL	5400	120		50000	35000	20000	1290 x 86 x 68	
	DP Compact 1200 44W/6500K GR IP65	4058075062122	2 x 36 W FL	5400	120		50000	35000	20000	1290 x 86 x 68	
	DP Compact 1500 31W/4000K GR IP65	4058075062146	1 x 58 W FL	3800	120		50000	35000	20000	1590 x 86 x 68	
	DP Compact 1500 55W/4000K GR IP65	4058075062160	2 x 58 W FL	6700	120		50000	35000	20000	1590 x 86 x 68	
	DP Compact 1500 55W/6500K GR IP65	4058075062184	2 x 58 W FL	6700	120		50000	35000	20000	1590 x 86 x 68	



LEDVANCE DAMP PROOF

- On/Off and DALI for light management
- No ESD risk as the LED module is integrated in the luminaire cover
- Easy installation and connection without any tools
- Through-wiring possible



E-number	Product name	GTIN (EAN)	Replacement for ⁴	lm	lm/W		L70 ⁵	L80 ⁶	L90 ⁷	L x W x H [mm]	RRP ⁸ [EUR]
DAMP PROOF											
	DAMP PROOF LED 1200 21W/4000K IP65	4058075079892	1 x 36 W FL	2400	115		50000	35000	20000	1200 x 95 x 78	
	DAMP PROOF LED 1200 39W/4000K IP65	4058075079915	2 x 36 W FL	4400	115		50000	35000	20000	1200 x 95 x 78	
	DAMP PROOF LED 1200 39W/6500K IP65	4058075079854	2 x 36 W FL	4400	115		50000	35000	20000	1200 x 95 x 78	
	DAMP PROOF LED 1500 30W/4000K IP65	4058075079939	1 x 58 W FL	3500	115		50000	35000	20000	1500 x 95 x 78	
	DAMP PROOF LED 1500 55W/4000K IP65	4058075079953	2 x 58 W FL	6400	115		50000	35000	20000	1500 x 95 x 78	
	DAMP PROOF LED 1500 55W/6500K IP65	4058075079878	2 x 58 W FL	6400	115		50000	35000	20000	1500 x 95 x 78	
DAMP PROOF DALI											
NEW	DAMP PROOF DALI 1200 21W/4000K IP65	4058075130913	1 x 36 W FL	2400	115		50000	35000	20000	1200 x 95 x 78	✓
NEW	DAMP PROOF DALI 1200 39W/4000K IP65	4058075130937	2 x 36 W FL	4400	115		50000	35000	20000	1200 x 95 x 78	✓
NEW	DAMP PROOF DALI 1500 30W/4000K IP65	4058075130975	1 x 58 W FL	3500	115		50000	35000	20000	1500 x 95 x 78	✓
NEW	DAMP PROOF DALI 1500 55W/4000K IP65	4058075130999	2 x 58 W FL	6400	115		50000	35000	20000	1500 x 95 x 78	✓

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Only DAMP PROOF LED | ³ Only DAMP PROOF DALI | ⁴ Replacement for usually used traditional equivalent

⁵ t[h]: L70 @ 25°C (T_a) | ⁶ t[h]: L80 @ 25°C (T_a) | ⁷ t[h]: L90 @ 25°C (T_a) | ⁸ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁹ Recommended retail price excl. VAT



LEDVANCE DAMP PROOF SLIM VALUE

- Easy installation as mounting brackets can be positioned freely on the luminaire
- Easy access to electrical terminal thanks end caps with clip mechanism
- Tool-free connection thanks to pushbutton connector
- Efficacy of up to 110 lm/W
- Very slim design with uniform light distribution and wide beam angle
- Mounting accessories included



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	RRP ⁶ [EUR]
DAMP PROOF SLIM VALUE											
	DP SLIM VALUE 1200 36W/4000K IP65	4058075066458	2 x 36W FL	4000	110	120	30000	28000	17000	1200 x 35 x 48	
	DP SLIM VALUE 1200 36W/6500K IP65	4058075066472	2 x 36W FL	4000	110	120	30000	28000	17000	1200 x 35 x 48	
	DP SLIM VALUE 1500 50W/4000K IP65	4058075066496	2 x 58W FL	5500	110	120	30000	28000	17000	1500 x 35 x 48	
	DP SLIM VALUE 1500 50W/6500K IP65	4058075066519	2 x 58W FL	5500	75	120	30000	28000	17000	1500 x 35 x 48	



LEDVANCE DAMP PROOF HOUSING

- Replacement for applications with one or two T8 fluorescent tubes with 18 W, 36 W or 58 W
- Versatile housing for energy-saving replacement of T8 LED tubes
- Suitable for all SubstiTUBE® EM and Connected types
- Extremely long life as there is no separate control gear for the LED tubes



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	L x W x H [mm]	RRP ⁶ [EUR]
DAMP PROOF HOUSING											
NEW	DAMP PROOF 600 1 x LAMP HOUSING IP65	4058075089785	—	—	—	—	—	—	—	655 x 72 x 86	
NEW	DAMP PROOF 600 2 x LAMP HOUSING IP65	4058075089808	—	—	—	—	—	—	—	655 x 115 x 86	
NEW	DAMP PROOF 1200 1 x LAMP HOUSING IP65	4058075089822	—	—	—	—	—	—	—	1265 x 72 x 86	
NEW	DAMP PROOF 1200 2 x LAMP HOUSING IP65	4058075089846	—	—	—	—	—	—	—	1265 x 115 x 86	
	DAMP PROOF 1500 1 x LAMP HOUSING IP65	4058075079977	—	—	—	—	—	—	—	1565 x 72 x 86	
	DAMP PROOF 1500 2 x LAMP HOUSING IP65	4058075079991	—	—	—	—	—	—	—	1565 x 115 x 86	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Recommended retail price excl. VAT



HIGH-BAY LUMINAIRES



LEDVANCE HIGH BAY DALI


- CLO version with constant luminous flux over the entire life of up to 50,000 hours
- Easy installation with plug connector or pushbutton terminals
- IP65 driver housing
- Separate accessories available: 80° aluminum reflector, bracket



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W	°C	L70 ³	L80 ⁴	L90 ⁵	Ø × H [mm] L × W × H [mm]	RRP ⁷ [EUR]
HIGH BAY DALI											
NEW	HB DALI 90W/4000K 115DEG IP65	4058075130685	250 W HID	13000	140	115	80000	50000	25000	333 × 130.5	✓
NEW	HB DALI CLO 90W/4000K 115DEG IP65	4058075130661	250 W HID	~10500 over lifetime	140–115	115	80000	50000	25000	333 × 130.5	✓
NEW	HB DALI 155W/4000K 115DEG IP65	4058075130678	400 W HID	22000	140	115	80000	50000	25000	360 × 131.5	✓
NEW	HB DALI CLO 155W/4000K 115DEG IP65	4058075130654	400 W HID	~17500 over lifetime	140–115	115	80000	50000	25000	360 × 131.5	✓
HIGH BAY DALI ACCESSORIES											
NEW	HB DALI REFLECTOR 90W 80DEG SI	4058075157453	—	—	—	—	—	—	—	406 × 204	
NEW	HB DALI REFLECTOR 155W 80DEG SI	4058075157477	—	—	—	—	—	—	—	472 × 224	
NEW	HB DALI BRACKET 90W	4058075157484	—	—	—	—	—	—	—	263 × 212.5 × 40	
NEW	HB DALI BRACKET 155W	4058075157507	—	—	—	—	—	—	—	277 × 233 × 40	

CONSTANT LIGHT OUTPUT

throughout the life of the luminaire – the High Bay DALI CLO version

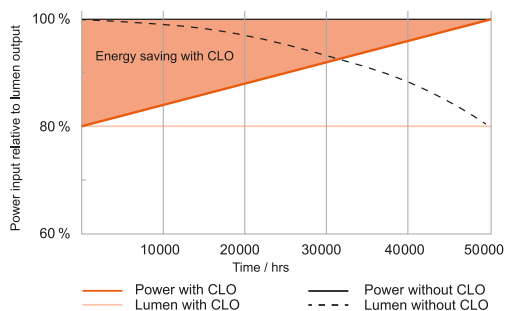



High Bay LED 95W



High Bay LED 165W



High Bay LED 200W



High Bay LED 250W

LEDVANCE HIGH BAY

- Replacement for 250 W/400 W HQI high-bay luminaires
- Efficiency of up to 135 lm/W
- Exclusive LEDVANCE design with optimized size and weight
- Different luminous flux and beam angles for mounting heights of 6 to 14 m
- Accessories: hook and bracket (included)
- Cable length 1.5 m



E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L80 ⁴	L90 ⁵	Ø × H [mm]	RRP ⁷ [EUR]
HIGH BAY (CABLE LENGTH: 1.5 M)											
	HighBayLED 95W/4000K 90DEG IP65	4058075074330	250W HID	13000	135	90	50000	35000	20000	285 × 129.5	
	HighBayLED 95W/4000K 110DEG IP65	4058075074354	250W HID	13000	135	110	50000	35000	20000	285 × 129.5	
NEW	HighBayLED 95W/6500K 90DEG IP65	4058075074347	250W HID	13000	135	90	50000	35000	20000	285 × 129.5	
	HighBayLED 165W/4000K 70DEG IP65	4058075074361	400W HID	22000	135	70	50000	35000	20000	376 × 139	
NEW	HighBayLED 165W/6500K 70DEG IP65	4058075074378	400W HID	22000	135	70	50000	35000	20000	376 × 139	
	HighBayLED 200W/4000K 110DEG IP65	4058075074385	500W HID	27000	135	110	50000	35000	20000	376 × 139	
	High Bay LED 250W/4000K 100-240V IP65	4058075814776	400W HID	30000	120	70	50000	35000	20000	452 × 160	
	High Bay LED 250W/6500K 100-240V IP65	4058075814783	400W HID	30000	120	70	50000	35000	20000	452 × 160	

EFFICIENCY MADE EASY

This is a change well worth making. For your next lighting project the LEDVANCE High Bay 250 W will bring some really impressive benefits – in terms of purchase costs, installation and energy costs. Our calculation for illuminating a 450 m² hall with a ceiling height of 10 meters shows what we mean.

	HIGH BAY 200 W	vs.	HIGH BAY 250 W
Number of luminaires	9		6
Lumen/luminaire	22,000 lm		30,000 lm
Connected load/luminaire	200 W		250 W
Total connected load	1,800 W		1,500 W
Illuminance (lux)	339		311
Uniformity	0.600		0.662
RRP/luminaire	€ 473.50		€ 549.50
RRP total	€ 4,261.50		€ 3,297.00

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ t[h]: L80 @ 25 °C (T_a) | ⁵ t[h]: L90 @ 25 °C (T_a)
⁶ Dimmable with DALI interface, for lighting controls see pages 56–57 | ⁷ Recommended retail price excl. VAT

FLOODLIGHTS



Floodlight LED 10W White



Floodlight LED 50W Black



Floodlight LED 90W Black



Floodlight LED 180W Black

LEDVANCE FLOODLIGHT

- Replacement for floodlights with halogen lamps (up to 1,500 W) and HQI lamps (up to 400 W)
- Broad product range: 6 power packages, 3 color temperatures, black and white housings
- High efficiency of up to 110 lm/W
- Opal, tempered glass cover for uniform low-glare illumination
- Robust and compact design, ideal for a wide range of applications
- Connection-ready product with 1 m cable and prepared cable ends



E-number	Product name	GTIN (EAN)	Replacement for ⁴	lm	lm/W		L70 ⁵	L80 ⁶	L90 ⁷	L × W × H [mm]	RRP ⁹ [EUR]
FLOODLIGHT											
NEW	FLOOD LED 10W/3000K BK 100DEG IP65	4058075097360	80 W HAL	1050	105	100 × 100	50000	30000	15000	125 × 115 × 39	
NEW	FLOOD LED 10W/3000K WT 100DEG IP65	4058075097384	80 W HAL	1050	105	100 × 100	50000	30000	15000	125 × 115 × 39	
NEW	FLOOD LED 10W/4000K BK 100DEG IP65	4058075097407	80 W HAL	1100	110	100 × 100	50000	30000	15000	125 × 115 × 39	
NEW	FLOOD LED 10W/4000K WT 100DEG IP65	4058075097421	80 W HAL	1100	110	100 × 100	50000	30000	15000	125 × 115 × 39	
NEW	FLOOD LED 20W/3000K BK 100DEG IP65	4058075097445	160 W HAL	2100	105	100 × 100	50000	30000	15000	130 × 140 × 41	
NEW	FLOOD LED 20W/3000K WT 100DEG IP65	4058075097469	160 W HAL	2100	105	100 × 100	50000	30000	15000	130 × 140 × 41	
NEW	FLOOD LED 20W/4000K BK 100DEG IP65	4058075097483	160 W HAL	2200	110	100 × 100	50000	30000	15000	130 × 140 × 41	
NEW	FLOOD LED 20W/4000K WT 100DEG IP65	4058075097506	160 W HAL	2200	110	100 × 100	50000	30000	15000	130 × 140 × 41	
NEW	FLOOD LED 20W/6500K BK 100DEG IP65	4058075097520	160 W HAL	2200	110	100 × 100	50000	30000	15000	130 × 140 × 41	
NEW	FLOOD LED 20W/6500K WT 100DEG IP65	4058075097544	160 W HAL	2200	110	100 × 100	50000	30000	15000	130 × 140 × 41	
NEW	FLOOD LED 50W/3000K BK 100DEG IP65	4058075097568	400 W HAL	5250	105	100 × 100	50000	30000	15000	155 × 180 × 46	
NEW	FLOOD LED 50W/3000K WT 100DEG IP65	4058075097582	400 W HAL	5250	105	100 × 100	50000	30000	15000	155 × 180 × 46	
NEW	FLOOD LED 50W/4000K BK 100DEG IP65	4058075097605	400 W HAL	5500	110	100 × 100	50000	30000	15000	155 × 180 × 46	
NEW	FLOOD LED 50W/4000K WT 100DEG IP65	4058075097629	400 W HAL	5500	110	100 × 100	50000	30000	15000	155 × 180 × 46	
NEW	FLOOD LED 50W/6500K BK 100DEG IP65	4058075097643	400 W HAL	5500	110	100 × 100	50000	30000	15000	155 × 180 × 46	
NEW	FLOOD LED 50W/6500K WT 100DEG IP65	4058075097667	400 W HAL	5500	110	100 × 100	50000	30000	15000	155 × 180 × 46	
NEW	FLOOD LED 90W/4000K BK 100DEG IP65	4058075097681	750 W HAL	10000	110	100 × 100	50000	30000	15000	250 × 240 × 70	
NEW	FLOOD LED 90W/6500K BK 100DEG IP65	4058075097698	750 W HAL	10000	110	100 × 100	50000	30000	15000	250 × 240 × 70	
NEW	FLOOD LED 135W/4000K BK 100DEG IP65	4058075097704	1000 W HAL	15000	110	100 × 100	50000	30000	15000	300 × 270 × 76	
NEW	FLOOD LED 135W/6500K BK 100DEG IP65	4058075097711	1000 W HAL	15000	110	100 × 100	50000	30000	15000	300 × 270 × 76	
NEW	FLOOD LED 180W/4000K BK 100DEG IP65	4058075097728	1500 W HAL	20000	110	100 × 100	50000	30000	15000	340 × 310 × 81	
NEW	FLOOD LED 180W/6500K BK 100DEG IP65	4058075097735	1500 W HAL	20000	110	100 × 100	50000	30000	15000	340 × 310 × 81	



LEDVANCE FLOODLIGHT SENSOR

- Replacement for floodlights with halogen lamps (up to 400 W)
- Robust, IP65 daylight and motion sensor with adjustable sensor head
- High efficiency of up to 110 lm/W
- Opal, tempered glass cover for uniform low-glare illumination
- Easy configuration of range, daylight and motion detection; sensor can also be deactivated
- Connection-ready product with 1 m cable and prepared cable ends



E-number	Product name	GTIN (EAN)	Replacement for ⁴	lm	lm/W		L70 ⁵	L80 ⁶	L90 ⁷	L x W x H [mm]	⁸ RRP ⁹ [EUR]
FLOODLIGHT SENSOR											
NEW	FLOOD 20W/3000K BK 100DEG S IP65	4058075143531	160W HAL	2200	110	100 × 100	50000	30000	15000	224 × 167 × 104	✓
NEW	FLOOD 20W/4000K BK 100DEG S IP65	4058075143555	160W HAL	2200	110	100 × 100	50000	30000	15000	224 × 167 × 104	✓
NEW	FLOOD 50W/3000K BK 100DEG S IP65	4058075143579	400W HAL	5500	110	100 × 100	50000	30000	15000	251 × 216 × 122	✓
NEW	FLOOD 50W/4000K BK 100DEG S IP65	4058075143593	400W HAL	5500	110	100 × 100	50000	30000	15000	251 × 216 × 122	✓



LEDVANCE FLOODLIGHT ASYMMETRICAL


- Replacement for floodlights with halogen lamps (up to 1,500 W) and HQI lamps (up to 400 W)
- Asymmetrical light distribution based on state-of-the-art LED lens technology, ideal for floodlighting and area lighting
- High efficiency of up to 100 lm/W
- Lens plate protected by tempered glass cover for safe, uniform and virtually glare-free illumination
- Compact design with easy to adjust, wide rotation bracket
- Connection-ready product with 1 m cable and prepared cable ends



E-number	Product name	GTIN (EAN)	Replacement for ⁴	lm	lm/W		L70 ⁵	L80 ⁶	L90 ⁷	L x W x H [mm]	RRP ⁹ [EUR]
FLOODLIGHT ASYMMETRICAL											
	Flood LED Asym 150W/4000K BK IP65	4058075814752	1000W HAL	15000	100	38 × 80	50000	40000	20000	402 × 303 × 64	
	Flood LED Asym 200W/4000K BK IP65	4058075814769	1000W HAL	20000	100	38 × 80	50000	40000	20000	402 × 303 × 64	

A VISIBLE DIFFERENCE – A CHOICE OF LIGHT DISTRIBUTIONS

Depending on the lighting you want to achieve, you can get perfect results with symmetrical or asymmetrical light distribution. The difference is that when mounted at the same angle a luminaire with asymmetrical light distribution will focus the light further into the room than a luminaire with symmetrical light distribution.



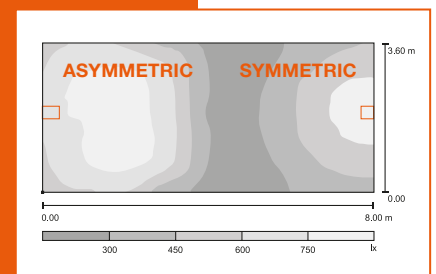


¹ Only for 10W–50W | ² Only for 90W–180W | ³ Refer to www.ledvance.com/guarantee for precise conditions | ⁴ Replacement for usually used traditional equivalent
⁵ t[h]: L70 @ 25°C (T_a) | ⁶ t[h]: L80 @ 25°C (T_a) | ⁷ t[h]: L90 @ 25°C (T_a) | ⁸ Daylight and motion sensor | ⁹ Recommended retail price excl. VAT

FACADE & PATH LUMINAIRES

LEDVANCE FACADE & PATH LUMINAIRES

- Modern facade, ceiling and path luminaires
- Attractive design combined with high-quality materials and finishes
- Indirect or direct lighting, some with adjustable luminaire head or optional light and motion sensor
- Robust and weatherproof (up to IP54)
- Warm white light for a pleasant atmosphere outdoors
- Simple installation





E-number	Product name	GTIN (EAN)	Replacement for ²	lm	lm/W		L70 ³	L x W x H [mm] Ø x H [mm]	 ⁴	RRP ⁵ [EUR]
LANTERN										
	O Facade Lantern 12W/3000K GY IP54	4058075074835	40W GLS	610	50	210	30000	176 x 110 x 240		
	O BD 500 Lantern 12W/3000K GY IP54	4058075074859	40W GLS	610	50	210	30000	110 x 500		
	O BD 900 Lantern 12W/3000K GY IP54	4058075074873	40W GLS	610	50	210	30000	110 x 900		
EDGE										
	O Facade Edge 12W/3000K GY IP54	4058075074750	60W GLS	740	60	107	30000	168 x 100 x 273		
	O Facade Edge 12W/3000K WT IP54	4058075074774	60W GLS	770	65	107	30000	168 x 100 x 273		
	O Facade Edge 12W/3000K GY S IP54	4058075074798	60W GLS	740	60	107	30000	168 x 100 x 273	✓	
	O Facade Edge 12W/3000K WT S IP54	4058075074811	60W GLS	770	65	107	30000	168 x 100 x 273	✓	
UPDOWN										
	O Facade Updown 12W/3000K GY IP54	4058075075054	60W GLS	700	60	280	30000	55 x 90 x 160		
	O Facade Updown 12W/3000K WT IP54	4058075075078	60W GLS	710	60	280	30000	55 x 90 x 160		
BELT										
	O Facade Belt RD 11W/3000K GY IP54	4058075074972	40W GLS	400	38	335	30000	60 x 240 x 142		
	O Facade Belt SQ 11W/3000K GY IP54	4058075074996	40W GLS	410	39	340	30000	60 x 240 x 142		
SPOT										
	O Facade Spot 8W/3000K GY IP54	4058075074712	40W GLS	440	55	110	30000	135 x 90 x 140		
	O Facade Spot 8W/3000K WT IP54	4058075074736	40W GLS	460	60	110	30000	135 x 90 x 140		
ROUND & SQUARE										
	O Surface RD 13W/3000K GY IP54	4058075074897	40W GLS	480	35	100	30000	202 x 45		
	O Surface RD 13W/3000K WT IP54	4058075074910	40W GLS	600	45	100	30000	202 x 45		
	O Surface SQ 13W/3000K GY IP54	4058075074934	40W GLS	480	35	100	30000	202 x 202 x 45		
	O Surface SQ 13W/3000K WT IP54	4058075074958	40W GLS	600	45	100	30000	202 x 202 x 45		
INDIRECT										
	O Facade IND RD 13W/3000K GY IP54	4058075075016	40W GLS	480	35	240	30000	150 x 118		
	O Facade IND RD 13W/3000K WT IP54	4058075075030	60W GLS	640	50	240	30000	150 x 118		
POLE										
	O Surface Pole 6W/3000K SST IP44	4058075075177	40W GLS	360	60	160	30000	102 x 87		
	O Facade Pole 6W/3000K SST IP44	4058075075092	40W GLS	360	60	160	30000	138 x 102 x 135		
	O Facade Pole 6W/3000K SST S IP44	4058075075115	40W GLS	360	60	160	30000	150 x 102 x 135	✓	
	O BD 500 Pole 6W/3000K SST IP44	4058075075139	40W GLS	360	60	160	30000	102 x 500		
	O BD 800 Pole 6W/3000K SST IP44	4058075075153	40W GLS	360	60	160	30000	102 x 800		


¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Replacement for usually used traditional equivalent | ³ t[h]: L70 @ 25 °C (T_a) | ⁴ Daylight and motion sensor
⁵ Recommended retail price excl. VAT

EMERGENCY LIGHTING



LEDVANCE EMERGENCY DOWNLIGHT

- Extensive range for escape route and anti-panic lighting in accordance with EN 60598-2-22
- Simple planning and installation as recessed or surface mounted luminaires with integrated battery and driver
- Fewer luminaires needed thanks to high light output (up to 335 lm) and optimized light distribution
- Easy maintenance with automatic test function or integrated test switch
- Robust design (IP43 and IK07)



E-number	Product name	GTIN (EAN)	lm	Battery duration	Test function	Operating mode	Battery technology	Ø × H [mm]	Cut out Ø [mm]	RRP ² [EUR]
EMERGENCY DOWNLIGHT										
NEW	EM DL DN120 HO AT 3H ANTIPANIC	4058075124554	335	3h	Automatic	Non-maintained	NiMH	140 × 48.5	120	
NEW	EM DL DN120 HO AT 3H ESCAPE	4058075124578	335	3h	Automatic	Non-maintained	NiMH	140 × 48.5	120	
NEW	EM DL DN120 MT 3H ANTIPANIC	4058075124516	235	3h	Manual	Maintained/Non-maintained	NiMH	140 × 48.5	120	
NEW	EM DL DN120 MT 3H ESCAPE	4058075124530	235	3h	Manual	Maintained/Non-maintained	NiMH	140 × 48.5	120	
EMERGENCY DOWNLIGHT ACCESSORIES										
NEW	EM DL SURFACE MOUNT KIT	4058075124592	—	—	—	—	—	140 × 48.5	—	



LEDVANCE EMERGENCY EXIT SIGN

- Universal emergency exit luminaire with wall, ceiling, recessed or pendant mounting options in accordance with EN 60598-2-22
- Compact modern design with extruded aluminum housing
- 3h or 8h operation selectable with an integrated switch
- 4 pictograms (ISO 7010) and white foil included
- High homogeneous brightness in accordance with DIN 4844-1



E-number	Product name	GTIN (EAN)	Battery duration	Test function	Operating mode	Battery technology	L × W × H [mm]	RRP ² [EUR]
EMERGENCY EXIT SIGN								
NEW	EM SIGN HB 27M 3/8H AT	4058075144484	3h/8h	Automatic	Maintained/Non-maintained	LiFePO4	274 × 40 × 195	
EMERGENCY EXIT SIGN ACCESSORIES								
NEW	EM SIGN HB 27M WALL BRACKET	4058075144507	—	—	—	—	274 × 42 × 62	
NEW	EM SIGN HB 27M FLAG BRACKET	4058075144521	—	—	—	—	290 × 40 × 76	
NEW	EM SIGN HB 27M SUSPENSION POLE KIT	4058075144545	—	—	—	—	274 × 40 × 387	
NEW	EM SIGN HB 27M SUSPENSION CHAIN KIT	4058075144569	—	—	—	—	274 × 40 × 2087	
NEW	EM SIGN HB 27M RECESSED FRAME	4058075144583	—	—	—	—	359 × 60 × 60	

¹ Refer to www.ledvance.com/guarantee for precise conditions | ² Recommended retail price excl. VAT

ONE RANGE FOR ALL EMERGENCIES

LEDVANCE presents a new portfolio of general-purpose single-battery emergency luminaires. The range offers numerous benefits. Thanks to outstanding product features, compliance with relevant standards and flexible mounting options, the LEDVANCE emergency luminaires meet a very wide variety of requirements. Their versatility makes life easier for installers and project customers.

YOUR EXPECTATIONS


Emergency lighting has to meet so many demands – and sometimes more than others. The luminaires need to offer flexible mounting options and comply with legal requirements for illuminance and brightness levels. Battery life has to be adequate to cope with power outages. But attractive design can turn an emergency luminaire from a necessary tool into a real eye-catcher.



ALWAYS UP TO DATE ALL THE INFORMATION YOU NEED


Looking for information on our products and services? LEDVANCE keeps you up to date: at the wholesaler's PoS, through our LEDVANCE sales staff and via our Customer Service Center (email: kundenservice@ledvance.com).

And in our eCatalog you can find technical data sheets, installation videos, product information and planning and calculation tools to help you in your day-to-day work: www.ledvance.com

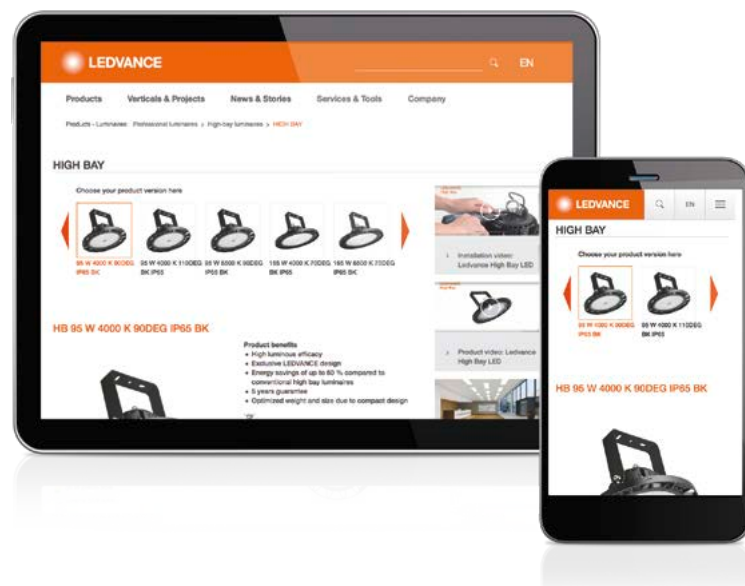


FAST CALCULATION TOOL

We now offer a handy calculation tool for each product on our website. Simply click on the Fast Calculation button on the product page. The tool provides a simple way to calculate the luminaires you need for the particular application and the space to be illuminated.*

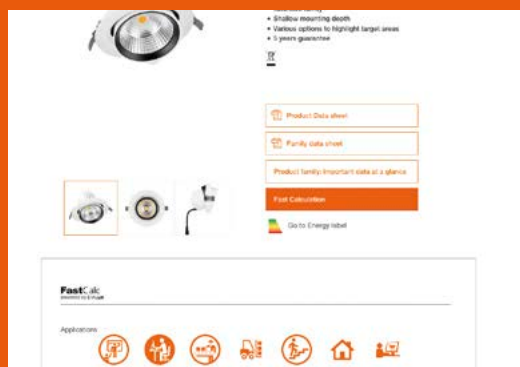


LIGHT PLANNING WITH DIALUX AND RELUX

Good news for DIALux and RELUX users: since the start of 2018 LEDVANCE has been working with the software producers. DIALux and RELUX users can now easily integrate LEDVANCE products in their lighting plans. Our luminaire data is also BIM-compatible. We also support users in the form of consultation, calculation and after-sales services.

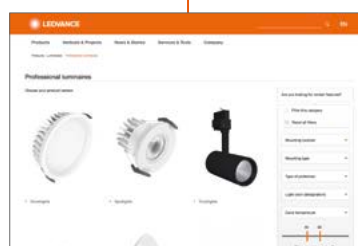

PERFECTLY FILTERED

Use the online filters to find precisely what you're looking for in our luminaire portfolio – type of mounting, IP rating, light color, etc.: ledvance.com/products/luminaires/professional-luminaires

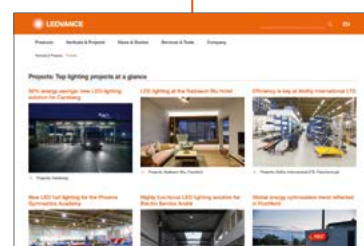

BEST REFERENCES



You can find a selection of top lighting projects at ledvance.com/projects



SERVICE COMPACT


Our service packages are listed at ledvance.com/services-and-tools/services

* The Fast Calculation tool is not a replacement for professional planning with DIALux and RELUX.

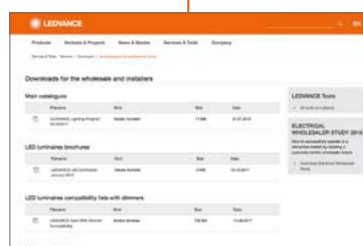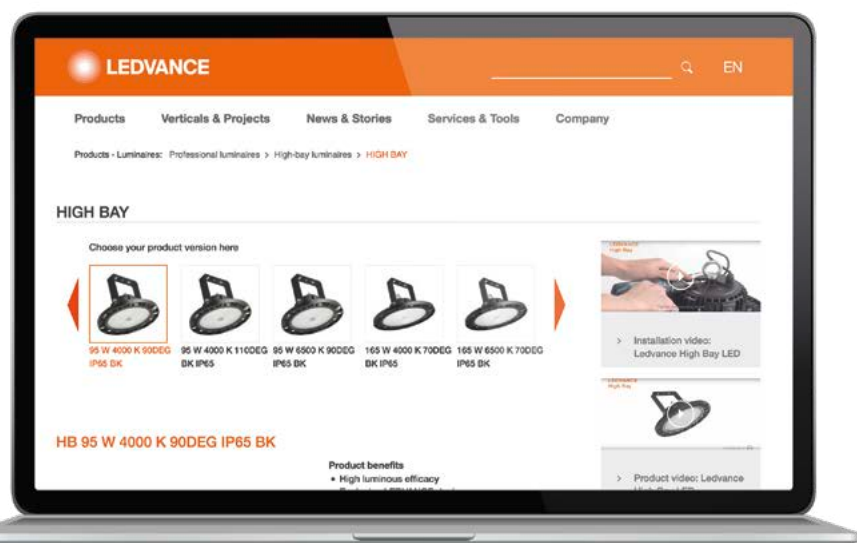

DOWNLOAD CENTER

Catalogs, price lists, brochures and much more are available for you in our Download Center: ledvance.com/download

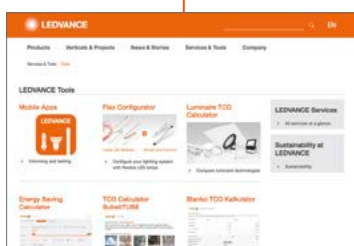

OUR TOOLS FOR YOU

From the mobile app to the energy-savings calculator, practical tools are available at ledvance.com/services-and-tools/tools



LEDVANCE SERVICE PLUS

Information on our project services for professional end customers can be found at ledvance.com/vam

LIST OF ABBREVIATIONS

AT	Auto Test
BD	Bollard
BK	Black
CLO	Constant Lumen Output
D	Direct
D/I	Direct/Indirect
DA	Double Asymmetric (shelf beam)
DEG	Degree (beam angle)
DK	Dark Light (cut-off)
DL	Downlight
DN	Diameter Nominal
DP	Damp Proof
EM	Emergency
ER	Energy Rail
FL	Flood (beam angle)
Flood	Floodlight
FP	Fire-Proof (fire rated up to...)
GY	Grey/Gray
HB	High Bay
IND	Indirect
INDV	IndiviLED®
LN	Linear
MA	Manual Test
MP	Microprismatic (= UGR < 19)
NFL	Narrow Flood (beam angle)
O	Outdoor
OP	Opal
RD	Round
S	Sensor
SF	Surface
SI	Silver
SP	Spot
SQ	Square
Surface-C	Surface Circular
TH	Through-wiring
Track	Tracklight
UO	Ultra Output
W	Wide (90° beam)
WT	White
WW	Wallwasher = asymmetric

LIGHTING CONTROL FROM OSRAM – SAVING EVEN MORE ENERGY

LUXeye – INTELLIGENT LIGHTING CONTROL FOR LEDVANCE LUMINAIRES WITH SMARTPHONE INTERFACE

The intuitive way to achieve perfect lighting control

The compact system with integrated sensor technology (daylight and presence) as well as a Bluetooth interface controls the light automatically and can be overridden conveniently via a smartphone or pushbutton.

Two versions: dimmable and with switch relay

While the dimmable LUXeye Sense DALI BT can control up to 20 luminaires via a DALI interface, the LUXeye Sense 10A BT features a 10-ampere switch relay.

Easy to use via an app

With the LUXeye app, the light can be switched on and off and, with the DALI version, also dimmed autonomously and conveniently via a smartphone. Automatic settings can be overridden manually at any time.

Quick installation and convenient adjustment

According to the complexity of your project, you can choose freely from three different options: Plug & Play based on presets, manual adjustment with a screwdriver or convenient adjustment via a smartphone.

LIGHT MANAGEMENT – CONVENIENT DIMMING AND SWITCHING OF DALI LUMINAIRES



DALI PCU
GTIN (EAN):
4052899**955622**



DALI MCU
GTIN (EAN):
4008321**189721**



DALI ACU BT
GTIN (EAN):
4052899**544819**

CONTROL:

DALI PCU – Compact control unit for standard pushbuttons

DALI MCU – Digital rotary dimmer for DALI luminaires

- Simple dimming and switching
- Individual brightness settings
- Control of up to 25 ECGs per controller
- Control of up to 100 luminaires by connecting up to four DALI PCU/MCU units in parallel
- Flexible expansion with DALI repeaters or additional DALI PCU/MCU units
- Ideal for conference rooms, restaurants and shops

CONTROL:

DALI ACU BT – Compact control unit for standard pushbuttons plus Bluetooth

- Operated via standard pushbuttons or app (via Bluetooth)
- Simple dimming and switching of white light or Tunable White
- Can be combined with OSRAM DALI presence and motion sensors
- Control of up to 32 ECGs
- Free app for IOS and Android



OSRAM

Products of OSRAM GmbH,
distributed by LEDVANCE

LUXeye Sense DALI BT

GTIN (EAN): 4052899957411

LUXeye Sense 10A BT

GTIN (EAN): 4052899957428

LIGHT ON DEMAND – THANKS TO SMART SENSOR TECHNOLOGY



DUO

GTIN (EAN):
4008321496355

DUO:

Combined daylight and presence detection

- Flexible: daylight sensor only, presence sensor only, or daylight sensor and presence sensor combined
- Energy savings of up to 45 % compared with manual switching
- Adjustable switch-off delay: 1 min – 60 min
- Suitable for up to 30 ECGs
- Approx. 110° detection angle, maximum installation height 5 m
- Ideal for individual and open-plan offices and classrooms



HIGH BAY

GTIN (EAN):
4008321410078

HIGH BAY:

Motion sensor with switch contact

- Energy savings of up to 35 % compared with manual switching
- Max. installation height 13 m
- Adjustable switch-off delay: 30 s to 20 min
- Suitable for up to 15 ECGs
- Approx. 100° detection angle, maximum diameter of detection area: 18 m
- Ideal for large installation heights, industry, production plants



VISION

GTIN (EAN):
4008321957047

VISION:

Motion sensor with switch contact

- Energy savings of up to 35 % compared with manual switching
- Adjustable switch-off delay: 30 s to 20 min
- Suitable for up to 15 ECGs
- Approx. 140° detection angle, maximum diameter of detection area: 21 m, maximum installation height 4.5 m
- Ideal for large areas, e.g. open-plan offices, corridors and storage rooms

FIND THE RIGHT SOLUTIONS FOR YOUR PROJECTS

LEDVANCE IS YOUR PARTNER FOR EVERYTHING TO DO WITH LIGHTING

Are you looking for a full-service provider for your lighting project? You've found it in LEDVANCE. As your lighting partner we can offer you a comprehensive range of application-specific products. We can also help you reduce the costs of your lighting systems and at the same time improve the quality of light. The basis is our worldwide network in which we bring together the know-how and experience in countless industries and for a wide range of major customers. Within this network our LEDVANCE experts will support you in your lighting projects with advice matched to your needs, a tailored selection of products and excellent service. With LEDVANCE you therefore get everything from a single source. For more information go to www.ledvance.com/vam

Our experts specialize in a wide range of applications, particularly in these four sectors:



FACILITY MANAGEMENT

- Offices and administrative buildings
- Car parks
- Transport: train stations and airports



INDUSTRY

- Production buildings
- Logistics centers
- Administration



HOSPITALITY

- Hotels
- Restaurants
- Cultural and leisure facilities



SHOPS

- Food (e.g. supermarkets)
- Fashion (e.g. clothing stores)
- Non-food (e.g. DIY)

THE BENEFITS FOR LEDVANCE CUSTOMERS:

Global network



Broad product portfolio



Outstanding services



SUCCESS WITH LEDVANCE – an example:

Carlsberg Høje Tåstrup
Logistics Center East, Denmark

- LED replacements for 600 conventional luminaires
- 50 % energy savings per year
- 650,000 kWh energy savings per year
- CO₂ emissions reduced by 400 tonnes per year

€ 53,300 SAVINGS PER YEAR*

* Based on energy price in Denmark per kWh € 0.082 in 2017
(Source: Eurostat)



EXCELLENT PROSPECTS – SOMETHING TO LOOK FORWARD TO!

OUR NEXT INNOVATIONS IN THE PANEL SEGMENT

The needs of your customers and your expectations as a lighting professional continue to change – and so too does our portfolio. 2018 will see further developments in our luminaire portfolio with new product lines – for example in the LEDVANCE Panel Direct/Indirect and LEDVANCE Panel IndiviLED® families.

LEDVANCE PANEL DIRECT/INDIRECT

- Modern panel for attractive direct (70 %) and indirect (30 %) lighting
- Extremely slim aluminum frame and exclusive SCALE design
- Homogeneous and controlled light distribution thanks to highly reflective microprismatic PMMA light guide
- UGR < 19 as standard in accordance with EN 12464-1
- High light output and high efficiency of up to 110 lm/W
- DALI option available, further options on request

LEDVANCE PANEL INDIVILED®

- Homogeneous light distribution and reduced glare (UGR < 16) thanks to IndiviLED® optics
- High energy savings with an efficiency of up to 120 lm/W
- Enhanced light comfort: low-flicker driver and SDCM < 4
- Available with On/Off function or as a DALI version
- Same design as Linear IndiviLED®



ABOUT LEDVANCE

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. Having emerged from the general lighting business of OSRAM GmbH, LEDVANCE offers a wide-ranging assortment of LED luminaires for a broad spectrum of application areas, intelligent lighting products for Smart Homes and Buildings, one of the largest LED lamps portfolios in the industry as well as traditional light sources.



LEDVANCE

Partner:



LEDVANCE GmbH
Parkring 29–33
85748 Garching
Germany

LEDVANCE is the expert partner for installers and lighting professionals. To match our extensive range of luminaires we also offer a large portfolio of innovative LED lamps in excellent brand quality. Further information about our range of lamps and services is available online at www.ledvance.com

LEDVANCE.COM