


TOP VIEW




QZ-STICK Components

1 Driver Compartment 2 Primary Compartment 3 Secondary Compartment 4 Mounting Tab Slots

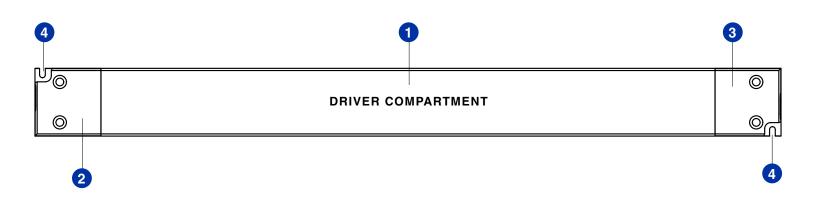

Required Hardware






Mounting




The QZ-STICK can be mounted either vertically or horizontally, utilizing the supplied screws and the mounting tabs on the bottom of the enclosure

SIDE SLOT




The QZ-STICK must be mounted into a stud for sufficient support, using the slots of each mounting tab








When installing multiple QZ-STICK power supplies, seperate the enclosures by 3" of space from edge to edge. This prevents the rise of ambient temperature between the power supplies.

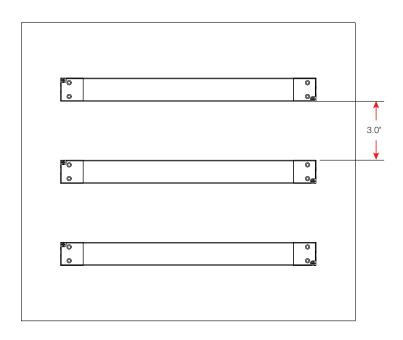

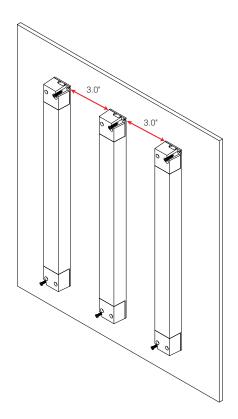

Horizontal mount illustrated above


Vertical mount illustrated above






Wiring diagram

Phase Dimming



0-10v Dimming

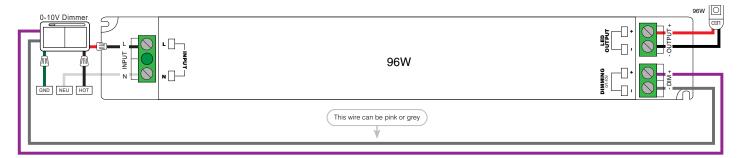


Wiring from power supply to light fixture must be two conductor cable



QZ-STICK 96W

TOP VIEW



SIDE VIEW

