


Front Bumper


BXG.2032

(1)Contents:

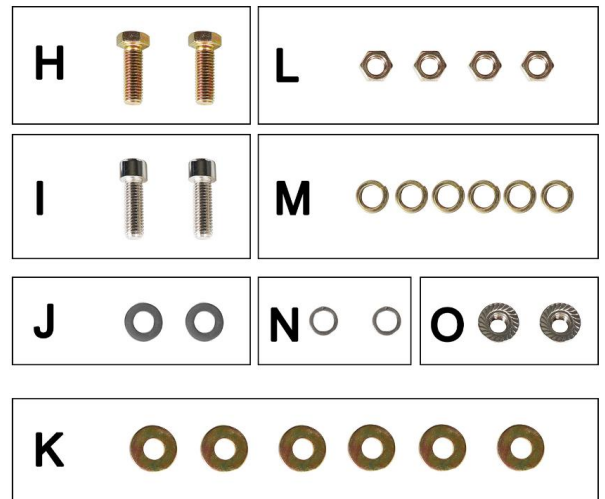

(2)Tools required:

- a. 19mm socket wrench;**
- b. 19 mm wrench;**
- c. 10 mm Allen wrench;**

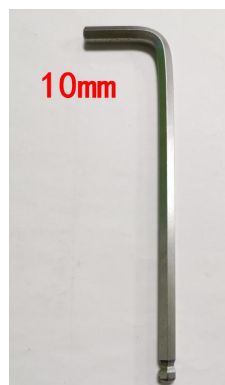

(3)Installation time:

About 1 hour, 2-3 persons needed.

(Installation time is different according to individual person)

(4) Installation instruction:

Step 1:


Remove the original front bumper. And ready to install the new bumper.



Step 2:

Install the PART "I", PART "J", PART "N" & PART "O" on the vehicle.

No need to tighten it in this step. As shown below.

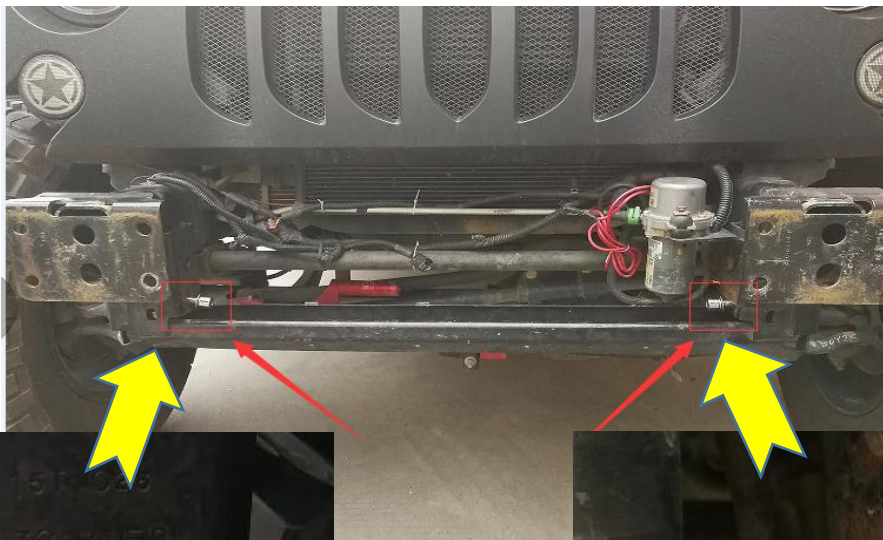

Step 3:


After the step 2, then install the PART "B". As shown below.

And don't forget to tighten the bolts.



Step 4:

Install the PART“A” onto the vehicle with PART“H”,PART“K”,PART“L” & PART“M”.As shown below.

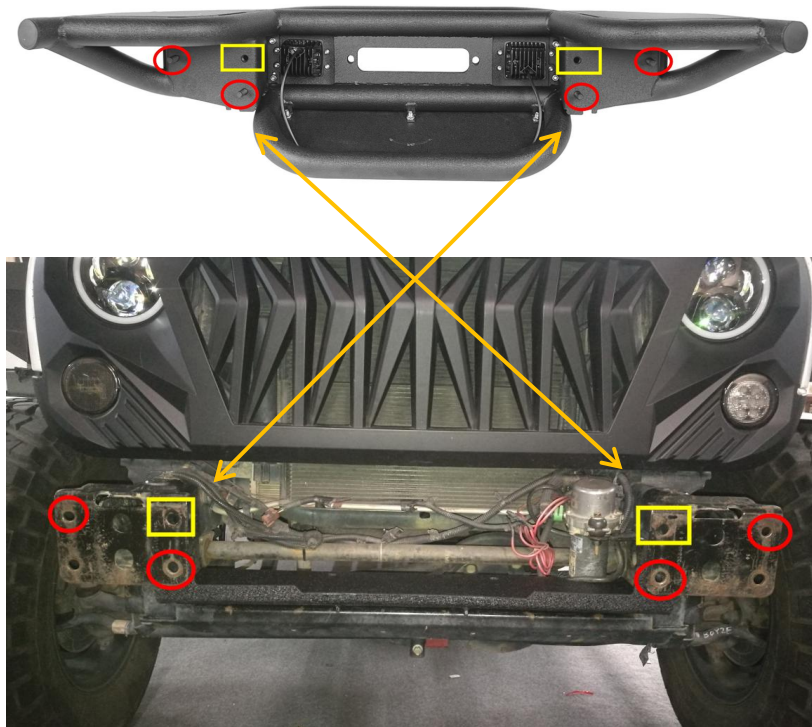


Step 5:

Tighten the bumper(PART“A”).

(1)Install the PART“L”,PART“M”,PART“K” on the red circle bolt holes.

(Just one red circle, shows on “Step 4”)

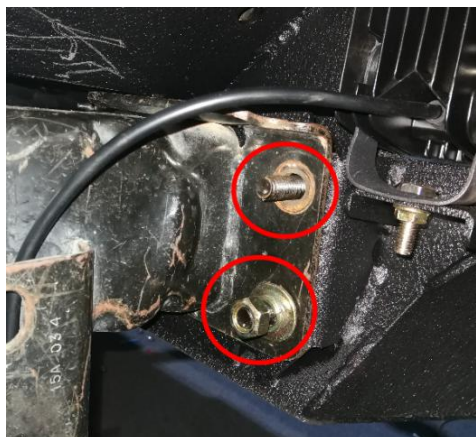

(2)Install the PART“H”,PART“K”,PART“M” on the yellow circle bolt holes.



Step 6:

After all of the above steps, the installation completed.



Attention:

1.The product parts in this instruction may differ slightly from the actual product contents but generally does not affect the installation of the product.

2.Please feel free to contact us if you have any kind of question about your purchase. We will reply you in timely manner.



www.ubox-offroad.com



@HookeRoad4x4

Post Your Jeep w/Hashtag #hookerod to Win Discount Every Week