

CASE SPECIFICATIONS	
Model Number	: C686
Form Factor	: Full Tower Case
Materials	: Steel, Tempered Glass front and side panel
Size	: 435*230*456 mm
Weight	: 6.5 kg
Motherboard Compatibility	: Mini ITX, Micro ATX, ATX, E-ATX
I/O	: 1*USB 3.1 Gen1 Type-C, 1*USB 3.0, 1*USB 2.0, HD Audio, Power Button, Reset Button

FAN	120mm	140mm
Side	:2	-
Top	:3	2
Bottom	:3	-
Rear	:1	1

CLEARANCE	
GPU Length	: 395 mm (Max)
CPU Cooler Height	: 185 mm (Max)
PSU Length	: 240 mm (Max)
Cable Management	: 28 mm

x19 Motherboard Screws	x6 Power Supply Screws	x8 HDD Screws
x3 Motherboard Standoff Screws	x1 Standoff Support Nut	x5 Cable Ties
x12 Bottom Mount Fan Screws	x2 Side Panel Clips	x1 Glass Wipe

The diagram illustrates the connection of the LED module to the power supply and the LED module to the LED strip. It is divided into three main sections:

- Power Supply Connection:** Shows a power supply unit with a red (+) terminal and a black (-) terminal. The red terminal is connected to the "POWER SW +" terminal of the LED module. The black terminal is connected to the "HDD LED -" terminal of the LED module.
- LED Module Connection:** Shows the LED module with a red (+) terminal and a black (-) terminal. The red terminal is connected to the "POWER SW +" terminal of the LED module. The black terminal is connected to the "HDD LED -" terminal of the LED module.
- LED Strip Connection:** Shows the LED module with a red (+) terminal and a black (-) terminal. The red terminal is connected to the "POWER SW +" terminal of the LED module. The black terminal is connected to the "HDD LED -" terminal of the LED module.

Diagram illustrating the rear panel of the HP Z840 Workstation, showing various ports and their labels:


- USB-C
- USB 3.0
- USB 3.0
- HD AUDIO
- POWER
- RESET

360/280/240 mm

120 mm


FANTECH

INDONESIA

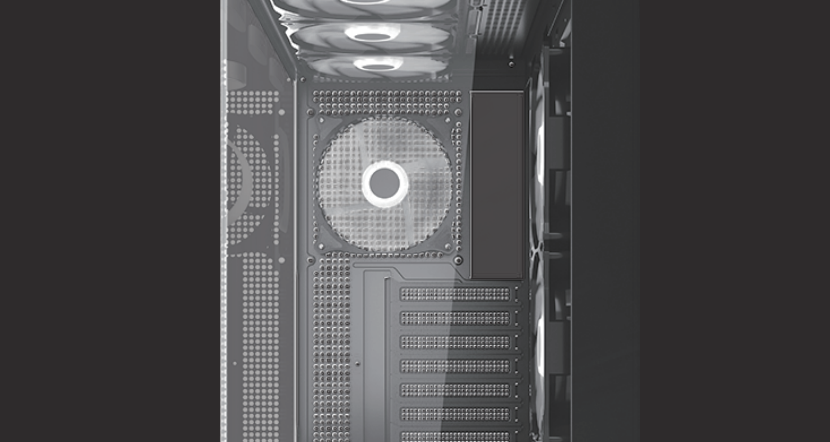

LUMINA L | CG86

FULL TOWER CASE

Apa yang tersedia dalam kotak

1. LUMINA L CG86
2. 6 pcs Kipas ARGB
3. Sekrup dan Perangkat
4. Panduan Pengguna

Kompatibilitas Motherboard

1. Mini ITX
2. Micro ATX
3. ATX
4. E-ATX

PANDUAN PENGGUNA

SPESIFIKASI CASING	
Nomor Model	: C686
Tipe Ukuran	: Full Tower Case
Bahan	: Baja, Kaca Tempered panel depan dan panel samping
Ukuran	: 435*230*456 mm
Berat	: 6,6 kg
Kompatibilitas Motherboard	: Mini ITX, Micro ATX, ATX, E-ATX
I/O	: 1*USB 3.1 Gen1 Type-C, 1*USB 3.0, 1*USB 2.0,

KIPAS	120mm	140mm
Samping	:2	-
Atas	:3	2
Bawah	:3	-
Belakang	:1	1

RUANG BEBAS	
Panjang GPU	: 395 mm (Maks)
Tinggi Cooler CPU	: 185 mm (Maks)
Panjang PSU	: 240 mm (Maks)
Pengatur Kabel	: 28 mm

 x19	 x6	 x8
Sekrup Motherboard	Sekrup Power Supply	Sekrup HDD
 x3	 x1	 x5
Sekrup Standoff Motherboard	Mur Penahan Standoff	Kabel Ties
 x12	 x2	 x1
Sekrup Kipas Bawah	Klip Panel Sampling	Kain Pembersih

Diagram showing the connection of the USB cable to the board. The cable is plugged into the USB port. The board has labels for POWER SW, HDD LED, RESET SW, POWER LED+, and POWER LED-.

Diagram illustrating the rear panel of the HP Z2 Mini G1, showing the following ports and their labels:

- USB-C
- USB 3.0
- USB 2.0
- HD AUDIO
- RESET
- POWER