

CDW-61851BE-00
Dual-band Wi-Fi 6 + BT5.3 Module
DATASHEET

Software:

客 户 Customer	客户承认 Approve（请盖印章）	日 期 Date

拟制 Design	审核 Check	批准 Approve	版本 Version	日期 Date
			V1.1	2024.08.27

Hunan China Dragon Technology Co., Ltd.

Address: NO.13, ZIYUAN ROAD, XUESHI STREET, YUELU DISTRICT, CHANGSHA CITY, HUNAN PROVINCE, China

Tel: (86 755) 81449957

Fax: (86 755) 81449967

E-mail: Info@cdtech.cn

Http://www.cdtech.cn



更改记录:

Reversion History:

版本 Version	日期 Date	更改内容 Modification
1.0	2022.03.31	First release
1.1	2024.08.27	Update Layout Recommendation /Physical photo/number of packages

1. Overview

The CDW-61851BE-00 is a highly integrated module that supports 1T1R 802.11ax solutions with MU-MIMO with wireless LAN (WLAN) PCI Express network interface controller and HS-USB mixed interface. It combines a WLAN MAC, a 1T1R capable WLAN baseband, and RF in the module.

The wireless module complies with IEEE 802.11 a/b/g/n/ac/ax 1x1 MIMO standard and it can achieve up to a speed of 600Mbps . The integrated module provides PCI-e interface for Wi-Fi, USB interface for Bluetooth. And it provides a complete solution for a high-performance integrated wireless and Bluetooth device.

2. Features


WLAN

- IEEE 802.11a/b/g/n/ac/ax compliant WLAN
- 20MHz / 40MHz / 80MHz bandwidth transmission
- Complies with PCI Express Base Specification Revision 1.1
- Dual-band 1T1R mode with data rate up to 600Mbps
- Supports 802.11ac/ax 1*1 Wave-2 compliant with MU-MIMO
- Maximum PHY data rate up to 150 Mbps using 20MHz bandwidth with 11n, 433Mbps using 40MHz bandwidth with 11ac, and 600Mbps using 80MHz bandwidth with 11ax

Bluetooth

- Supports Bluetooth 5 system (BT5.3 Logo Compliant)
- Compatible with Bluetooth v2.1+EDR
- Integrated MCU to execute Bluetooth protocol stack
- Enhanced BT/WIFI Coexistence Control to improve transmission quality in different Profiles
- Dual Mode support: Simultaneous LE and BR/ED
- Supports multiple Low Energy states
- Supports Enhanced Power Control
- Supports all packet types in basic rate and enhanced data rate
- Supports Secure Simple Pairing

3. Block diagram

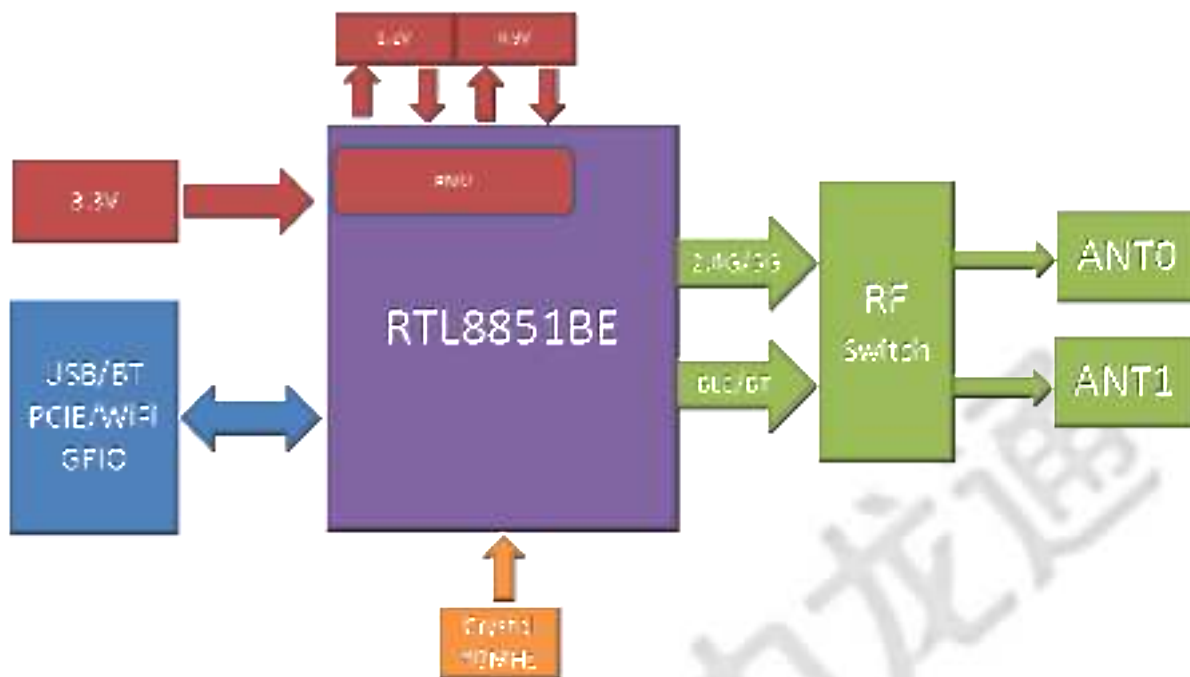

4. General Specification

Model	CDW-61851BE-00
Product Name	Wi-Fi 11a/b/g/n/ac/ax 1T1R and BT 5.3 Module
Major Chipset	Realtek RTL8851BE-CG
Standard	IEEE802.11a/b/g/n/ac/ax, BT V2.1+EDR/ 4.2 /5.3
Data Transfer Rate	Max: 600 Mbps
Modulation Method	DSSS/DBPSK/DQPSK/16-QAM/ 64-QAM/256QAM/1024QAM
Frequency Band	2.4 GHz ISM Band, 5.0 GHz ISM Band
Spread Spectrum	IEEE 802.11b: DSSS (Direct Sequence Spread Spectrum) IEEE802.11a/g/n/ac/ax: OFDM (Orthogonal orthogonal Frequency Division Multiplexing)
Interface	Wi-Fi : PCIE , Bluetooth : USB2.0
Operating Temperature	-10~ +65° C ambient temperature

Storage Temperature	-40 ~+90°C ambient temperature
Humidity	5 to 90 % maximum (non-condensing)
Dimension	16.0mm x12.0mm x 2.1mm (LxWxH)±0.2mm

5. Electrical Characteristics

Wi-Fi Section: 5.1 2.4GHz RF Specification

Feature	Description
WLAN Standard	IEEE 802.11b/g/n/ax Wi-Fi compliant
Frequency Range	2.4 GHz ISM Band
Modulation	802.11b : DQPSK, DBPSK, CCK 802.11 g/n : OFDM /64-QAM, 16-QAM, QPSK, BPSK 802.11ax : OFDMA /1024-QAM、256-QAM、64-QAM、16-QAM、
Receive Sensitivity (11b,20MHz)	- 1Mbps PER≤8% @ -98dBm ≤ -83dBm
	- 11Mbps PER≤8% @ -91dBm ≤ -76dBm
Receive Sensitivity (11g,20MHz)	- 6Mbps PER≤10%@ -91dBm ≤ -85dBm
	- 54Mbps PER≤10%@ -78dBm ≤ -68dBm
Receive Sensitivity (11n,20MHz)	- MCS=0 PER≤10%@ -90dBm ≤ -85dBm
	- MCS=7 PER≤10%@ -76dBm ≤ -67dBm
Receive Sensitivity (11n,40MHz)	- MCS=0 PER≤10%@ -90dBm ≤ -82dBm
	- MCS=7 PER≤10%@ -73dBm ≤ -64dBm
Receive Sensitivity (11ax,20MHz)	- MCS=0 PER≤10%@ -94dBm ≤ -82dBm
	- MCS=11 PER≤10%@ -67dBm ≤ -52dBm
Receive Sensitivity (11ax,40MHz)	- MCS=0 PER≤10%@ -91dBm ≤ -79dBm
	- MCS=11 PER≤10%@ -64dBm ≤ -49dBm
Maximum Input Level	802.11b : -10dBm
	802.11g/n/ax : -20dBm
Antenna Reference	

5.2 5GHz RF Specification

Feature	Description
WLAN Standard	IEEE 802.11a/n/ac 1x1, Wi-Fi compliant
Frequency Range	5.0 GHz ISM Band

Modulation	802.11a : OFDM /64-QAM,16-QAM, QPSK, BPSK 802.11n : OFDM /64-QAM,16-QAM, QPSK, BPSK 802.11ac : OFDM /256-QAM/64-QAM,16-QAM, QPSK, BPSK 802.11ax:OFDM /1024-QAM/256-QAM/64-QAM,16-QAM,QPSK, BPSK		
Receive Sensitivity (11a,20MHz)	- 6Mbps	PER≤10%@ -91dBm	≤ -85dBm
	- 54Mbps	PER≤10%@ -75dBm	≤ -68dBm
Receive Sensitivity (11n,20MHz)	- MCS=0	PER≤10%@ -90dBm	≤ -85dBm
	- MCS=7	PER≤10%@ -73dBm	≤ -67dBm
Receive Sensitivity (11n,40MHz)	- MCS=0	PER≤10%@ -90dBm	≤ -82dBm
	- MCS=7	PER≤10%@ -70dBm	≤ -64dBm
Receive Sensitivity (11ac,20MHz)	- MCS=0, NSS1	PER≤10%@ -92dBm	≤ -82dBm
	- MCS=8, NSS1	PER≤10%@ -70dBm	≤ -60dBm
Receive Sensitivity (11ac,40MHz)	- MCS=0, NSS1	PER≤10%@ -89dBm	≤ -79dBm
	- MCS=9, NSS1	PER≤10%@ -64dBm	≤ -55dBm
Receive Sensitivity (11ac,80MHz)	- MCS=0, NSS1	PER≤10%@ -88dBm	≤ -79dBm
	- MCS=9, NSS1	PER≤10%@ -61dBm	≤ -54dBm
Receive Sensitivity (11ax,20MHz)	- MCS=0	PER≤10%@ -94dBm	≤ -82dBm
	- MCS=11	PER≤10%@ -64dBm	≤ -52dBm
Receive Sensitivity (11ax,40MHz)	- MCS=0	PER≤10%@ -90dBm	≤ -79dBm
	- MCS=11	PER≤10%@ -61dBm	≤ -49dBm
Receive Sensitivity (11ax,80MHz)	- MCS=0	PER≤10%@ -88dBm	≤ -73dBm
	- MCS=11	PER≤10%@ -59dBm	≤ -43dBm
Maximum Input Level	802.11a/n/ac/ax : -20dBm		
Antenna Reference			

5.3 Bluetooth Section:

Feature	Description
General Specification	
Bluetooth Standard	Bluetooth V2.1+EDR /4.2/5.3
Host Interface	USB2.0
Antenna Reference	
Frequency Band	2402 MHz ~ 2480 MHz
Number of Channels	79 channels
Modulation	FHSS, GFSK, DPSK, DQPSK
RF Specification	

	Min	Typical	Max
Sensitivity @ BER=0.1% for GFSK (1Mbps)		-88dBm	
Sensitivity @ BER=0.01% for $\pi/4$ -DQPSK (2Mbps)		-86dBm	
Sensitivity @ BER=0.01% for 8DPSK (3Mbps)		-83dBm	
Sensitivity Sent1000 packets@ PER $\leq 30.8\%$ (BLE 1M)		-98dBm	
Maximum Input Level	GFSK (1Mbps):-20dBm		
	$\pi/4$ -DQPSK (2Mbps) :-20dBm		
	8DPSK (3Mbps) :-20dBm		


6. Electrical Characteristics

symbol	Parameter	Minimum	Typical	Maximum	Units
3.3V	3.3V supply voltage	3.0	3.3	3.6	V
Current	3.3V rating current	--	--	1500	mA



7. Time Sequence diagram

7.1. PCIe Bus during Power On Sequence


a. When WLAN is power off

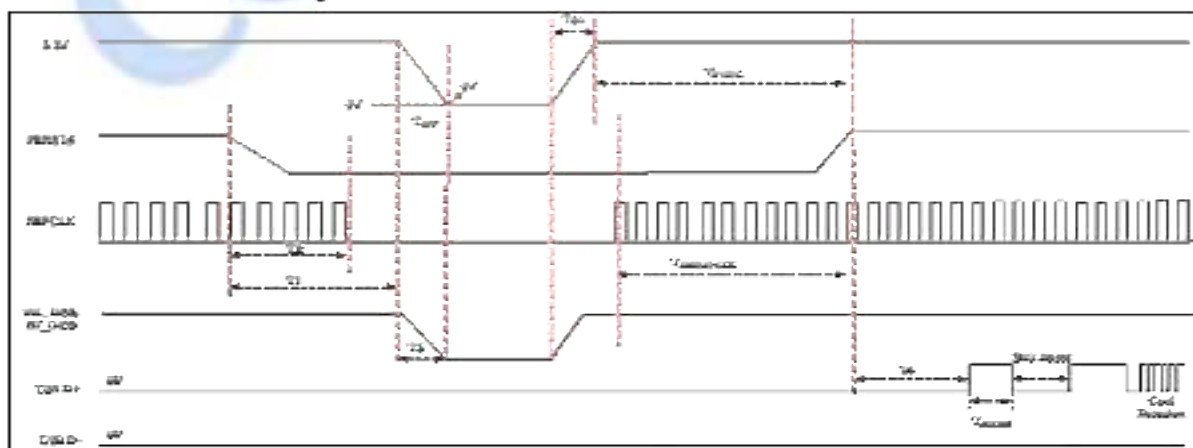

7.2. PCIe PERST# Timing Sequence (if need at least twice) 7.3. Power Off Sequence

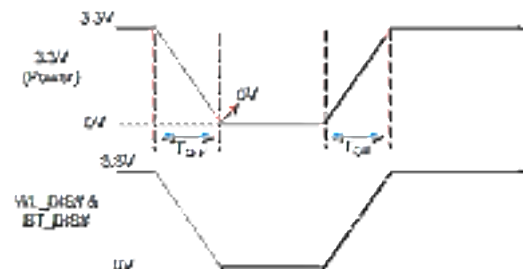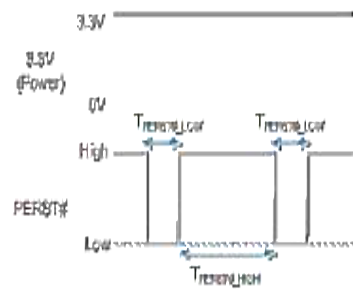

b. When WLAN is NOT power off

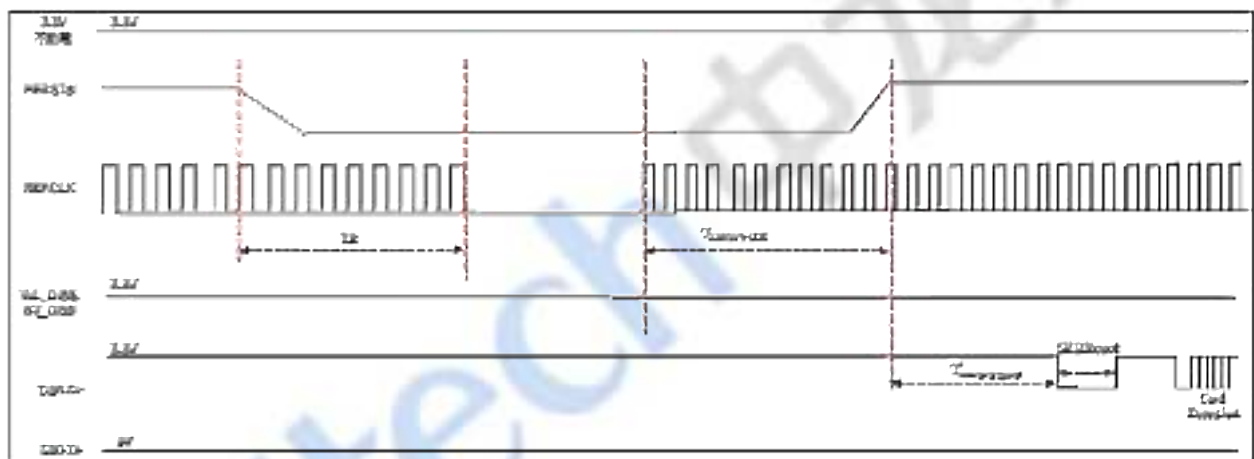


8. Layout Recommendation (Unit: mm)



9. Pin Description

(Sketch map)

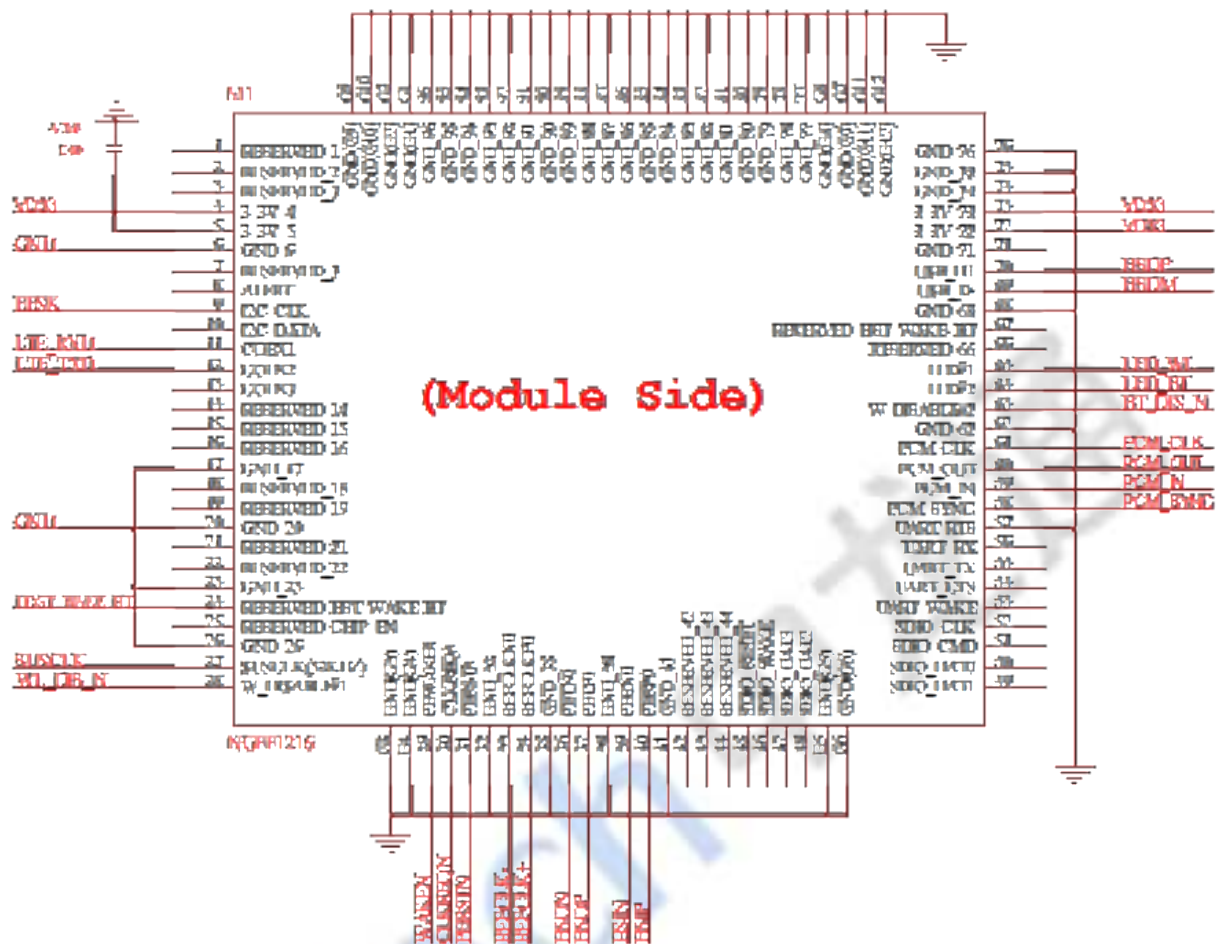

NO.	Name	Type	Description	Voltage
1	NC	—	No connect	
2	NC	—	No connect	
3	NC	—	No connect	
4	3.3V	P	3.3V INPUT	3.3V
5	3.3V	P	3.3V INPUT	3.3V
6	GND	—	Ground connections	
7	NC	—	No connect	
8	NC	—	No connect	
9	NC	—	No connect	
10	NC	—	No connect	
11	NC	—	No connect	
12	NC	—	No connect	
13	NC	—	No connect	
14	NC	—	No connect	
15	NC	—	No connect	
16	NC	—	No connect	

17	GND	—	Ground connections	
18	NC	—	No connect	
19	NC	—	No connect	
20	GND	—	Ground connections	
21	NC	—	No connect	
22	NC	—	No connect	
23	GND	—	Ground connections	
24	HST_WAKE_BT	I	Host wake BT(GPIO7)	3.3V
25	NC	—	No connect	
26	GND	—	Ground connections	
27	NC	—	No connect	
28	WL_DIS_N	I	Enable pin for WL device(GPIO9)	3.3V
29	PCIE_WAKEN	O/D	PCIE wake signal (active low)	3.3V
30	PCIE_CLKREQN	I/O/D	PCIE clock request(active low)	3.3V
31	PCIE_PERSTN	I	PCIE host indication to reset the device	3.3V
32	GND	—	Ground connections	
33	PCIE_RCLK_N	I	PCIE differential Clock input —N	3.3V
34	PCIE_RCLK_P	I	PCIE differential Clock input —P	3.3V
35	GND	—	Ground connections	
36	PCIE_TX_N	O	PCIE Transmit Data —N	
37	PCIE_TX_P	O	PCIE Transmit Data —P	
38	GND	—	Ground connections	
39	PCIE_RX_N	I	PCIE Receive Data —N	
40	PCIE_RX_P	I	PCIE Receive Data —P	
41	GND	—	Ground connections	
42	NC	—	No connect	
43	NC	—	No connect	
44	NC	—	No connect	
45	NC	—	No connect	
46	NC	—	No connect	
47	NC	—	No connect	
48	NC	—	No connect	
49	NC	—	No connect	
50	NC	—	No connect	
51	NC	—	No connect	
52	NC	—	No connect	
53	NC	—	No connect	
54	NC	—	No connect	
55	NC	—	No connect	
56	NC	—	No connect	
57	GND	—	Ground connections	

58	PCM_SYNC	I/O	PCM_SYNC (input/output)(GPIO2)	3.3V
59	PCM_IN	I	PCM_IN (input)(GPIO0)	3.3V
60	PCM_OUT	O	PCM_OUT (output)(GPIO1)	3.3V
61	PCM_CLK	I	PCM_CLK (input)(GPIO3)	3.3V
62	GND	—	Ground connections	
63	BT_DIS_N	I	Enable pin for BT device(GPIO11)	3.3V
64	BT_LED	O	BT_LED	3.3V
65	WL_LED	O	WL_LED	3.3V
66	NC	—	No connect	
67	NC	—	No connect	
68	GND	—	Ground connections	
69	USB_DM	I/O	USB Serial Differential Data Minus	
70	USB_DP	I/O	USB Serial Differential Data Plus	
71	GND	—	Ground connections	
72	3.3V	P	3.3V INPUT	3.3V
73	3.3V	P	3.3V INPUT	3.3V
74	GND	—	Ground connections	
75	GND	—	Ground connections	
76	GND	—	Ground connections	
77	GND	—	Ground connections	
78	GND	—	Ground connections	
79	GND	—	Ground connections	
80	GND	—	Ground connections	
81	GND	—	Ground connections	
82	GND	—	Ground connections	
83	GND	—	Ground connections	
84	GND	—	Ground connections	
85	GND	—	Ground connections	
86	GND	—	Ground connections	
87	GND	—	Ground connections	
88	GND	—	Ground connections	
89	GND	—	Ground connections	
90	GND	—	Ground connections	
91	GND	—	Ground connections	
92	GND	—	Ground connections	
93	GND	—	Ground connections	
94	GND	—	Ground connections	
95	GND	—	Ground connections	
96	GND	—	Ground connections	
G1	GND	—	Ground connections	
G2	GND	—	Ground connections	
G3	GND	—	Ground connections	

G4	GND	—	Ground connections	
G5	GND	—	Ground connections	
G6	GND	—	Ground connections	
G7	GND	—	Ground connections	
G8	GND	—	Ground connections	
G9	GND	—	Ground connections	
G10	GND	—	Ground connections	
G11	GND	—	Ground connections	
G12	GND	—	Ground connections	



10. Supplier

Secondary supplier list	
Material name	Supplier brand
WIFI IC	Realtek
Crystal	FK /TKD/JWT
PCBA	A, O, I,F
RF Switch	GSR/GW
Power inductance	Sunlord/CHILISIN/SAMWHA
Capacitance	SAMSUNG /EYANG/Murata
resistance	UniOhm /YAGEO

11. Physical photo



12. IPEX Spec

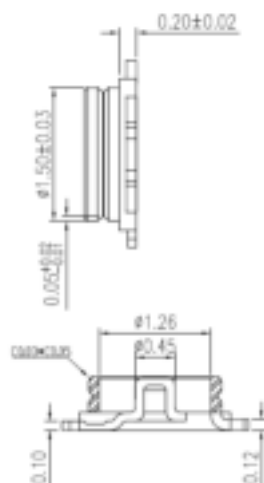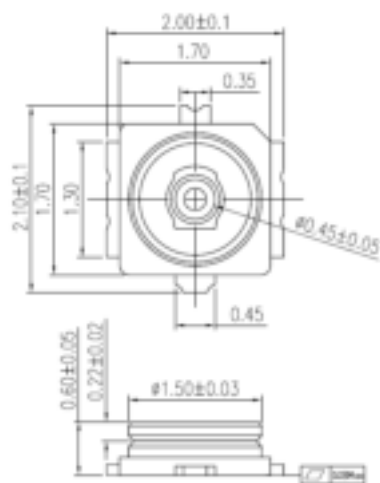

NOTES:

- 1.0 : 绝缘电阻: 500MΩ Min(Initial)
- 2.0 : 频率范围: 0~6GHz
- 3.0 : 特性阻抗: 50±5Ω
- 4.0 : 内导体接触电阻: 20MΩ Max
- 5.0 : 外导体接触电阻: 10MΩ Max
- 6.0 : 耐压: 200V AC/60s
- 7.0 : 电压驻波比: ≤1.3(DC~3GHz)
≤1.4(3~6GHz)
- 8.0 : 机械寿命: 30 Cycles
- 9.0 : 相对湿度: 95%R.H.Max
- 10.0: 工作温度: -40°C~+85°C

13. Warpage



Inspection standard for warpage (clearance) :

Place the module on the horizontal marble and measure the gap between the bottom of the module and the marble with a 0.1mm thick feeler gauge.

The gap is required to be ≤0.1mm

翘曲（间隙）的检验标准：

将模组放在水平大理石上，用 0.1mm 厚度的塞尺测量模组底部与大理石之间的间隙，

要求 gap≤0.1mm

14. Baking & storage temperature & Recommended Reflow Profile

(烘烤, 储存温度和推荐炉温)

14.1 Baking & storage temperature

A. Storage life: 12 months. Storage conditions: <40°C. Relative humidity: <90%R.H.

(保存期限: 12个月, 储存环境条件: 温度在: <40°C, 相对湿度: <90%R.H.)

B. After this bag is opened, devices that will be subjected to infrared reflow, vapor-phase reflow, or equivalent processing must be. (模块包装被拆后, SMT 组装之时限)

a. Check the humidity card :stored at $\leq 20\%RH$. If :30%~40%(pink) or greater than 40%(red). Labeling module has moisture absorption. (检查湿度卡: 显示值应小于30% (蓝色), 如: 30%~40%(粉红色) 或者大于40% (红色) 表示模块已吸湿气.)

b. Mounted within 168 hours at factory conditions of: $t \leq 30^\circ C$, $\leq 60\%R.H$.

(工厂环境温度湿度管制: $\leq 30^\circ C$, $\leq 60\%R.H$, 168小时内。)

c. Once opened, the workshop the preservation of life for 168 hours.

(拆封后, 车间的保存寿命为168小时。)

C. Module apart packing after 168 hours, If baking is required, devices may be baked for.

(如在拆封后的168个小时内未使用完, 需要烘烤, 烘烤条件如下:)

a. Modules must be to remove module moisture problem. (模块须重新烘烤, 以除去模块吸湿问题。)

b. Baking temperature: $40^\circ C \pm 5^\circ C$, 120 hours. (烘烤温度条件: $40^\circ C \pm 5^\circ C$, 120小时。)

c. After baking, put proper amount of desiccant to seal packages.


(烘烤后, 放入适量的干燥剂再密封包装)

14.2 Recommended Reflow Profile


Referred IPC/JEDEC standard.


Peak Temperature : <250°C

Number of Times : ≤2 times

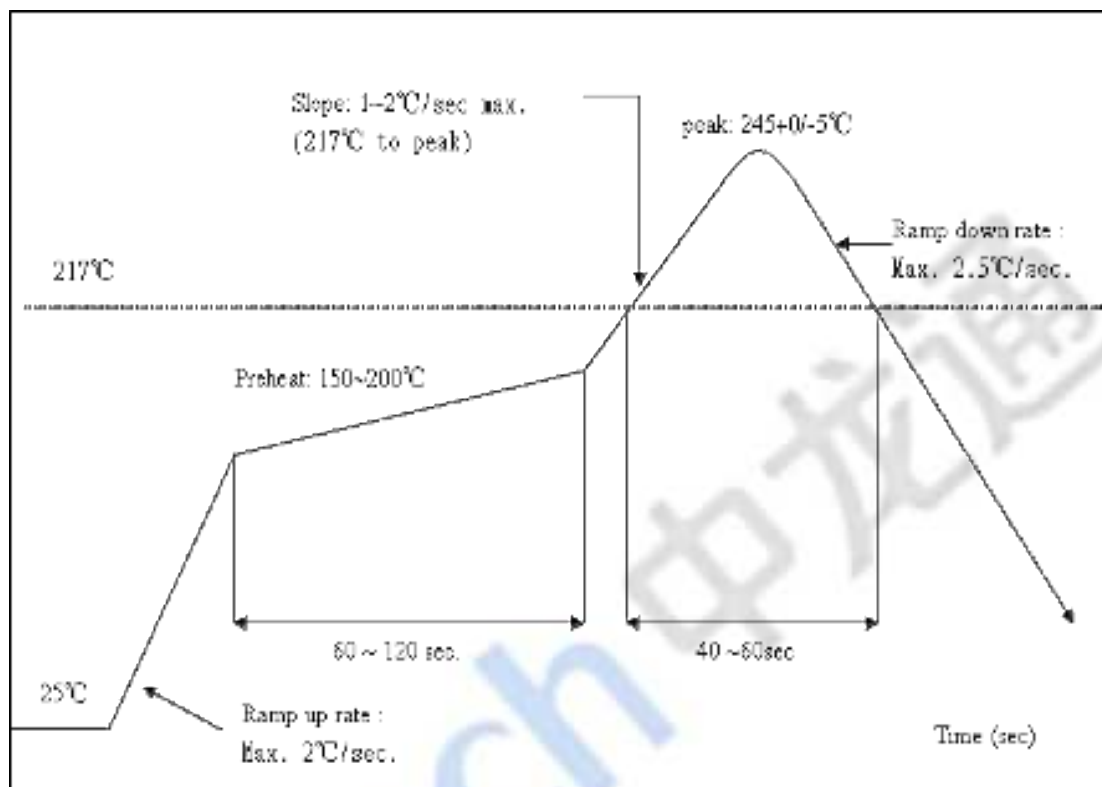

15. Packing information

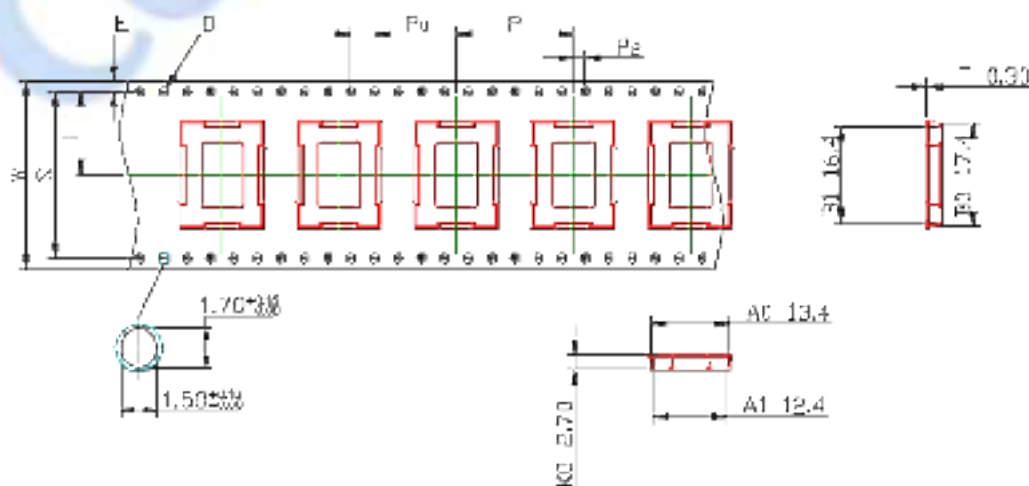

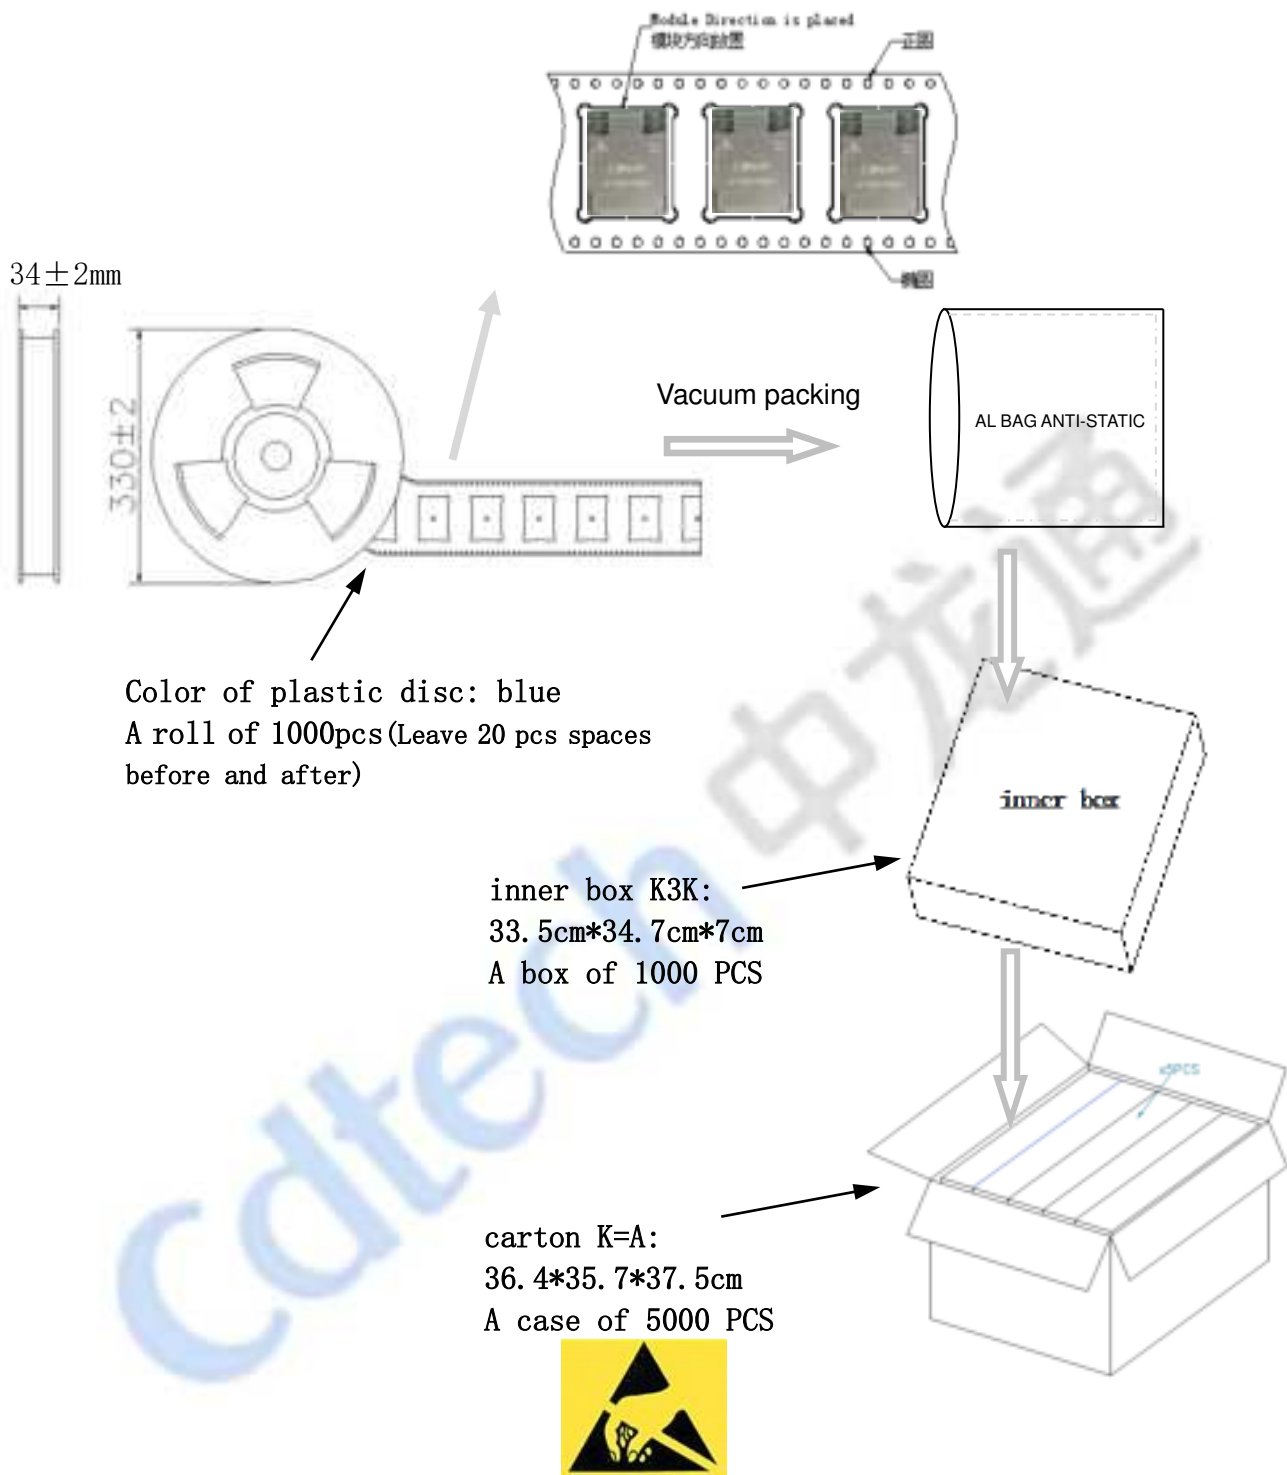

ESD CAUTION

The CDW-61851BE-00 is ESD (electrostatic discharge) sensitive device and may be damaged with ESD or spike voltage. Although CDW-61851BE-00 is with built-in ESD protection circuitry, please handle with care to avoid the permanent malfunction or the performance degradation.

FCC WARNING

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

15.105 Information to the user.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination.

The firmware setting is not accessible by the end user.

The final end product must be labelled in a visible area with the following:

"Contains Transmitter Module FCC ID: 2BFLD-61851BE00"

Requirement per KDB996369 D03

2.2 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.³

Explanation: This module meets the requirements of FCC part 15C(15.247), FCC Part15 15.407.

2.3 Summarize the specific operational use conditions

Provide all the restrictions imposed by the specific rule(s), that extend to host's and any other notices or regulatory statements require in host's end-user manual. For example, the rule that restricts use to indoor operation, not operated on aircraft, etc.

Explanation: Equipment operating within the frequency band of 5150-5350MHz is for indoor use only

Also describe conditions that are applicable to the modular transmitter, such as including for example any limits on antennas. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, for professional installed equipment, then this information must be in the instructions. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.

Explanation: The EUT has FPC antenna, the module contains 2 unique antenna connector. The maximum gain value of FPC antenna is 2.03dBi

2.4 Limited module procedures

The Grantee of a limited module must file with the application for certification a procedure^[6] that describes the proposed method used to ensure host compliance when the limited module is installed in the host product.

If a modular transmitter is approved as a "limited module," then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions.

A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval. The Grantee can devise a strategy to be approved through a Pre-Approval Guidance (KDB Publication 388624 PAG item MODLIM) inquiry

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of

the product into which the modular transmitter will be installed and maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

Explanation: The module is a single module.

2.5 Trace antenna designs

If trace antenna designs are applicable, full-detail design specifications are required per D02 Module Q&A Question 11.

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ – Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects: layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.⁴

- a) Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);
- b) Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- c) The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
- d) Appropriate parts by manufacturer and specifications;
- e) Test procedures for design verification; and
- f) Production test procedures for ensuring compliance.

The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

Explanation: The module with FPC antenna designs, See antenna report for antenna details.

2.6 RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable – xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

Module Grantees are required to provide an RF exposure (RFX) exhibit for CoU related to fixed, mobile or portable configurations, as defined §2.1091 and §2.1093, as well as per further specification in by KDB Publication 447498. This exhibit shall include an RF exposure compliance statement, as well as references to Maximum Permissible Exposure (MPE) or Specific Absorption Rate (SAR) test reports, as required per KDB 447498.

Modules can only be used in a host for the conditions that it was granted for. To be used in any other way than granted, such as mobile to portable or with other transmitters simultaneously, requires additional evaluation, testing, or testing and Class 2 permissive change.

Explanation: This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body." This module is designed to comply with the FCC statement, FCC ID is: 2BFLD-61851BE00.

2.7 Antennas

For Part 15 and licensed CMRS Client devices a list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an "omni-directional antenna" is not considered to be a specific "antenna type")).

For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product. The module manufacturers shall provide a list of acceptable unique connectors.

Licensed (non-client station) Modules for a base, fixed station can be stated as conducted, and antenna data is not required when it is clear that the licensee is responsible for the applicable limits under the rules and or license.

Explanation: The EUT has FPC antenna, the module contains 2 unique antenna connector. The maximum gain value of FPC antenna is 2.03dBi

2.8 Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This includes advising host product manufacturers that they need to provide a physical or e-label stating "Contains FCC ID" with their finished product. See Guidelines for Labeling and User Information for RF Devices – KDB Publication 784748.

Explanation: The host system using this module, should have label in a visible area indicated the following texts: "Contains FCC ID: 2BFLD-61851BE00"

2.9 Information on test modes and additional testing requirements

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide. Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterizes a connection by enabling a transmitter. This can

greatly simplify a host manufacturer's determination that a module as installed in a host complies with FCC requirements.

Explanation: Can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

2.10 Additional testing, Part 15 Subpart B disclaimer

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.⁶

Explanation: The module is only FCC authorized for the specific rule parts listed on the grant. The OEM integrator is responsible for testing their end-product for any additional compliance requirements required with this module installed. If the final product contains circuits of other FCC PART 15 Subparts, the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

2.11 Note EMI Considerations

Note that a host manufacture is recommended to use D04 Module Integration Guide recommending as "best practice" RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties

Explanation: The host manufacturer is strongly recommended to confirm compliance with FCC requirements for the transmitter when the module is installed in the host. This module is a stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, the host manufacturer has to consult with the module manufacturer for the installation method in the end system. Host manufacturer is recommended to use D 04 Module Integration Guide. The final host product may also need to be evaluated against FCC rule part 15 Subpart B (criteria for unintentional radiators) in order to be properly authorized for operation as part 15B

2.12 How to make changes

Since. only Grantees are permitted to make permissive changes, it is recommended that module manufactures provide contact information and some guidance to host providers in the integration instructions if they expect their module will be used differently than granted.

Explanation: Module manufacturer contact: Tel: (86 755) 81449957, E-mail: Info@cdtech.cn