



Affordable. Reliable. Home Improvement.


**PADDLE-BOARD-PUMP
MODEL: HT-708**

Technical Support and E-Warranty Certificate
www.vevor.com/support




VEVOR

Affordable. Reliable. Home Improvement.

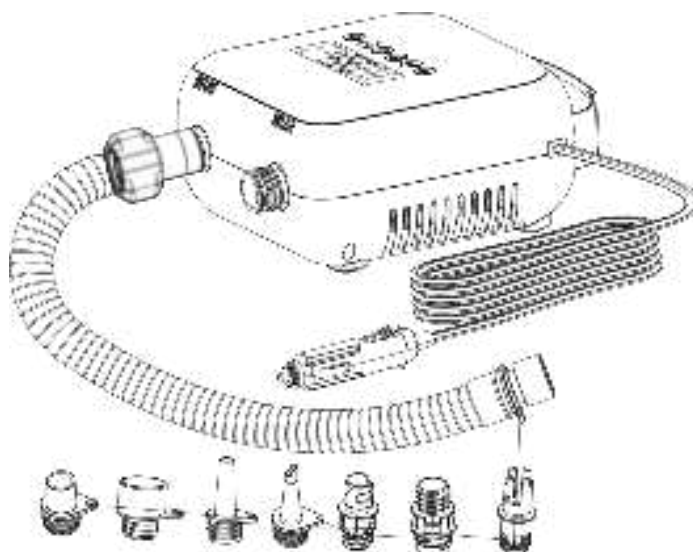MODEL: HT-708



This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves a clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

	<p>Warning-To reduce the risk of injury, user must read instructions manual carefully.</p>
	<p>This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)This device may not cause harmful interference, and (2)this device must accept any interference received, including interference that may cause undesired operation.</p>
	<p>This product is subject to the provision of European Directive 2012/19/EC. The symbol showing a wheelie bin crossed through indicates that the product requires separate refuse collection in the European Union. This applies to the product and all accessories marked with this symbol. Products marked as such may not be discarded with normal domestic waste, but must be taken to a collection point for recycling electrical and electronic devices</p>

I. Warnings

- * **Warning:** This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.
- * **Warning:** Children shall not play with the appliance.
- * **Warning:** Cleaning and user maintenance shall not be made by children without supervision.
- * **Warning:** Keep the air pump out of reach of children.
- * **Warning:** This product shall not be exposed to the rain or immersed in water.
- * **Warning:** Before moving, maintaining, repairing or adjusting this product, please first pull out the cigarette lighter plug from the socket.
- * **Warning:** Please do not bury the wire in the soil and it shall be place in the safe zone where it won't be damaged by mower or other equipment.

- * **Warning:** If the power wire is damaged, the power wire must be changed by the manufacturer or its service agent or the similar authorized personnel, in case of any risk.
- * **Warning:** If you are standing in a place with water or your hands are wet, please don't plug or pull the cigarette lighter plug.
- * **Warning:** Before inflating, please pay attention to check the maximum bearable pressure of the inflatable product, because the air bag may be damaged upon exceeding the maximum bearable pressure.
- * **Warning:** Before using, please check the cigarette lighter socket to make sure that there is no rust or residue inside. The cigarette lighter socket with poor electric conduction may cause overheating of the product or power source, which will damage the product.
- * **Warning:** The product can not be used under flammable and explosive environment.
- * **Warning:** Please use this equipment at ambient temperature of no more than 40 degrees.
- * **Warning:** The pressure line of the product is only suitable for the original wave pipe.
- * **Warning:** Do not disassemble the device without authorization. This product does not contain spare parts that can be assembled/maintained by the user.
- * **Warning:** Do not cover or obstruct the product with paper or other objects for fear of affecting heat dissipation and cooling of the product.
- * **Warning:** Be sure to check if the wave pipe is broken, and make sure the switch and the pressure screen really work prior to use.
- * **Warning:** Keep away from heat source, humidity, dust and direct sunlight.
- * **Warning:** The purpose of using this product is limited to the description in the instruction book.

II. Product Introduction

HT-708 is an intelligent DC electric pump with the preset pressure LED screen display with preset pressure value and It can inflate inflatable tents, inflatable beds, canoeing, car, bicycle, ball etc. In addition, it has an

intelligent pressure system. The air pump will automatically stop inflation when pressure reaches the preset pressure value.






This product also can deflate and when the inflatable product is not used, you can use the air pump to empty the air inside for folding and storage.

III. Product Parameters


Pressure	0-40PSI	Input voltage	DC12V
----------	---------	---------------	-------

IV. List of Accessories

Please make sure that the following accessories are in the box before using it, if any missing, please contact with the local service agents


Air pump	Plastic hose	Braided hose	Instruction Book	sealing ring
				

V. Details of Accessories

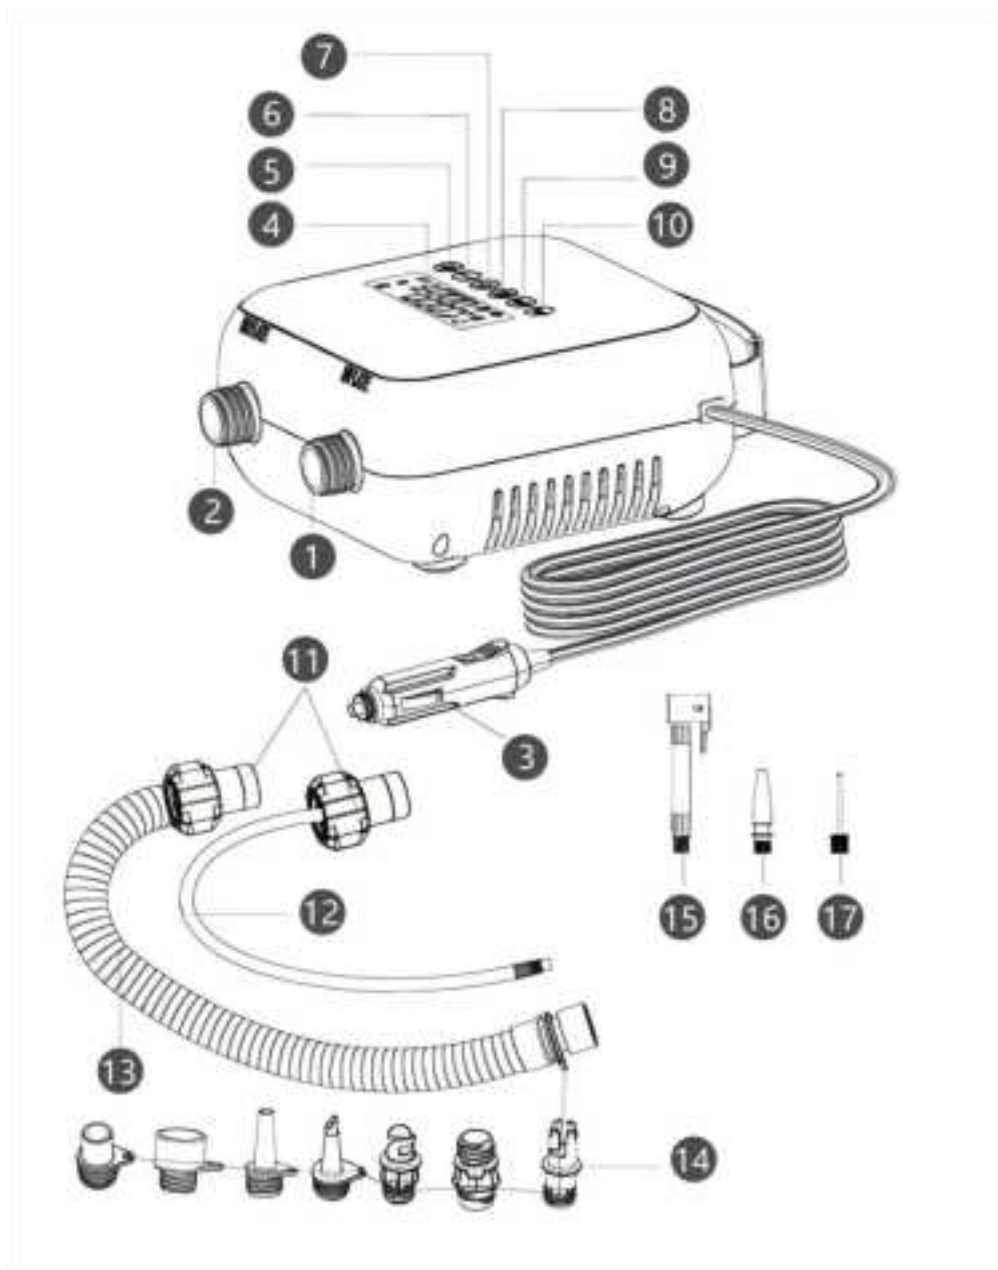



①	Inflation inlet	⑩	PSI Unit button
②	Deflation outlet	⑪	Flexible conduit adaptor
③	Cigarette lighter plug	⑫	Braided hose
④	LED display	⑬	Plastic hose
⑤	On/off button	⑭	Air nozzle
⑥	Decompressing button	⑮	Hose coupler
⑦	Pressurizing button	⑯	Plastic valve
⑧	Scene switch button	⑰	Ball needle
⑨	BAR Unit button		



VI. Inflation Operation

* Press Scene switch button  to switch between the following six inflatable scenes:

[200] Free mode: adjustable range: 0.5-20PSI







 SUP mode: default 15PSI, adjustable range: 10-20PSI  Tent mode: default 6PSI, adjustable range: 3-10PSI

 Air bed mode: default 0.5PSI



 Car mode: default 2.5BAR, adjustable range: 1.7-2.75BAR 


Basketball mode: default 8PSI, Adjustable range: 4-16PSI.

INSTRUCTIONS


Product model	Product type	Recommended pressure range
Free 	Other inflatable products	0.5-20PSI
SUP 	SUP surfboard	12-15PSI
Tent 	Air tent	4-7PSI
	Kayak	3-4PSI
	Air kite	6-9PSI
Air bed 	Airbed	0.5PSI
	Air-filled toy	
Car 	Motorcycle and electric motorcycle tires	1.8-2.75BAR
	Small car tires	2.2-2.75BAR
Balls 	Basketball	7-9PSI
	Football	8-16PSI
	Volleyball	4-5PSI
	Football	12-14PSI

SUP Inflation Operation


- * Connect the end with flexible conduit adaptor of the hose with the air pump inflation inlet and twist clockwise to tighten it (Fig 1).
- * Connect the other end of the hose with the air nozzle that matches the air bag (Fig 2) and insert the inflation valve of the air bag, turn it clockwise to fix it (Fig 3).
- * Plug the cigarette lighter plug into the 12V DC socket (Fig 4), the display will light up.
- * Press the scene switch button  to select the  inflatable scene.

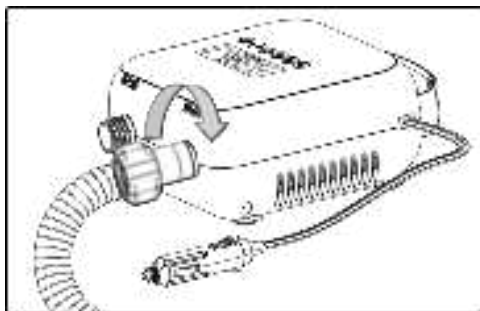


(Fig 1)





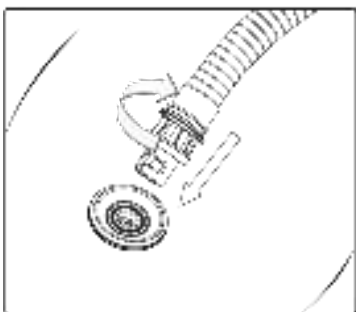

(Fig 2)

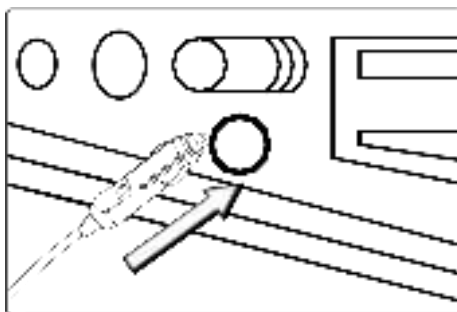







(Fig 3)




(Fig 4)


- * Press the BAR unit button  or press the PSI unit button  to select the unit you need.
- * Press the pressure increase button  or decompressing button  to set the desired pressure value. The pressure range is from 0 to 20 PSI (1 PSI = 0.0689 bar = 6.89KPA).

* Upon the completion of the above steps, press the on/off button  to start inflation (Fig 5).

* During the inflating process, you can press the pressurizing button  or decompressing button  to increase or reduce the pressure value, press the BAR unit button  or press the PSI unit button  to switch the unit, and press the On/Off button  to stop.

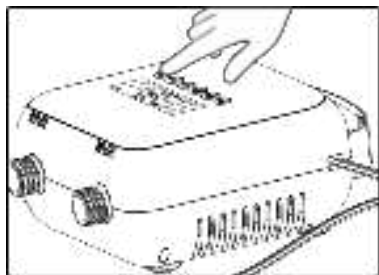

(Fig 5)

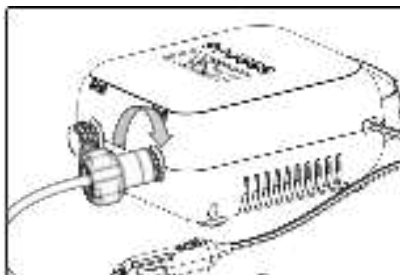

(Fig 6)



Car Inflation Operation



* Connect one end of the fixed head of the braided hose with the air pump inflation port and tighten it clockwise (Fig 6), turn the other end with the plastic air nozzle clockwise (Fig 7) and then insert it into the inflation port of the car tire and fix it (Fig 8).


* Plug the cigarette lighter plug into the 12V DC socket (Fig 4), the display will light up.



* Press the scene switch button  to select the  inflatable scene.




INSTRUCTIONS

* Press the BAR unit button  or press the PSI unit button  to select the unit you need.

* Press the pressure increase button  or decompressing button  to set the desired pressure value. The pressure range is from 1.8 to 2.75 BAR (1 PSI = 0.0689 BAR = 6.89KPA).

* Upon the completion of the above steps, press the on/off button  to start inflation.



* During the inflating process, you can press the pressurizing button  or decompressing button  to increase or reduce the pressure

value, press the BAR unit button  or press the PSI unit button  to switch the unit, and press the On/Off button  to stop.


*When the pressure reaches the set value, the air pump will stop working automatically.

VII. Deflation Operation


SUP Deflation Operation

*Plug the cigarette lighter plug into the 12V DC socket (Fig 4), the display will light up, press the scene switch button  to select the  inflatable scene.

* Remove the hose from the inflation inlet; connect the end with flexible conduit adaptor of the hose with the air pump deflation outlet and twist clockwise to tighten it (Fig 9) and the other end shall still be to the airbag.

* Press the on/off button  to start deflation until all the gas is discharged, then the power can be turned off to stop the deflation.

*After the deflation is complete, pull the cigarette lighter plug out of the 12V DC socket; please remove the hose from the air pump and airbag and store it.

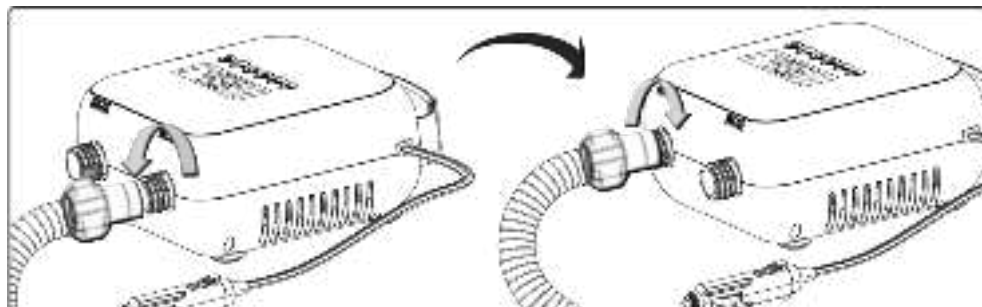


(Fig 9)

VIII. Precautions

* The applied power source must be the 12V DC power source (Fig 4).

* Before inflating, please confirm the air pressure value required by the inflated item to avoid personal injury caused by excessive inflation.

- * Do not block the inflation inlet and deflation outlet, and ensure that the inflation inlet and deflation outlet remain smooth at all times.
- *Observe the local waste treatment provisions and it is not allowed to throw the air pump away randomly.
- * Don't use this product when the hose is damaged, and please change the hose immediately.
- *Don't pull out the hose when inflating because the high pressure may hurt the physical body.
- * Don't make the air pump work for more than 20 minutes because that motor overheating may cause internal damage and the air pump shall be fully cooled for 30 minutes after continuously working up to 20 minutes.
- *  Disposal: Do not dispose of this product as unsorted municipal waste. The waste must be collected separately for special disposal. This product shall not be disposed of with household waste and must be disposed of in an approved location for recycling electrical and electronic products. By collecting and recycling waste, you can help conserve natural resources and ensure that product is treated in an environmentally friendly and healthy way.
- * Please don't use this air pump if any part is damaged and please contact with the professional personnel to repair it.
- * In order to prevent risk, the inflation inlet shall not be forwarded to face or body.
- * Please don't leave while inflating.
- * Please start the car when using the product, in case of unnecessary damage.

IX. Fault Handling

Malfunction	Cause	Solution
The air pump cannot be started	1. The power source is not plugged properly. 2. The fuse in Cigarette lighter	1. Make sure that the power wire is plugged in the 12V DC socket. 2. Change the fuse. 3. Cool the motor and restart it.

normally.	plug is burnt out. 3. Overheating or overload causes motor stop.	4. If the problem cannot be solved, please contact local agents or the similar authorized personnel.
Slow or abnormal inflation.	1. Check whether the hose is blocked or cracked. 2. The joint between the hose and air pump or air bag is not installed properly.	1. Change the hose or make it unblocked, and check whether the hose is cracked. 2. Reinstall the hose. 3. If the problem cannot be solved, please contact with the manufacturer or its service agent or the similar authorized personnel.
Hot	Temperature alarm.	Heat dissipation is required.
E3	Shutdown protection without increasing air pressure.	Check for air leaks.
U-L	Low power alarm of power supply (voltage lower than 10.5 V).	1. Power supply voltage is low. 2. Power supply is insufficient. And line has limited current. 3. Power adapter overcurrent protection shall be used, requiring special adapter (120 W without current limit).
U-H	High input voltage alarm (over 17 V).	Standard power supply shall be selected.

LO/Hi E6	Motor overcurrent protection.	Check motor for foreign matter stuck or restart air pump, If the problem cannot be solved, please contact local agents or the similar authorized personnel.
E8	Failure of air pressure sensor	Please contact with the manufacturer or its service agent or the similar authorized personnel.
Air pressure does not return to zero	Remove the connecting trachea.	Press and hold the PSI button for more than 3 seconds to return to zero.

XII. Maintenance and Storage

*After using, or if you want to move, maintain or adjust the product, please first pull out the DC plug from the socket.

*When it is idle, it shall be properly stored after being fully cooled. * It shall not be exposed to the rain or immersed in water.

* Please store it in the dry and ventilated place.

XIII. Suggestions

* The warranty period of this product is one year, and it is suggested to use the original accessories. For any fault not caused by using the original accessories, it shall be out of the warranty scope.

Manufacturer: Shanghaimuxinmuyeyouxiangongsi

Address: Shuangchenglu 803nong11hao1602A-1609shi, baoshanqu, shanghai 200000 CN.

Imported to AUS: SIHAO PTY LTD. 1 ROKEVA STREETEASTWOOD NSW 2122 Australia

Imported to USA: Sanven Technology Ltd. Suite 250, 9166 Anaheim Place, Rancho Cucamonga, CA 91730

UK	REP
----	-----

YH CONSULTING LIMITED. C/O YH Consulting Limited Office 147, Centurion House, London Road, Staines-upon-Thames, Surrey, TW18 4AX

EC	REP
----	-----

E-CrossStu GmbH
Mainzer Landstr.69,
60329 Frankfurt am Main.



Technical Support and E-Warranty Certificate
www.vevor.com/support