

Click for
Table of Contents

x

Contents

UniFi Security Gateway



Power Adapter (12V, 1A)



Power Cord



Screws (Qty. 2)




Screw Anchors (Qty. 2)

UniFi Controller System Requirements

- Microsoft Windows 8, Mac OS X, or Linux
- Java Runtime Environment 1.6 (or above)
- Web Browser: Mozilla Firefox, Google Chrome, Microsoft Edge, or Microsoft Internet Explorer 11
- UniFi Controller software v5.4 or higher (available at: ui.com/download/unifi)

Hardware Overview

Ports Panel

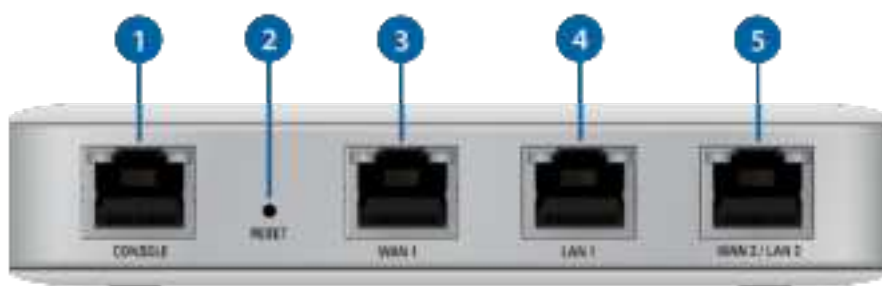

1 Console

RJ45 serial console port for CLI management. Use a RJ45-to-DB9 serial console cable to

Click for
Table of Contents

- Flow control NONE

2 Reset

Resets to factory defaults. The UniFi Gateway should be powered on. Press and hold the Reset button for about 10 seconds until the right LED on the WAN 2 / LAN 2 port starts flashing and then becomes solidly lit. After a few seconds, the LED will turn off, and the UniFi Gateway will automatically reboot.

3 WAN 1 Port

Supports 10/100/1000 Ethernet WAN connections. Default setting is DHCP client.


4 LAN 1 Port

Supports 10/100/1000 Ethernet LAN connections. Default setting is DHCP Server.
Server IP: 192.168.1.1/24

5 WAN 2 / LAN 2 Port

Supports 10/100/1000 Ethernet connections. Configure the port using the UniFi Gateway configuration interface.

LEDs

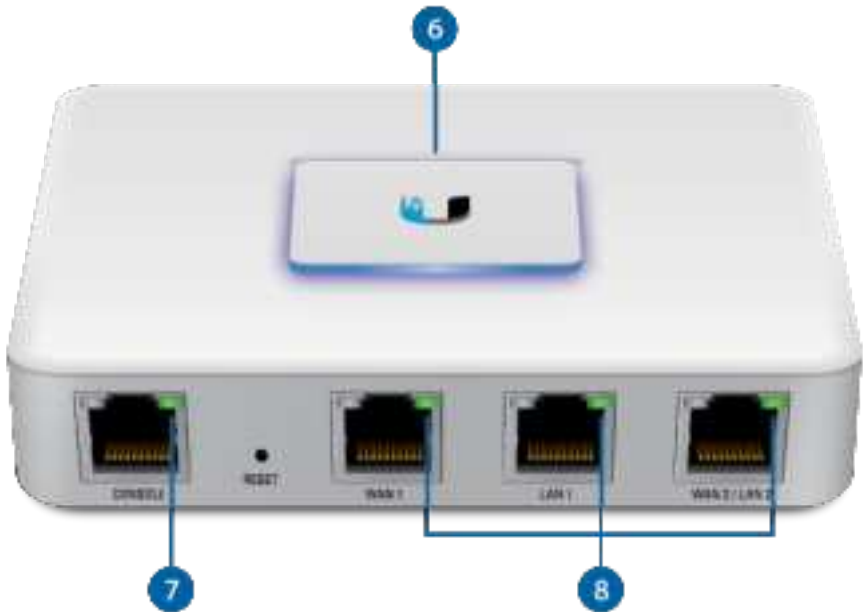

6 System LED

[Click here](#) for detailed descriptions.

7 Power LED

Off

Power Off

Click for Table of Contents

×


Act LED

	No Link
Amber	Link Established at 10/100 Mbps
Amber Flashing	Link Activity at 10/100 Mbps
Green	Link Established at 1000 Mbps
Green Flashing	Link Activity at 1000 Mbps

Hardware Installation


Wall-Mounting (Optional)

1.

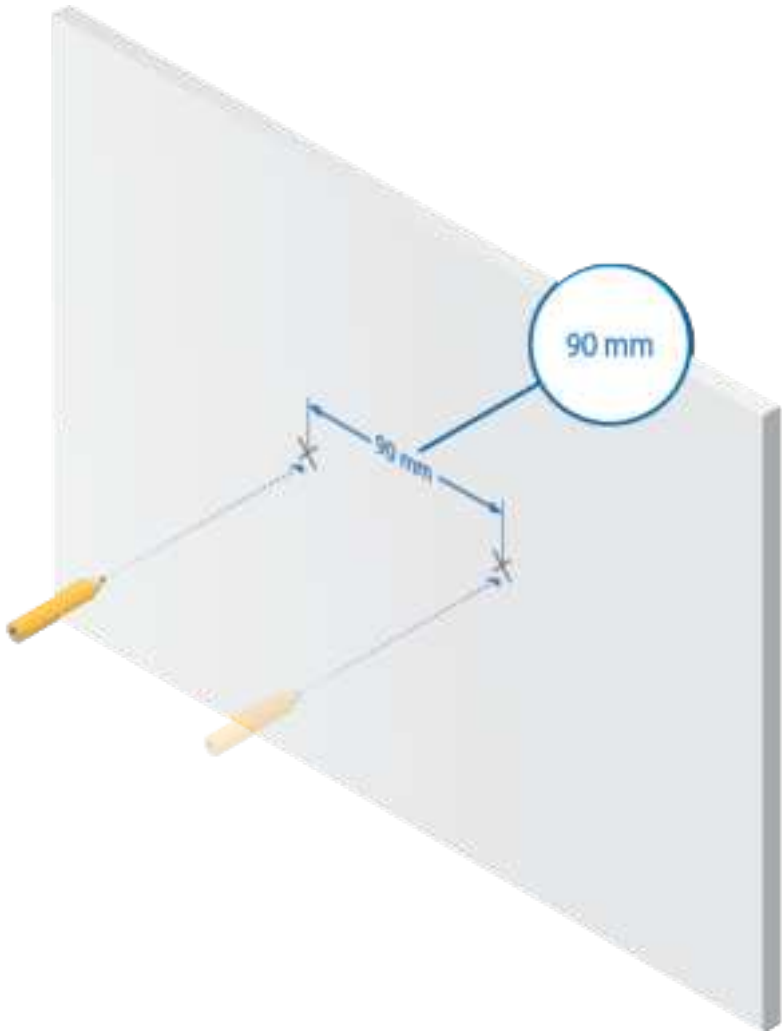


2.

Click for
Table of Contents

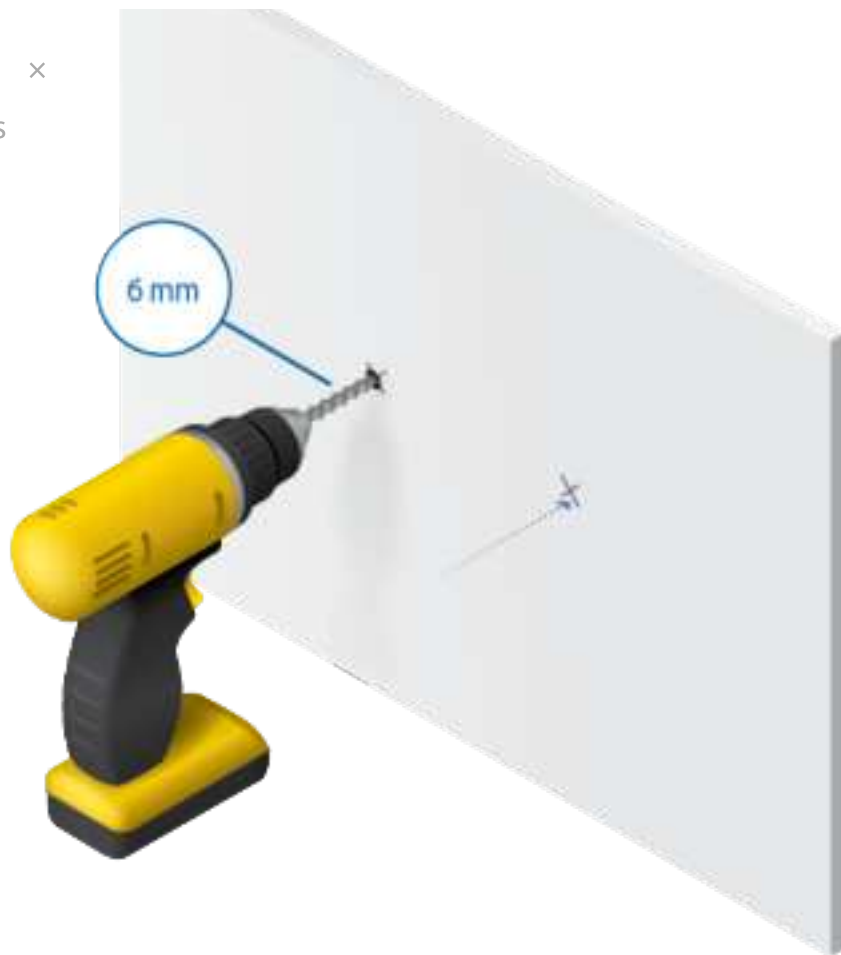


3.

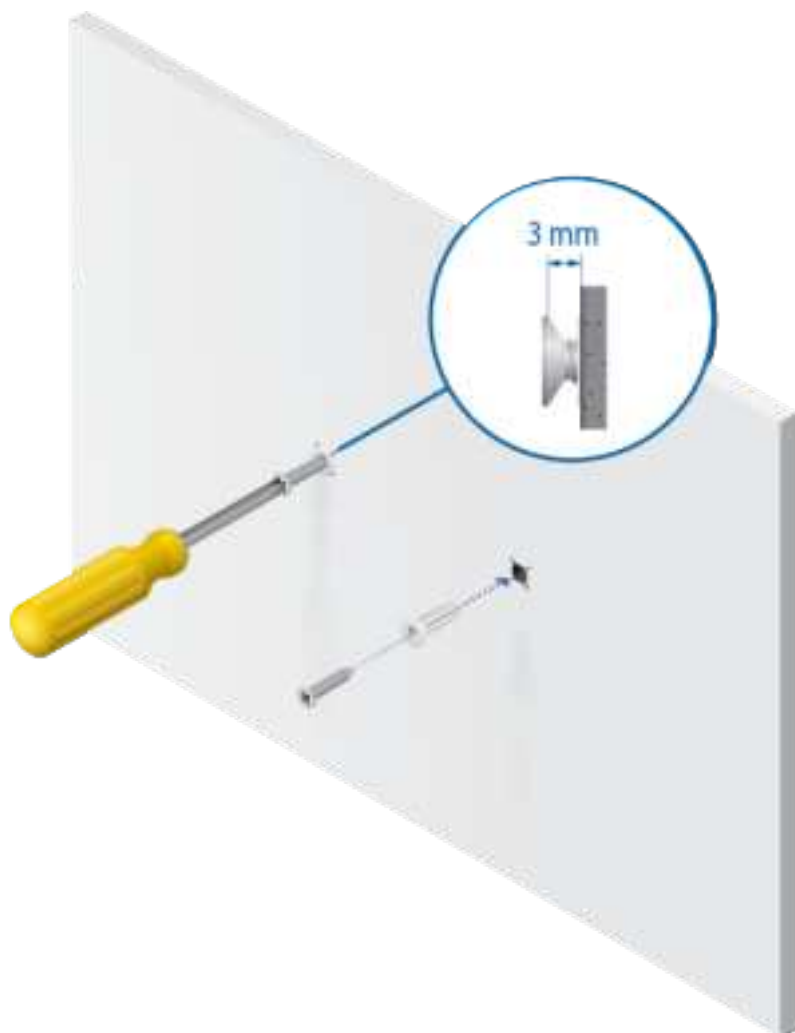

4.

Click for
Table of Contents

×

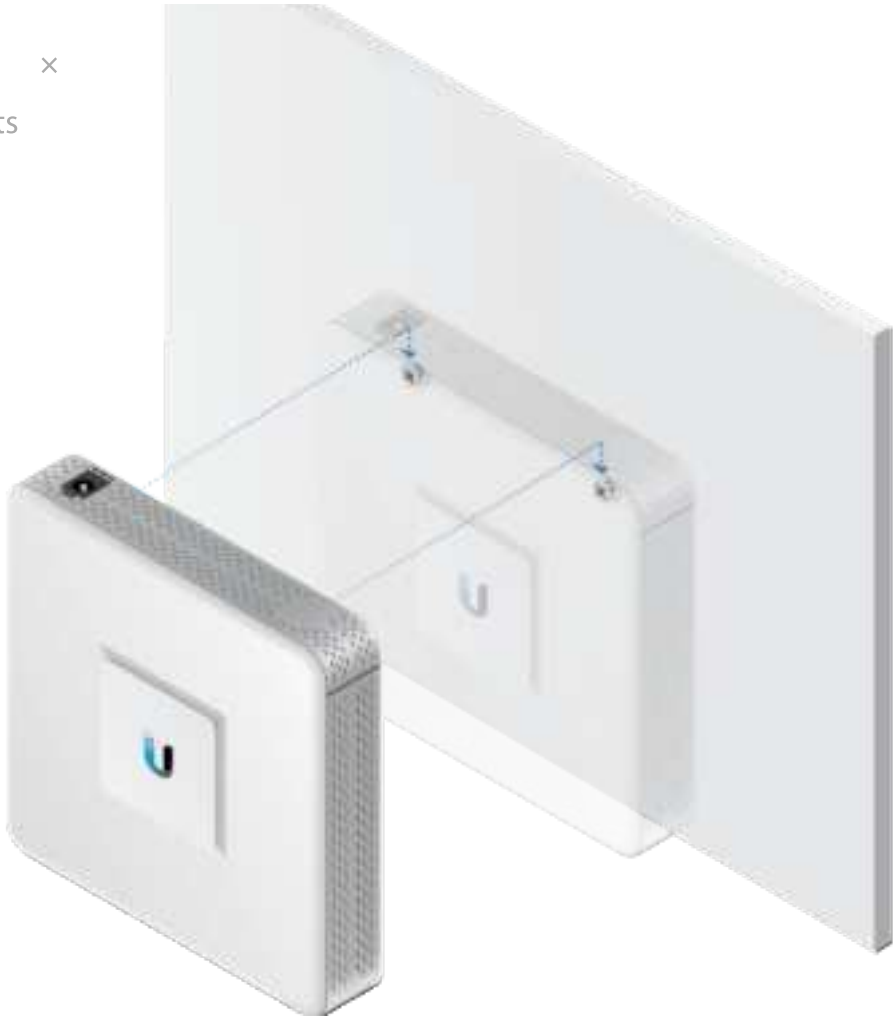

Connecting Power


1.



2.

Click for
Table of Contents

×

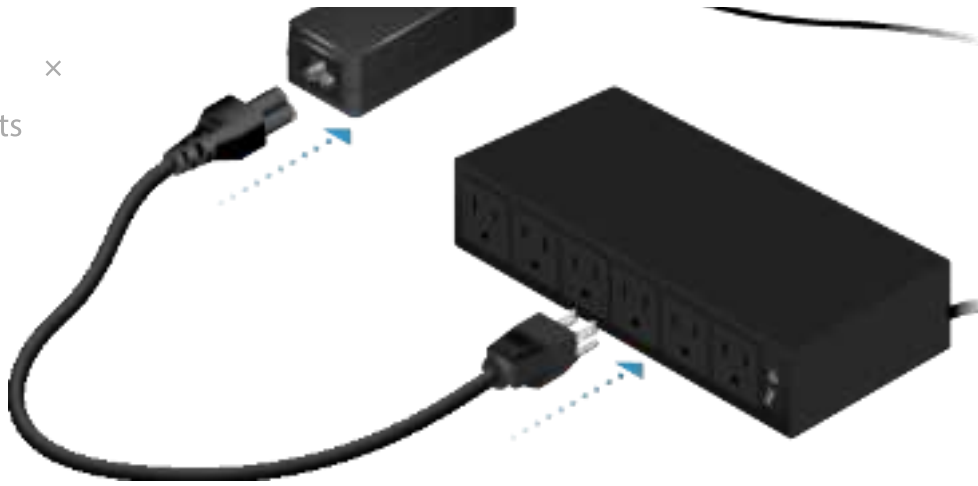

Network Connections

1.



2.



Click for
Table of Contents

✕



Software Installation

Download the latest version of the UniFi Controller software at: ui.com/download/unifi

From a management station connected to the same Layer-2 network, launch the installer and follow the on-screen instructions.



Note: If you already have UniFi Controller v5.4 or higher installed, go to the section, Adopting the UniFi Gateway.

After you have installed the software and run the UniFi Installation Wizard, a login screen will appear for the UniFi Controller management interface. Enter the username and password that you created and click Sign In.



Click for
Table of Contents

1. From the UniFi Controller dashboard, click **Devices** in the left menu bar.



2. Locate the UniFi Gateway in the list of devices under the Model column. Click Adopt.

WU 134		WU 135		WU 136		WU 137	
OPERATOR NAME	WU NUMBER	STATUS	WU CODE	OPERATOR	WU NUMBER	STATUS	WU CODE
WU 134-1	WU 134-1	Completed	WU 134-1	WU 134-1	WU 134-1	Completed	WU 134-1
WU 134-2	WU 134-2	Completed	WU 134-2	WU 134-2	WU 134-2	Completed	WU 134-2
WU 134-3	WU 134-3	Completed	WU 134-3	WU 134-3	WU 134-3	Completed	WU 134-3
WU 134-4	WU 134-4	Completed	WU 134-4	WU 134-4	WU 134-4	Completed	WU 134-4
WU 134-5	WU 134-5	Completed	WU 134-5	WU 134-5	WU 134-5	Completed	WU 134-5
WU 134-6	WU 134-6	Completed	WU 134-6	WU 134-6	WU 134-6	Completed	WU 134-6
WU 134-7	WU 134-7	Completed	WU 134-7	WU 134-7	WU 134-7	Completed	WU 134-7
WU 134-8	WU 134-8	Completed	WU 134-8	WU 134-8	WU 134-8	Completed	WU 134-8
WU 134-9	WU 134-9	Completed	WU 134-9	WU 134-9	WU 134-9	Completed	WU 134-9
WU 134-10	WU 134-10	Completed	WU 134-10	WU 134-10	WU 134-10	Completed	WU 134-10
WU 134-11	WU 134-11	Completed	WU 134-11	WU 134-11	WU 134-11	Completed	WU 134-11
WU 134-12	WU 134-12	Completed	WU 134-12	WU 134-12	WU 134-12	Completed	WU 134-12
WU 134-13	WU 134-13	Completed	WU 134-13	WU 134-13	WU 134-13	Completed	WU 134-13
WU 134-14	WU 134-14	Completed	WU 134-14	WU 134-14	WU 134-14	Completed	WU 134-14
WU 134-15	WU 134-15	Completed	WU 134-15	WU 134-15	WU 134-15	Completed	WU 134-15
WU 134-16	WU 134-16	Completed	WU 134-16	WU 134-16	WU 134-16	Completed	WU 134-16
WU 134-17	WU 134-17	Completed	WU 134-17	WU 134-17	WU 134-17	Completed	WU 134-17
WU 134-18	WU 134-18	Completed	WU 134-18	WU 134-18	WU 134-18	Completed	WU 134-18
WU 134-19	WU 134-19	Completed	WU 134-19	WU 134-19	WU 134-19	Completed	WU 134-19
WU 134-20	WU 134-20	Completed	WU 134-20	WU 134-20	WU 134-20	Completed	WU 134-20
WU 134-21	WU 134-21	Completed	WU 134-21	WU 134-21	WU 134-21	Completed	WU 134-21
WU 134-22	WU 134-22	Completed	WU 134-22	WU 134-22	WU 134-22	Completed	WU 134-22
WU 134-23	WU 134-23	Completed	WU 134-23	WU 134-23	WU 134-23	Completed	WU 134-23
WU 134-24	WU 134-24	Completed	WU 134-24	WU 134-24	WU 134-24	Completed	WU 134-24
WU 134-25	WU 134-25	Completed	WU 134-25	WU 134-25	WU 134-25	Completed	WU 134-25
WU 134-26	WU 134-26	Completed	WU 134-26	WU 134-26	WU 134-26	Completed	WU 134-26
WU 134-27	WU 134-27	Completed	WU 134-27	WU 134-27	WU 134-27	Completed	WU 134-27
WU 134-28	WU 134-28	Completed	WU 134-28	WU 134-28	WU 134-28	Completed	WU 134-28
WU 134-29	WU 134-29	Completed	WU 134-29	WU 134-29	WU 134-29	Completed	WU 134-29
WU 134-30	WU 134-30	Completed	WU 134-30	WU 134-30	WU 134-30	Completed	WU 134-30
WU 134-31	WU 134-31	Completed	WU 134-31	WU 134-31	WU 134-31	Completed	WU 134-31
WU 134-32	WU 134-32	Completed	WU 134-32	WU 134-32	WU 134-32	Completed	WU 134-32
WU 134-33	WU 134-33	Completed	WU 134-33	WU 134-33	WU 134-33	Completed	WU 134-33
WU 134-34	WU 134-34	Completed	WU 134-34	WU 134-34	WU 134-34	Completed	WU 134-34
WU 134-35	WU 134-35	Completed	WU 134-35	WU 134-35	WU 134-35	Completed	WU 134-35
WU 134-36	WU 134-36	Completed	WU 134-36	WU 134-36	WU 134-36	Completed	WU 134-36

3. The System LED on the UniFi Gateway will turn blue to confirm that it is successfully adopted.

Optional WAN Port Configuration via Layer 3

1 port of the UniFi Gateway.

Click for  browser, go to <https://setup.ui.com>



2. Enter your Username and Password. Click Sign In.



Note: If the UniFi Gateway has not been adopted by a UniFi Controller, the login window will be skipped and the Setup window will appear.

3. In the Setup window, click Edit Configuration to configure the WAN port to DHCP, Static IP, or PPPoE.

For information on using the UniFi Controller software, refer to the User Guide located on our website at: ui.com/download/unifi

Specifications

USG	
Dimensions	135 x 135 x 28.3 mm (5.32 x 5.32 x 1.11")

Click for
Table of Contents

× ces
rt

USG (1.2.1.0.1)

	(1) RJ45 Serial Port (3) 10/100/1000 Ethernet Ports
Max. Power Consumption	7W
Power Supply	12VDC, 1A Power Adapter (Included)
Supported Voltage Range	9 to 24VDC
LEDs	
System	Status
Serial Console Port	Power
Data Ports	Speed/Link/Activity
Layer 3 Forwarding Performance	
Packet Size: 64 Bytes	1,000,000 pps
Packet Size: 512 Bytes or Larger	3 Gbps (Line Rate)
Processor	Dual-Core 500 MHz, MIPS64 with Hardware Acceleration for Packet Processing
System Memory	512 MB DDR2 RAM
On-Board Flash Storage	2 GB
Rackmount	Yes
Operating Temperature	-10 to 45° C (14 to 113° F)
Operating Humidity	10 to 90% Noncondensing
Certifications	CE, FCC, IC

Safety Notices

1. Read, follow, and keep these instructions.
2. Heed all warnings.
3. Only use attachments/accessories specified by the manufacturer.



WARNING: Failure to provide proper ventilation may cause fire hazard. Keep at least 20 mm of clearance next to the ventilation holes for adequate airflow.



WARNING: To reduce the risk of fire or electric shock, do not expose this product to rain or moisture.



WARNING: Do not use this product in location that can be submerged by water.



WARNING: Avoid using this product during an electrical storm. There may be a remote risk of electric shock from lightning.

Electrical Safety Information

improper operation, damage to the equipment or pose a fire hazard if the limitations are not followed.

Click for
Table of Contents

× ator serviceable parts inside this equipment. Service should be provided only by a technician.

provided with a detachable power cord which has an integral safety ground wire intended for connection to a grounded safety outlet.

- a. Do not substitute the power cord with one that is not the provided approved type. Never use an adapter plug to connect to a 2-wire outlet as this will defeat the continuity of the grounding wire.
- b. The equipment requires the use of the ground wire as a part of the safety certification, modification or misuse can provide a shock hazard that can result in serious injury or death.
- c. Contact a qualified electrician or the manufacturer if there are questions about the installation prior to connecting the equipment.
- d. Protective earthing is provided by Listed AC adapter. Building installation shall provide appropriate short-circuit backup protection.
- e. Protective bonding must be installed in accordance with local national wiring rules and regulations.

Limited Warranty

ui.com/support/warranty

The limited warranty requires the use of arbitration to resolve disputes on an individual basis, and, where applicable, specify arbitration instead of jury trials or class actions.

Compliance

FCC

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operations of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

ISED Canada

CAN ICES-3(A)/NMB-3(A)

Australia and New Zealand



Warning: This equipment is compliant with Class A of CISPR 32. In a residential environment this equipment may cause radio interference.

CE Marking



Click for ×
Table of Contents



[WEEE Compliance Statement](#)

[Declaration of Conformity](#)

Online Resources

