

Junos® OS

High Availability User Guide

Published
2021-04-18

Juniper Networks, Inc.
1133 Innovation Way
Sunnyvale, California 94089
USA
408-745-2000
www.juniper.net

Juniper Networks, the Juniper Networks logo, Juniper, and Junos are registered trademarks of Juniper Networks, Inc. in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Juniper Networks assumes no responsibility for any inaccuracies in this document. Juniper Networks reserves the right to change, modify, transfer, or otherwise revise this publication without notice.

Junos® OS High Availability User Guide

Copyright © 2021 Juniper Networks, Inc. All rights reserved.

The information in this document is current as of the date on the title page.

YEAR 2000 NOTICE

Juniper Networks hardware and software products are Year 2000 compliant. Junos OS has no known time-related limitations through the year 2038. However, the NTP application is known to have some difficulty in the year 2036.

END USER LICENSE AGREEMENT

The Juniper Networks product that is the subject of this technical documentation consists of (or is intended for use with) Juniper Networks software. Use of such software is subject to the terms and conditions of the End User License Agreement ("EULA") posted at <https://support.juniper.net/support/eula/>. By downloading, installing or using such software, you agree to the terms and conditions of that EULA.

Table of Contents

About This Guide | xxv

1

Overview

High Availability Overview | 2

Understanding High Availability Features on Juniper Networks Routers | 2

High Availability-Related Features in Junos OS | 8

High Availability Features for EX Series Switches Overview | 9

2

Configuring Switching Control Board Redundancy

Understanding How Switching Control Board Redundancy Prevents Network Failures | 15

Understanding Switching Control Board Redundancy | 15

Configuring Switching Control Board Redundancy | 20

Configuring CFEB Redundancy on the M10i Router | 20

Configuring FEB Redundancy on the M120 Router | 21

Example: Configuring FEB Redundancy on M120 Routers | 22

Configuring SFM Redundancy on M40e and M160 Routers | 24

Configuring SSB Redundancy on the M20 Router | 24

Configuring the Junos OS to Support Redundancy on Routers Having Multiple Routing Engines or Switching Boards | 25

3

Configuring Bidirectional Forwarding Detection (BFD)

Understanding How BFD Detects Network Failures | 28

Understanding BFD for Static Routes for Faster Network Failure Detection | 28

Understanding BFD for BGP | 33

Understanding BFD for OSPF | 35

Understanding BFD for IS-IS | 38

Understanding BFD for RIP | 41

Understanding Independent Micro BFD Sessions for LAG | 42

Understanding Distributed BFD | 46

Understanding Static Route State When BFD is in Admin Down State | 53

Configuring BFD | 55

Example: Configuring BFD for Static Routes for Faster Network Failure Detection | 55

Requirements | 56

Overview | 56

Configuration | 57

Verification | 62

Example: Configuring BFD on Internal BGP Peer Sessions | 65

Requirements | 65

Overview | 65

Configuration | 67

Verification | 73

Example: Configuring BFD for OSPF | 78

Requirements | 78

Overview | 78

Configuration | 80

Verification | 83

Example: Configuring BFD for IS-IS | 84

Requirements | 84

Overview | 84

Configuration | 85

Verification | 90

Example: Configuring BFD for RIP | 94

Requirements | 94

Overview | 94

Configuration | 96

Verification | 100

Configuring Micro BFD Sessions for LAG | 102

Example: Configuring Independent Micro BFD Sessions for LAG | 108

Requirements | 108

Overview | 109

Configuration | 109

Verification | 117

Configuring BFD for PIM | 121

Enabling Dedicated and Real-Time BFD | 123

4

Configuring Routing Engine Redundancy

Understanding How Routing Engine Redundancy Prevents Network Failures | 127

Understanding Routing Engine Redundancy on Juniper Networks Routers | 127

Configuring Routing Engine Redundancy | 134

Configuring Routing Engine Redundancy | 134

Modifying the Default Routing Engine Primary Role | 134

Configuring Automatic Failover to the Backup Routing Engine | 135

Without Interruption to Packet Forwarding | 135

On Detection of a Hard Disk Error on the Primary Routing Engine | 136

On Detection of a Broken LCMD Connectivity Between the VM and RE | 136

On Detection of a Loss of Keepalive Signal from the Primary Routing Engine | 136

On Detection of the em0 Interface Failure on the Primary Routing Engine | 138

When a Software Process Fails | 138

Manually Switching Routing Engine Primary Role | 138

Verifying Routing Engine Redundancy Status | 138

Initial Routing Engine Configuration Example | 141

Copying a Configuration File from One Routing Engine to the Other | 143

Loading a Software Package from the Other Routing Engine | 144

5

Configuring Load Balancing

Understanding Load Balancing | 146

Load Balancing on Aggregated Ethernet Interfaces | 146

Load Balancing and Ethernet Link Aggregation Overview | 147

Understanding Aggregated Ethernet Load Balancing | 147

Stateful Load Balancing for Aggregated Ethernet Interfaces Using 5-Tuple Data | 149

Configuring Stateful Load Balancing on Aggregated Ethernet Interfaces | 153

Configuring Adaptive Load Balancing | 154

Configuring Symmetrical Load Balancing on an 802.3ad Link Aggregation Group on MX Series Routers | 155

Symmetrical Load Balancing on an 802.3ad LAG on MX Series Routers Overview | 156

Configuring Symmetric Load Balancing on an 802.3ad LAG on MX Series Routers | 156

Configuring Symmetrical Load Balancing on Trio-Based MPCs | 160

Example Configurations | 162

Configuring PIC-Level Symmetrical Hashing for Load Balancing on 802.3ad LAGs for MX Series Routers | 163

Examples: Configuring PIC-Level Symmetrical Hashing for Load Balancing on 802.3ad LAGs on MX Series Routers | 166

Example: Configuring Aggregated Ethernet Load Balancing | 169

Example: Configuring Aggregated Ethernet Load Balancing | 169

Configuring Adaptive Load Balancing | 188

6

Configuring Graceful Routing Engine Switchover (GRES)

Understanding How GRES Enables Uninterrupted Packet Forwarding During a Routing Engine Switchover | 191

Understanding Graceful Routing Engine Switchover | 191

GRES System Requirements | 201

Graceful Routing Engine Switchover System Requirements | 201

Configuring GRES | 207

Requirements for Routers with a Backup Router Configuration | 207

Configuring Graceful Routing Engine Switchover | 208

Enabling Graceful Routing Engine Switchover | 208

Configuring Graceful Routing Engine Switchover with Graceful Restart | 209

Synchronizing the Routing Engine Configuration | 209

Verifying Graceful Routing Engine Switchover Operation | 210

Configuring Graceful Routing Engine Switchover in a Virtual Chassis | 211

Preventing Graceful Routing Engine Switchover in the Case of Slow Disks | 213

Resetting Local Statistics | 213

Example: Configuring IS-IS for GRES with Graceful Restart | 214

Requirements | 215

- Overview | 215
- Configuration | 215
- Verification | 217

Configuring Ethernet Automatic Protection Switching for High Availability | 219

Ethernet Automatic Protection Switching Overview | 219

Mapping of CCM Defects to APS Events | 223

Example: Configuring Protection Switching Between Psuedowires | 224

- Requirements | 225
- Overview and Topology | 225
- Configuration | 226

7

Configuring Ethernet Ring Protection Switching

Configuring Ethernet Ring Protection Switching for High Availability | 231

Ethernet Ring Protection Switching Overview | 231

Understanding Ethernet Ring Protection Switching Functionality | 232

Configuring Ethernet Ring Protection Switching | 241

Example: Ethernet Ring Protection Switching Configuration on MX Routers | 242

- Requirements | 242
- Ethernet Ring Overview and Topology | 243
- Configuring a Three-Node Ring | 243

8

Configuring Nonstop Bridging

Understanding How Nonstop Bridging Preserves Layer 2 Protocol Information During a Routing Engine Switchover | 256

Nonstop Bridging Concepts | 256

Understanding Nonstop Bridging on EX Series Switches | 259

Nonstop Bridging System Requirements | 260

Nonstop Bridging System Requirements | 260

Configuring Nonstop Bridging | 262

Configuring Nonstop Bridging | 262

- Enabling Nonstop Bridging | 262
- Synchronizing the Routing Engine Configuration | 263

Verifying Nonstop Bridging Operation | 263

Configuring Nonstop Bridging on Switches (CLI Procedure) | 264

Configuring Nonstop Bridging on EX Series Switches (CLI Procedure) | 266

Configuring Nonstop Active Routing (NSR)

Understanding How Nonstop Active Routing Preserves Routing Protocol Information During a Routing Engine Switchover | 269

Nonstop Active Routing Concepts | 269

Understanding Nonstop Active Routing on EX Series Switches | 272

Nonstop Active Routing System Requirements | 274

Nonstop Active Routing System Requirements | 274

Configuring Nonstop Active Routing | 290

Configuring Nonstop Active Routing | 290

Enabling Nonstop Active Routing | 291

Synchronizing the Routing Engine Configuration | 292

Verifying Nonstop Active Routing Operation | 292

Configuring Nonstop Active Routing on Switches | 293

Preventing Automatic Reestablishment of BGP Peer Sessions After NSR Switchovers | 295

Example: Configuring Nonstop Active Routing | 296

Tracing Nonstop Active Routing Synchronization Events | 299

Resetting Local Statistics | 301

Example: Configuring Nonstop Active Routing on Switches | 301

Requirements | 302

Overview and Topology | 302

Configuration | 302

Verification | 304

Troubleshooting | 305

Configuring Graceful Restart

Understanding How Graceful Restart Enables Uninterrupted Packet Forwarding When a Router Is Restarted | 308

Graceful Restart Concepts | 308

Graceful Restart for Aggregate and Static Routes	309
Graceful Restart and Routing Protocols	310
Graceful Restart and MPLS-Related Protocols	313
Understanding Restart Signaling-Based Helper Mode Support for OSPF Graceful Restart	314
Graceful Restart and Layer 2 and Layer 3 VPNs	315
Graceful Restart on Logical Systems	316
Graceful Restart System Requirements 	318
Graceful Restart System Requirements	318
Configuring Graceful Restart 	319
Enabling Graceful Restart	319
Configuring Graceful Restart	320
Configuring Routing Protocols Graceful Restart	355
Enabling Graceful Restart	355
Configuring Graceful Restart Options for BGP	356
Using Control Plane Dependent BFD along with Graceful Restart Helper Mode	357
Configuring Graceful Restart Options for ES-IS	358
Configuring Graceful Restart Options for IS-IS	359
Configuring Graceful Restart Options for OSPF and OSPFv3	359
Configuring Graceful Restart Options for RIP and RIPng	361
Configuring Graceful Restart Options for PIM Sparse Mode	362
Tracking Graceful Restart Events	363
Configuring Graceful Restart for MPLS-Related Protocols	364
Configuring Graceful Restart Globally	364
Configuring Graceful Restart Options for RSVP, CCC, and TCC	364
Configuring Graceful Restart Options for LDP	365
Configuring VPN Graceful Restart	366
Configuring Graceful Restart Globally	367
Configuring Graceful Restart for the Routing Instance	367
Configuring Logical System Graceful Restart	368
Enabling Graceful Restart Globally	368

Configuring Graceful Restart for a Routing Instance | 369

Configuring Graceful Restart for QFabric Systems | 370

Enabling Graceful Restart | 370

Configuring Graceful Restart Options for BGP | 371

Configuring Graceful Restart Options for OSPF and OSPFv3 | 372

Tracking Graceful Restart Events | 374

Example: Managing Helper Modes for OSPF Graceful Restart | 375

Requirements | 377

Overview | 377

Verification | 377

Tracing Restart Signaling-Based Helper Mode Events for OSPF Graceful Restart | 378

Verifying Graceful Restart Operation | 379

Graceful Restart Operational Mode Commands | 380

Verifying BGP Graceful Restart | 380

Verifying IS-IS and OSPF Graceful Restart | 381

Verifying CCC and TCC Graceful Restart | 382

11

Power Management Overview

Understanding Power Management | 385

Understanding Power Management on EX Series Switches | 385

Configuring the Power Priority of Line Cards (CLI Procedure) | 392

Configuring Power Supply Redundancy (CLI Procedure) | 393

Redundant Power System Overview | 395

EX Series Redundant Power System Hardware Overview | 395

Understanding How Power Priority Is Determined and Set for Switches Connected to the EX Series Redundant Power System | 399

Determining and Setting Priority for Switches Connected to an EX Series RPS | 402

Using RPS Default Configuration | 403

Setting the EX Series RPS Priority for a Switch (CLI) | 403

12

Configuring Virtual Router Redundancy Protocol (VRRP)

Understanding How the VRRP Router Failover Mechanism Prevents Network Failures | 405

Understanding VRRP | 405

Understanding VRRP Between QFabric Systems | 410

Junos OS Support for VRRPv3 | 414

VRRP failover-delay Overview | 421

Configuring VRRP | 424

Configuring Basic VRRP Support | 425

Configuring VRRP | 431

VRRP and VRRP for IPv6 Overview | 433

Configuring VRRP and VRRP for IPv6 | 434

Configuring VRRP for IPv6 (CLI Procedure) | 436

Example: Configuring VRRP for IPv6 | 438

Requirements | 438

Overview | 438

Configuring VRRP | 438

Verification | 445

Configuring VRRP Authentication (IPv4 Only) | 446

Configuring VRRP Preemption and Hold Time | 448

Configuring VRRP Preemption | 448

Configuring the Preemption Hold Time | 449

Configuring the Advertisement Interval for the VRRP Primary Router | 449

Modifying the Advertisement Interval in Seconds | 450

Modifying the Advertisement Interval in Milliseconds | 451

Configuring the Startup Period for VRRP Operations | 452

Configuring a Backup Router to Preempt the VRRP Primary Router | 453

Configuring a Backup to Accept Packets Destined for the Virtual IP Address | 454

Modifying the Preemption Hold-Time Value for the VRRP Primary Router | 455

Configuring the Asymmetric Hold Time for VRRP Routers | 456

Configuring Passive ARP Learning for Backup VRRP Routers | 456

Configuring VRRP Route Tracking | 457

Configuring a Logical Interface to Be Tracked for a VRRP Group | 459

Configuring a Route to Be Tracked for a VRRP Group | 462

Example: Configuring Multiple VRRP Owner Groups | 465

Requirements | 465

Overview | 465

Configuration | 465

Verification | 474

Configuring Inheritance for a VRRP Group | 474

Configuring an Interface to Accept All Packets Destined for the Virtual IP Address of a VRRP Group | 475

Configuring the Silent Period to Avoid Alarms Due to Delay in Receiving VRRP Advertisement Packets | 477

Enabling the Distributed Periodic Packet Management Process for VRRP | 478

Improving the Convergence Time for VRRP | 479

Configuring VRRP to Improve Convergence Time | 481

Tracing VRRP Operations | 483

Example: Configuring VRRP for Load Sharing | 484

Requirements | 484

Overview and Topology | 484

Configuring VRRP on Both Switches | 486

Verification | 490

Troubleshooting VRRP | 492

Performing Unified In-Service Software Upgrade (ISSU)

Getting Started with Unified ISSU and Understanding How Unified ISSU Works | 495

Getting Started with Unified In-Service Software Upgrade | 495

Understanding the Unified ISSU Process | 496

Understanding the Unified ISSU Process on a Router | 496

Understanding the Unified ISSU Process on the TX Matrix Router | 501

Understanding In-Service Software Upgrade (ISSU) | 504

Understanding In-Service Software Upgrade (ISSU) in ACX5000 Series Routers | 505

Unified ISSU System Requirements | 507

Unified ISSU System Requirements | 507

Performing a Unified ISSU | 536

Best Practices for Performing a Unified ISSU | 536

Example: Performing a Unified ISSU | 537

Requirements | 537

Overview | 538

Configuration | 539

Verifying Dual Routing Engines and Enabling GRES and NSR | 540

Verifying the Software Versions and Backing Up the Device Software | 542

Adjusting Timers and Changing Feature-Specific Configuration | 544

Upgrading and Rebooting Both Routing Engines Automatically | 546

Restoring Feature-Specific Configuration | 553

Upgrading Both Routing Engines and Rebooting the New Backup Routing Engine Manually | 555

Upgrading and Rebooting Only One Routing Engine | 565

Performing an In-Service Software Upgrade (ISSU) with Non-Stop Routing | 575

Preparing the Switch for Software Installation | 576

Upgrading the Software Using ISSU | 576

Performing an In-Service Software Upgrade (ISSU) in ACX5000 Series Routers | 581

Preparing the Router for Software Installation | 581

Upgrading the Software Using ISSU | 583

Verifying a Unified ISSU | 585

How to Use Unified ISSU with Enhanced Mode | 586

Unified ISSU with Enhanced Mode Overview | 586

Benefits of Unified ISSU with Enhanced Mode | 586

Prerequisites for Performing Unified ISSU with Enhanced Mode | 586

Performing Unified ISSU with Enhanced Mode | 587

Verifying a Unified ISSU | 590

Troubleshooting Unified ISSU Problems | 591

Managing and Tracing BFD Sessions During Unified ISSU Procedures | 591

Performing an ISSR | 593

Performing an In-Service Software Reboot | 593

Performing Nonstop Software Upgrade (NSSU)

Getting Started with NSSU and Understanding How NSSU Works | 597

Understanding Nonstop Software Upgrade on EX Series Switches | 597

Performing a NSSU | 607

Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade | 607

How Line-card Upgrade Groups Work with Nonstop Software Upgrade | 607

Line-card Upgrade Groups Support | 608

Configure Line-Card Upgrade Groups on an EX4650 Virtual Chassis, a QFX Series Virtual Chassis or a QFX5100 VCF | 608

Configure Line-Card Upgrade Groups on Standalone EX6200 or EX8200 Switches | 609

Configure Line-Card Upgrade Groups on an EX8200 Virtual Chassis | 610

Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade (CLI Procedure) | 612

Preparing the Switch for Software Installation | 612

Upgrading Both Routing Engines Using NSSU | 614

Upgrading One Routing Engine Using NSSU (EX8200 Switch Only) | 618

Upgrading the Original Primary Routing Engine (EX8200 Switch Only) | 621

Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches | 623

Requirements | 623

Overview and Topology | 623

Configuration | 625

Multinode High Availability

Multinode High Availability | 629

Multinode High Availability | 629

Multinode High Availability | 629

Support for VPN on HA Nodes in Multinode High Availability Solution | 636

Configure Tunnel Link Encryption for Multinode High Availability Nodes | 638

Requirements | 638

Overview | 639
Configuration | 640
Verification | 650

Configuration Statements and Operational Commands

Configuration Statements: Adaptive Load Balancing | 658

adaptive | 658

Configuration Statements: Bidirectional Forwarding Detection | 661

dedicated-ukern-cpu (BFD) | 661

realtime-ukern-thread (BFD) | 662

authentication (LAG) | 664

bfd-liveness-detection (LAG) | 666

detection-time (LAG) | 669

traceoptions (Protocols BFD) | 670

transmit-interval (LAG) | 673

Ethernet Automatic Protection Switching | 676

clear | 676

exercise | 677

force switch | 678

lockout | 679

manual switch | 680

Configuration Statements: Ethernet Ring Protection Switching | 682

compatibility-version | 683

control-channel | 684

data-channel | 686

dot1p-priority | 687

east-interface | 689

ethernet-ring | 691

guard-interval | 693

hold-interval (Protection Group) | 694

major-ring-name | 696

non-revertive | 697

non-vc-mode | 698

node-id | 699

propagate-tc | 700

protection-group | 702

restore-interval | 705

ring-id | 706

ring-protection-link-end | 708

ring-protection-link-owner | 709

wait-to-block-interval | 710

west-interface | 712

Configuration Statements: Graceful Routing Engine Switchover | 714

graceful-switchover | 714

graceful-switchover | 715

redundancy (Graceful Switchover) | 717

Configuration Statements: Graceful Restart | 719

disable | 720

disable (BGP Graceful Restart) | 721

dont-help-shared-fate-bfd-down | 723

graceful-restart (Enabling Globally) | 724

graceful-restart (Multicast Snooping) | 726

graceful-restart (Protocols BGP) | 728

graceful-restart (Protocols OSPF) | 730

helper-disable (Multiple Protocols) | 733

kernel-replication | 734

maximum-helper-recovery-time | 736

maximum-helper-restart-time (RSVP) | 737

maximum-neighbor-reconnect-time | 739

maximum-neighbor-recovery-time | 740

not-on-disk-underperform | 742

reconnect-time | 743

recovery-time | 744

restart-duration | 746

restart-time (BGP Graceful Restart) | 748

stale-routes-time | 750

traceoptions (Protocols) | 751

warm-standby | 754

Configuration Statements: Multiple Node High Availability | 756

services-redundancy-group | 756

High-Availability (Chassis) | 759

ike (High Availability) | 762

ipsec (High Availability) | 764

Configuration Statements: Nonstop Active Routing | 768

nonstop-routing | 768

switchover-on-routing-crash | 770

synchronize | 771

traceoptions | 773

Configuration Statements: Nonstop Bridging | 778

nonstop-bridging | 778

nonstop-bridging (Ethernet Switching) | 779

Configuration Statements: NSSU | 781

fpcs (NSSU Upgrade Groups) | 781

member (NSSU Upgrade Groups) | 783

nssu | 785

upgrade-group | 787

Configuration Statements: Power Management | 789

power-budget-priority | 789

n-plus-n (Power Management) | 791

psu | 792

redundancy (Power Management) | 793

Configuration Statements: Redundant Power System | 795

member (Redundant Power System) | 795

priority (Redundant Power System) | 797

redundant-power-system | 798

Configuration Statements: Routing Engine and Switching Control Board Redundancy | 800

cfeb | 801

description (Chassis Redundancy) | 802

disk-failure-action | 803

failover (Chassis) | 805

failover (Chassis) | 806

failover (System Process) | 807

feb (Creating a Redundancy Group) | 809

feb (Assigning a FEB to a Redundancy Group) | 810

keepalive-time | 812

keepalive-time | 814

no-auto-failover | 815

on-disk-failure (Chassis Redundancy Failover) | 817

on-disk-failure | 818

on-loss-of-keepalives | 819

on-loss-of-keepalives | 821

redundancy | 822

redundancy-group | 824

routing-engine (Chassis Redundancy) | 825

routing-engine | 827

sfm (Chassis Redundancy) | 828

ssb | 830

vcp-no-hold-time | 831

Configuration Statements: Unified ISSU | 834

no-issu-timer-negotiation | 834

traceoptions (Protocols BFD) | 835

Configuration Statements: VRRP | 839

accept-data | 840

advertise-interval | 842

asymmetric-hold-time | 844

asymmetric-hold-time | 845

authentication-key | 846

authentication-type | 848

bandwidth-threshold | 850

delegate-processing (VRRP) | 852

failover-delay | 853

failover-delay | 855

fast-interval | **856**

global-advertisements-threshold | **858**

hold-time (VRRP) | **860**

hold-time | **861**

inherit-advertisement-interval | **863**

inet6-advertise-interval | **864**

inet6-advertise-interval | **866**

interface | **867**

preempt (VRRP) | **869**

preempt | **870**

priority (Protocols VRRP) | **872**

priority | **874**

priority-cost (VRRP) | **875**

priority-hold-time | **877**

route (Interfaces) | **879**

skew-timer-disable | **880**

startup-silent-period | **882**

traceoptions (Protocols VRRP) | **883**

traceoptions | **886**

track (VRRP) | **889**

version-3 | **890**

virtual-address | **892**

virtual-inet6-address | **893**

virtual-inet6-address | **895**

virtual-link-local-address | **896**

virtual-link-local-address | **898**

vrrp-group | 899

vrrp-inet6-group | 901

vrrp-inet6-group | 904

vrrp-inherit-from | 905

Administration | 907

Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade (CLI Procedure) | 907

Preparing the Switch for Software Installation | 908

Upgrading Both Routing Engines Using NSSU | 909

Upgrading One Routing Engine Using NSSU (EX8200 Switch Only) | 913

Upgrading the Original Primary Routing Engine (EX8200 Switch Only) | 916

Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade (CLI Procedure) | 918

Preparing the Switch for Software Installation | 919

Upgrading the Software Using NSSU | 920

Upgrading Software Using Nonstop Software Upgrade on EX Series Virtual Chassis and Mixed Virtual Chassis (CLI Procedure) | 924

Preparing the Switch for Software Installation | 925

Upgrading the Software Using NSSU | 926

Verification Tasks | 930

Verifying Power Configuration and Use | 930

Operational Commands | 934

show bgp neighbor | 936

show log | 972

show (ospf | ospf3) overview | 979

show chassis dedicated-ukern-cpu | 988

show chassis in-service-upgrade | 989

show chassis realtime-ukern-thread | 995

show chassis redundancy feb | 996

clear vrrp | 1001

clear chassis high-availability data-plane statistics | **1002**

clear security ike security-associations | **1003**

clear security ipsec security-associations | **1006**

request chassis high-availability failover services-redundancy-group | **1008**

request chassis redundancy feb slot | **1009**

request chassis routing-engine master | **1011**

request chassis sfm master switch | **1019**

request chassis ssb master switch | **1021**

request redundant-power-system multi-backup | **1023**

request system software in-service-upgrade | **1024**

request system software in-service-upgrade (MX Series 5G Universal Routing Platforms and EX9200 Switches) | **1045**

request system software nonstop-upgrade | **1068**

request system software validate in-service-upgrade | **1082**

show chassis high-availability information | **1087**

show chassis high-availability services-redundancy-group | **1096**

show chassis high-availability data-plane statistics | **1100**

show chassis nonstop-upgrade | **1106**

show chassis nonstop-upgrade node-group | **1109**

show chassis power-budget-statistics | **1111**

show chassis redundant-power-system | **1117**

show protection-group ethernet-ring aps | **1120**

show protection-group ethernet-ring configuration | **1126**

show protection-group ethernet-ring data-channel | **1135**

show protection-group ethernet-ring flush-info | **1139**

show protection-group ethernet-ring interface | **1141**

show protection-group ethernet-ring node-state | **1147**

show protection-group ethernet-ring statistics | **1154**

show protection-group ethernet-ring vlan | **1162**

show redundant-power-system led | **1168**

show redundant-power-system multi-backup | **1171**

show redundant-power-system network | **1172**

show redundant-power-system power-supply | **1174**

show redundant-power-system status | **1176**

show redundant-power-system upgrade | **1179**

show redundant-power-system version | **1181**

show security ike security-associations | **1183**

show security ike active-peer | **1202**

show security ipsec security-associations | **1209**

show security ipsec statistics | **1243**

show chassis ssb | **1250**

show nonstop-routing | **1252**

show pfe ssb | **1257**

show system switchover | **1266**

show task replication | **1272**

show vrrp | **1276**

show vrrp track | **1296**

Troubleshooting | 1303

Tracing Nonstop Active Routing Synchronization Events | **1303**

Troubleshooting the EX Series Redundant Power System Power On and Power Backup Issues | **1305**

The EX Series RPS Is Not Powering On | **1306**

A Switch Is Not Recognized by the RPS | **1307**

An Error Message Indicates That an RPS Power Supply is Not Supported | **1307**

The EX Series Redundant Power System Is Not Providing Power Backup to a Connected Switch | **1308**

The Wrong Switches Are Being Backed Up | **1309**

Six Switches That Do Not Require PoE Are Not All Being Backed Up | **1310**

Knowledge Base | 1312

About This Guide

Use this guide to configure high availability features like ISSU, GRES, and BFD on a Junos OS device.

1

PART

Overview

[High Availability Overview](#) | 2

CHAPTER 1

High Availability Overview

IN THIS CHAPTER

- Understanding High Availability Features on Juniper Networks Routers | 2
- High Availability-Related Features in Junos OS | 8
- High Availability Features for EX Series Switches Overview | 9

Understanding High Availability Features on Juniper Networks Routers

IN THIS SECTION

- Routing Engine Redundancy | 3
- Graceful Routing Engine Switchover | 3
- Nonstop Bridging | 3
- Nonstop Active Routing | 4
- Graceful Restart | 4
- Nonstop Active Routing Versus Graceful Restart | 6
- Effects of a Routing Engine Switchover | 6
- VRRP | 6
- Unified ISSU | 7
- Interchassis Redundancy for MX Series Routers Using Virtual Chassis | 7

For Juniper Networks routing platforms running the Junos operating system (Junos OS), *high availability* refers to the hardware and software components that provide redundancy and reliability for packet-based communications. This topic provides brief overviews of the following high availability features:

Routing Engine Redundancy

Redundant Routing Engines are two Routing Engines that are installed in the same routing platform. One functions as the primary, while the other stands by as a backup should the primary Routing Engine fail. On routing platforms with dual Routing Engines, network reconvergence takes place more quickly than on routing platforms with a single Routing Engine.

Graceful Routing Engine Switchover

Graceful Routing Engine switchover (GRES) enables a routing platform with redundant Routing Engines to continue forwarding packets, even if one Routing Engine fails. Graceful Routing Engine switchover preserves interface and kernel information. Traffic is not interrupted. However, graceful Routing Engine switchover does not preserve the control plane. Neighboring routers detect that the router has experienced a restart and react to the event in a manner prescribed by individual routing protocol specifications.

NOTE: To preserve routing during a switchover, graceful Routing Engine switchover must be combined with either graceful restart protocol extensions or *nonstop active routing*. For more information, see ["Understanding Graceful Routing Engine Switchover" on page 191](#) and ["Nonstop Active Routing Concepts" on page 269](#).

NOTE: In T Series routers, TX Matrix routers, and TX Matrix Plus routers, the control plane is preserved in case of GRES with NSR, and 75% of line rate worth of traffic per Packet Forwarding Engine remains uninterrupted during GRES.

Nonstop Bridging

Nonstop bridging enables an MX Series 5G Universal Routing Platform with redundant Routing Engines to switch from a primary Routing Engine to a backup Routing Engine without losing Layer 2 Control Protocol (L2CP) information. Nonstop bridging uses the same infrastructure as graceful Routing Engine switchover to preserve interface and kernel information. However, nonstop bridging also saves L2CP information by running the Layer 2 Control Protocol process (l2cpd) on the backup Routing Engine.

NOTE: To use nonstop bridging, you must first enable graceful Routing Engine switchover.

Nonstop bridging is supported for the following Layer 2 control protocols:

- Spanning Tree Protocol (STP)

- Rapid Spanning Tree Protocol (RSTP)
- Multiple Spanning Tree Protocol (MSTP)
- VLAN Spanning Tree Protocol (VSTP)

For more information, see ["Nonstop Bridging Concepts" on page 256](#).

Nonstop Active Routing

Nonstop active routing (NSR) enables a routing platform with redundant Routing Engines to switch from a primary Routing Engine to a backup Routing Engine without alerting peer nodes that a change has occurred. Nonstop active routing uses the same infrastructure as graceful Routing Engine switchover to preserve interface and kernel information. However, nonstop active routing also preserves routing information and protocol sessions by running the routing protocol process (rpd) on both Routing Engines. In addition, nonstop active routing preserves TCP connections maintained in the kernel.

NOTE: To use nonstop active routing, you must also configure graceful Routing Engine switchover.

For a list of protocols and features supported by nonstop active routing, see ["Nonstop Active Routing Protocol and Feature Support" on page 274](#).

For more information about nonstop active routing, see ["Nonstop Active Routing Concepts" on page 269](#).

Graceful Restart

With routing protocols, any service interruption requires an affected router to recalculate adjacencies with neighboring routers, restore routing table entries, and update other protocol-specific information. An unprotected restart of a router can result in forwarding delays, route flapping, wait times stemming from protocol reconvergence, and even dropped packets. To alleviate this situation, graceful restart provides extensions to routing protocols. These protocol extensions define two roles for a router—*restarting* and *helper*. The extensions signal neighboring routers about a router undergoing a restart and prevent the neighbors from propagating the change in state to the network during a graceful restart wait interval. The main benefits of graceful restart are uninterrupted packet forwarding and temporary suppression of all routing protocol updates. Graceful restart enables a router to pass through intermediate convergence states that are hidden from the rest of the network.

When a router is running graceful restart and the router stops sending and replying to protocol liveness messages (hellos), the adjacencies assume a graceful restart and begin running a timer to monitor the restarting router. During this interval, helper routers do not process an adjacency change for the router that they assume is restarting, but continue active routing with the rest of the network. The helper

routers assume that the router can continue stateful forwarding based on the last preserved routing state during the restart.

If the router was actually restarting and is back up before the graceful timer period expires in all of the helper routers, the helper routers provide the router with the routing table, topology table, or label table (depending on the protocol), exit the graceful period, and return to normal network routing.

If the router does not complete its negotiation with helper routers before the graceful timer period expires in all of the helper routers, the helper routers process the router's change in state and send routing updates, so that convergence occurs across the network. If a helper router detects a link failure from the router, the topology change causes the helper router to exit the graceful wait period and to send routing updates, so that network convergence occurs.

To enable a router to undergo a graceful restart, you must include the **graceful-restart** statement at the global **[edit routing-options]** or **[edit routing-instances *instance-name* routing-options]** hierarchy level. You can, optionally, modify the global settings at the individual protocol level. When a routing session is started, a router that is configured with graceful restart must negotiate with its neighbors to support it when it undergoes a graceful restart. A neighboring router will accept the negotiation and support helper mode without requiring graceful restart to be configured on the neighboring router.

NOTE: A Routing Engine switchover event on a helper router that is in graceful wait state causes the router to drop the wait state and to propagate the adjacency's state change to the network.

Graceful restart is supported for the following protocols and applications:

- BGP
- ES-IS
- IS-IS
- OSPF/OSPFv3
- PIM sparse mode
- RIP/RIPng
- MPLS-related protocols, including:
 - Label Distribution Protocol (LDP)
 - Resource Reservation Protocol (RSVP)
 - Circuit cross-connect (CCC)
 - Translational cross-connect (TCC)

- Layer 2 and Layer 3 virtual private networks (VPNs)

For more information, see ["Graceful Restart Concepts" on page 308](#).

Nonstop Active Routing Versus Graceful Restart

Nonstop active routing and graceful restart are two different methods of maintaining high availability. Graceful restart requires a router restart. A router undergoing a graceful restart relies on its neighbors (or helpers) to restore its routing protocol information. The restart is the mechanism by which helpers are signaled to exit the wait interval and start providing routing information to the restarting router. For more information, see ["Graceful Restart Concepts" on page 308](#).

In contrast, nonstop active routing does not involve a router restart. Both the primary and backup Routing Engines are running the routing protocol process (rpd) and exchanging updates with neighbors. When one Routing Engine fails, the router simply switches to the active Routing Engine to exchange routing information with neighbors. Because of these feature differences, nonstop routing and graceful restart are mutually exclusive. Nonstop active routing cannot be enabled when the router is configured as a graceful restarting router. If you include the **graceful-restart** statement at any hierarchy level and the **nonstop-routing** statement at the **[edit routing-options]** hierarchy level and try to commit the configuration, the commit request fails. For more information, see ["Nonstop Active Routing Concepts" on page 269](#).

Effects of a Routing Engine Switchover

["Effects of a Routing Engine Switchover" on page 191](#) describes the effects of a Routing Engine switchover when no high availability features are enabled and when graceful Routing Engine switchover, graceful restart, and nonstop active routing features are enabled.

VRRP

The Virtual Router Redundancy Protocol (VRRP) enables hosts on a LAN to make use of redundant routing platforms (primary and backup pairs) on the LAN, requiring only the static configuration of a single default route on the hosts.

The VRRP routing platform pairs share the IP address corresponding to the default route configured on the hosts. At any time, one of the VRRP routing platforms is the primary (active) and the others are backups. If the primary fails, one of the backup routers or switches becomes the new primary router.

VRRP has advantages in ease of administration and network throughput and reliability:

- It provides a virtual default routing platform.
- It enables traffic on the LAN to be routed without a single point of failure.
- A virtual backup router can take over a failed default router:

- Within a few seconds.
- With a minimum of VRRP traffic.
- Without any interaction with the hosts.

Devices running VRRP dynamically elect primary and backup routers. You can also force assignment of primary and backup routers using priorities from 1 through 255, with 255 being the highest priority.

In VRRP operation, the default primary router sends advertisements to backup routers at regular intervals (default 1 second). If a backup router does not receive an advertisement for a set period, the backup router with the next highest priority takes over as primary and begins forwarding packets.

As of Junos OS Release 13.2, VRRP nonstop active routing (NSR) is enabled only when you configure the **nonstop-routing** statement at the **[edit routing-options]** or **[edit logical system *logical-system-name* routing-options]** hierarchy level.

For more information, see ["Understanding VRRP" on page 405](#).

Unified ISSU

A unified in-service software upgrade (unified ISSU) enables you to upgrade between two different Junos OS Releases with no disruption on the control plane and with minimal disruption of traffic. Unified ISSU is only supported by dual Routing Engine platforms. In addition, graceful Routing Engine switchover (GRES) and nonstop active routing (NSR) must be enabled.

With a unified ISSU, you can eliminate network downtime, reduce operating costs, and deliver higher services levels. For more information, see ["Getting Started with Unified In-Service Software Upgrade" on page 495](#).

Interchassis Redundancy for MX Series Routers Using Virtual Chassis

Interchassis redundancy is a high availability feature that can span equipment located across multiple geographies to prevent network outages and protect routers against access link failures, uplink failures, and wholesale chassis failures without visibly disrupting the attached subscribers or increasing the network management burden for service providers. As more high-priority voice and video traffic is carried on the network, interchassis redundancy has become a requirement for providing stateful redundancy on broadband subscriber management equipment such as broadband services routers, broadband network gateways, and broadband remote access servers. Interchassis redundancy support enables service providers to fulfill strict service-level agreements (SLAs) and avoid unplanned network outages to better meet the needs of their customers.

To provide a stateful interchassis redundancy solution for MX Series 5G Universal Routing Platforms, you can configure a *Virtual Chassis*. A *Virtual Chassis* configuration interconnects two MX Series routers into a logical system that you can manage as a single network element. The member routers in a Virtual

Chassis are designated as the *primary router* (also known as the *protocol primary*) and the *backup router* (also known as the *protocol backup*). The member routers are interconnected by means of dedicated *Virtual Chassis ports* that you configure on Trio Modular Port Concentrator/Modular Interface Card (MPC/MIC) interfaces.

An MX Series Virtual Chassis is managed by the *Virtual Chassis Control Protocol (VCCP)*, which is a dedicated control protocol based on IS-IS. VCCP runs on the Virtual Chassis port interfaces and is responsible for building the Virtual Chassis topology, electing the Virtual Chassis primary router, and establishing the interchassis routing table to route traffic within the Virtual Chassis.

Starting with Junos OS Release 11.2, Virtual Chassis configurations are supported on MX240, MX480, and MX960 Universal Routing Platforms with Trio MPC/MIC interfaces and dual Routing Engines. In addition, graceful Routing Engine switchover (GRES) and nonstop active routing (NSR) must be enabled on both member routers in the Virtual Chassis.

RELATED DOCUMENTATION

[High Availability-Related Features in Junos OS](#) | 8

High Availability-Related Features in Junos OS

Related redundancy and reliability features include:

- Redundant power supplies, host modules, host subsystems, and forwarding boards. For more information, see the [Junos OS Administration Library for Routing Devices](#) and the *Junos OS Hardware Network Operations Guide*.
- Additional link-layer redundancy, including Automatic Protection Switching (APS) for SONET interfaces, Multiplex Section Protection (MSP) for SDH interfaces, and DLSw redundancy for Ethernet interfaces. For more information, see the [Junos OS Network Interfaces Library for Routing Devices](#).
- Bidirectional Forwarding Detection (BFD) works with other routing protocols to detect failures rapidly. For more information, see the [Junos OS Routing Protocols Library for Routing Devices](#).
- Redirection of Multiprotocol Label Switching (MPLS) label-switched path (LSP) traffic—Mechanisms such as link protection, node-link protection, and fast reroute recognize link and node failures, allowing MPLS LSPs to select a bypass LSP to circumvent failed links or devices. For more information, see the [MPLS Applications User Guide](#).

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers](#) | 2

High Availability Features for EX Series Switches Overview

IN THIS SECTION

- [VRRP](#) | 9
- [Graceful Protocol Restart](#) | 10
- [Redundant Routing Engines](#) | 10
- [Virtual Chassis](#) | 11
- [Graceful Routing Engine Switchover](#) | 11
- [Link Aggregation](#) | 12
- [Nonstop Active Routing and Nonstop Bridging](#) | 12
- [Nonstop Software Upgrade](#) | 12
- [Redundant Power System](#) | 13

High availability refers to the hardware and software components that provide redundancy and reliability for network communications. This topic covers the following high availability features of Juniper Networks EX Series Ethernet Switches:

VRRP

You can configure Virtual Router Redundancy Protocol (VRRP) for IP and IPv6 on most switch interfaces, including Gigabit Ethernet interfaces, high-speed Gigabit Ethernet uplink interfaces, and logical interfaces. When VRRP is configured, the switches act as virtual routing platforms. VRRP enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts. The VRRP routing platforms share the IP address corresponding to the default route configured on the hosts. At any time, one of the VRRP routing platforms is the primary (active) and the others are backups. If the primary routing platform fails, one of the backup routing platforms becomes the new primary, providing a virtual default routing platform and enabling traffic on the LAN to be routed without relying on a single routing platform. Using VRRP, a backup switch can take over a failed default switch within a few seconds. This is done with minimum loss of VRRP traffic and without any interaction with the hosts.

Graceful Protocol Restart

With standard implementations of routing protocols, any service interruption requires an affected switch to recalculate adjacencies with neighboring switches, restore routing table entries, and update other protocol-specific information. An unprotected restart of a switch can result in forwarding delays, route flapping, wait times stemming from protocol reconvergence, and even dropped packets. Graceful protocol restart enables a restarting switch and its neighbors to continue forwarding packets without disrupting network performance. Because neighboring switches assist in the restart (these neighbors are called helper switches), the restarting switch can quickly resume full operation without recalculating algorithms from scratch.

On the switches, graceful protocol restart can be applied to aggregate and static routes and for routing protocols (BGP, IS-IS, OSPF, and RIP).

Graceful protocol restart works similarly for the different routing protocols. The main benefits of graceful protocol restart are uninterrupted packet forwarding and temporary suppression of all routing protocol updates. Graceful protocol restart thus allows a switch to pass through intermediate convergence states that are hidden from the rest of the network. Most graceful restart implementations define two types of switches—the restarting switch and the helper switch. The restarting switch requires rapid restoration of forwarding state information so that it can resume the forwarding of network traffic. The helper switch assists the restarting switch in this process. Individual graceful restart configuration statements typically apply to either the restarting switch or the helper switch.

Redundant Routing Engines

Redundant Routing Engines are two Routing Engines that are installed in a switch or a *Virtual Chassis*. When a switch has two Routing Engines, one functions as the primary, while the other stands by as a backup in case the primary Routing Engine fails. When a Virtual Chassis has two Routing Engines, the switch in the primary role functions as the primary Routing Engine and the switch in the backup role functions as the backup Routing Engine. Redundant Routing Engines are supported on Juniper Networks EX6200 Ethernet Switches, Juniper Networks EX8200 Ethernet Switches, and on all EX Series Virtual Chassis configurations.

The primary Routing Engine receives and transmits routing information, builds and maintains routing tables, communicates with interfaces and Packet Forwarding Engine components of the switch, and has full control over the control plane of the switch.

The backup Routing Engine stays in sync with the primary Routing Engine in terms of protocol states, forwarding tables, and so forth. If the primary becomes unavailable, the backup Routing Engine takes over the functions that the primary Routing Engine performs.

Network reconvergence takes place more quickly on switches and on Virtual Chassis with redundant Routing Engines than on switches and on Virtual Chassis with a single Routing Engine.

Virtual Chassis

A Virtual Chassis is multiple switches connected together that operate as a single network entity. The advantages of connecting multiple switches into a Virtual Chassis include better-managed bandwidth at a network layer, simplified configuration and maintenance because multiple devices can be managed as a single device, a simplified Layer 2 network topology that minimizes or eliminates the need for loop prevention protocols such as Spanning Tree Protocol (STP), and improved fault tolerance and high availability. A Virtual Chassis improves high availability for the following reasons:

- **Dual Routing Engine support.** A Virtual Chassis automatically has two Routing Engines—the switches in the primary and backup **routing-engine** roles—and, therefore, provides more high availability options than standalone switches. Many high availability features, including graceful protocol restart, graceful Routing Engine switchover (GRES), nonstop software upgrade (NSSU), nonstop active routing (NSR), and nonstop bridging (NSB), are available for an EX Series Virtual Chassis that are not available on standalone EX Series switches.
- **Increased fault tolerance.** You increase your fault tolerance options when you configure your EX Series switches into a Virtual Chassis. You can, for instance, configure interfaces into a link aggregation group (LAG) with member interfaces on different member switches in the same Virtual Chassis to ensure network traffic is received by a Virtual Chassis even when a switch or physical interface in the Virtual Chassis fails.

Juniper Networks EX2200 Ethernet Switches, Juniper Networks EX3300 Ethernet Switches, Juniper Networks EX4200 Ethernet Switches, Juniper Networks EX4300 Ethernet Switches, Juniper Networks EX4500 Ethernet Switches, Juniper Networks EX4550 Ethernet Switches, or Juniper Networks EX8200 Ethernet Switches can form a Virtual Chassis. EX4200, EX4500, and EX4550 switches can be interconnected together to form a mixed Virtual Chassis.

Graceful Routing Engine Switchover

You can configure *graceful Routing Engine switchover* (GRES) on a switch with redundant Routing Engines or on a Virtual Chassis, allowing control to switch from the primary Routing Engine to the backup Routing Engine with minimal interruption to network communications. When you configure GRES, the backup Routing Engine automatically synchronizes with the primary Routing Engine to preserve kernel state information and forwarding state. Any updates to the primary Routing Engine are replicated to the backup Routing Engine as soon as they occur. If the kernel on the primary Routing Engine stops operating, the primary Routing Engine experiences a hardware failure, or the administrator initiates a manual switchover, primary role switches to the backup Routing Engine.

When the backup Routing Engine assumes primary role in a redundant failover configuration (that is, when GRES is not enabled), the Packet Forwarding Engines initialize their state to the boot state before they connect to the new primary Routing Engine. In contrast, in a GRES configuration, the Packet Forwarding Engines do not reinitialize their state, but resynchronize their state to that of the new primary Routing Engine. The interruption to traffic is minimal.

Link Aggregation

You can combine multiple physical Ethernet ports to form a logical point-to-point link, known as a link aggregation group (LAG) or bundle. A LAG provides more bandwidth than a single Ethernet link can provide. Additionally, link aggregation provides network redundancy by load-balancing traffic across all available links. If one of the links should fail, the system automatically load-balances traffic across all remaining links. In a Virtual Chassis, LAGs can be used to load-balance network traffic between member switches, which increases high availability by ensuring that network traffic is received by the Virtual Chassis even if a single interface fails for any reason.

The number of Ethernet interfaces you can include in a LAG and the number of LAGs you can configure on a switch depend on the switch model.

Nonstop Active Routing and Nonstop Bridging

Nonstop active routing (NSR) provides high availability in a switch with redundant Routing Engines by enabling transparent switchover of the Routing Engines without requiring restart of supported Layer 3 routing protocols. Both Routing Engines are fully active in processing protocol sessions, and so each can take over for the other. The switchover is transparent to neighbor routing devices, which do not detect that a change has occurred.

Nonstop bridging (NSB) provides the same mechanism for Layer 2 protocols. NSB provides high availability in a switch with redundant Routing Engines by enabling transparent switchover of the Routing Engines without requiring restart of supported Layer 2 protocols. Both Routing Engines are fully active in processing protocol sessions, and so each can take over for the other. The switchover is transparent to neighbor switching devices, which do not detect that a change has occurred.

To use NSR or NSB, you must also configure GRES.

Nonstop Software Upgrade

Nonstop software upgrade (NSSU) allows you to upgrade the software on a switch with dual Routing Engines or on a Virtual Chassis in an automated manner with minimal traffic disruption. NSSU takes advantage of GRES and NSR to enable upgrading the Junos OS version with no disruption to the control plane. In addition, NSSU minimizes traffic disruption by:

- Upgrading line cards one at a time in an EX6200 switch, EX8200 switch, or EX8200 Virtual Chassis, permitting traffic to continue to flow through the line cards that are not being upgraded.
- Upgrading member switches one at a time in all other Virtual Chassis, permitting traffic to continue to flow through the members that are not being upgraded.

By configuring LAGs such that the member links reside on different line cards or Virtual Chassis members, you can achieve minimal traffic disruption when performing an NSSU.

Redundant Power System

Most Juniper Networks Ethernet Switches have a built-in capability for redundant power supplies—therefore if one power supply fails on those switches, the other power supply takes over. However, EX2200 switches and EX3300 switches have only one internal fixed power supply. If an EX2200 switch or EX3300 switch is deployed in a critical situation, we recommend that you connect a Redundant Power System (RPS) to that switch to supply backup power if the internal power supply fails. RPS is not a primary power supply—it only provides backup power to switches when the single dedicated power supply fails. An RPS operates in parallel with the single dedicated power supplies of the switches connected to it and provides all connected switches enough power to support either Power over Ethernet (PoE) or non-PoE devices. For more information about RPS, see ["EX Series Redundant Power System Hardware Overview" on page 395](#).

RELATED DOCUMENTATION

[Junos OS High Availability Configuration Guide](#)

[Understanding EX Series Virtual Chassis](#)

[EX8200 Virtual Chassis Overview](#)

[Understanding Nonstop Active Routing on EX Series Switches | 272](#)

[Understanding Nonstop Software Upgrade on EX Series Switches | 597](#)

[EX Series Redundant Power System Hardware Guide](#)

2

PART

Configuring Switching Control Board Redundancy

Understanding How Switching Control Board Redundancy Prevents Network Failures | 15

Configuring Switching Control Board Redundancy | 20

Understanding How Switching Control Board Redundancy Prevents Network Failures

IN THIS CHAPTER

- [Understanding Switching Control Board Redundancy | 15](#)

Understanding Switching Control Board Redundancy

IN THIS SECTION

- [Redundant CFEBs on the M10i Router | 16](#)
- [Redundant FEBs on the M120 Router | 16](#)
- [Redundant SSBs on the M20 Router | 18](#)
- [Redundant SFMs on the M40e and M160 Routers | 19](#)

This section describes the following redundant switching control boards:

NOTE: A failover from a primary switching control board to a backup switching control board occurs automatically when the primary experiences a hardware failure or when you have configured the software to support a change in primary role based on specific conditions. You can also manually switch primary role by issuing specific **request chassis** commands. In this section, the term *failover* refers to an automatic event, whereas *switchover* refers to either an automatic or a manual event.

Redundant CFEBs on the M10i Router

On the M10i router, the CFEB performs the following functions:

- Route lookups—Performs route lookups using the forwarding table stored in synchronous SRAM (SSRAM).
- Management of shared memory—Uniformly allocates incoming data packets throughout the router's shared memory.
- Transfer of outgoing data packets—Passes data packets to the destination Fixed Interface Card (FIC) or *Physical Interface Card* (PIC) when the data is ready to be transmitted.
- Transfer of exception and control packets—Passes exception packets to the microprocessor on the CFEB, which processes almost all of them. The remainder are sent to the Routing Engine for further processing. Any errors originating in the Packet Forwarding Engine and detected by the CFEB are sent to the Routing Engine using system log messages.

The M10i router has two CFEBs, one that is configured to act as the primary and the other that serves as a backup in case the primary fails. You can initiate a manual switchover by issuing the **request chassis cfeb master switch** command. For more information, see the [Junos OS Administration Library for Routing Devices](#).

Redundant FEBs on the M120 Router

The M120 router supports up to six Forwarding Engine Boards (FEBs). Flexible PIC Concentrator (FPCs), which host PICs, are separate from the FEBs, which handle packet forwarding. FPCs are located on the front of the chassis and provide power and management to PICs through the midplane. FEBs are located on the back of the chassis and receive signals from the midplane, which the FEBs process for packet forwarding. The midplane allows any FEB to carry traffic for any FPC.

To configure the mapping of FPCs to FEBs, use the **fpc-feb-connectivity** statement as described in the [Junos OS Administration Library for Routing Devices](#). You cannot specify a connection between an FPC and a FEB configured as a backup. If an FPC is not specified to connect to a FEB, the FPC is assigned automatically to the FEB with the same slot number. For example, the FPC in slot 1 is assigned to the FEB in slot 1.

You can configure one FEB as a backup for one or more FEBs by configuring a FEB redundancy group. When a FEB fails, the backup FEB can quickly take over packet forwarding. A redundancy group must contain exactly one backup FEB and can optionally contain one primary FEB and multiple other FEBs. A FEB can belong to only one group. A group can provide backup on a one-to-one basis (primary-to-backup), a many-to-one basis (two or more other-FEBs-to-backup), or a combination of both (one primary-to-backup and one or more other-FEBs-to-backup).

When you configure a primary FEB in a redundancy group, the backup FEB mirrors the exact forwarding state of the primary FEB. If switchover occurs from a primary FEB, the backup FEB does not reboot. A manual switchover from the primary FEB to the backup FEB results in less than 1 second of traffic loss. Failover from the primary FEB to the backup FEB results in less than 10 seconds of traffic loss.

If a failover occurs from the other FEB and a primary FEB is specified for the group, the backup FEB reboots so that the forwarding state from the other FEB can be downloaded to the backup FEB and forwarding can continue. Automatic failover from a FEB that is not specified as a primary FEB results in higher packet loss. The duration of packet loss depends on the number of interfaces and on the size of the routing table, but it can be minutes.

If a failover from a FEB occurs when no primary FEB is specified in the redundancy group, the backup FEB does not reboot and the interfaces on the FPC connected to the previously active FEB remain online. The backup FEB must obtain the entire forwarding state from the Routing Engine after a switchover, and this update may take a few minutes. If you do not want the interfaces to remain online during the switchover for the other FEB, configure a primary FEB for the redundancy group.

Failover to a backup FEB occurs automatically if a FEB in a redundancy group fails. You can disable automatic failover for any redundancy group by including the **no-auto-failover** statement at the **[edit chassis redundancy feb redundancy-group *group-name*]** hierarchy level.

You can also initiate a manual switchover by issuing the **request chassis redundancy feb slot *slot-number* switch-to-backup** command, where *slot-number* is the number of the active FEB. For more information, see the [CLI Explorer](#).

The following conditions result in failover as long as the backup FEB in a redundancy group is available:

- The FEB is absent.
- The FEB experienced a hard error while coming online.
- A software failure on the FEB resulted in a crash.
- Ethernet connectivity from a FEB to a Routing Engine failed.
- A hard error on the FEB, such as a power failure, occurred.
- The FEB was disabled when the offline button for the FEB was pressed.
- The software watchdog timer on the FEB expired.
- Errors occurred on the links between all the active fabric planes and the FEB. This situation results in failover to the backup FEB if it has at least one valid fabric link.
- Errors occurred on the link between the FEB and all of the FPCs connected to it.

After a switchover occurs, a backup FEB is no longer available for the redundancy group. You can revert from the backup FEB to the previously active FEB by issuing the *operational mode command* **request**

chassis redundancy feb slot *slot-number* revert-from-backup, where *slot-number* is the number of the previously active FEB. For more information, see the [CLI Explorer](#).

When you revert from the backup FEB, it becomes available again for a switchover. If the redundancy group does not have a primary FEB, the backup FEB reboots after you revert back to the previously active FEB. If the FEB to which you revert back is not a primary FEB, the backup FEB is rebooted so that it can align with the state of the primary FEB.

If you modify the configuration for an existing redundancy group so that a FEB connects to a different FPC, the FEB is rebooted unless the FEB was already connected to one or two Type 1 FPCs and the change only resulted in the FEB being connected either to one additional or one fewer Type 1 FPC. For more information about how to map a connection between an FPC and a FEB, see the [Junos OS Administration Library for Routing Devices](#). If you change the primary FEB in a redundancy group, the backup FEB is rebooted. The FEB is also rebooted if you change a backup FEB to a nonbackup FEB or change an active FEB to a backup FEB.

To view the status of configured FEB redundancy groups, issue the **show chassis redundancy feb** operational mode command. For more information, see the [CLI Explorer](#).

Redundant SSBs on the M20 Router

The System and Switch Board (SSB) on the M20 router performs the following major functions:

- Shared memory management on the FPCs—The Distributed Buffer Manager ASIC on the SSB uniformly allocates incoming data packets throughout shared memory on the FPCs.
- Outgoing data cell transfer to the FPCs—A second Distributed Buffer Manager ASIC on the SSB passes data cells to the FPCs for packet reassembly when the data is ready to be transmitted.
- Route lookups—The Internet Processor ASIC on the SSB performs route lookups using the forwarding table stored in SSRAM. After performing the lookup, the Internet Processor ASIC informs the midplane of the forwarding decision, and the midplane forwards the decision to the appropriate outgoing interface.
- System component monitoring—The SSB monitors other system components for failure and alarm conditions. It collects statistics from all sensors in the system and relays them to the Routing Engine, which sets the appropriate alarm. For example, if a temperature sensor exceeds the first internally defined threshold, the Routing Engine issues a “high temp” alarm. If the sensor exceeds the second threshold, the Routing Engine initiates a system shutdown.
- Exception and control packet transfer—The Internet Processor ASIC passes exception packets to a microprocessor on the SSB, which processes almost all of them. The remaining packets are sent to the Routing Engine for further processing. Any errors that originate in the Packet Forwarding Engine and are detected by the SSB are sent to the Routing Engine using system log messages.

- FPC reset control—The SSB monitors the operation of the FPCs. If it detects errors in an FPC, the SSB attempts to reset the FPC. After three unsuccessful resets, the SSB takes the FPC offline and informs the Routing Engine. Other FPCs are unaffected, and normal system operation continues.

The M20 router holds up to two SSBs. One SSB is configured to act as the primary and the other is configured to serve as a backup in case the primary fails. You can initiate a manual switchover by issuing the **request chassis ssb master switch** command. For more information, see the [CLI Explorer](#).

Redundant SFMs on the M40e and M160 Routers

The M40e and M160 routers have redundant Switching and Forwarding Modules (SFMs). The SFMs contain the Internet Processor II ASIC and two Distributed Buffer Manager ASICs. SFMs ensure that all traffic leaving the FPCs is handled properly. SFMs provide route lookup, filtering, and switching.

The M40e router holds up to two SFMs, one that is configured to act as the primary and the other configured to serve as a backup in case the primary fails. Removing the standby SFM has no effect on router function. If the active SFM fails or is removed from the chassis, forwarding halts until the standby SFM boots and becomes active. It takes approximately 1 minute for the new SFM to become active. Synchronizing router configuration information can take additional time, depending on the complexity of the configuration.

The M160 router holds up to four SFMs. All SFMs are active at the same time. A failure or taking an SFM offline has no effect on router function. Forwarding continues uninterrupted.

You can initiate a manual switchover by issuing the **request chassis sfm master switch** command. For more information, see the [CLI Explorer](#).

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

[Understanding Routing Engine Redundancy on Juniper Networks Routers | 127](#)

[Configuring CFEB Redundancy on the M10i Router | 20](#)

[Configuring FEB Redundancy on the M120 Router | 21](#)

[Configuring SFM Redundancy on M40e and M160 Routers | 24](#)

[Configuring SSB Redundancy on the M20 Router | 24](#)

[show chassis redundancy feb | 996](#)

[request chassis cb](#)

Configuring Switching Control Board Redundancy

IN THIS CHAPTER

- Configuring CFEB Redundancy on the M10i Router | 20
- Configuring FEB Redundancy on the M120 Router | 21
- Example: Configuring FEB Redundancy on M120 Routers | 22
- Configuring SFM Redundancy on M40e and M160 Routers | 24
- Configuring SSB Redundancy on the M20 Router | 24
- Configuring the Junos OS to Support Redundancy on Routers Having Multiple Routing Engines or Switching Boards | 25

Configuring CFEB Redundancy on the M10i Router

The Compact Forwarding Engine Board (CFEB) on the M10i router provides route lookup, filtering, and switching on incoming data packets, and then directs outbound packets to the appropriate interface for transmission to the network. The CFEB communicates with the Routing Engine using a dedicated 100-Mbps Fast Ethernet link that transfers routing table data from the Routing Engine to the forwarding table in the integrated ASIC. The link is also used to transfer from the CFEB to the Routing Engine routing link-state updates and other packets destined for the router that have been received through the router interfaces.

To configure a CFEB redundancy group, include the following statements at the **[edit chassis redundancy]** hierarchy level:

```
[edit chassis redundancy]
cfep slot-number (always | preferred);
```

slot-number can be 0 or 1.

always defines the CFEB as the sole device.

preferred defines a preferred CFEB.

To manually switch CFEB primary role, issue the **request chassis cfep master switch** command. To view CFEB status, issue the **show chassis cfep** command.

RELATED DOCUMENTATION

[Understanding Switching Control Board Redundancy | 15](#)

Configuring FEB Redundancy on the M120 Router

To configure a FEB redundancy group for the M120 router, include the following statements at the **[edit chassis redundancy feb]** hierarchy level:

```
[edit chassis redundancy feb]
redundancy-group group-name {
  description description;
  feb slot-number (backup | primary);
  no-auto-failover;
}
```

group-name is the unique name for the redundancy group. The maximum length is 39 alphanumeric characters.

slot-number is the slot number of each FEB you want to include in the redundancy group. The range is from 0 through 5. You must specify exactly one FEB as a backup FEB per redundancy group. Include the **backup** keyword when configuring the backup FEB and make sure that the FEB is not connected to an FPC.

Include the **primary** keyword to optionally specify one primary FEB per redundancy group. When the **primary** keyword is specified for a particular FEB, that FEB is configured for 1:1 redundancy. With 1:1 redundancy, the backup FEB contains the same forwarding state as the primary FEB. When no FEB in the redundancy group is configured as a primary FEB, the redundancy group is configured for *N*:1 redundancy. In this case, the backup FEB has no forwarding state. When a FEB fails, the forwarding state must be downloaded from the Routing Engine to the backup FEB before forwarding continues.

A combination of 1:1 and *N*:1 redundancy is possible when more than two FEBs are present in a group. The backup FEB contains the same forwarding state as the primary FEB, so that when the primary FEB fails, 1:1 failover is in effect. When a nonprimary FEB fails, the backup FEB must be rebooted so that the forwarding state from the nonprimary FEB is installed on the backup FEB before it can continue forwarding.

You can optionally include the **description** statement to describe a redundancy group.

Automatic failover is enabled by default. To disable automatic failover, include the **no-auto-failover** statement. If you disable automatic failover, you can perform only a manual switchover using the operational command **request chassis redundancy feb slot *slot-number* switch-to-backup**.

To view FEB status, issue the **show chassis feb** command. For more information, see the [CLI Explorer](#).

RELATED DOCUMENTATION

[Understanding Switching Control Board Redundancy | 15](#)

[Example: Configuring FEB Redundancy on M120 Routers | 22](#)

Example: Configuring FEB Redundancy on M120 Routers

In the following configuration, two FEB redundancy groups are created:

- A FEB redundancy group named **group0** with the following properties:
 - Contains three FEBs (0 through 2).
 - Has a primary FEB (2).
 - Has a unique backup FEB (0).
 - Automatic failover is disabled.

When an active FEB in **group0** fails, automatic failover to the backup FEB does not occur. For **group0**, you can only perform a manual switchover.

- A FEB redundancy group named **group1** with the following properties:
 - Two FEBs (3 and 5). There is no primary FEB.
 - A unique backup FEB (5).
 - Automatic failover is enabled by default.

When **feb 3** in **group1** fails, an automatic failover occurs.

Because you must explicitly configure an FPC *not* to connect to the backup FEB, connectivity is set to none between **fpc 0** and **feb 0** and between **fpc 5** and **feb 5**.

NOTE: For information about the **fpc-feb-connectivity** statement, see the [Junos OS Administration Library for Routing Devices](#).

FPC to primary FEB connectivity is not explicitly configured, so by default, the software automatically assigns connectivity based on the numerical order of the FPCs.

```
[edit]
chassis {
  fpc-feb-connectivity {
    fpc 0 feb none;
    fpc 5 feb none;
  }
  redundancy feb {
    redundancy-group group0 {
      description "Interfaces to Customer X";
      feb 2 primary;
      feb 1;
      feb 0 backup;
      no-auto-failover;
    }
    redundancy-group group1 {
      feb 3;
      feb 5 backup;
    }
  }
}
```

RELATED DOCUMENTATION

[Understanding Switching Control Board Redundancy | 15](#)

[Configuring FEB Redundancy on the M120 Router | 21](#)

Configuring SFM Redundancy on M40e and M160 Routers

By default, the Switching and Forwarding Module (SFM) in slot 0 is the primary and the SFM in slot 1 is the backup. To modify the default configuration, include the **sfm** statement at the **[edit chassis redundancy]** hierarchy level:

```
[edit chassis redundancy]
sfm slot-number (always | preferred);
```

On the M40e router, **slot-number** is 0 or 1. On the M160 router, **slot-number** is 0 through 3.

always defines the SFM as the sole device.

preferred defines a preferred SFM.

To manually switch primary role between SFMs, issue the **request chassis sfm master switch** command. To view SFM status, issue the **show chassis sfm** command. For more information, see the [CLI Explorer](#).

RELATED DOCUMENTATION

[Understanding Switching Control Board Redundancy](#) | 15

Configuring SSB Redundancy on the M20 Router

For M20 routers with two System and Switch Boards (SSBs), you can configure which SSB is the primary and which is the backup. By default, the SSB in slot 0 is the primary and the SSB in slot 1 is the backup. To modify the default configuration, include the **ssb** statement at the **[edit chassis redundancy]** hierarchy level:

```
[edit chassis redundancy]
ssb slot-number (always | preferred);
```

slot-number is 0 or 1.

always defines the SSB as the sole device.

preferred defines a preferred SSB.

To manually switch primary role between SSBs, issue the **request chassis ssb master switch** command.

To display SSB status information, issue the **show chassis ssb** command. The command output displays the number of times the primary role has changed, the SSB slot number, and the current state of the SSB: primary, backup, or empty. For more information, see the [CLI Explorer](#).

RELATED DOCUMENTATION

| [Understanding Switching Control Board Redundancy](#) | 15

Configuring the Junos OS to Support Redundancy on Routers Having Multiple Routing Engines or Switching Boards

For routers that have multiple Routing Engines or these multiple switching control boards: Switching and Forwarding Modules (SFMs), System and Switch Boards (SSBs), Forwarding Engine Boards (FEBs), or Compact Forwarding Engine Boards (CFEBs), you can configure redundancy properties.

To configure redundancy, include the following redundancy statements at the **[edit chassis]** hierarchy level:

```

redundancy {
    cfcb slot (always | preferred);
    failover {
        on-disk-failure
        on-loss-of-keepalives;
    }
    feb {
        redundancy-group group-name {
            feb slot-number (backup | primary);
            description description;
            no-auto-failover;
        }
    }
    graceful-switchover;
    keepalive-time seconds;
    routing-engine slot-number (master | backup | disabled);
    sfm slot-number (always | preferred);
    ssb slot-number (always | preferred);
}

```

RELATED DOCUMENTATION

[Understanding Routing Engine Redundancy on Juniper Networks Routers](#) | 127

3

PART

Configuring Bidirectional Forwarding Detection (BFD)

[Understanding How BFD Detects Network Failures](#) | 28

[Configuring BFD](#) | 55

Understanding How BFD Detects Network Failures

IN THIS CHAPTER

- Understanding BFD for Static Routes for Faster Network Failure Detection | 28
- Understanding BFD for BGP | 33
- Understanding BFD for OSPF | 35
- Understanding BFD for IS-IS | 38
- Understanding BFD for RIP | 41
- Understanding Independent Micro BFD Sessions for LAG | 42
- Understanding Distributed BFD | 46
- Understanding Static Route State When BFD is in Admin Down State | 53

Understanding BFD for Static Routes for Faster Network Failure Detection

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchanges BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the static route failure detection mechanisms, so they provide faster detection.

The BFD failure detection timers can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

By default, BFD is supported on single-hop static routes.

NOTE: On MX Series devices, multihop BFD is not supported on a static route if the static route is configured with more than one next hop. It is recommended that you avoid using multiple next hops when a multihop BFD is required for a static route.

To enable failure detection, include the `bfd-liveness-detection` statement in the static route configuration.

NOTE: Starting with Junos OS Release 15.1X49-D70 and Junos OS Release 17.3R1, the **bfd-liveness-detection** command includes the description field. The description is an attribute under the **bfd-liveness-detection** object and it is supported only on SRX Series devices. This field is applicable only for the static routes.

In Junos OS Release 9.1 and later, the BFD protocol is supported for IPv6 static routes. Global unicast and link-local IPv6 addresses are supported for static routes. The BFD protocol is not supported on multicast or anycast IPv6 addresses. For IPv6, the BFD protocol supports only static routes and only in Junos OS Release 9.3 and later. IPv6 for BFD is also supported for the eBGP protocol.

NOTE: Inline BFD is supported on PTX5000 routers with third-generation FPCs starting in Junos OS Release 15.1F3 and 16.1R2. Inline BFD is supported on PTX3000 routers with third-generation FPCs starting in Junos OS Release 15.1F6 and 16.1R2.

There are three types of BFD sessions based on the source from which BFD packets are sent to the neighbors. Different types of BFD sessions and their descriptions are:

Type of BFD session	Description
Non-distributed BFD	BFD sessions running completely on the Routing Engine.
Distributed BFD	BFD sessions running completely on the Packet Forwarding Engine.

(Continued)

Type of BFD session	Description
Inline BFD NOTE: Starting in Junos OS Release 13.3, inline BFD is supported only on static MX Series routers with MPCs/MICs that have configured enhanced-ip. NOTE: Starting in Junos OS Release 16.1R1, the inline BFD sessions are supported on integrated routing and bridging (IRB) interfaces.	BFD sessions running on the FPC hardware.

To configure the BFD protocol for IPv6 static routes, include the **bfd-liveness-detection** statement at the **[edit routing-options rib inet6.0 static route *destination-prefix*]** hierarchy level.

In Junos OS Release 8.5 and later, you can configure a hold-down interval to specify how long the BFD session must remain up before a state change notification is sent.

To specify the hold-down interval, include the **holddown-interval** statement in the BFD configuration.

You can configure a number in the range from 0 through 255,000 milliseconds. The default is 0. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.

NOTE: If a single BFD session includes multiple static routes, the hold-down interval with the highest value is used.

To specify the minimum transmit and receive intervals for failure detection, include the **minimum-interval** statement in the BFD configuration.

This value represents both the minimum interval after which the local routing device transmits hello packets and the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.

NOTE: QFX5000 Series switches and EX4600 switches do not support minimum interval values of less than 1 second.

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when *nonstop active routing* (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

To specify the minimum receive interval for failure detection, include the **minimum-receive-interval** statement in the BFD configuration. This value represents the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum receive interval using the **minimum-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level.

To specify the number of hello packets not received by the neighbor that causes the originating interface to be declared down, include the **multiplier** statement in the BFD configuration.

The default value is 3. You can configure a number in the range from 1 through 255.

To specify a threshold for detecting the adaptation of the detection time, include the **threshold** statement in the BFD configuration.

When the BFD session detection time adapts to a value equal to or higher than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the **minimum-interval** or the **minimum-receive-interval** value. The threshold must be a higher value than the multiplier for either of these configured values. For example if the **minimum-receive-interval** is 300 ms and the **multiplier** is 3, the total detection time is 900 ms. Therefore, the detection time threshold must have a value higher than 900.

To specify the minimum transmit interval for failure detection, include the **transmit-interval minimum-interval** statement in the BFD configuration.

This value represents the minimum interval after which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value in the range

from 1 through 255,000 milliseconds. Optionally, instead of using this statement, you can configure the minimum transmit interval using the **minimum-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level.

To specify the threshold for the adaptation of the transmit interval, include the **transmit-interval threshold** statement in the BFD configuration.

The threshold value must be greater than the transmit interval. When the BFD session transmit time adapts to a value greater than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the value for the **minimum-interval** or the **minimum-receive-interval** statement at the **[edit routing-options static route *destination-prefix* bfd-liveness-detection]** hierarchy level. The threshold must be a higher value than the multiplier for either of these configured values.

To specify the BFD version, include the **version** statement in the BFD configuration. The default is to have the version detected automatically.

To include an IP address for the next hop of the BFD session, include the **neighbor** statement in the BFD configuration.

NOTE: You must configure the **neighbor** statement if the next hop specified is an interface name. If you specify an IP address as the next hop, that address is used as the neighbor address for the BFD session.

In Junos OS Release 9.0 and later, you can configure BFD sessions not to adapt to changing network conditions.

To disable BFD adaptation, include the **no-adaptation** statement in the BFD configuration.

NOTE: We recommend that you not disable BFD adaptation unless it is preferable *not* to have BFD adaptation in your network.

NOTE: If BFD is configured only on one end of a static route, the route is removed from the routing table. BFD establishes a session when BFD is configured on both ends of the static route. BFD is not supported on ISO address families in static routes. BFD does support IS-IS.

If you configure *graceful Routing Engine switchover* (GRES) at the same time as BFD, GRES does not preserve the BFD state information during a failover.

Release History Table

Release	Description
16.1R1	Starting in Junos OS Release 16.1R1, the inline BFD sessions are supported on integrated routing and bridging (IRB) interfaces.
15.1X49-D70	Starting with Junos OS Release 15.1X49-D70 and Junos OS Release 17.3R1, the bfd-liveness-detection command includes the description field. The description is an attribute under the bfd-liveness-detection object and it is supported only on SRX Series devices. This field is applicable only for the static routes.
15.1F6	Inline BFD is supported on PTX3000 routers with third-generation FPCs starting in Junos OS Release 15.1F6 and 16.1R2.
15.1F3	Inline BFD is supported on PTX5000 routers with third-generation FPCs starting in Junos OS Release 15.1F3 and 16.1R2.
13.3	Starting in Junos OS Release 13.3, inline BFD is supported only on static MX Series routers with MPCs/MICs that have configured enhanced-ip.

RELATED DOCUMENTATION

[Enabling Dedicated and Real-Time BFD](#) | 123

Understanding BFD for BGP

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. BFD works with a wide variety of network environments and topologies. The failure detection timers for BFD have shorter time limits than default failure detection mechanisms for BGP, so they provide faster detection.

NOTE: Configuring both BFD and graceful restart for BGP on the same device is counterproductive. When an interface goes down, BFD detects this instantly, stops traffic forwarding and the BGP session goes down whereas graceful restart forwards traffic despite the interface failure, this behavior might cause network issues. Hence we do not recommend configuring both BFD and graceful restart on the same device.

NOTE: QFX5000 Series switches and EX4600 switches do not support minimum interval values of less than 1 second.

NOTE: QFX5110, QFX5120, QFX5200, and QFX5210 switches support multihop Bidirectional Forwarding Detection (BFD) inline keep alive support which will enable sessions to be configured at less than 1 second. Performance may vary depending on the system load. 10 inline BFD sessions are supported and can be configured with a timer of 150 x 3 milliseconds.

The BFD failure detection timers can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds (15000 milliseconds). A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

NOTE: On all SRX Series devices, high CPU utilization triggered for reasons such as CPU intensive commands and SNMP walks causes the BFD protocol to flap while processing large BGP updates. (Platform support depends on the Junos OS release in your installation.) Starting with Junos OS Release 15.1X49-D100, SRX340, SRX345, and SRX1500 devices support dedicated BFD.

Starting with Junos OS Release 15.1X49-D100, SRX300 and SRX320 devices support real-time BFD.

Starting with Junos OS Release 15.1X49-D110, SRX550M devices support dedicated BFD.

In Junos OS Release 8.3 and later, BFD is supported on internal BGP (IBGP) and multihop external BGP (EBGP) sessions as well as on single-hop EBGP sessions. In Junos OS Release 9.1 through Junos OS Release 11.1, BFD supports IPv6 interfaces in static routes only. In Junos OS Release 11.2 and later, BFD supports IPv6 interfaces with BGP.

Release History Table

Release	Description
15.1X49-D100	Starting with Junos OS Release 15.1X49-D100, SRX340, SRX345, and SRX1500 devices support dedicated BFD.
15.1X49-D100	Starting with Junos OS Release 15.1X49-D100, SRX300 and SRX320 devices support real-time BFD.
11.2	In Junos OS Release 11.2 and later, BFD supports IPv6 interfaces with BGP.
9.1	In Junos OS Release 9.1 through Junos OS Release 11.1, BFD supports IPv6 interfaces in static routes only.
8.3	In Junos OS Release 8.3 and later, BFD is supported on internal BGP (IBGP) and multihop external BGP (EBGP) sessions as well as on single-hop EBGP sessions.

RELATED DOCUMENTATION

[Enabling Dedicated and Real-Time BFD](#) | 123

Understanding BFD for OSPF

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchange BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the OSPF failure detection mechanisms, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their

configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

NOTE: QFX5000 Series switches and EX4600 switches do not support minimum interval values of less than 1 second.

NOTE: BFD is supported for OSPFv3 in Junos OS Release 9.3 and later.

NOTE: For branch SRX Series devices, we recommend 1000 ms as the minimum keepalive time interval for BFD packets.

You can configure the following BFD protocol settings:

- **detection-time threshold**—Threshold for the adaptation of the detection time. When the BFD session detection time adapts to a value equal to or greater than the configured threshold, a single trap and a single system log message are sent.
- **full-neighbors-only**—Ability to establish BFD sessions only for OSPF neighbors with full neighbor adjacency. The default behavior is to establish BFD sessions for all OSPF neighbors. This setting is available in Junos OS Release 9.5 and later.
- **minimum-interval**—Minimum transmit and receive interval for failure detection. This setting configures both the minimum interval after which the local routing device transmits hello packets and the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. Both intervals are in milliseconds. You can also specify the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements.

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of no less than 500 ms. An interval of 1000 ms is recommended to avoid any instability issues.

- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when *nonstop active routing* (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. Without NSR, Routing Engine-based sessions can have a minimum interval of 100 ms. In OSPFv3, BFD is always based in the Routing Engine, meaning that BFD is not distributed. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.
- On a single QFX5100 switch, when you add a QFX-EM-4Q expansion module, specify a minimum interval higher than 1000 ms.

- **minimum-receive-interval**—Minimum receive interval for failure detection. This setting configures the minimum receive interval, in milliseconds, after which the routing device expects to receive a hello packet from a neighbor with which it has established a BFD session. You can also specify the minimum receive interval using the **minimum-interval** statement.
- **multiplier**—Multiplier for hello packets. This setting configures the number of hello packets that are not received by a neighbor, which causes the originating interface to be declared down. By default, three missed hello packets cause the originating interface to be declared down.
- **no-adaptation**—Disables BFD adaption. This setting disables BFD sessions from adapting to changing network conditions. This setting is available in Junos OS Release 9.0 and later.

NOTE: We recommend that you do not disable BFD adaptation unless it is preferable not to have BFD adaptation in your network.

- **transmit-interval minimum-interval**—Minimum transmit interval for failure detection. This setting configures the minimum transmit interval, in milliseconds, at which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can also specify the minimum transmit interval using the **minimum-interval** statement.
- **transmit-interval threshold**—Threshold for the adaptation of the BFD session transmit interval. When the transmit interval adapts to a value greater than the threshold, a single trap and a single system log message are sent. The threshold value must be greater than the minimum transmit interval. If you attempt to commit a configuration with a threshold value less than the minimum transmit interval, the routing device displays an error and does not accept the configuration.
- **version**—BFD version. This setting configures the BFD version used for detection. You can explicitly configure BFD version 1, or the routing device can automatically detect the BFD version. By default, the routing device automatically detects the BFD version automatically, which is either 0 or 1.

You can also trace BFD operations for troubleshooting purposes.

Understanding BFD for IS-IS

The Bidirectional Forwarding Detection (BFD) protocol is a simple hello mechanism that detects failures in a network. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. BFD works with a wide variety of network environments and topologies. The failure detection timers for BFD have shorter time limits than the failure detection mechanisms of IS-IS, providing faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. For example, the timers can adapt to a higher value if the adjacency fails, or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (RX) interval by two if the local BFD instance is the reason for the session flap. The transmission (TX) interval is increased by two if the remote BFD instance is the reason for the session flap.

You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

NOTE: Starting with Junos OS Release 16.1R1, you can configure IS-IS BFD sessions for IPv6 by including the **bfd-liveness-detection** statement at the **[edit protocols isis interface *interface-name* family inet[inet6]** hierarchy level.

- For interfaces that support both IPv4 and IPv6 routing, the **bfd-liveness-detection** statement must be configured separately for each inet family.
- BFD over IPv6 link local address is currently not distributed because IS-IS uses link local addresses for forming adjacencies.
- BFD sessions over IPv6 must not have the same aggressive detection intervals as IPv4 sessions.
- BFD IPv6 sessions with detection intervals less than 2.5 seconds are currently not supported when nonstop active routing (NSR) is enabled.

NOTE: QFX5000 Series switches and EX4600 switches do not support minimum interval values of less than 1 second.

To detect failures in the network, the set of statements in [Table 1 on page 39](#) are used in the configuration.

Table 1: Configuring BFD for IS-IS

Statement	Description
bfd-liveness-detection	Enable failure detection.
minimum-interval <i>milliseconds</i>	Specify the minimum transmit and receive intervals for failure detection. This value represents the minimum interval at which the local router transmits hellos packets as well as the minimum interval at which the router expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number from 1 through 255,000 milliseconds. You can also specify the minimum transmit and receive intervals separately. NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping. Depending on your network environment, these additional recommendations might apply: • For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions. • For very large-scale network deployments with a large number of BFD sessions, please contact Juniper Networks customer support for more information. • For BFD sessions to remain up during a Routing Engine switchover event when <i>nonstop active routing</i> (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with nonstop active routing configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

Table 1: Configuring BFD for IS-IS (*Continued*)

Statement	Description
minimum-receive-interval <i>milliseconds</i>	Specify only the minimum receive interval for failure detection. This value represents the minimum interval at which the local router expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number from 1 through 255,000 milliseconds.
multiplier <i>number</i>	Specify the number of hello packets not received by the neighbor that causes the originating interface to be declared down. The default is 3, and you can configure a value from 1 through 225.
no-adaptation	Disable BFD adaptation. In Junos OS Release 9.0 and later, you can specify that the BFD sessions not adapt to changing network conditions. NOTE: We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.
threshold	Specify the threshold for the following: - Adaptation of the detection time When the BFD session detection time adapts to a value equal to or greater than the threshold, a single trap and a system log message are sent. - Transmit interval NOTE: The threshold value must be greater than the minimum transmit interval multiplied by the multiplier number.
transmit-interval minimum-interval	Specify the minimum transmit interval for failure detection. This value represents the minimum interval at which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value from 1 through 255,000 milliseconds.

Table 1: Configuring BFD for IS-IS (*Continued*)

Statement	Description
version	Specify the BFD version used for detection. The default is to have the version detected automatically.

NOTE: You can trace BFD operations by including the **traceoptions** statement at the **[edit protocols bfd]** hierarchy level.

For a list of hierarchy levels at which you can include these statements, see the statement summary sections for these statements.

RELATED DOCUMENTATION

[Understanding BFD for IS-IS | 38](#)

Understanding BFD Authentication for IS-IS

Understanding BFD for RIP

The Bidirectional Forwarding Detection (BFD) Protocol is a simple hello mechanism that detects failures in a network. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. BFD works with a wide variety of network environments and topologies. BFD failure detection times are shorter than RIP detection times, providing faster reaction times to various kinds of failures in the network. Instead of waiting for the routing protocol neighbor timeout, BFD provides rapid detection of link failures. BFD timers are adaptive and can be adjusted to be more or less aggressive. For example, a timer can adapt to a higher value if the adjacency fails, or a neighbor can negotiate a higher value for a timer than the one configured. Note that the functionality of configuring BFD for RIP described in this topic is not supported in Junos OS Releases 15.1X49, 15.1X49-D30, or 15.1X49-D40.

NOTE: QFX5000 Series switches and EX4600 switches do not support minimum interval values of less than 1 second.

BFD enables quick failover between a primary and a secondary routed path. The protocol tests the operational status of the interface multiple times per second. BFD provides for configuration timers and thresholds for failure detection. For example, if the minimum interval is set for 50 milliseconds and the threshold uses the default value of three missed messages, a failure is detected on an interface within 200 milliseconds of the failure.

Intervening devices (for example, an Ethernet LAN switch) hide link-layer failures from routing protocol peers, such as when two routers are connected by way of a LAN switch, where the local interface status remains up even when a physical fault happens on the remote link. Link-layer failure detection times vary, depending on the physical media and the Layer 2 encapsulation. BFD can provide fast failure detection times for all media types, encapsulations, topologies, and routing protocols.

To enable BFD for RIP, both sides of the connection must receive an update message from the peer. By default, RIP does not export any routes. Therefore, you must enable update messages to be sent by configuring an export policy for routes before a BFD session is triggered.

Release History Table

Release	Description
15.1X49	Note that the functionality of configuring BFD for RIP described in this topic is not supported in Junos OS Releases 15.1X49, 15.1X49-D30, or 15.1X49-D40.

Understanding Independent Micro BFD Sessions for LAG

Starting with Junos OS Release 13.3, this feature is supported on the following PIC/FPC types:

- PC-1XGE-XENPAK (Type 3 FPC)
- PD-4XGE-XFP (Type 4 FPC)
- PD-5-10XGE-SFPP (Type 4 FPC)
- 24x10GE (LAN/WAN) SFPP, 12x10GE (LAN/WAN) SFPP, 1x100GE Type 5 PICs
- All MPCs on MX Series with Ethernet MICs
- FPC-PTX-P1-A on PTX5000 with 10-Gigabit Ethernet interfaces
- FPC2-PTX-P1A on PTX5000 with 10-Gigabit Ethernet interfaces in Junos OS Release 14.1 and later
- All FPCs on PTX Series with Ethernet interfaces in Junos OS Release 14.1R3 and later 14.1 releases, and Junos 14.2 and later

TIP: See [PTX Series PIC/FPC Compatibility](#) for a list of PICs that are supported on each PTX Series FPC.

NOTE: Micro-BFD configuration with interface addresses is not supported on PTX routers on FPC3 and QFX10000 line of switches.

The Bidirectional Forwarding Detection (BFD) protocol is a simple detection protocol that quickly detects failures in the forwarding paths. A link aggregation group (LAG) combines multiple links between devices that are in point-to-point connections, thereby increasing bandwidth, providing reliability, and allowing load balancing. To run a BFD session on LAG interfaces, configure an independent, asynchronous mode BFD session on every LAG member link in a LAG bundle. Instead of a single BFD session monitoring the status of the UDP port, independent micro BFD sessions monitor the status of individual member links.

The individual BFD sessions determine the Layer 2 and Layer 3 connectivity of each member link in the LAG. Once a BFD session is established on a particular link, the member links are attached to the LAG and the load balancer either by a static configuration or by the Link Aggregation Control Protocol (LACP). If the member links are attached to the LAG by a static configuration, the device control process acts as the client to the micro BFD session. When member links are attached to the LAG by the LACP, the LACP acts as the client to the micro BFD session.

When the micro BFD session is up, a LAG link is established and data is transmitted over that LAG link. If the micro BFD session on a member link is down, that particular member link is removed from the load balancer, and the LAG managers stop directing traffic to that link. These micro BFD sessions are independent of each other despite having a single client that manages the LAG interface.

NOTE:

- Starting with Junos OS Release 13.3, IANA has allocated 01-00-5E-90-00-01 as the dedicated MAC address for micro BFD. Dedicated MAC mode is used by default for micro BFD sessions, in accordance with the latest draft for BFD over LAG.
- In Junos OS, MicroBFD control packets are always untagged by default. For L2 aggregated interfaces, the configuration must include vlan-tagging or flexible-vlan-tagging in the Aggregated Ethernet with BFD. Otherwise, the system will throw error while committing the configuration.

- When you enable MicroBFD on an aggregated Ethernet Interface, the aggregated Interface can receive MicroBFD packets. Starting with Junos OS Release 19.3 and later, for MPC10E and MPC11E MPCs, you cannot apply firewall filters on the MicroBFD packets received on the aggregated Ethernet Interface. For MPC1E through MPC9E, you can apply firewall filters on the MicroBFD packets received on the aggregated Ethernet Interface only if the aggregated Ethernet Interface is configured as an untagged Interface.

Micro BFD sessions run in the following modes:

- Distribution Mode—Micro BFD sessions are distributed by default at Layer 3.
- Non-Distribution Mode—You can configure the BFD session to run in this mode by including the **no-delegate-processing** statement under periodic packet management (PPM). In this mode, the packets are being sent or received by the Routing Engine at Layer 2.

A pair of routing devices in a LAG exchange BFD packets at a specified, regular interval. The routing device detects a neighbor failure when it stops receiving a reply after a specified interval. This allows the quick verification of member link connectivity with or without LACP. A UDP port distinguishes BFD over LAG packets from BFD over single-hop IP.

NOTE: IANA has allocated 6784 as the UDP destination port for micro BFD.

To enable failure detection for LAG networks for aggregated Ethernet interfaces:

- Include the ["bfd-liveness-detection" on page 666](#) statement in the configuration.
- Specify a hold-down interval value to set the minimum time that the BFD session must remain up before a state change notification is sent to the other members in the LAG network.
- Specify the minimum interval that indicates the time interval for transmitting and receiving data.
- Starting with Junos OS Release 14.1, specify the neighbor in a BFD session. In releases prior to Junos OS Release 16.1, you must configure the loopback address of the remote destination as the neighbor address. Beginning with Junos OS Release 16.1, you can also configure this feature on MX series routers with aggregated Ethernet interface address of the remote destination as the neighbor address.

NOTE: On T1600 and T4000 routers, you cannot configure the local aggregated Ethernet Interface address of the remote destination as the neighbor address.



CAUTION: Deactivate "[bfd-liveness-detection](#)" on [page 666](#) at the `[edit interfaces aex aggregated-ether-options]` hierarchy level or deactivate the aggregated Ethernet interface before changing the neighbor address from loopback IP address to aggregated Ethernet interface IP address. Modifying the local and neighbor address without deactivating **bfd-liveness-detection** or the aggregated Ethernet interface first might cause micro BFD sessions failure.

NOTE: Beginning with Release 16.1R2, Junos OS checks and validates the configured micro BFD **local-address** against the interface or loopback IP address before the configuration commit. Junos OS performs this check on both IPv4 and IPv6 micro BFD address configurations, and if they do not match, the commit fails.

NOTE: This feature works only when both the devices support BFD. If BFD is configured at one end of the LAG, this feature does not work.

For the IPv6 address family, disable duplicate address detection before configuring this feature with AE interface addresses. To disable duplicate address detection, include the **dad-disable** statement at the `[edit interface aex unit y family inet6]` hierarchy level.

Release History Table

Release	Description
19.3	Starting with Junos OS Release 19.3 and later, for MPC10E and MPC11E MPCs, you cannot apply firewall filters on the MicroBFD packets received on the aggregated Ethernet Interface. For MPC1E through MPC9E, you can apply firewall filters on the MicroBFD packets received on the aggregated Ethernet Interface only if the aggregated Ethernet Interface is configured as an untagged Interface.
16.1	Beginning with Junos OS Release 16.1, you can also configure this feature on MX series routers with aggregated Ethernet interface address of the remote destination as the neighbor address.
16.1	Beginning with Release 16.1R2, Junos OS checks and validates the configured micro BFD local-address against the interface or loopback IP address before the configuration commit.
14.1	Starting with Junos OS Release 14.1, specify the neighbor in a BFD session. In releases prior to Junos OS Release 16.1, you must configure the loopback address of the remote destination as the neighbor address.

13.3

Starting with Junos OS Release 13.3, IANA has allocated 01-00-5E-90-00-01 as the dedicated MAC address for micro BFD.

RELATED DOCUMENTATION

[authentication](#)
[bfd-liveness-detection \(LAG\) | 666](#)
[detection-time](#)
[transmit-interval](#)

Understanding Distributed BFD

IN THIS SECTION

- [Benefits | 46](#)
- [Configuration | 47](#)
- [Single-hop and Multihop BFD | 48](#)
- [Support for BFD on SRX Devices | 48](#)

Bidirectional Forwarding Detection (BFD) is a protocol to verify the liveness of data path. The term *distributed BFD* refers to BFD that runs on the Packet Forwarding Engine. The terms *nondistributed BFD* and *centralized BFD* refer to BFD that runs on the Routing Engine.

Benefits

The benefits of distributed BFD are mainly in the scaling and performance areas. Distributed BFD:

- Allows for the creation of a larger number of BFD sessions.
- Runs BFD sessions with a shorter transfer/receive timer interval, which can in turn be used to bring down the overall detection time.
- Separates the functionality of BFD from that of the Routing Engine. This means that a BFD session can stay up during graceful restart, even with an aggressive interval. The minimum interval for

Routing Engine-based BFD sessions to survive *graceful Routing Engine switchover* is 2500 ms. This is improved to sub-second times with distribution.

- Offloads the processing to the FPC CPU. This frees up the Routing Engine CPU, resulting in improved scaling and performance for Routing Engine-based applications.

Configuration

For both single-hop BFD and multihop BFD, the BFD session can be made to run on the Routing Engine (in nondistributed mode) by configuring **set routing-options ppm no-delegate-processing** and then running the **clear bfd session** command.

To determine if a BFD peer is running distributed BFD, run the **show bfd sessions extensive** command and look for **Remote is control-plane independent** in the command output.

For distributed BFD to work, you need to configure the lo0 interface with unit 0 and the appropriate family.

```
# set interfaces lo0 unit 0 family inet
# set interfaces lo0 unit 0 family inet6
# set interfaces lo0 unit 0 family mpls
```

This is true for the following types of BFD sessions:

- BFD over ae logical interfaces, both IPv4 and IPv6
- Multihop BFD, both IPv4 and IPv6
- BFD over VLAN interfaces in EX Series switches, both IPv4 and IPv6
- Virtual Circuit Connectivity Verification (VCCV) BFD (Layer 2 circuit, Layer 3 VPN, and VPLS) (MPLS)

NOTE: Starting in Junos OS Release 13.3, the distribution of adjacency entry (the IP addresses of adjacent routers) and transmit entry (the IP address of transmitting routers) for a BFD session is asymmetric. This is because an adjacency entry that requires rules might or might not be distributed based on the redirect rule, and the distribution of transmit entries is *not* dependent on the redirect rule.

The term *redirect rule* here denotes the capability of an interface to send protocol redirect messages. See *Disabling the Transmission of Redirect Messages on an Interface*.

In *centralized BFD* mode, the routing engine handles BFD. If the routing engine CPU goes too high, there is a chance that BFD will flap. Even in cases where routing engine CPU is normal, smaller values of

minimum-interval can lead to BFD packets not being processed if other higher priority tasks are running. The minimum interval value should be selected based on proper testing.

For information about troubleshooting BFD, see [Juniper Networks Knowledge Base article 26746](#).

Single-hop and Multihop BFD

Both single-hop BFD and multihop BFD can run in distributed mode.

- **Single-hop BFD**—Single-hop BFD in Junos OS runs in distributed mode by default. The exceptions are OSPFv3 BFD and PIMv6 BFD, for which only nondistributed BFD is supported. Single-hop BFD control packets use UDP port 3784.
- **Multihop BFD**—One desirable application of BFD is to detect connectivity to routing devices that span multiple network hops and follow unpredictable paths. This is known as a multihop session. Multihop BFD control packets use UDP port 4784.

Consider the following when using multihop BFD:

- Prior to Junos OS Release 12.3, multihop BFD is nondistributed and runs on the Routing Engine. Starting in Junos OS Release 12.3, multihop BFD runs in distributed mode by default.
- In a multichassis link aggregation group setup, Inter-Chassis Control Protocol (ICCP) uses BFD in multihop mode. Multihop BFD runs in centralized mode in this kind of setup prior to Junos OS Release 12.3 and continues to do so as of Junos OS Release 12.3 and later.
- QFX5110, QFX5120, QFX5200, and QFX5210 switches support multihop BFD inline keep alive support which will enable sessions to be configured at less than 1 second. Performance may vary depending on the system load. 10 inline BFD sessions are supported and can be configured with a timer of 150 x 3 milliseconds.
- Starting in Junos OS Release 13.3R5, if you apply a firewall filter on a loopback interface for a multihop BFD session with a delegated anchor FPC, Junos OS does not execute this filter, because there is an implicit filter on all ingress FPCs to forward packets to the anchor FPC. Therefore, the firewall filter on the loopback interface is not applied on these packets. If you do not want these packets to be forwarded to the anchor FPC, you can configure the **no-delegate-processing** option.

Support for BFD on SRX Devices

By default, SRX Series devices operate in centralized BFD mode. They also support distributed BFD, dedicated BFD, and real-time BFD. [Table 2 on page 50](#) shows the BFD modes supported on SRX Series devices.

Distributed BFD

- Starting in Junos OS Release 20.3R1, the SRX5000 line of devices with SPC3 card support distributed BFD. This mode provides a faster BFD failure detection time of 3 x 100 ms.
- Starting in Junos OS Release 21.1R1, we support distributed BFD on SRX1500, SRX4100, SRX4200, and SRX4600. This mode provides a faster BFD failure detection time of 3 x 300 ms. We support this feature for a standalone SRX Series device. It is not supported for chassis clusters.
- Enable distributed mode on the SRX5000 line of devices with SPC3 and SRX1500, SRX4100, SRX4200, and SRX4600 devices by configuring the BFD failure detection time to a value less than 500 ms.
- SRX1500 devices run in dedicated mode if you've configured **set chassis dedicated-ukern-cpu**, regardless of the BFD failure detection time. You can enable distributed mode on SRX1500 devices only when dedicated mode is not enabled.

Dedicated BFD

- Starting with Junos OS Release 15.1X49-D100, dedicated BFD is supported on SRX340, SRX345, and SRX1500 devices.
- Starting with Junos OS Release 15.1X49-D110, dedicated BFD is supported on SRX550M devices.
- Starting with Junos OS Release 12.3X48-D60, dedicated BFD is supported on SRX240, SRX550, and SRX650 devices.
- To enable dedicated BFD on SRX100, SRX110, SRX210, SRX220, SRX240, SRX300, SRX320, SRX340, SRX345, SRX550, SRX550M, SRX650, and SRX1500 devices, use the **set chassis dedicated-ukern-cpu** command.
- Enabling dedicated BFD impacts traffic throughput as one CPU core is removed from data plane processing.

Real-time BFD

- Starting with Junos OS Release 15.1X49-D100, real-time BFD is supported on SRX300 and SRX320 devices.
- Starting with Junos OS Release 12.3X48-D60, real-time BFD is supported on SRX100, SRX110, SRX210, and SRX220 devices.
- To enable real-time BFD on SRX100, SRX110, SRX210, SRX220, SRX240, SRX300, SRX320, SRX340, SRX345, SRX550, SRX550M, and SRX650 devices, use the **set chassis realtime-ukern-thread** command.

- Enabling real-time BFD does not impact data plane performance. Higher priority is given to the pfe process handling BFD in distributed mode. This is suitable for scenarios where the number of BFD sessions are less.

Table 2: BFD Modes Supported on SRX Series Devices

SRX Series Device	Centralized BFD Mode	Distributed BFD	Real-Time BFD	Dedicated Core
SRX100	Default	Configuration	Configuration (Optional)	Not supported
SRX110	Default	Configuration	Configuration (Optional)	Not supported
SRX210	Default	Configuration	Configuration (Optional)	Not supported
SRX220	Default	Configuration	Configuration (Optional)	Not supported
SRX240	Default	Configuration	Configuration	Configuration (Optional)
SRX300	Default	Configuration	Configuration (Optional)	Not supported
SRX320	Default	Configuration	Configuration (Optional)	Not supported
SRX340	Default	Configuration	Configuration	Configuration (Optional)
SRX345	Default	Configuration	Configuration	Configuration (Optional)

Table 2: BFD Modes Supported on SRX Series Devices (Continued)

SRX Series Device	Centralized BFD Mode	Distributed BFD	Real-Time BFD	Dedicated Core
SRX550	Default	Configuration	Configuration	Configuration (Optional)
SRX550M	Default	Configuration	Configuration	Configuration (Optional)
SRX650	Default	Configuration	Configuration	Configuration (Optional)
SRX1500	Default	Configuration	Not supported	Configuration (Optional)
SRX4100	Default	Not supported	Not supported	Not supported
SRX4200	Default	Not supported	Not supported	Not supported
SRX5400	Default	Not supported	Not supported	Not supported
SRX5600	Default	Not supported	Not supported	Not supported
SRX5800	Default	Not supported	Not supported	Not supported
SRX5000 line of devices with SPC3 card	BFD failure detection time > 500 ms	BFD failure detection time < 500 ms	Not supported	Not supported

Table 2: BFD Modes Supported on SRX Series Devices (Continued)

SRX Series Device	Centralized BFD Mode	Distributed BFD	Real-Time BFD	Dedicated Core
SRX1500	BFD failure detection time > 500 ms and dedicated mode is not enabled	BFD failure detection time < 500 ms and dedicated mode is not enabled	Not supported	Configuration
SRX4100	BFD failure detection time > 500 ms	BFD failure detection time < 500 ms	Not supported	Not supported
SRX4200	BFD failure detection time > 500 ms	BFD failure detection time < 500 ms	Not supported	Not supported
SRX4600	BFD failure detection time > 500 ms	BFD failure detection time < 500 ms	Not supported	Not supported

Release History Table

Release	Description
21.1R1	Starting in Junos OS Release 21.1R1, distributed BFD is supported on SRX1500, SRX4100, SRX4200, and SRX4600.
20.3R1	Starting in Junos OS Release 20.3R1, the SRX5000 line of devices with SPC3 card support distributed BFD.
15.1X49-D100	Starting with Junos OS Release 15.1X49-D100, dedicated BFD is supported on SRX340, SRX345, and SRX1500 devices.
15.1X49-D100	Starting with Junos OS Release 15.1X49-D100, real-time BFD is supported on SRX300 and SRX320 devices.

13.3R5	Starting in Junos OS Release 13.3R5, if you apply a firewall filter on a loopback interface for a multihop BFD session with a delegated anchor FPC, Junos OS does not execute this filter, because there is an implicit filter on all ingress FPCs to forward packets to the anchor FPC.
13.3	Starting in Junos OS Release 13.3, the distribution of adjacency entry (the IP addresses of adjacent routers) and transmit entry (the IP address of transmitting routers) for a BFD session is asymmetric.

RELATED DOCUMENTATION

show bfd session

detection-time (BFD Liveness Detection)

Understanding BFD for RIP

[Understanding BFD for Static Routes for Faster Network Failure Detection | 28](#)

Understanding BFD for BGP

[Understanding BFD for IS-IS | 38](#)

Understanding BFD for OSPF

Understanding EBGP Multihop

Understanding Static Route State When BFD is in Admin Down State

The Bidirectional Forwarding Detection (BFD) Admin Down state is used to bring down a BFD session administratively (applicable for normal BFD session and micro BFD session), to protect client applications from BFD configuration removal, license issues, and clearing of BFD sessions.

When BFD enters the Admin Down state, BFD notifies the new state to its peer for a failure detection time and after the time expires, the client stops transmitting packets.

For the Admin Down state to work, the peer, which receives the Admin Down state notification, must have the capability to distinguish between administratively down state and real link failure.

A BFD session moves to the Admin Down state under the following conditions:

- If BFD configuration is removed for the last client tied to a BFD session, BFD moves to Admin Down state and communicates the change to the peer, to enable the client protocols without going down.
- If BFD license is removed on the client, BFD moves to Admin Down state and communicates the change to the remote system to enable the client protocols without going down.

- When **clear bfd session** command is executed, the BFD sessions move to Admin Down state before restarting. This **clear bfd session** command also ensures that the client applications are not impacted.

Starting from Junos OS 16.1R1 release, you can set the state of static route in BFD Admin Down state by configuring one of the following commands:

- **set routing-options static static-route bfd-admin-down active**—BFD Admin Down state pulls down the static route.
- **set routing-options static static-route bfd-admin-down passive**—BFD Admin Down state does not pull down the static route.

RELATED DOCUMENTATION

[Understanding BFD for Static Routes for Faster Network Failure Detection | 28](#)

[Example: Configuring BFD for Static Routes for Faster Network Failure Detection | 55](#)

CHAPTER 5

Configuring BFD

IN THIS CHAPTER

- [Example: Configuring BFD for Static Routes for Faster Network Failure Detection | 55](#)
- [Example: Configuring BFD on Internal BGP Peer Sessions | 65](#)
- [Example: Configuring BFD for OSPF | 78](#)
- [Example: Configuring BFD for IS-IS | 84](#)
- [Example: Configuring BFD for RIP | 94](#)
- [Configuring Micro BFD Sessions for LAG | 102](#)
- [Example: Configuring Independent Micro BFD Sessions for LAG | 108](#)
- [Configuring BFD for PIM | 121](#)
- [Enabling Dedicated and Real-Time BFD | 123](#)

Example: Configuring BFD for Static Routes for Faster Network Failure Detection

IN THIS SECTION

- [Requirements | 56](#)
- [Overview | 56](#)
- [Configuration | 57](#)
- [Verification | 62](#)

This example shows how to configure Bidirectional Forwarding Detection (BFD) for static routes.

Requirements

In this example, no special configuration beyond device initialization is required.

Overview

IN THIS SECTION

- [Topology | 57](#)


There are many practical applications for static routes. Static routing is often used at the network edge to support attachment to stub networks, which, given their single point of entry and egress, are well suited to the simplicity of a static route. In Junos OS, static routes have a global preference of 5. Static routes are activated if the specified next hop is reachable.

In this example, you configure the static route 192.168.47.0/24 from the provider network to the customer network, using the next-hop address of 172.16.1.2. You also configure a static default route of 0.0.0.0/0 from the customer network to the provider network, using a next-hop address of 172.16.1.1.

For demonstration purposes, some loopback interfaces are configured on Device B and Device D. These loopback interfaces provide addresses to ping and thus verify that the static routes are working.

Figure 1 on page 57 shows the sample network.

Figure 1: Customer Routes Connected to a Service Provider

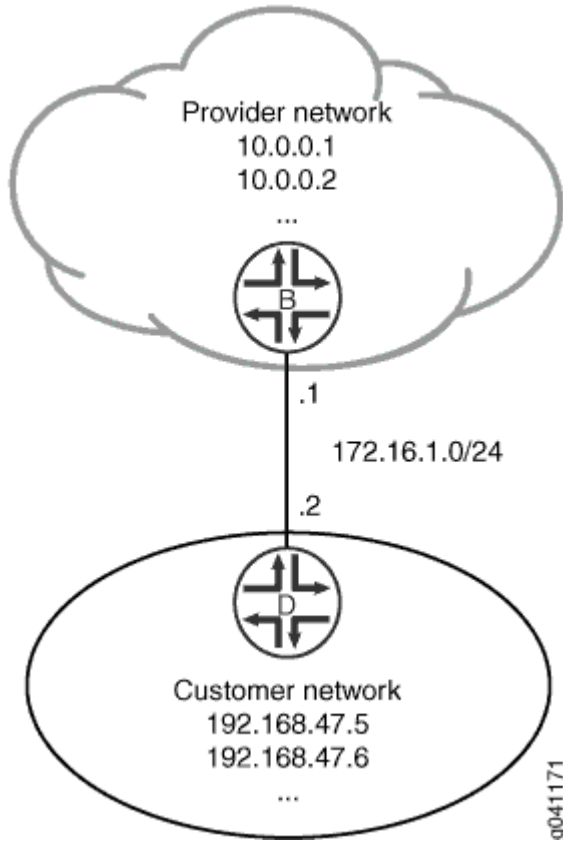

Topology

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 58](#)
- [Procedure | 58](#)
- [Results | 60](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device B

```
set interfaces ge-1/2/0 unit 0 description B->D
set interfaces ge-1/2/0 unit 0 family inet address 172.16.1.1/24
set interfaces lo0 unit 57 family inet address 10.0.0.1/32
set interfaces lo0 unit 57 family inet address 10.0.0.2/32
set routing-options static route 192.168.47.0/24 next-hop 172.16.1.2
set routing-options static route 192.168.47.0/24 bfd-liveness-detection minimum-interval 1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection description Site-xxx
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

Device D

```
set interfaces ge-1/2/0 unit 1 description D->B
set interfaces ge-1/2/0 unit 1 family inet address 172.16.1.2/24
set interfaces lo0 unit 2 family inet address 192.168.47.5/32
set interfaces lo0 unit 2 family inet address 192.168.47.6/32
set routing-options static route 0.0.0.0/0 next-hop 172.16.1.1
set routing-options static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
```

Procedure

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [Junos OS CLI User Guide](#).

To configure BFD for static routes:

1. On Device B, configure the interfaces.

```
[edit interfaces]
user@B# set ge-1/2/0 unit 0 description B->D
user@B# set ge-1/2/0 unit 0 family inet address 172.16.1.1/24
user@B# set lo0 unit 57 family inet address 10.0.0.1/32
user@B# set lo0 unit 57 family inet address 10.0.0.2/32
```

2. On Device B, create a static route and set the next-hop address.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 next-hop 172.16.1.2
```

3. On Device B, configure BFD for the static route.

```
[edit routing-options]
user@B# set static route 192.168.47.0/24 bfd-liveness-detection minimum-interval 1000
set routing-options static route 192.168.47.0/24 bfd-liveness-detection description Site-xxx
```

4. On Device B, configure tracing operations for BFD.

```
[edit protocols]
user@B# set bfd traceoptions file bfd-trace
user@B# set bfd traceoptions flag all
```

5. If you are done configuring Device B, commit the configuration.

```
[edit]
user@B# commit
```

6. On Device D, configure the interfaces.

```
[edit interfaces]
user@D# set ge-1/2/0 unit 1 description D->B
user@D# set ge-1/2/0 unit 1 family inet address 172.16.1.2/24
```

```
user@D# set lo0 unit 2 family inet address 192.168.47.5/32
user@D# set lo0 unit 2 family inet address 192.168.47.6/32
```

7. On Device D, create a static route and set the next-hop address.

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 next-hop 172.16.1.1
```

8. On Device D, configure BFD for the static route.

```
[edit routing-options]
user@D# set static route 0.0.0.0/0 bfd-liveness-detection minimum-interval 1000
```

9. On Device D, configure tracing operations for BFD.

```
[edit protocols]
user@D# set bfd traceoptions file bfd-trace
user@D# set bfd traceoptions flag all
```

10. If you are done configuring Device D, commit the configuration.

```
[edit]
user@D# commit
```

Results

Confirm your configuration by issuing the **show interfaces**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Device B

```
user@B# show interfaces
ge-1/2/0 {
  unit 0 {
    description B->D;
    family inet {
```

```

        address 172.16.1.1/24;
    }
}
lo0 {
    unit 57 {
        family inet {
            address 10.0.0.1/32;
            address 10.0.0.2/32;
        }
    }
}
}

```

```
user@D# show protocols
```

```

bfd {
    traceoptions {
        file bfd-trace;
        flag all;
    }
}

```

```
user@B# show routing-options
```

```

static {
    route 192.168.47.0/24 {
        next-hop 172.16.1.2;
        bfd-liveness-detection {
            description Site- xxx;
            minimum-interval 1000;
        }
    }
}
}

```

Device D

```
user@D# show interfaces
```

```

ge-1/2/0 {
    unit 1 {
        description D->B;
        family inet {

```

```

        address 172.16.1.2/24;
    }
}
lo0 {
    unit 2 {
        family inet {
            address 192.168.47.5/32;
            address 192.168.47.6/32;
        }
    }
}
}

```

```

user@D# show routing-options
static {
    route 0.0.0.0/0 {
        next-hop 172.16.1.1;
        bfd-liveness-detection {
            description Site - xxx;
            minimum-interval 1000;
        }
    }
}
}

```

Verification

IN THIS SECTION

- [Verifying That BFD Sessions Are Up | 63](#)
- [Viewing Detailed BFD Events | 64](#)

Confirm that the configuration is working properly.

Verifying That BFD Sessions Are Up

Purpose

Verify that the BFD sessions are up, and view details about the BFD sessions.

Action

From operational mode, enter the `show bfd session extensive` command.

```
user@B> show bfd session extensive
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.2	Up	lt-1/2/0.0	3.000	1.000	3

Client Static, description Site-xxx, TX interval 1.000, RX interval 1.000
 Session up time 00:14:30
 Local diagnostic None, remote diagnostic None
 Remote state Up, version 1
 Replicated, routing table index 172
 Min async interval 1.000, min slow interval 1.000
 Adaptive async TX interval 1.000, RX interval 1.000
 Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
 Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
 Local discriminator 2, remote discriminator 1
 Echo mode disabled/inactive

1 sessions, 1 clients
 Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

NOTE: The **description Site- <xxx>** is supported only on the SRX Series devices.

If each client has more than one description field, then it displays "and more" along with the first description field.

```
user@D> show bfd session extensive
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
172.16.1.1	Up	lt-1/2/0.1	3.000	1.000	3

Client Static, TX interval 1.000, RX interval 1.000


```

Session up time 00:14:35
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Replicated, routing table index 170
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 1, remote discriminator 2
Echo mode disabled/inactive

1 sessions, 1 clients
Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```

Meaning

The **TX interval 1.000, RX interval 1.000** output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the **bfd-liveness-detection** statement.

Viewing Detailed BFD Events

Purpose

View the contents of the BFD trace file to assist in troubleshooting, if needed.

Action

From operational mode, enter the **file show /var/log/bfd-trace** command.

```

user@B> file show /var/log/bfd-trace
Nov 23 14:26:55    Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 72
Nov 23 14:26:55 PPM Trace: BFD periodic xmit rt tbl index 172
Nov 23 14:26:55 Received Downstream TraceMsg (22) len 108:
Nov 23 14:26:55    IfIndex (3) len 4: 0
Nov 23 14:26:55    Protocol (1) len 1: BFD
Nov 23 14:26:55    Data (9) len 83: (hex) 70 70 6d 64 5f 62 66 64 5f 73 65 6e 64
6d 73 67 20 3a 20
Nov 23 14:26:55 PPM Trace: pcmd_bfd_sendmsg : socket 12 len 24, ifl 78 src
172.16.1.1 dst 172.16.1.2 errno 65

```

```

Nov 23 14:26:55 Received Downstream TraceMsg (22) len 93:
Nov 23 14:26:55      IfIndex (3) len 4: 0
Nov 23 14:26:55      Protocol (1) len 1: BFD
Nov 23 14:26:55      Data (9) len 68: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 74

```

Meaning

BFD messages are being written to the trace file.

Example: Configuring BFD on Internal BGP Peer Sessions

IN THIS SECTION

- [Requirements | 65](#)
- [Overview | 65](#)
- [Configuration | 67](#)
- [Verification | 73](#)

This example shows how to configure internal BGP (IBGP) peer sessions with the Bidirectional Forwarding Detection (BFD) protocol to detect failures in a network.

Requirements

No special configuration beyond device initialization is required before you configure this example.

Overview

The minimum configuration to enable BFD on IBGP sessions is to include the `bfd-liveness-detection minimum-interval` statement in the BGP configuration of all neighbors participating in the BFD session. The `minimum-interval` statement specifies the minimum transmit and receive intervals for failure detection. Specifically, this value represents the minimum interval after which the local routing device transmits hello packets as well as the minimum interval that the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value from 1 through 255,000 milliseconds.

Optionally, you can specify the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** and **minimum-receive-interval** statements. For information about these and other optional BFD configuration statements, see `bfd-liveness-detection`.

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD less than 100 milliseconds for Routing Engine-based sessions and less than 10 milliseconds for distributed BFD sessions can cause undesired BFD flapping.


Depending on your network environment, these additional recommendations might apply:

- To prevent BFD flapping during the general Routing Engine switchover event, specify a minimum interval of 5000 milliseconds for Routing Engine-based sessions. This minimum value is required because, during the general Routing Engine switchover event, processes such as RPD, MIBD, and SNMPD utilize CPU resources for more than the specified threshold value. Hence, BFD processing and scheduling is affected because of this lack of CPU resources.
- For BFD sessions to remain up during the dual chassis cluster control link scenario, when the first control link fails, specify the minimum interval of 6000 milliseconds to prevent the LACP from flapping on the secondary node for Routing Engine-based sessions.
- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 milliseconds for Routing Engine-based sessions and 100 milliseconds for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 milliseconds for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

BFD is supported on the default routing instance (the main router), routing instances, and logical systems. This example shows BFD on logical systems.

Figure 2 on page 67 shows a typical network with internal peer sessions.

Figure 2: Typical Network with IBGP Sessions

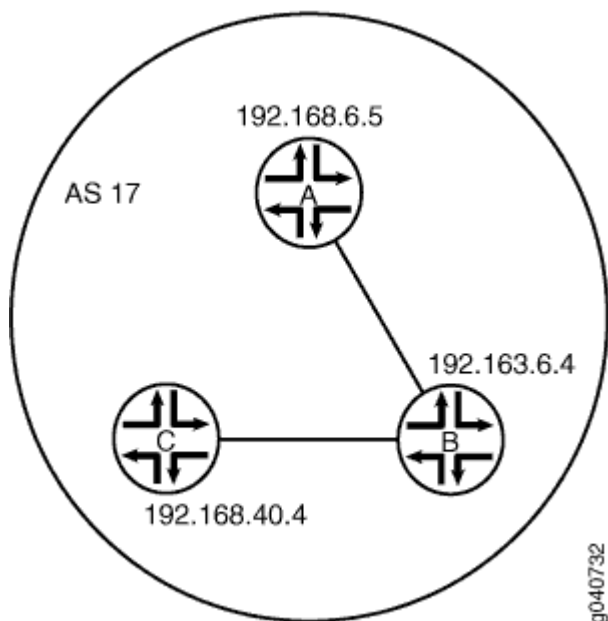

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 67](#)
- [Configuring Device A | 69](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device A

```
set logical-systems A interfaces lt-1/2/0 unit 1 description to-B
set logical-systems A interfaces lt-1/2/0 unit 1 encapsulation ethernet
```

```

set logical-systems A interfaces lt-1/2/0 unit 1 peer-unit 2
set logical-systems A interfaces lt-1/2/0 unit 1 family inet address 10.10.10.1/30
set logical-systems A interfaces lo0 unit 1 family inet address 192.168.6.5/32
set logical-systems A protocols bgp group internal-peers type internal
set logical-systems A protocols bgp group internal-peers traceoptions file bgp-bfd
set logical-systems A protocols bgp group internal-peers traceoptions flag bfd detail
set logical-systems A protocols bgp group internal-peers local-address 192.168.6.5
set logical-systems A protocols bgp group internal-peers export send-direct
set logical-systems A protocols bgp group internal-peers bfd-liveness-detection minimum-interval 1000
set logical-systems A protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems A protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems A protocols ospf area 0.0.0.0 interface lo0.1 passive
set logical-systems A protocols ospf area 0.0.0.0 interface lt-1/2/0.1
set logical-systems A policy-options policy-statement send-direct term 2 from protocol direct
set logical-systems A policy-options policy-statement send-direct term 2 then accept
set logical-systems A routing-options router-id 192.168.6.5
set logical-systems A routing-options autonomous-system 17

```

Device B

```

set logical-systems B interfaces lt-1/2/0 unit 2 description to-A
set logical-systems B interfaces lt-1/2/0 unit 2 encapsulation ethernet
set logical-systems B interfaces lt-1/2/0 unit 2 peer-unit 1
set logical-systems B interfaces lt-1/2/0 unit 2 family inet address 10.10.10.2/30
set logical-systems B interfaces lt-1/2/0 unit 5 description to-C
set logical-systems B interfaces lt-1/2/0 unit 5 encapsulation ethernet
set logical-systems B interfaces lt-1/2/0 unit 5 peer-unit 6
set logical-systems B interfaces lt-1/2/0 unit 5 family inet address 10.10.10.5/30
set logical-systems B interfaces lo0 unit 2 family inet address 192.163.6.4/32
set logical-systems B protocols bgp group internal-peers type internal
set logical-systems B protocols bgp group internal-peers local-address 192.163.6.4
set logical-systems B protocols bgp group internal-peers export send-direct
set logical-systems B protocols bgp group internal-peers bfd-liveness-detection minimum-interval 1000
set logical-systems B protocols bgp group internal-peers neighbor 192.168.40.4
set logical-systems B protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems B protocols ospf area 0.0.0.0 interface lo0.2 passive
set logical-systems B protocols ospf area 0.0.0.0 interface lt-1/2/0.2
set logical-systems B protocols ospf area 0.0.0.0 interface lt-1/2/0.5
set logical-systems B policy-options policy-statement send-direct term 2 from protocol direct
set logical-systems B policy-options policy-statement send-direct term 2 then accept

```

```
set logical-systems B routing-options router-id 192.163.6.4
set logical-systems B routing-options autonomous-system 17
```

Device C

```
set logical-systems C interfaces lt-1/2/0 unit 6 description to-B
set logical-systems C interfaces lt-1/2/0 unit 6 encapsulation ethernet
set logical-systems C interfaces lt-1/2/0 unit 6 peer-unit 5
set logical-systems C interfaces lt-1/2/0 unit 6 family inet address 10.10.10.6/30
set logical-systems C interfaces lo0 unit 3 family inet address 192.168.40.4/32
set logical-systems C protocols bgp group internal-peers type internal
set logical-systems C protocols bgp group internal-peers local-address 192.168.40.4
set logical-systems C protocols bgp group internal-peers export send-direct
set logical-systems C protocols bgp group internal-peers bfd-liveness-detection minimum-interval 1000
set logical-systems C protocols bgp group internal-peers neighbor 192.163.6.4
set logical-systems C protocols bgp group internal-peers neighbor 192.168.6.5
set logical-systems C protocols ospf area 0.0.0.0 interface lo0.3 passive
set logical-systems C protocols ospf area 0.0.0.0 interface lt-1/2/0.6
set logical-systems C policy-options policy-statement send-direct term 2 from protocol direct
set logical-systems C policy-options policy-statement send-direct term 2 then accept
set logical-systems C routing-options router-id 192.168.40.4
set logical-systems C routing-options autonomous-system 17
```

Configuring Device A

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [CLI User Guide](#).

To configure Device A:

1. Set the CLI to Logical System A.

```
user@host> set cli logical-system A
```

2. Configure the interfaces.

```
[edit interfaces lt-1/2/0 unit 1]
user@host:A# set description to-B
user@host:A# set encapsulation ethernet
user@host:A# set peer-unit 2
user@host:A# set family inet address 10.10.10.1/30
[edit interfaces lo0 unit 1]
user@host:A# set family inet address 192.168.6.5/32
```

3. Configure BGP.

The **neighbor** statements are included for both Device B and Device C, even though Device A is not directly connected to Device C.

```
[edit protocols bgp group internal-peers]
user@host:A# set type internal
user@host:A# set local-address 192.168.6.5
user@host:A# set export send-direct
user@host:A# set neighbor 192.163.6.4
user@host:A# set neighbor 192.168.40.4
```

4. Configure BFD.

```
[edit protocols bgp group internal-peers]
user@host:A# set bfd-liveness-detection minimum-interval 1000
```

You must configure the same minimum interval on the connecting peer.

5. (Optional) Configure BFD tracing.

```
[edit protocols bgp group internal-peers]
user@host:A# set traceoptions file bgp-bfd
user@host:A# set traceoptions flag bfd detail
```

6. Configure OSPF.

```
[edit protocols ospf area 0.0.0.0]
user@host:A# set interface lo0.1 passive
user@host:A# set interface lt-1/2/0.1
```

7. Configure a policy that accepts direct routes.

Other useful options for this scenario might be to accept routes learned through OSPF or local routes.

```
[edit policy-options policy-statement send-direct term 2]
user@host:A# set from protocol direct
user@host:A# set then accept
```

8. Configure the router ID and the autonomous system (AS) number.

```
[edit routing-options]
user@host:A# set router-id 192.168.6.5
user@host:A# set autonomous-system 17
```

9. If you are done configuring the device, enter **commit** from configuration mode.

Repeat these steps to configure Device B and Device C.

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show policy-options**, **show protocols**, and **show routing-options** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host:A# show interfaces
lt-1/2/0 {
  unit 1 {
    description to-B;
    encapsulation ethernet;
    peer-unit 2;
    family inet {
      address 10.10.10.1/30;
```



```

    }
}
}
lo0 {
    unit 1 {
        family inet {
            address 192.168.6.5/32;
        }
    }
}
}

```

```

user@host:A# show policy-options
policy-statement send-direct {
    term 2 {
        from protocol direct;
        then accept;
    }
}

```

```

user@host:A# show protocols
bgp {
    group internal-peers {
        type internal;
        traceoptions {
            file bgp-bfd;
            flag bfd detail;
        }
        local-address 192.168.6.5;
        export send-direct;
        bfd-liveness-detection {
            minimum-interval 1000;
        }
        neighbor 192.163.6.4;
        neighbor 192.168.40.4;
    }
}
ospf {
    area 0.0.0.0 {
        interface lo0.1 {
            passive;

```

```

    }
    interface lt-1/2/0.1;
  }
}

```

```

user@host:A# show routing-options
router-id 192.168.6.5;
autonomous-system 17;

```

Verification

IN THIS SECTION

- [Verifying That BFD Is Enabled | 73](#)
- [Verifying That BFD Sessions Are Up | 74](#)
- [Viewing Detailed BFD Events | 75](#)
- [Viewing Detailed BFD Events After Deactivating and Reactivating a Loopback Interface | 76](#)

Confirm that the configuration is working properly.

Verifying That BFD Is Enabled

Purpose

Verify that BFD is enabled between the IBGP peers.

Action

From operational mode, enter the **show bgp neighbor** command. You can use the **| match bfd** filter to narrow the output.

```

user@host:A> show bgp neighbor | match bfd
Options: <BfdEnabled>
  BFD: enabled, up
  Trace file: /var/log/A/bgp-bfd size 131072 files 10
Options: <BfdEnabled>

```

```
BFD: enabled, up
Trace file: /var/log/A/bgp-bfd size 131072 files 10
```

Meaning

The output shows that Logical System A has two neighbors with BFD enabled. When BFD is not enabled, the output displays **BFD: disabled, down**, and the **<BfdEnabled>** option is absent. If BFD is enabled and the session is down, the output displays **BFD: enabled, down**. The output also shows that BFD-related events are being written to a log file because trace operations are configured.

Verifying That BFD Sessions Are Up

Purpose

Verify that the BFD sessions are up, and view details about the BFD sessions.

Action

From operational mode, enter the `show bfd session extensive` command.

```
user@host:A> show bfd session extensive
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
192.163.6.4	Up		3.000	1.000	3

```

Client BGP, TX interval 1.000, RX interval 1.000
Session up time 00:54:40
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Logical system 12, routing table index 25
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 10, remote discriminator 9
Echo mode disabled/inactive
Multi-hop route table 25, local-address 192.168.6.5

```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
192.168.40.4	Up		3.000	1.000	3

```

Client BGP, TX interval 1.000, RX interval 1.000

```

```

Session up time 00:48:03
Local diagnostic None, remote diagnostic None
Remote state Up, version 1
Logical system 12, routing table index 25
Min async interval 1.000, min slow interval 1.000
Adaptive async TX interval 1.000, RX interval 1.000
Local min TX interval 1.000, minimum RX interval 1.000, multiplier 3
Remote min TX interval 1.000, min RX interval 1.000, multiplier 3
Local discriminator 14, remote discriminator 13
Echo mode disabled/inactive
Multi-hop route table 25, local-address 192.168.6.5

2 sessions, 2 clients
Cumulative transmit rate 2.0 pps, cumulative receive rate 2.0 pps

```

Meaning

The **TX interval 1.000, RX interval 1.000** output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under the `bfd-liveness-detection` statement.

Viewing Detailed BFD Events

Purpose

View the contents of the BFD trace file to assist in troubleshooting, if needed.

Action

From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```

user@host:A> file show /var/log/A/bgp-bfd
Aug 15 17:07:25 trace_on: Tracing to "/var/log/A/bgp-bfd" started
Aug 15 17:07:26.492190 bgp_peer_init: BGP peer 192.163.6.4 (Internal AS 17)
local address 192.168.6.5 not found. Leaving peer idled
Aug 15 17:07:26.493176 bgp_peer_init: BGP peer 192.168.40.4 (Internal AS 17)
local address 192.168.6.5 not found. Leaving peer idled
Aug 15 17:07:32.597979 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:07:32.599623 bgp_connect_start: connect 192.163.6.4 (Internal AS 17):
No route to host

```

```

Aug 15 17:07:36.869394 task_connect: task BGP_17.192.168.40.4+179 addr
192.168.40.4+179: No route to host
Aug 15 17:07:36.870624 bgp_connect_start: connect 192.168.40.4 (Internal AS 17):
No route to host
Aug 15 17:08:04.599220 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:08:04.601135 bgp_connect_start: connect 192.163.6.4 (Internal AS 17):
No route to host
Aug 15 17:08:08.869717 task_connect: task BGP_17.192.168.40.4+179 addr
192.168.40.4+179: No route to host
Aug 15 17:08:08.869934 bgp_connect_start: connect 192.168.40.4 (Internal AS 17):
No route to host
Aug 15 17:08:36.603544 advertising receiving-speaker only capabilty to neighbor
192.163.6.4 (Internal AS 17)
Aug 15 17:08:36.606726 bgp_read_message: 192.163.6.4 (Internal AS 17): 0 bytes
buffered
Aug 15 17:08:36.609119 Initiated BFD session to peer 192.163.6.4 (Internal AS
17): address=192.163.6.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:08:36.734033 advertising receiving-speaker only capabilty to neighbor
192.168.40.4 (Internal AS 17)
Aug 15 17:08:36.738436 Initiated BFD session to peer 192.168.40.4 (Internal AS
17): address=192.168.40.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:08:40.537552 BFD session to peer 192.163.6.4 (Internal AS 17) up
Aug 15 17:08:40.694410 BFD session to peer 192.168.40.4 (Internal AS 17) up

```

Meaning

Before the routes are established, the **No route to host** message appears in the output. After the routes are established, the last two lines show that both BFD sessions come up.

Viewing Detailed BFD Events After Deactivating and Reactivating a Loopback Interface

Purpose

Check to see what happens after bringing down a router or switch and then bringing it back up. To simulate bringing down a router or switch, deactivate the loopback interface on Logical System B.

Action

1. From configuration mode, enter the **deactivate logical-systems B interfaces lo0 unit 2 family inet** command.

```
user@host:A# deactivate logical-systems B interfaces lo0 unit 2 family inet
user@host:A# commit
```

2. From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```
user@host:A> file show /var/log/A/bgp-bfd
...
Aug 15 17:20:55.995648 bgp_read_v4_message:9747: NOTIFICATION received from
192.163.6.4 (Internal AS 17): code 6 (Cease) subcode 6 (Other Configuration
Change)
Aug 15 17:20:56.004508 Terminated BFD session to peer 192.163.6.4 (Internal
AS 17)
Aug 15 17:21:28.007755 task_connect: task BGP_17.192.163.6.4+179 addr
192.163.6.4+179: No route to host
Aug 15 17:21:28.008597 bgp_connect_start: connect 192.163.6.4 (Internal AS
17): No route to host
```

3. From configuration mode, enter the **activate logical-systems B interfaces lo0 unit 2 family inet** command.

```
user@host:A# activate logical-systems B interfaces lo0 unit 2 family inet
user@host:A# commit
```

4. From operational mode, enter the **file show /var/log/A/bgp-bfd** command.

```
user@host:A> file show /var/log/A/bgp-bfd
...
Aug 15 17:25:53.623743 advertising receiving-speaker only capabilty to
neighbor 192.163.6.4 (Internal AS 17)
Aug 15 17:25:53.631314 Initiated BFD session to peer 192.163.6.4 (Internal AS
17): address=192.163.6.4 ifindex=0 ifname=(none) txivl=1000 rxivl=1000 mult=3
ver=255
Aug 15 17:25:57.570932 BFD session to peer 192.163.6.4 (Internal AS 17) up
```

RELATED DOCUMENTATION

| [Example: Configuring BFD Authentication for BGP](#)

Example: Configuring BFD for OSPF

IN THIS SECTION

- [Requirements | 78](#)
- [Overview | 78](#)
- [Configuration | 80](#)
- [Verification | 83](#)

This example shows how to configure the Bidirectional Forwarding Detection (BFD) protocol for OSPF.

Requirements

Before you begin:

- Configure the device interfaces. See the [Junos OS Network Interfaces Library for Routing Devices](#).
- Configure the router identifiers for the devices in your OSPF network. See *Example: Configuring an OSPF Router Identifier*.
- Control OSPF designated router election. See *Example: Controlling OSPF Designated Router Election*.
- Configure a single-area OSPF network. See *Example: Configuring a Single-Area OSPF Network*.
- Configure a multiarea OSPF network. See *Example: Configuring a Multiarea OSPF Network*.
- Configure a multiarea OSPF network. See *Example: Configuring a Multiarea OSPF Network*.

Overview

IN THIS SECTION

- [Topology | 80](#)

An alternative to adjusting the OSPF hello interval and dead interval settings to increase route convergence is to configure BFD. The BFD protocol is a simple hello mechanism that detects failures in a network. The BFD failure detection timers have shorter timer limits than the OSPF failure detection mechanisms, thereby providing faster detection.

BFD is useful on interfaces that are unable to detect failure quickly, such as Ethernet interfaces. Other interfaces, such as SONET interfaces, already have built-in failure detection. Configuring BFD on those interfaces is unnecessary.

You configure BFD on a pair of neighboring OSPF interfaces. Unlike the OSPF hello interval and dead interval settings, you do not have to enable BFD on all interfaces in an OSPF area.

In this example, you enable failure detection by including the **bfd-liveness-detection** statement on the neighbor OSPF interface **fe-0/1/0** in area 0.0.0.0 and configure the BFD packet exchange interval to 300 milliseconds, configure 4 as the number of missed hello packets that causes the originating interface to be declared down, and configure BFD sessions only for OSPF neighbors with full neighbor adjacency by including the following settings:

- **full-neighbors-only**—In Junos OS Release 9.5 and later, configures the BFD protocol to establish BFD sessions only for OSPF neighbors with full neighbor adjacency. The default behavior is to establish BFD sessions for all OSPF neighbors.
- **minimum-interval**—Configures the minimum interval, in milliseconds, after which the local routing device transmits hello packets as well as the minimum interval after which the routing device expects to receive a reply from the neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. You can also specify the minimum transmit and receive intervals separately using the **transmit-interval**, **minimum-interval**, and **minimum-receive-interval** statements.

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of no less than 500 ms. An interval of 1000 ms is recommended to avoid any instability issues.



NOTE:

- For the bfdd process, the detection time interval set is lower than 300 ms. If there is a high priority process such as pppd running on the system, the CPU might spend time on the pppd process rather than the bfdd process.
- For branch SRX Series devices, we recommend 1000 ms as the minimum keepalive time interval for BFD packets.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with NSR configured, the minimum interval recommendations are unchanged and depend only on your network deployment.
- **multiplier**—Configures the number of hello packets not received by a neighbor that causes the originating interface to be declared down. By default, three missed hello packets cause the originating interface to be declared down. You can configure a value in the range from 1 through 255.

Topology

Configuration

IN THIS SECTION

- [Procedure](#) | 80

Procedure

CLI Quick Configuration

To quickly configure the BFD protocol for OSPF, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy

and paste the commands into the CLI at the [edit] hierarchy level, and then enter **commit** from configuration mode.

```
[edit]
set protocols ospf area 0.0.0.0 interface fe-0/0/1 bfd-liveness-detection
minimum-interval 300
set protocols ospf area 0.0.0.0 interface fe-0/0/1 bfd-liveness-detection
multiplier 4
set protocols ospf area 0.0.0.0 interface fe-0/0/1 bfd-liveness-detection full-
neighbors-only
```

Step-by-Step Procedure

To configure the BFD protocol for OSPF on one neighboring interface:

1. Create an OSPF area.

NOTE: To specify OSPFv3, include the **ospf3** statement at the [edit protocols] hierarchy level.

```
[edit]
user@host# edit protocols ospf area 0.0.0.0
```

2. Specify the interface.

```
[edit protocols ospf area 0.0.0.0]
user@host# set interface fe-0/0/1
```

3. Specify the minimum transmit and receive intervals.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 bfd-liveness-detection minimum-interval 300
```

4. Configure the number of missed hello packets that cause the originating interface to be declared down.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 bfd-liveness-detection multiplier 4
```

5. Configure BFD sessions only for OSPF neighbors with full neighbor adjacency.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# set interface fe-0/0/1 bfd-liveness-detection full-neighbors-only
```

6. If you are done configuring the device, commit the configuration.

```
[edit protocols ospf area 0.0.0.0 ]
user@host# commit
```

NOTE: Repeat this entire configuration on the other neighboring interface.

Results

Confirm your configuration by entering the **show protocols ospf** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@host# show protocols ospf
area 0.0.0.0 {
  interface fe-0/0/1.0 {
    bfd-liveness-detection {
      minimum-interval 300;
      multiplier 4;
      full-neighbors-only;
    }
  }
}
```

To confirm your OSPFv3 configuration, enter the **show protocols ospf3** command.

Verification

IN THIS SECTION

- [Verifying the BFD Sessions | 83](#)

Confirm that the configuration is working properly.

Verifying the BFD Sessions

Purpose

Verify that the OSPF interfaces have active BFD sessions, and that session components have been configured correctly.

Action

From operational mode, enter the `show bfd session detail` command.

Meaning

The output displays information about the BFD sessions.

- The Address field displays the IP address of the neighbor.
- The Interface field displays the interface you configured for BFD.
- The State field displays the state of the neighbor and should show Full to reflect the full neighbor adjacency that you configured.
- The Transmit Interval field displays the time interval you configured to send BFD packets.
- The Multiplier field displays the multiplier you configured.

Example: Configuring BFD for IS-IS

IN THIS SECTION

- [Requirements | 84](#)
- [Overview | 84](#)
- [Configuration | 85](#)
- [Verification | 90](#)

This example describes how to configure the Bidirectional Forwarding Detection (BFD) protocol to detect failures in an IS-IS network.

NOTE: BFD is not supported with ISIS for IPV6 on QFX10000 series switches.

Requirements

Before you begin, configure IS-IS on both routers. See *Example: Configuring IS-IS* for information about the required IS-IS configuration.

This example uses the following hardware and software components:

- Junos OS Release 7.3 or later
- M Series, MX Series, and T Series routers

Overview

IN THIS SECTION


- [Topology | 85](#)

This example shows two routers connected to each other. A loopback interface is configured on each router. IS-IS and BFD protocols are configured on both routers.

Topology

Figure 3 on page 85 shows the sample network.

Figure 3: Configuring BFD for IS-IS

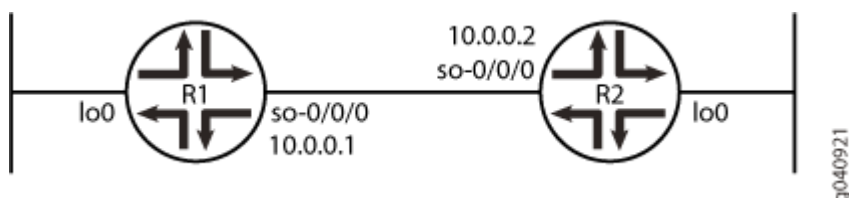

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 85](#)
- [Procedure | 86](#)
- [Results | 89](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Router R1

```
set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 5
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 2
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 3
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic
```

Router R2

```
set protocols isis interface so-0/0/0 bfd-liveness-detection detection-time threshold 6
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-interval 3
set protocols isis interface so-0/0/0 bfd-liveness-detection minimum-receive-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection no-adaptation
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval threshold 4
set protocols isis interface so-0/0/0 bfd-liveness-detection transmit-interval minimum-interval 1
set protocols isis interface so-0/0/0 bfd-liveness-detection multiplier 2
set protocols isis interface so-0/0/0 bfd-liveness-detection version automatic
```

Procedure

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

NOTE: To simply configure BFD for IS-IS, only the **minimum-interval** statement is required. The BFD protocol selects default parameters for all the other configuration statements when you use the **bfd-liveness-detection** statement without specifying any parameters.

NOTE: You can change parameters at any time without stopping or restarting the existing session. BFD automatically adjusts to the new parameter value. However, no changes to BFD parameters take place until the values resynchronize with each BFD peer.

To configure BFD for IS-IS on Routers R1 and R2:

1. Enable BFD failure detection for IS-IS.

```
[edit protocols isis]
user@R1# set interface so-0/0/0 bfd-liveness-detection
```

```
[edit protocols isis]
user@R2# set interface so-0/0/0 bfd-liveness-detection
```

2. Configure the threshold for the adaptation of the detection time, which must be greater than the multiplier number multiplied by the minimum interval.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set detection-time threshold 5
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set detection-time threshold 6
```

3. Configure the minimum transmit and receive intervals for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-interval 2
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-interval 3
```

4. Configure only the minimum receive interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set minimum-receive-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set minimum-receive-interval 1
```

5. Disable BFD adaptation.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set no-adaptation
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set no-adaptation
```


6. Configure the threshold for the transmit interval, which must be greater than the minimum transmit interval.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval threshold 3
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval threshold 4
```

7. Configure the minimum transmit interval for failure detection.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set transmit-interval minimum-interval 1
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set transmit-interval minimum-interval 1
```

8. Configure the multiplier number, which is the number of hello packets not received by the neighbor that causes the originating interface to be declared down.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set multiplier 2
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set multiplier 2
```

9. Configure the BFD version used for detection.

The default is to have the version detected automatically.

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R1# set version automatic
```

```
[edit protocols isis interface so-0/0/0 bfd-liveness-detection]
user@R2# set version automatic
```

Results

From configuration mode, confirm your configuration by issuing the **show protocols isis interface** command. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R1# show protocols isis interface so-0/0/0
```

```

    bfd-liveness-detection {
      version automatic;
      minimum-interval 2;
      minimum-receive-interval 1;
      multiplier 2;
      no-adaptation;
      transmit-interval {
        minimum-interval 1;
        threshold 3;
      }
      detection-time {
        threshold 5;
      }
    }
  ...
```

```
user@R2# show protocols isis interface so-0/0/0
```

```

    bfd-liveness-detection {
      version automatic;
      minimum-interval 3;
      minimum-receive-interval 1;
```

```
multiplier 2;  
no-adaptation;  
transmit-interval {  
    minimum-interval 1;  
    threshold 4;  
}  
detection-time {  
    threshold 6;  
}  
}  
...
```

Verification

IN THIS SECTION

- [Verifying the Connection Between Routers R1 and R2 | 90](#)
- [Verifying That IS-IS Is Configured | 91](#)
- [Verifying That BFD Is configured | 92](#)

Confirm that the configuration is working properly.

Verifying the Connection Between Routers R1 and R2

Purpose

Make sure that Routers R1 and R2 are connected to each other.

Action

Ping the other router to check the connectivity between the two routers as per the network topology.

```
user@R1> ping 10.0.0.2
```

```
PING 10.0.0.2 (10.0.0.2): 56 data bytes  
64 bytes from 10.0.0.2: icmp_seq=0 ttl=64 time=1.367 ms  
64 bytes from 10.0.0.2: icmp_seq=1 ttl=64 time=1.662 ms
```

```

64 bytes from 10.0.0.2: icmp_seq=2 ttl=64 time=1.291 ms
^C
--- 10.0.0.2 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.291/1.440/1.662/0.160 ms

```

```

user@R2> ping 10.0.0.1

```

```

PING 10.0.0.1 (10.0.0.1): 56 data bytes
64 bytes from 10.0.0.1: icmp_seq=0 ttl=64 time=1.287 ms
64 bytes from 10.0.0.1: icmp_seq=1 ttl=64 time=1.310 ms
64 bytes from 10.0.0.1: icmp_seq=2 ttl=64 time=1.289 ms
^C
--- 10.0.0.1 ping statistics ---
3 packets transmitted, 3 packets received, 0% packet loss
round-trip min/avg/max/stddev = 1.287/1.295/1.310/0.010 ms

```

Meaning

Routers R1 and R2 are connected to each other.

Verifying That IS-IS Is Configured

Purpose

Make sure that the IS-IS instance is running on both routers.

Action

Use the **show isis database** statement to check if the IS-IS instance is running on both routers, R1 and R2.

```

user@R1> show isis database

```

```

IS-IS level 1 link-state database:
LSP ID          Sequence Checksum Lifetime Attributes
R1.00-00        0x4a571    0x30c5      1195 L1 L2
R2.00-00        0x4a586    0x4b7e      1195 L1 L2
R2.02-00        0x330ca1   0x3492      1196 L1 L2

```

3 LSPs

IS-IS level 2 link-state database:

LSP ID	Sequence	Checksum	Lifetime	Attributes
R1.00-00	0x4a856	0x5db0	1194	L1 L2
R2.00-00	0x4a89d	0x149b	1194	L1 L2
R2.02-00	0x1fb2ff	0xd302	1194	L1 L2

3 LSPs

user@R2> **show isis database**

IS-IS level 1 link-state database:

LSP ID	Sequence	Checksum	Lifetime	Attributes
R1.00-00	0x4b707	0xcc80	1195	L1 L2
R2.00-00	0x4b71b	0xeb37	1198	L1 L2
R2.02-00	0x33c2ce	0xb52d	1198	L1 L2

3 LSPs

IS-IS level 2 link-state database:

LSP ID	Sequence	Checksum	Lifetime	Attributes
R1.00-00	0x4b9f2	0xee70	1192	L1 L2
R2.00-00	0x4ba41	0x9862	1197	L1 L2
R2.02-00	0x3	0x6242	1198	L1 L2

3 LSPs

Meaning

IS-IS is configured on both routers, R1 and R2.

Verifying That BFD Is configured

Purpose

Make sure that the BFD instance is running on both routers, R1 and R2.

Action

Use the **show bfd session detail** statement to check if BFD instance is running on the routers.

```
user@R1> show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.0.0.2	Up	so-0/0/0	2.000	1.000	2

Client ISIS R2, TX interval 0.001, RX interval 0.001
 Client ISIS R1, TX interval 0.001, RX interval 0.001
 Session down time 00:00:00, previous up time 00:00:15
 Local diagnostic NbrSignal, remote diagnostic NbrSignal
 Remote state AdminDown, version 1
 Router 3, routing table index 17

1 sessions, 2 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

```
user@R2> show bfd session detail
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.0.0.1	Up	so-0/0/0	2.000	1.000	2

Client ISIS R2, TX interval 0.001, RX interval 0.001
 Session down time 00:00:00, previous up time 00:00:05
 Local diagnostic NbrSignal, remote diagnostic NbrSignal
 Remote state AdminDown, version 1
 Router 2, routing table index 15

1 sessions, 1 clients

Cumulative transmit rate 1.0 pps, cumulative receive rate 1.0 pps

Meaning

BFD is configured on Routers R1 and R2 for detecting failures in the IS-IS network.

RELATED DOCUMENTATION

[Understanding BFD for IS-IS](#) | 38

Example: Configuring BFD for RIP

IN THIS SECTION

- [Requirements | 94](#)
- [Overview | 94](#)
- [Configuration | 96](#)
- [Verification | 100](#)

This example shows how to configure Bidirectional Forwarding Detection (BFD) for a RIP network.

Requirements

No special configuration beyond device initialization is required before configuring this example.

Overview

IN THIS SECTION

- [Topology | 96](#)

To enable failure detection, include the **bfd-liveness-detection** statement:

```
bfd-liveness-detection {  
    detection-time {  
        threshold milliseconds;  
    }  
    minimum-interval milliseconds;  
    minimum-receive-interval milliseconds;  
    multiplier number;  
    no-adaptation;  
    transmit-interval {  
        threshold milliseconds;  
        minimum-interval milliseconds;  
    }  
}
```

```
version (1 | automatic);
}
```

Optionally, you can specify the threshold for the adaptation of the detection time by including the **threshold** statement. When the BFD session detection time adapts to a value equal to or greater than the threshold, a single trap and a system log message are sent.

To specify the minimum transmit and receive interval for failure detection, include the **minimum-interval** statement. This value represents the minimum interval at which the local routing device transmits hello packets as well as the minimum interval at which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds. This examples sets a minimum interval of 600 milliseconds.

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD of less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing (NSR) is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with nonstop active routing configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

You can optionally specify the minimum transmit and receive intervals separately.

To specify only the minimum receive interval for failure detection, include the **minimum-receive-interval** statement. This value represents the minimum interval at which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,00 milliseconds.

To specify only the minimum transmit interval for failure detection, include the **transmit-interval** **minimum-interval** statement. This value represents the minimum interval at which the local routing device transmits hello packets to the neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds.

To specify the number of hello packets not received by a neighbor that causes the originating interface to be declared down, include the **multiplier** statement. The default is 3, and you can configure a value in the range from 1 through 255.

To specify the threshold for detecting the adaptation of the transmit interval, include the **transmit-interval threshold** statement. The threshold value must be greater than the transmit interval.


To specify the BFD version used for detection, include the **version** statement. The default is to have the version detected automatically.

You can trace BFD operations by including the **traceoptions** statement at the **[edit protocols bfd]** hierarchy level.

In Junos OS Release 9.0 and later, you can configure BFD sessions not to adapt to changing network conditions. To disable BFD adaptation, include the **no-adaptation** statement. We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

[Figure 4 on page 96](#) shows the topology used in this example.

Figure 4: RIP BFD Network Topology

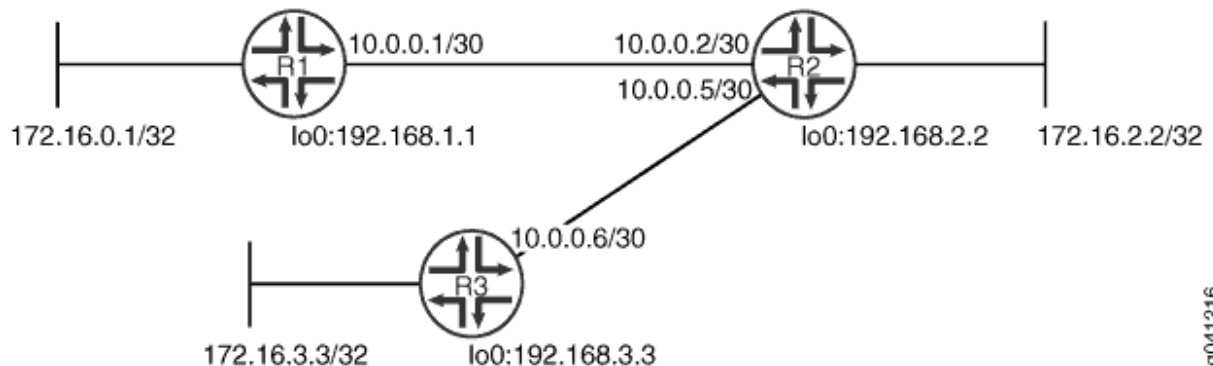

"CLI Quick Configuration" on [page 97](#) shows the configuration for all of the devices in [Figure 4 on page 96](#). The section "No Link Title" on [page 98](#) describes the steps on Device R1.

Topology

Configuration

IN THIS SECTION

- [Procedure | 97](#)

Procedure

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Device R1

```
set interfaces fe-1/2/0 unit 1 family inet address 10.0.0.1/30
set protocols bfd traceoptions file bfd-trace
set protocols bfd traceoptions flag all
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.1
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

Device R2

```
set interfaces fe-1/2/0 unit 2 family inet address 10.0.0.2/30
set interfaces fe-1/2/1 unit 5 family inet address 10.0.0.5/30
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.2
set protocols rip group rip-group neighbor fe-1/2/1.5
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol direct
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

Device R3

```
set interfaces fe-1/2/0 unit 6 family inet address 10.0.0.6/30
set protocols rip group rip-group export advertise-routes-through-rip
set protocols rip group rip-group neighbor fe-1/2/0.6
set protocols rip group rip-group bfd-liveness-detection minimum-interval 600
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol direct
```

```
set policy-options policy-statement advertise-routes-through-rip term 1 from protocol rip
set policy-options policy-statement advertise-routes-through-rip term 1 then accept
```

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode* in the [CLI User Guide](#).

To configure a BFD for a RIP network:

1. Configure the network interfaces.

```
[edit interfaces]
user@R1# set fe-1/2/0 unit 1 family inet address 10.0.0.1/30
```

2. Create the RIP group and add the interface.

To configure RIP in Junos OS, you must configure a group that contains the interfaces on which RIP is enabled. You do not need to enable RIP on the loopback interface.

```
[edit protocols rip group rip-group]
user@R1# set neighbor fe-1/2/0.1
```

3. Create the routing policy to advertise both direct and RIP-learned routes.

```
[edit policy-options policy-statement advertise-routes-through-rip term 1]
user@R1# set from protocol direct
user@R1# set from protocol rip
user@R1# set then accept
```

4. Apply the routing policy.

In Junos OS, you can only apply RIP export policies at the group level.

```
[edit protocols rip group rip-group]
user@R1# set export advertise-routes-through-rip
```

5. Enable BFD.

```
[edit protocols rip group rip-group]
user@R1# set bfd-liveness-detection minimum-interval 600
```

6. Configure tracing operations to track BFD messages.

```
[edit protocols bfd traceoptions]
user@R1# set file bfd-trace
user@R1# set flag all
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces**, **show protocols**, and **show policy-options** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```
user@R1# show interfaces
fe-1/2/0 {
  unit 1 {
    family inet {
      address 10.0.0.1/30;
    }
  }
}
```

```
user@R1# show protocols
bfd {
  traceoptions {
    file bfd-trace;
    flag all;
  }
}
rip {
  group rip-group {
    export advertise-routes-through-rip;
    bfd-liveness-detection {
      minimum-interval 600;
    }
  }
}
```

```
    }
    neighbor fe-1/2/0.1;
  }
}
```

```
user@R1# show policy-options
policy-statement advertise-routes-through-rip {
  term 1 {
    from protocol [ direct rip ];
    then accept;
  }
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

IN THIS SECTION

[Verifying That the BFD Sessions Are Up | 100](#)

[Checking the BFD Trace File | 101](#)

Confirm that the configuration is working properly.

Verifying That the BFD Sessions Are Up

Purpose

Make sure that the BFD sessions are operating.

Action

From operational mode, enter the **show bfd session** command.

```
user@R1> show bfd session
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier

```

10.0.0.2          Up          fe-1/2/0.1      1.800    0.600    3

1 sessions, 1 clients
Cumulative transmit rate 1.7 pps, cumulative receive rate 1.7 pps

```

Meaning

The output shows that there are no authentication failures.

Checking the BFD Trace File

Purpose

Use tracing operations to verify that BFD packets are being exchanged.

Action

From operational mode, enter the **show log** command.

```

user@R1> show log bfd-trace
Feb 16 10:26:32 PPM Trace: BFD periodic xmit to 10.0.0.2 (IFL 124, rtbl 53,
single-hop port)
Feb 16 10:26:32 Received Downstream TraceMsg (24) len 86:
Feb 16 10:26:32     IfIndex (3) len 4: 0
Feb 16 10:26:32     Protocol (1) len 1: BFD
Feb 16 10:26:32     Data (9) len 61: (hex) 42 46 44 20 70 61 63 6b 65 74 20 66 72
6f 6d 20 31 30 2e
Feb 16 10:26:32 PPM Trace: BFD packet from 10.0.0.1 (IFL 73, rtbl 56, ttl 255)
absorbed
Feb 16 10:26:32 Received Downstream TraceMsg (24) len 60:
Feb 16 10:26:32     IfIndex (3) len 4: 0
Feb 16 10:26:32     Protocol (1) len 1: BFD
Feb 16 10:26:32     Data (9) len 35: (hex) 42 46 44 20 70 65 72 69 6f 64 69 63 20
78 6d 69 74 20 6f
...

```

Meaning

The output shows the normal functioning of BFD.

Configuring Micro BFD Sessions for LAG

The Bidirectional Forwarding Detection (BFD) protocol is a simple detection protocol that quickly detects failures in the forwarding paths. A link aggregation group (LAG) combines multiple links between devices that are in point-to-point connections, thereby increasing bandwidth, providing reliability, and allowing load balancing. To run a BFD session on LAG interfaces, configure an independent, asynchronous mode BFD session on every LAG member link in a LAG bundle. Instead of a single BFD session monitoring the status of the UDP port, independent micro BFD sessions monitor the status of individual member links.

NOTE: Starting in Junos OS Evolved Release 20.1R1, independent micro Bidirectional Forwarding Detection (BFD) sessions are enabled on a per member link basis of a Link Aggregation Group (LAG) bundle.

To enable failure detection for aggregated Ethernet interfaces:

1. Include the following statement in the configuration at the **[edit interfaces *aex* aggregated-ether-options]** hierarchy level:

```
bfd-liveness-detection
```

2. Configure the authentication criteria of the BFD session for LAG.

To specify the authentication criteria, include the **authentication** statement:

```
bfd-liveness-detection {
  authentication {
    algorithm algorithm-name;
    key-chain key-chain-name;
    loose-check;
  }
}
```

- Specify the algorithm to be used to authenticate the BFD session. You can use one of the following algorithms for authentication:
 - keyed-md5
 - keyed-sha-1
 - meticulous-keyed-md5

- meticulous-keyed-sha-1
 - simple-password
 - To configure the key chain, specify the name that is associated with the security key for the BFD session. The name you specify must match one of the key chains configured in the **authentication-key-chains** *key-chain* statement at the **[edit security]** hierarchy level.
 - Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication might not be configured at both ends of the BFD session.
3. Configure BFD timers for aggregated Ethernet interfaces.

To specify the BFD timers, include the **detection-time** statement:

```
bfd-liveness-detection {
    detection-time {
        threshold milliseconds;
    }
}
```

Specify the threshold value. This is the maximum time interval for detecting a BFD neighbor. If the transmit interval is greater than this value, the device triggers a trap.

4. Configure a hold-down interval value to set the minimum time that the BFD session must remain up before a state change notification is sent to the other members in the LAG network.

To specify the hold-down interval, include the **holddown-interval** statement:

```
bfd-liveness-detection {
    holddown-interval milliseconds;
}
```

You can configure a number in the range from 0 through 255,000 milliseconds, and the default is 0. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.

This value represents the minimum interval at which the local routing device transmits BFD packets, as well as the minimum interval in which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. You can also specify the minimum transmit and receive intervals separately.

5. Configure the source address for the BFD session.

To specify a local address, include the **local-address** statement:

```
bfd-liveness-detection {
    local-address bfd-local-address;
}
```

The BFD local address is the loopback address of the source of the BFD session.

NOTE: Beginning with Junos OS Release 16.1, you can also configure this feature with the AE interface address as the local address in a micro BFD session. For the IPv6 address family, disable duplicate address detection before configuring this feature with the AE interface address. To disable duplicate address detection, include the **dad-disable** statement at the **[edit interface *aex* unit *y* family inet6]** hierarchy level.

Beginning with Release 16.1R2, Junos OS checks and validates the configured micro BFD **local-address** against the interface or loopback IP address before the configuration commit. Junos OS performs this check on both IPv4 and IPv6 micro BFD address configurations, and if they do not match, the commit fails.

6. Specify the minimum interval that indicates the time interval for transmitting and receiving data. This value represents the minimum interval at which the local routing device transmits BFD packets, as well as the minimum interval in which the routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds. You can also specify the minimum transmit and receive intervals separately.

To specify the minimum transmit and receive intervals for failure detection, include the **minimum-interval** statement:

```
bfd-liveness-detection {
    minimum-interval milliseconds;
}
```

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD less than 100 ms for Routing Engine-based sessions and 10 ms for distributed BFD sessions can cause undesired BFD flapping.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing is configured, specify a minimum interval of 2500 ms for Routing Engine-based sessions. For distributed BFD sessions with nonstop active routing configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

7. Specify only the minimum receive interval for failure detection by including the **minimum-receive-interval** statement:

```
bfd-liveness-detection {
    minimum-receive-interval milliseconds;
}
```

This value represents the minimum interval in which the local routing device expects to receive a reply from a neighbor with which it has established a BFD session. You can configure a number in the range from 1 through 255,000 milliseconds.

8. Specify the number of BFD packets that were not received by the neighbor that causes the originating interface to be declared down by including the **multiplier** statement:

```
bfd-liveness-detection {
    multiplier number;
}
```

The default value is 3. You can configure a number in the range from 1 through 255.

9. Configure the neighbor in a BFD session.

The neighbor address can be either an IPv4 or an IPv6 address.

To specify the next hop of the BFD session, include the **neighbor** statement:

```
bfd-liveness-detection {
    neighbor bfd-neighbor-address;
}
```

The BFD neighbor address is the loopback address of the remote destination of the BFD session.

NOTE: Beginning with Junos OS Release 16.1, you can also configure the AE interface address of the remote destination as the BFD neighbor address in a micro BFD session.

10. (Optional) Configure BFD sessions not to adapt to changing network conditions.

To disable BFD adaptation, include the **no-adaptation** statement:

```
bfd-liveness-detection {
    no-adaptation;
}
```

NOTE: We recommend that you do not disable BFD adaptation unless it is preferable not to have BFD adaptation in your network.

11. Specify a threshold for detecting the adaptation of the detection time by including the **threshold statement:**

```
bfd-liveness-detection {
    detection-time {
        threshold milliseconds;
    }
}
```

When the BFD session detection time adapts to a value equal to or greater than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the minimum-interval or the minimum-receive-interval value. The threshold must be a higher value than the multiplier for either of these configured values. For example, if the minimum-receive-interval is 300 ms and the multiplier is 3, the total detection time is 900 ms. Therefore, the detection time threshold must have a value greater than 900.

12. Specify only the minimum transmit interval for failure detection by including the **transmit-interval **minimum-interval** statement:**

```
bfd-liveness-detection {
    transmit-interval {
        minimum-interval milliseconds;
    }
}
```

This value represents the minimum interval at which the local routing device transmits BFD packets to the neighbor with which it has established a BFD session. You can configure a value in the range from 1 through 255,000 milliseconds.

13. Specify the transmit threshold for detecting the adaptation of the transmit interval by including the **transmit-interval threshold** statement:

```
bfd-liveness-detection {
    transmit-interval {
        threshold milliseconds;
    }
}
```

The threshold value must be greater than the transmit interval. When the BFD session detection time adapts to a value greater than the threshold, a single trap and a system log message are sent. The detection time is based on the multiplier of the minimum-interval or the minimum-receive-interval value. The threshold must be a higher value than the multiplier for either of these configured values.

14. Specify the BFD version by including the **version** statement:

```
bfd-liveness-detection {
    version (1 | automatic);
}
```

The default is to have the version detected automatically.

NOTE:

- The **version** option is not supported on the QFX Series. Starting in Junos OS Release 17.2R1, a warning will appear if you attempt to use this command.
- This feature works when both the devices support BFD. If BFD is configured at only one end of the LAG, this feature does not work.

RELATED DOCUMENTATION

[authentication](#)

[bfd-liveness-detection \(LAG\) | 666](#)

[detection-time](#)

Example: Configuring Independent Micro BFD Sessions for LAG

IN THIS SECTION

- [Requirements | 108](#)
- [Overview | 109](#)
- [Configuration | 109](#)
- [Verification | 117](#)

This example shows how to configure an independent micro BFD session for aggregated Ethernet interfaces.

Requirements

This example uses the following hardware and software components:

- MX Series routers with Junos Trio chipset
- T Series routers with Type 4 FPC or Type 5 FPC

BFD for LAG is supported on the following PIC types on T-Series:

- PC-1XGE-XENPAK (Type 3 FPC),
- PD-4XGE-XFP (Type 4 FPC),
- PD-5-10XGE-SFPP (Type 4 FPC),
- 24x10GE (LAN/WAN) SFPP, 12x10GE (LAN/WAN) SFPP, 1X100GE Type 5 PICs
- PTX Series routers with 24X10GE (LAN/WAN) SFPP
- Junos OS Release 13.3 or later running on all devices

Overview

IN THIS SECTION


- [Topology | 109](#)

The example includes two routers that are directly connected. Configure two aggregated Ethernet interfaces, AE0 for IPv4 connectivity and AE1 for IPv6 connectivity. Configure micro BFD session on the AE0 bundle using IPv4 addresses as local and neighbor endpoints on both routers. Configure micro BFD session on the AE1 bundle using IPv6 addresses as local and neighbor endpoints on both routers. This example verifies that independent micro BFD sessions are active in the output.

Topology

[Figure 5 on page 109](#) shows the sample topology.

Figure 5: Configuring an Independent Micro BFD Session for LAG

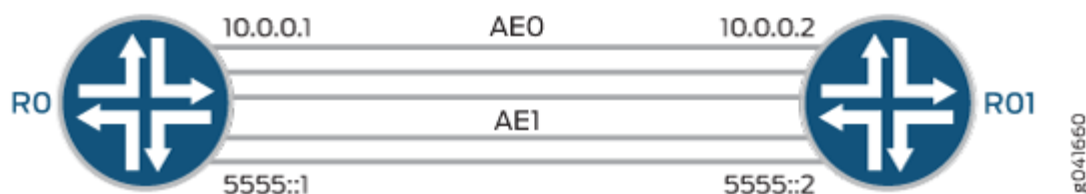

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 110](#)
- [Configuring a Micro BFD Session for Aggregated Ethernet Interfaces | 111](#)
- [Procedure | 111](#)
- [Results | 114](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Router R0

```
set interfaces ge-1/0/1 unit 0 family inet address 20.20.20.1/30
set interfaces ge-1/0/1 unit 0 family inet6 address 3ffe::1:1/126
set interfaces xe-4/0/0 gigether-options 802.3ad ae0
set interfaces xe-4/0/1 gigether-options 802.3ad ae0
set interfaces xe-4/1/0 gigether-options 802.3ad ae1
set interfaces xe-4/1/1 gigether-options 802.3ad ae1
set interfaces lo0 unit 0 family inet address 10.255.106.107/32
set interfaces lo0 unit 0 family inet6 address 201:DB8:251::aa:aa:1/126
set interfaces ae0 aggregated-ether-options bfd-liveness-detection minimum-interval 100
set interfaces ae0 aggregated-ether-options bfd-liveness-detection neighbor 10.255.106.102
set interfaces ae0 aggregated-ether-options bfd-liveness-detection local-address 10.255.106.107
set interfaces ae0 aggregated-ether-options minimum-links 1
set interfaces ae0 aggregated-ether-options link-speed 10g
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 unit 0 family inet address 10.0.0.1/30
set interfaces ae1 aggregated-ether-options bfd-liveness-detection minimum-interval 100
set interfaces ae1 aggregated-ether-options bfd-liveness-detection multiplier 3
set interfaces ae1 aggregated-ether-options bfd-liveness-detection neighbor 201:DB8:251::bb:bb:1
set interfaces ae1 aggregated-ether-options bfd-liveness-detection local-address 201:DB8:251::aa:aa:1
set interfaces ae1 aggregated-ether-options minimum-links 1
set interfaces ae1 aggregated-ether-options link-speed 10g
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 unit 0 family inet6 address 5555::1/126
set interface ae1 unit 0 family inet6 dad-disable
set routing-options nonstop-routing
set routing-options static route 30.30.30.0/30 next-hop 10.0.0.2
set routing-options rib inet6.0 static route 3ffe::1:2/126 next-hop 5555::2
set protocols bfd traceoptions file bfd
set protocols bfd traceoptions file size 100m
set protocols bfd traceoptions file files 10
set protocols bfd traceoptions flag all
```

Router R1

```

set interfaces ge-1/1/8 unit 0 family inet address 30.30.30.1/30
set interfaces ge-1/1/8 unit 0 family inet6 address 3ffe::1:2/126
set interfaces xe-0/0/0 gigether-options 802.3ad ae0
set interfaces xe-0/0/1 gigether-options 802.3ad ae0
set interfaces xe-0/0/2 gigether-options 802.3ad ae1
set interfaces xe-0/0/3 gigether-options 802.3ad ae1
set interfaces lo0 unit 0 family inet address 10.255.106.102/32
set interfaces lo0 unit 0 family inet6 address 201:DB8:251::bb:bb:1/126
set interfaces ae0 aggregated-ether-options bfd-liveness-detection minimum-interval 150
set interfaces ae0 aggregated-ether-options bfd-liveness-detection multiplier 3
set interfaces ae0 aggregated-ether-options bfd-liveness-detection neighbor 10.255.106.107
set interfaces ae0 aggregated-ether-options bfd-liveness-detection local-address 10.255.106.102
set interfaces ae0 aggregated-ether-options minimum-links 1
set interfaces ae0 aggregated-ether-options link-speed 10g
set interfaces ae0 aggregated-ether-options lacp passive
set interfaces ae0 unit 0 family inet address 10.0.0.2/30
set interfaces ae1 aggregated-ether-options bfd-liveness-detection minimum-interval 200
set interfaces ae1 aggregated-ether-options bfd-liveness-detection multiplier 3
set interfaces ae1 aggregated-ether-options bfd-liveness-detection neighbor 201:DB8:251::aa:aa:1
set interfaces ae1 aggregated-ether-options bfd-liveness-detection local-address 201:DB8:251::bb:bb:1
set interfaces ae1 aggregated-ether-options minimum-links 1
set interfaces ae1 aggregated-ether-options link-speed 10g
set interfaces ae1 aggregated-ether-options lacp passive
set interfaces ae1 unit 0 family inet6 address 5555::2/126
set routing-options static route 20.20.20.0/30 next-hop 10.0.0.1
set routing-options rib inet6.0 static route 3ffe::1:1/126 next-hop 5555::1

```

Configuring a Micro BFD Session for Aggregated Ethernet Interfaces

Procedure

Step-by-Step Procedure

The following example requires that you navigate various levels in the configuration hierarchy. For information about navigating the CLI, see “*Using the CLI Editor in Configuration Mode*” in the [CLI User Guide](#).

NOTE: Repeat this procedure for Router R1, modifying the appropriate interface names, addresses, and any other parameters for each router.

To configure a micro BFD session for aggregated Ethernet interfaces on Router R0:

1. Configure the physical interfaces.

```
[edit interfaces]
user@R0# set ge-1/0/1 unit 0 family inet address 20.20.20.1/30
user@R0# set ge-1/0/1 unit 0 family inet6 address 3ffe::1:1/126
user@R0# set xe-4/0/0 gigether-options 802.3ad ae0
user@R0# set xe-4/0/1 gigether-options 802.3ad ae0
user@R0# set xe-4/1/0 gigether-options 802.3ad ae1
user@R0# set xe-4/1/1 gigether-options 802.3ad ae1
```

2. Configure the loopback interface.

```
[edit interfaces]
user@R0# set lo0 unit 0 family inet address 10.255.106.107/32
user@R0# set lo0 unit 0 family inet6 address 201:DB8:251::aa:aa:1/128
```

3. Configure an IP address on the aggregated Ethernet interface ae0 with either IPv4 or IPv6 addresses, as per your network requirements.

```
[edit interfaces]
user@R0# set ae0 unit 0 family inet address 10.0.0.1/30
```

4. Set the routing option, create a static route, and set the next-hop address.

NOTE: You can configure either an IPv4 or IPv6 static route, depending on your network requirements.

```
[edit routing-options]
user@R0# set nonstop-routing
```

```
user@R0# set static route 30.30.30.0/30 next-hop 10.0.0.2
user@R0# set rib inet6.0 static route 3ffe::1:2/126 next-hop 5555::2
```

5. Configure the Link Aggregation Control Protocol (LACP).

```
[edit interfaces]
user@R0# set ae0 aggregated-ether-options lacp active
```

6. Configure BFD for the aggregated Ethernet interface ae0, and specify the minimum interval, local IP address, and the neighbor IP address.

```
[edit interfaces]
user@R0# set ae0 aggregated-ether-options bfd-liveness-detection minimum-interval 100
user@R0# set ae0 aggregated-ether-options bfd-liveness-detection multiplier 3
user@R0# set ae0 aggregated-ether-options bfd-liveness-detection neighbor 10.255.106.102
user@R0# set ae0 aggregated-ether-options bfd-liveness-detection local-address 10.255.106.107
user@R0# set ae0 aggregated-ether-options minimum-links 1
user@R0# set ae0 aggregated-ether-options link-speed 10g
```

7. Configure an IP address on the aggregated Ethernet interface ae1.

You can assign either IPv4 or IPv6 addresses as per your network requirements.

```
[edit interfaces]
user@R0# set ae1 unit 0 family inet6 address 5555::1/126
```

8. Configure BFD for the aggregated Ethernet interface ae1.

```
[edit interfaces]
user@R0# set ae1 aggregated-ether-options bfd-liveness-detection minimum-interval 100
user@R0# set ae1 aggregated-ether-options bfd-liveness-detection multiplier 3
user@R0# set ae1 aggregated-ether-options bfd-liveness-detection neighbor 201:DB8:251::bb:bb:1
user@R0# set ae1 aggregated-ether-options bfd-liveness-detection local-address 201:DB8:251::aa:aa:1
user@R0# set ae1 aggregated-ether-options minimum-links 1
user@R0# set ae1 aggregated-ether-options link-speed 10g
```

NOTE: Beginning with Junos OS Release 16.1, you can also configure this feature with the AE interface address as the local address in a micro BFD session.

Beginning with Release 16.1R2, Junos OS checks and validates the configured micro BFD **local-address** against the interface or loopback IP address before the configuration commit. Junos OS performs this check on both IPv4 and IPv6 micro BFD address configurations, and if they do not match, the commit fails.

9. Configure tracing options for BFD for troubleshooting.

```
[edit protocols]
user@R0# set bfd traceoptions file bfd
user@R0# set bfd traceoptions file size 100m
user@R0# set bfd traceoptions file files 10
user@R0# set bfd traceoptions flag all
```

Results

From configuration mode, enter the **show interfaces**, **show protocols**, and **show routing-options** commands and confirm your configuration. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R0> show interfaces
traceoptions {
    flag bfd-events;
}
ge-1/0/1 {
    unit 0 {
        family inet {
            address 20.20.20.1/30;
        }
        family inet6 {
            address 3ffe::1:1/126;
        }
    }
}
xe-4/0/0 {
    enable;
    gigether-options {
```

```

        802.3ad ae0;
    }
}
xe-4/0/1 {
    gigether-options {
        802.3ad ae0;
    }
}
xe-4/1/0 {
    enable;
    gigether-options {
        802.3ad ae1;
    }
}
xe-4/1/1 {
    gigether-options {
        802.3ad ae1;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.255.106.107/32;
        }
        family inet6 {
            address 201:DB8:251::aa:aa:1/128;
        }
    }
}
ae0 {
    aggregated-ether-options {
        bfd-liveness-detection {
            minimum-interval 100;
            neighbor 10.255.106.102;
            local-address 10.255.106.107;
        }
        minimum-links 1;
        link-speed 10g;
        lacp {
            active;
        }
    }
    unit 0 {

```

```

        family inet {
            address 10.0.0.1/30;
        }
    }
}
ae1 {
    aggregated-ether-options {
        bfd-liveness-detection {
            minimum-interval 100;
            multiplier 3;
            neighbor 201:DB8:251::bb:bb:1;
            local-address 201:DB8:251::aa:aa:1;
        }
        minimum-links 1
        link-speed 10g;
    }
    unit 0 {
        family inet6 {
            address 5555::1/126;
        }
    }
}

```

```

user@R0> show protocols
bfd {
    traceoptions {
        file bfd size 100m files 10;
        flag all;
    }
}

```

```

user@R0> show routing-options
nonstop-routing ;
rib inet6.0 {
    static {
        route 3ffe:1:2/126 {
            next-hop 5555::2;
        }
    }
}

```

```
static {
    route 30.30.30.0/30 {
        next-hop 10.0.0.2;
    }
}
```

If you are done configuring the device, commit the configuration.

```
user@R0# commit
```

Verification

IN THIS SECTION

[Verifying That the Independent BFD Sessions Are Up | 117](#)

[Viewing Detailed BFD Events | 119](#)

Confirm that the configuration is working properly.

Verifying That the Independent BFD Sessions Are Up

Purpose

Verify that the micro BFD sessions are up, and view details about the BFD sessions.

Action

From operational mode, enter the **show bfd session extensive** command.

```
user@R0> show bfd session extensive
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.255.106.102	Up	xe-4/0/0	9.000	3.000	

```
3
Client LACPD, TX interval 0.100, RX interval 0.100
Session up time 4d 23:13, previous down time 00:00:06
Local diagnostic None, remote diagnostic None
```

```
Remote heard, hears us, version 1
Replicated
Session type: Micro BFD
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
Local min TX interval 0.100, minimum RX interval 0.100, multiplier 3
Remote min TX interval 3.000, min RX interval 3.000, multiplier 3
Local discriminator 21, remote discriminator 75
Echo mode disabled/inactive
Remote is control-plane independent
Session ID: 0x0
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
10.255.106.102	Up	xe-4/0/1	9.000	3.000	3

```
Client LACPD, TX interval 0.100, RX interval 0.100
Session up time 4d 23:13, previous down time 00:00:07
Local diagnostic None, remote diagnostic None
Remote heard, hears us, version 1
Replicated
Session type: Micro BFD
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
Local min TX interval 0.100, minimum RX interval 0.100, multiplier 3
Remote min TX interval 3.000, min RX interval 3.000, multiplier 3
Local discriminator 19, remote discriminator 74
Echo mode disabled/inactive
Remote is control-plane independent
Session ID: 0x0
```

Address	State	Interface	Detect Time	Transmit Interval	Multiplier
201:DB8:251::bb:bb:1	Up	xe-4/1/1	9.000		3

```
Client LACPD, TX interval 0.100, RX interval 0.100
Session up time 4d 23:13
Local diagnostic None, remote diagnostic None
Remote not heard, hears us, version 1
Replicated
Session type: Micro BFD
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
```

```

Local min TX interval 1.000, minimum RX interval 0.100, multiplier 3
Remote min TX interval 3.000, min RX interval 3.000, multiplier 3
Local discriminator 17, remote discriminator 67
Echo mode disabled/inactive, no-absorb, no-refresh
Remote is control-plane independent
Session ID: 0x0

Address                State      Interface    Detect    Transmit
                    Time    Interval  Multiplier
201:DB8:251::bb:bb:1  UP        xe-4/1/0     9.000
3.000      3
Client LACPD, TX interval 0.100, RX interval 0.100
Session up time 4d 23:13
Local diagnostic None, remote diagnostic None
Remote not heard, hears us, version 1
Replicated
Session type: Micro BFD
Min async interval 0.100, min slow interval 1.000
Adaptive async TX interval 0.100, RX interval 0.100
Local min TX interval 1.000, minimum RX interval 0.100, multiplier 3
Remote min TX interval 3.000, min RX interval 3.000, multiplier 3
Local discriminator 16, remote discriminator 66
Echo mode disabled/inactive, no-absorb, no-refresh
Remote is control-plane independent
Session ID: 0x0

4 sessions, 4 clients
Cumulative transmit rate 2.0 pps, cumulative receive rate 1.7 pps

```

Meaning

The Micro BFD field represents the independent micro BFD sessions running on the links in a LAG. The TX interval *item*, RX interval *item* output represents the setting configured with the **minimum-interval** statement. All of the other output represents the default settings for BFD. To modify the default settings, include the optional statements under **bfd-liveness-detection** statement.

Viewing Detailed BFD Events

Purpose

View the contents of the BFD trace file to assist in troubleshooting, if required.

Action

From operational mode, enter the **file show /var/log/bfd** command.

```
user@R0> file show /var/log/bfd
Jun  5 00:48:59      Protocol (1) len 1: BFD
Jun  5 00:48:59      Data (9) len 41: (hex) 42 46 44 20 6e 65 69 67 68 62 6f 72 20
31 30 2e 30 2e 30
Jun  5 00:48:59 PPM Trace: BFD neighbor 10.255.106.102 (IFL 349) set, 9 0
Jun  5 00:48:59 Received Downstream RcvPkt (19) len 108:
Jun  5 00:48:59      IfIndex (3) len 4: 329
Jun  5 00:48:59      Protocol (1) len 1: BFD
Jun  5 00:48:59      SrcAddr (5) len 8: 10.255.106.102
Jun  5 00:48:59      Data (9) len 24: (hex) 00 88 03 18 00 00 00 4b 00 00 00 15 00
2d c6 c0 00 2d c6
Jun  5 00:48:59      PktError (26) len 4: 0
Jun  5 00:48:59      RtblIdx (24) len 4: 0
Jun  5 00:48:59      MultiHop (64) len 1: (hex) 00
Jun  5 00:48:59      Unknown (168) len 1: (hex) 01
Jun  5 00:48:59      Unknown (171) len 2: (hex) 02 3d
Jun  5 00:48:59      Unknown (172) len 6: (hex) 80 71 1f c7 81 c0
Jun  5 00:48:59      Authenticated (121) len 1: (hex) 01
Jun  5 00:48:59 BFD packet from 10.0.0.2 (IFL 329), len 24
Jun  5 00:48:59      Ver 0, diag 0, mult 3, len 24
Jun  5 00:48:59      Flags: IHU Fate
Jun  5 00:48:59      My discr 0x0000004b, your discr 0x00000015
Jun  5 00:48:59      Tx ivl 3000000, rx ivl 3000000, echo rx ivl 0
Jun  5 00:48:59 [THROTTLE]bfdd_rate_limit_can_accept_pkt: session 10.255.106.102
is up or already in program thread
Jun  5 00:48:59 Replicate: marked session (discr 21) for update
```

Meaning

BFD messages are being written to the specified trace file.

RELATED DOCUMENTATION

[authentication \(LAG\) | 664](#)

[bfd-liveness-detection \(LAG\) | 666](#)

Configuring BFD for PIM

The Bidirectional Forwarding Detection (BFD) Protocol is a simple hello mechanism that detects failures in a network. BFD works with a wide variety of network environments and topologies. A pair of routing devices exchanges BFD packets. Hello packets are sent at a specified, regular interval. A neighbor failure is detected when the routing device stops receiving a reply after a specified interval. The BFD failure detection timers have shorter time limits than the Protocol Independent Multicast (PIM) hello hold time, so they provide faster detection.

The BFD failure detection timers are adaptive and can be adjusted to be faster or slower. The lower the BFD failure detection timer value, the faster the failure detection and vice versa. For example, the timers can adapt to a higher value if the adjacency fails (that is, the timer detects failures more slowly). Or a neighbor can negotiate a higher value for a timer than the configured value. The timers adapt to a higher value when a BFD session flap occurs more than three times in a span of 15 seconds. A back-off algorithm increases the receive (Rx) interval by two if the local BFD instance is the reason for the session flap. The transmission (Tx) interval is increased by two if the remote BFD instance is the reason for the session flap. You can use the **clear bfd adaptation** command to return BFD interval timers to their configured values. The **clear bfd adaptation** command is hitless, meaning that the command does not affect traffic flow on the routing device.

You must specify the minimum transmit and minimum receive intervals to enable BFD on PIM.

To enable failure detection:

1. Configure the interface globally or in a routing instance.

This example shows the global configuration.

```
[edit protocols pim]
user@host# edit interface fe-1/0/0.0 family inet bfd-liveness-detection
```

2. Configure the minimum transmit interval.

This is the minimum interval after which the routing device transmits hello packets to a neighbor with which it has established a BFD session. Specifying an interval smaller than 300 ms can cause undesired BFD flapping.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set transmit-interval 350
```

3. Configure the minimum interval after which the routing device expects to receive a reply from a neighbor with which it has established a BFD session.

Specifying an interval smaller than 300 ms can cause undesired BFD flapping.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set minimum-receive-interval 350
```

4. (Optional) Configure other BFD settings.

As an alternative to setting the receive and transmit intervals separately, configure one interval for both.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set minimum-interval 350
```

5. Configure the threshold for the adaptation of the BFD session detection time.

When the detection time adapts to a value equal to or greater than the threshold, a single trap and a single system log message are sent.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set detection-time threshold 800
```

6. Configure the number of hello packets not received by a neighbor that causes the originating interface to be declared down.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set multiplier 50
```

7. Configure the BFD version.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set version 1
```

8. Specify that BFD sessions should not adapt to changing network conditions.

We recommend that you not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.

```
[edit protocols pim interface fe-1/0/0.0 family inet bfd-liveness-detection]
user@host# set no-adaptation
```

9. Verify the configuration by checking the output of the **show bfd session** command.

RELATED DOCUMENTATION

| *show bfd session*

Enabling Dedicated and Real-Time BFD

To enable dedicated BFD on the SRX100, SRX110, SRX210, SRX220, SRX240, SRX300, SRX320,, SRX340, SRX345, SRX550, SRX550M, SRX650, and SRX1500 devices:

1. Include the **dedicated-ukern-cpu** statement at the **[edit chassis]** hierarchy level and then commit the configuration.

- a. **[edit]**

- b. **user@host# set chassis dedicated-ukern-cpu**

user@host# commit

The following warning message to reboot the system displays when you commit the configuration:

warning: Packet processing throughput may be impacted in dedicated-ukernel-cpu mode.
warning: A reboot is required for dedicated-ukernel-cpu mode to be enabled. Please use "request system reboot" to reboot the system. commit complete

2. Reboot the device to enable the configuration:

- a. **user@host> request system reboot**

3. Verify that dedicated BFD is enabled.

user@host> show chassis dedicated-ukern-cpu

Dedicated Ukern CPU Status: Enabled

To enable real-time BFD on the SRX100, SRX110, SRX210, SRX220, SRX240, SRX300, SRX320, SRX340, SRX345, SRX550, SRX550M, and SRX650 devices:

1. Include the **realtime-ukern-thread** statement at the **[edit chassis]** hierarchy level and then commit the configuration.

- a. **[edit]**

- b. **user@host# set chassis realtime-ukern-thread**

user@host# commit

The following warning message to reboot the system displays when you commit the configuration:

WARNING: realtime-ukern-thread is enable. Please use the command request system reboot.

2. Reboot the device to enable the configuration:

- a. **user@host> request system reboot**

3. Verify that real-time BFD is enabled.

user@host> show chassis realtime-ukern-thread

realtime Ukern thread Status: Enabled

NOTE: When BFD is used over the following types of interfaces: tunnel interfaces, redundant interfaces, aggregate interfaces, IRB interfaces, it will revert back to centralized mode for packet processing

NOTE: Starting with Junos OS Release 15.1X49-D100, SRX340, SRX345, and SRX1500 devices support dedicated BFD.

NOTE: Starting with Junos OS Release 15.1X49-D100, SRX300 and SRX320 devices support real-time BFD.

NOTE: Starting with Junos OS Release 15.1X49-D110, SRX550M devices support distributed BFD.

NOTE: Starting with Junos OS Release 12.3X48-D60, dedicated BFD is supported on SRX240, SRX550, and SRX650 devices.

NOTE: Starting with Junos OS Release 12.3X48-D60, real-time BFD is supported on SRX100, SRX110, SRX210, and SRX220 devices.

NOTE: SRX Series devices support the following maximum number of BFD sessions:

- Up to four sessions on SRX100, SRX110, SRX210, SRX220, SRX300, and SRX320 devices
- Up to 50 sessions on SRX240, SRX340, SRX345, SRX550, SRX550M, and SRX650 devices
- Up to 120 sessions on SRX1500 devices
- The supported failure detection interval has improved

RELATED DOCUMENTATION

[Understanding BFD for BGP | 33](#)

[Understanding Distributed BFD | 46](#)

[show chassis dedicated-ukern-cpu | 988](#)

[show chassis realtime-ukern-thread | 995](#)

4

PART

Configuring Routing Engine Redundancy

[Understanding How Routing Engine Redundancy Prevents Network Failures](#) | 127

[Configuring Routing Engine Redundancy](#) | 134

Understanding How Routing Engine Redundancy Prevents Network Failures

IN THIS CHAPTER

- [Understanding Routing Engine Redundancy on Juniper Networks Routers | 127](#)

Understanding Routing Engine Redundancy on Juniper Networks Routers

IN THIS SECTION

- [Routing Engine Redundancy Overview | 127](#)
- [Conditions That Trigger a Routing Engine Failover | 128](#)
- [Default Routing Engine Redundancy Behavior | 129](#)
- [Routing Engine Redundancy on a TX Matrix Router | 130](#)
- [Routing Engine Redundancy on a TX Matrix Plus Router | 131](#)
- [Situations That Require You to Halt Routing Engines | 132](#)

This topic contains the following sections:

Routing Engine Redundancy Overview

Redundant Routing Engines are two Routing Engines that are installed in the same routing platform. One functions as the primary, while the other stands by as a backup should the primary Routing Engine fail. On routing platforms with dual Routing Engines, network reconvergence takes place more quickly than on routing platforms with a single Routing Engine.

When a Routing Engine is configured as primary, it has full functionality. It receives and transmits routing information, builds and maintains routing tables, communicates with interfaces and Packet Forwarding

Engine components, and has full control over the chassis. When a Routing Engine is configured to be the backup, it does not communicate with the Packet Forwarding Engine or chassis components.

NOTE: On devices running Junos OS Release 8.4 or later, both Routing Engines cannot be configured to be primary at the same time. This configuration causes the commit check to fail.

A failover from the primary Routing Engine to the backup Routing Engine occurs automatically when the primary Routing Engine experiences a hardware failure or when you have configured the software to support a change in primary role based on specific conditions. You can also manually switch Routing Engine primary role by issuing one of the **request chassis routing-engine** commands. In this topic, the term *failover* refers to an automatic event, whereas *switchover* refers to either an automatic or a manual event.

When a failover or a switchover occurs, the backup Routing Engine takes control of the system as the new primary Routing Engine.

- If *graceful Routing Engine switchover* is not configured, when the backup Routing Engine becomes primary, it resets the switch plane and downloads its own version of the microkernel to the Packet Forwarding Engine components. Traffic is interrupted while the Packet Forwarding Engine is reinitialized. All kernel and forwarding processes are restarted.
- If graceful Routing Engine switchover is configured, interface and kernel information is preserved. The switchover is faster because the Packet Forwarding Engines are not restarted. The new primary Routing Engine restarts the routing protocol process (rpd). All hardware and interfaces are acquired by a process that is similar to a warm restart. For more information about graceful Routing Engine switchover, see ["Understanding Graceful Routing Engine Switchover" on page 191](#).
- If graceful Routing Engine switchover and *nonstop active routing* (NSR) are configured, traffic is not interrupted during the switchover. Interface, kernel, and routing protocol information is preserved. For more information about nonstop active routing, see ["Nonstop Active Routing Concepts" on page 269](#).
- If graceful Routing Engine switchover and graceful restart are configured, traffic is not interrupted during the switchover. Interface and kernel information is preserved. Graceful restart protocol extensions quickly collect and restore routing information from the neighboring routers. For more information about graceful restart, see ["Graceful Restart Concepts" on page 308](#).

Conditions That Trigger a Routing Engine Failover

The following events can result in an automatic change in Routing Engine primary role, depending on your configuration:

- The routing platform experiences a hardware failure. A change in Routing Engine primary role occurs if either the Routing Engine or the associated host module or subsystem is abruptly powered off. You can also configure the backup Routing Engine to take primary role if it detects a hard disk error on the primary Routing Engine. To enable this feature, include the **failover on-disk-failure** statement at the **[edit chassis redundancy]** hierarchy level.
- The routing platform experiences a software failure, such as a kernel crash or a CPU lock. You must configure the backup Routing Engine to take primary role when it detects a loss of keepalive signal. To enable this failover method, include the **failover on-loss-of-keepalives** statement at the **[edit chassis redundancy]** hierarchy level.
- The routing platform experiences an em0 interface failure on the primary Routing Engine. You must configure the backup Routing Engine to take primary role when it detects the em0 interface failure. To enable this failover method, include the **on-re-to-fpc-stale** statement at the **[edit chassis redundancy failover]** hierarchy level.
- A specific software process fails. You can configure the backup Routing Engine to take primary role when one or more specified processes fail at least four times within 30 seconds. Include the **failover other-routing-engine** statement at the **[edit system processes *process-name*]** hierarchy level.

If any of these conditions is met, a message is logged and the backup Routing Engine attempts to take primary role. By default, an alarm is generated when the backup Routing Engine becomes active. After the backup Routing Engine takes primary role, it continues to function as primary even after the originally configured primary Routing Engine has successfully resumed operation. You must manually restore it to its previous backup status. (However, if at any time one of the Routing Engines is not present, the other Routing Engine becomes primary automatically, regardless of how redundancy is configured.)

Default Routing Engine Redundancy Behavior

By default, Junos OS uses **re0** as the primary Routing Engine and **re1** as the backup Routing Engine. Unless otherwise specified in the configuration, **re0** always becomes primary when the acting primary Routing Engine is rebooted.

NOTE: A single Routing Engine in the chassis always becomes the primary Routing Engine even if it was previously the backup Routing Engine.

Perform the following steps to see how the default Routing Engine redundancy setting works:

1. Ensure that **re0** is the primary Routing Engine.

2. Manually switch the state of Routing Engine primary role by issuing the **request chassis routing-engine master switch** command from the primary Routing Engine. **re0** is now the backup Routing Engine and **re1** is the primary Routing Engine.

NOTE: On the next reboot of the primary Routing Engine, Junos OS returns the router to the default state because you have not configured the Routing Engines to maintain this state after a reboot.

3. Reboot the primary Routing Engine **re1**.

The Routing Engine boots up and reads the configuration. Because you have not specified in the configuration which Routing Engine is the primary, **re1** uses the default configuration as the backup. Now both **re0** and **re1** are in a backup state. Junos OS detects this conflict and, to prevent a no-primary state, reverts to the default configuration to direct **re0** to become primary.

Routing Engine Redundancy on a TX Matrix Router

In a routing matrix, all primary Routing Engines in the TX Matrix router and connected T640 routers must run the same Junos OS release. Likewise, all backup Routing Engines in a routing matrix must run the same Junos OS release. When you run the same Junos OS release on all primary and backup Routing Engines in a routing matrix, a change in primary role to any backup Routing Engine in the routing matrix does not cause a change in primary role in any other chassis in the routing matrix.



CAUTION: (Routing matrix based on the TX Matrix or TX Matrix Plus routers only)

Within the routing matrix, we recommend that all Routing Engines run the same Junos OS release. If you run different releases on the Routing Engines and a change in primary role occurs on any backup Routing Engine in the routing matrix based on TX Matrix router or TX Matrix Plus router, one or all routers might become logically disconnected from the TX Matrix router or the TX Matrix Plus router and cause data loss.

If the same Junos OS release is not running on all primary and backup Routing Engines in the routing matrix, the following consequences occur when the **failover on-loss-of-keepalives** statement *is* included at the **[edit chassis redundancy]** hierarchy level:

- When the **failover on-loss-of-keepalives** statement is included at the **[edit chassis redundancy]** hierarchy level and you or a host subsystem initiates a change in primary role to the backup Routing Engine in the TX Matrix router, the primary Routing Engines in the T640 routers detect a software release mismatch with the new primary Routing Engine in the TX Matrix router and switch primary role to their backup Routing Engines.
- When you manually change primary role to a backup Routing Engine in a T640 router using the **request chassis routing-engine master** command, the new primary Routing Engine in the T640

router detects a software release mismatch with the primary Routing Engine in the TX Matrix router and relinquishes primary role to the original primary Routing Engine. (Routing Engine primary role in the TX Matrix router does not switch in this case.)

- When a host subsystem initiates a change in primary role to a backup Routing Engine in a T640 router because the primary Routing Engine has failed, the T640 router is logically disconnected from the TX Matrix router. To reconnect the T640 router, initiate a change in primary role to the backup Routing Engine in the TX Matrix router, or replace the failed Routing Engine in the T640 router and switch primary role to it. The replacement Routing Engine must be running the same software release as the primary Routing Engine in the TX Matrix router.

If the same Junos OS release is not running on all primary and backup Routing Engines in the routing matrix, the following consequences occur when the **failover on-loss-of-keepalives** statement *is not* included at the **[edit chassis redundancy]** hierarchy level:

- If you initiate a change in primary role to the backup Routing Engine in the TX Matrix router, all T640 routers are logically disconnected from the TX Matrix router. To reconnect the T640 routers, switch primary role of all primary Routing Engines in the T640 routers to their backup Routing Engines.
- If you initiate a change in primary role to a backup Routing Engine in a T640 router, the T640 router is logically disconnected from the TX Matrix router. To reconnect the T640 router, switch primary role of the new primary Routing Engine in the T640 router back to the original primary Routing Engine.

Routing Engine Redundancy on a TX Matrix Plus Router

In a routing matrix, all primary Routing Engines in the TX Matrix Plus router and the connected LCC must run the same Junos OS release. Likewise, all backup Routing Engines in a routing matrix must run the same Junos OS release. When you run the same Junos OS release on all primary and backup Routing Engines in the routing matrix, a change in primary role to any backup Routing Engine in the routing matrix does not cause a change in primary role in any other chassis in the routing matrix.



CAUTION: (Routing matrix based on the TX Matrix or TX Matrix Plus routers only)
Within the routing matrix, we recommend that all Routing Engines run the same Junos OS release. If you run different releases on the Routing Engines and a change in primary role occurs on any backup Routing Engine in the routing matrix based on a TX Matrix router or a TX Matrix Plus router, one or all routers might become logically disconnected from the TX Matrix router or the TX Matrix Plus router and cause data loss.

If the same Junos OS release is not running on all primary and backup Routing Engines in the routing matrix, the following scenarios occur when the **failover on-loss-of-keepalives** statement *is* included at the **[edit chassis redundancy]** hierarchy level:

- When the **failover on-loss-of-keepalives** statement is included at the **[edit chassis redundancy]** hierarchy level and you or a host subsystem initiates a change in primary role to the backup Routing Engine in the TX Matrix Plus router, the primary Routing Engines in the connected LCC detect a software release mismatch with the new primary Routing Engine in the TX Matrix Plus router and switch primary role to their backup Routing Engines.
- When you manually change primary role to a backup Routing Engine in a connected LCC by using the **request chassis routing-engine master** command, the new primary Routing Engine in the connected LCC detects a software release mismatch with the primary Routing Engine in the TX Matrix Plus router and relinquishes primary role to the original primary Routing Engine. (Routing Engine primary role in the TX Matrix Plus router does not switch in this case.)
- When a host subsystem initiates a change in primary role to a backup Routing Engine in a connected LCC because the primary Routing Engine has failed, the connected LCC is logically disconnected from the TX Matrix Plus router. To reconnect the connected LCC, initiate a change in primary role to the backup Routing Engine in the TX Matrix Plus router, or replace the failed Routing Engine in the connected LCC and switch primary role to it. The replacement Routing Engine must be running the same software release as the primary Routing Engine in the TX Matrix Plus router.

If the same Junos OS release is not running on all primary and backup Routing Engines in the routing matrix, the following scenarios occur when the **failover on-loss-of-keepalives** statement *is not* included at the **[edit chassis redundancy]** hierarchy level:

- If you initiate a change in primary role to the backup Routing Engine in the TX Matrix Plus router, all connected LCCs are logically disconnected from the TX Matrix Plus router. To reconnect the connected LCC, switch primary role of all primary Routing Engines in the connected LCC to their backup Routing Engines.
- If you initiate a change in primary role to a backup Routing Engine in a connected LCC, the connected LCC is logically disconnected from the TX Matrix Plus router. To reconnect the connected LCC, switch primary role of the new primary Routing Engine in the connected LCC back to the original primary Routing Engine.

Situations That Require You to Halt Routing Engines

Before you shut the power off to a routing platform that has two Routing Engines or before you remove the primary Routing Engine, you must first halt the backup Routing Engine and then halt the primary Routing Engine. Otherwise, you might need to reinstall Junos OS. You can use the **request system halt both-routing-engines** command on the primary Routing Engine, which first shuts down the primary Routing Engine and then shuts down the backup Routing Engine. To shut down only the backup Routing Engine, issue the **request system halt** command on the backup Routing Engine.

If you halt the primary Routing Engine and do not power it off or remove it, the backup Routing Engine remains inactive unless you have configured it to become the primary when it detects a loss of keepalive signal from the primary Routing Engine.

NOTE: To restart the router, you must log in to the console port (rather than the Ethernet management port) of the Routing Engine. When you log in to the console port of the primary Routing Engine, the system automatically reboots. After you log in to the console port of the backup Routing Engine, press Enter to reboot it.

NOTE: If you have upgraded the backup Routing Engine, first reboot it and then reboot the primary Routing Engine.

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

[Understanding Switching Control Board Redundancy | 15](#)

[Configuring Routing Engine Redundancy | 134](#)

Configuring Routing Engine Redundancy

IN THIS CHAPTER

- Configuring Routing Engine Redundancy | 134
- Initial Routing Engine Configuration Example | 141
- Copying a Configuration File from One Routing Engine to the Other | 143
- Loading a Software Package from the Other Routing Engine | 144

Configuring Routing Engine Redundancy

IN THIS SECTION

- Modifying the Default Routing Engine Primary Role | 134
- Configuring Automatic Failover to the Backup Routing Engine | 135
- Manually Switching Routing Engine Primary Role | 138
- Verifying Routing Engine Redundancy Status | 138

The following sections describe how to configure Routing Engine redundancy:

NOTE: To complete the tasks in the following sections, **re0** and **re1** configuration groups must be defined. For more information about configuration groups, see the [Junos OS CLI User Guide](#).

Modifying the Default Routing Engine Primary Role

For routers with two Routing Engines, you can configure which Routing Engine is the primary and which is the backup. By default, the Routing Engine in slot 0 is the primary (**re0**) and the one in slot 1 is the backup (**re1**).

NOTE: In systems with two Routing Engines, both Routing Engines cannot be configured to be primary at the same time. This configuration causes the commit check to fail.

To modify the default configuration, include the **routing-engine** statement at the **[edit chassis redundancy]** hierarchy level:

```
[edit chassis redundancy]
routing-engine slot-number (master | backup | disabled);
```

slot-number can be 0 or 1. To configure the Routing Engine to be the primary, specify the **master** option. To configure it to be the backup, specify the **backup** option. To disable a Routing Engine, specify the **disabled** option.

NOTE: To switch between the primary and the backup Routing Engines, see ["Manually Switching Routing Engine Primary Role" on page 138](#).

Configuring Automatic Failover to the Backup Routing Engine

IN THIS SECTION

- [Without Interruption to Packet Forwarding | 135](#)
- [On Detection of a Hard Disk Error on the Primary Routing Engine | 136](#)
- [On Detection of a Broken LCMD Connectivity Between the VM and RE | 136](#)
- [On Detection of a Loss of Keepalive Signal from the Primary Routing Engine | 136](#)
- [On Detection of the em0 Interface Failure on the Primary Routing Engine | 138](#)
- [When a Software Process Fails | 138](#)

The following sections describe how to configure automatic failover to the backup Routing Engine when certain failures occur on the primary Routing Engine.

Without Interruption to Packet Forwarding

For routers with two Routing Engines, you can configure graceful Routing Engine switchover (GRES). When graceful switchover is configured, socket reconnection occurs seamlessly without interruption to

packet forwarding. For information about how to configure graceful Routing Engine switchover, see ["Configuring Graceful Routing Engine Switchover" on page 208](#).

On Detection of a Hard Disk Error on the Primary Routing Engine

After you configure a backup Routing Engine, you can direct it to take primary role automatically if it detects a hard disk error from the primary Routing Engine. To enable this feature, include the **on-disk-failure** statement at the **[edit chassis redundancy failover]** hierarchy level.

```
[edit chassis redundancy failover]
on-disk-failure;
```

On Detection of a Broken LCMD Connectivity Between the VM and RE

Set the following configuration that will result in an automatic RE switchover when the LCMD connectivity between VM and RE is broken. To enable this feature, include the **on-loss-of-vm-host-connection** statement at the **[edit chassis redundancy failover]** hierarchy level.

```
[edit chassis redundancy failover]
on-loss-of-vm-host-connection;
```

If the LCMD process is crashing on the primary, the system will switchover after one minute provided the backup RE LCMD connection is stable. The system will not switchover under the following conditions: if the backup RE LCMD connection is unstable or if the current primary just gained primary role. When the primary has just gained primary role, the switchover happens only after four minutes.

On Detection of a Loss of Keepalive Signal from the Primary Routing Engine

After you configure a backup Routing Engine, you can direct it to take primary role automatically if it detects a loss of keepalive signal from the primary Routing Engine.

To enable failover on receiving a loss of keepalive signal, include the **on-loss-of-keepalives** statement at the **[edit chassis redundancy failover]** hierarchy level:

```
[edit chassis redundancy failover]
on-loss-of-keepalives;
```

When graceful Routing Engine switchover is not configured, by default, failover occurs after 300 seconds (5 minutes). You can configure a shorter or longer time interval.

NOTE: The keepalive time period is reset to 360 seconds when the primary Routing Engine has been manually rebooted or halted.

To change the keepalive time period, include the **keepalive-time** statement at the **[edit chassis redundancy]** hierarchy level:

```
[edit chassis redundancy]
keepalive-time seconds;
```

The range for **keepalive-time** is 2 through 10,000 seconds.

The following example describes the sequence of events if you configure the backup Routing Engine to detect a loss of keepalive signal in the primary Routing Engine:

1. Manually configure a **keepalive-time** of 25 seconds.
2. After the Packet Forwarding Engine connection to the primary Routing Engine is lost and the keepalive timer expires, packet forwarding is interrupted.
3. After 25 seconds of keepalive loss, a message is logged, and the backup Routing Engine attempts to take primary role. An alarm is generated when the backup Routing Engine becomes active, and the display is updated with the current status of the Routing Engine.
4. After the backup Routing Engine takes primary role, it continues to function as primary.

NOTE: When graceful Routing Engine switchover is configured, the keepalive signal is automatically enabled and the failover time is set to 2 seconds (4 seconds on M20 routers). You cannot manually reset the keepalive time.

NOTE: When you halt or reboot the primary Routing Engine, Junos OS resets the keepalive time to 360 seconds, and the backup Routing Engine does not take over primary role until the 360-second keepalive time period expires.

A former primary Routing Engine becomes a backup Routing Engine if it returns to service after a failover to the backup Routing Engine. To restore primary status to the former primary Routing Engine, you can use the **request chassis routing-engine master switch** operational mode command.

If at any time one of the Routing Engines is not present, the remaining Routing Engine becomes primary automatically, regardless of how redundancy is configured.

On Detection of the em0 Interface Failure on the Primary Routing Engine

After you configure a backup Routing Engine, you instruct it to take primary role automatically if the em0 interface fails on the primary Routing Engine. To enable this feature, include the **on-re-to-fpc-stale** statement at the **[edit chassis redundancy failover]** hierarchy level.

```
[edit chassis redundancy failover]
on-re-to-fpc-stale;
```

When a Software Process Fails

To configure automatic switchover to the backup Routing Engine if a software process fails, include the **failover other-routing-engine** statement at the **[edit system processes *process-name*]** hierarchy level:

```
[edit system processes process-name]
failover other-routing-engine;
```

process-name is one of the valid process names. If this statement is configured for a process, and that process fails four times within 30 seconds, the router reboots from the other Routing Engine. Another statement available at the **[edit system processes]** hierarchy level is **failover alternate-media**. For information about the alternate media option, see the [Junos OS Administration Library for Routing Devices](#).

Manually Switching Routing Engine Primary Role

To manually switch Routing Engine primary role, use one of the following commands:

- On the backup Routing Engine, request that the backup Routing Engine take primary role by issuing the **request chassis routing-engine master acquire** command.
- On the primary Routing Engine, request that the backup Routing Engine take primary role by using the **request chassis routing-engine master release** command.
- On either Routing Engine, switch primary role by issuing the **request chassis routing-engine master switch** command.

Verifying Routing Engine Redundancy Status

A separate log file is provided for redundancy logging at **/var/log/mastership**. To view the log, use the **file show /var/log/mastership** command. [Table 3 on page 139](#) lists the primary role log event codes and descriptions.

Table 3: Routing Engine Primary Role Log

Event Code	Description
E_NULL = 0	The event is a null event.
E_CFG_M	The Routing Engine is configured as primary.
E_CFG_B	The Routing Engine is configured as backup.
E_CFG_D	The Routing Engine is configured as disabled.
E_MAXTRY	The maximum number of tries to acquire or release primary role was exceeded.
E_REQ_C	A claim primary role request was sent.
E_ACK_C	A claim primary role acknowledgement was received.
E_NAK_C	A claim primary role request was not acknowledged.
E_REQ_Y	Confirmation of primary role is requested.
E_ACK_Y	Primary Role is acknowledged.
E_NAK_Y	Primary Role is not acknowledged.
E_REQ_G	A release primary role request was sent by a Routing Engine.
E_ACK_G	The Routing Engine acknowledged release of primary role.
E_CMD_A	The command request chassis routing-engine master acquire was issued from the backup Routing Engine.

Table 3: Routing Engine Primary Role Log (*Continued*)

Event Code	Description
E_CMD_F	The command request chassis routing-engine master acquire force was issued from the backup Routing Engine.
E_CMD_R	The command request chassis routing-engine master release was issued from the primary Routing Engine.
E_CMD_S	The command request chassis routing-engine master switch was issued from a Routing Engine.
E_NO_ORE	No other Routing Engine is detected.
E_TMOUT	A request timed out.
E_NO_IPC	Routing Engine connection was lost.
E_ORE_M	Other Routing Engine state was changed to primary.
E_ORE_B	Other Routing Engine state was changed to backup.
E_ORE_D	Other Routing Engine state was changed to disabled.

RELATED DOCUMENTATION

[Understanding Routing Engine Redundancy on Juniper Networks Routers | 127](#)

[Understanding Switching Control Board Redundancy | 15](#)

Initial Routing Engine Configuration Example

You can use configuration groups to ensure that the correct IP addresses are used for each Routing Engine and to maintain a single configuration file for both Routing Engines.

The following example defines configuration groups **re0** and **re1** with separate IP addresses. These well-known configuration group names take effect only on the appropriate Routing Engine.

```
groups {
  re0 {
    system {
      host-name my-re0;
    }
    interfaces {
      fxp0 {
        description "10/100 Management interface";
        unit 0 {
          family inet {
            address 10.255.2.40/24;
          }
        }
      }
    }
  }
  re1 {
    system {
      host-name my-re1;
    }
    interfaces {
      fxp0 {
        description "10/100 Management interface";
        unit 0 {
          family inet {
            address 10.255.2.41/24;
          }
        }
      }
    }
  }
}
```

You can assign an additional IP address to the management Ethernet interface (**fxp0** in this example) on both Routing Engines. The assigned address uses the **master-only** keyword and is identical for both Routing Engines, ensuring that the IP address for the primary Routing Engine can be accessed at any time. The address is active only on the primary Routing Engine's management Ethernet interface. During a Routing Engine switchover, the address moves over to the new primary Routing Engine.

For example, on **re0**, the configuration is:

```
[edit groups re0 interfaces fxp0]

unit 0 {
    family inet {
        address 10.17.40.131/25 {
            master-only;
        }
        address 10.17.40.132/25;
    }
}
```

On **re1**, the configuration is:

```
[edit groups re1 interfaces fxp0]

unit 0 {
    family inet {
        address 10.17.40.131/25 {
            master-only;
        }
        address 10.17.40.133/25;
    }
}
```

For more information about the initial configuration of dual Routing Engines, see the [Junos OS Software Installation and Upgrade Guide](#). For more information about assigning an additional IP address to the management Ethernet interface with the **master-only** keyword on both Routing Engines, see the [Junos OS CLI User Guide](#).

RELATED DOCUMENTATION

[Understanding Routing Engine Redundancy on Juniper Networks Routers](#) | 127

Copying a Configuration File from One Routing Engine to the Other

You can use either the console port or the management Ethernet port to establish connectivity between the two Routing Engines. You can then copy or use FTP to transfer the configuration from the primary to the backup, and load the file and commit it in the normal way.

To connect to the other Routing Engine using the management Ethernet port, issue the following command:

```
user@host> request routing-engine login (other-routing-engine | re0 | re1)
```

On a TX Matrix router, to make connections to the other Routing Engine using the management Ethernet port, issue the following command:

```
user@host> request routing-engine login (backup | lcc number | master | other-routing-engine | re0 | re1)
```

For more information about the **request routing-engine login** command, see the [CLI Explorer](#).

To copy a configuration file from one Routing Engine to the other, issue the **file copy** command:

```
user@host> file copy source destination
```

In this case, ***source*** is the name of the configuration file. These files are stored in the directory **/config**. The active configuration is **/config/juniper.conf**, and older configurations are in **/config/juniper.conf {1...9}**. The ***destination*** is a file on the other Routing Engine.

The following example copies a configuration file from Routing Engine 0 to Routing Engine 1:

```
user@host> file copy /config/juniper.conf re1:/var/tmp/copied-juniper.conf
```

The following example copies a configuration file from Routing Engine 0 to Routing Engine 1 on a TX Matrix router:

```
user@host> file copy /config/juniper.conf scc-re1:/var/tmp/copied-juniper.conf
```


To load the configuration file, enter the **load replace** command at the **[edit]** hierarchy level:

```
user@host> load replace /var/tmp/copied-juniper.conf
```



CAUTION: Make sure you change any IP addresses specified in the management Ethernet interface configuration on Routing Engine 0 to addresses appropriate for Routing Engine 1.

RELATED DOCUMENTATION

[Understanding Routing Engine Redundancy on Juniper Networks Routers | 127](#)

[Understanding Switching Control Board Redundancy | 15](#)

[Loading a Software Package from the Other Routing Engine | 144](#)

Loading a Software Package from the Other Routing Engine

You can load a package from the other Routing Engine onto the local Routing Engine using the existing **request system software add** *package-name* command:

```
user@host> request system software add re(0|1):/ filename
```

In the **re** portion of the URL, specify the number of the other Routing Engine. In the *filename* portion of the URL, specify the path to the package. Packages are typically in the directory **/var/sw/pkg**.

RELATED DOCUMENTATION

[Understanding Routing Engine Redundancy on Juniper Networks Routers | 127](#)

[Understanding Switching Control Board Redundancy | 15](#)

[Copying a Configuration File from One Routing Engine to the Other | 143](#)

5

PART

Configuring Load Balancing

[Understanding Load Balancing](#) | 146

Understanding Load Balancing

IN THIS CHAPTER

- [Load Balancing on Aggregated Ethernet Interfaces | 146](#)
- [Configuring Adaptive Load Balancing | 188](#)

Load Balancing on Aggregated Ethernet Interfaces

IN THIS SECTION

- [Load Balancing and Ethernet Link Aggregation Overview | 147](#)
- [Understanding Aggregated Ethernet Load Balancing | 147](#)
- [Stateful Load Balancing for Aggregated Ethernet Interfaces Using 5-Tuple Data | 149](#)
- [Configuring Stateful Load Balancing on Aggregated Ethernet Interfaces | 153](#)
- [Configuring Adaptive Load Balancing | 154](#)
- [Configuring Symmetrical Load Balancing on an 802.3ad Link Aggregation Group on MX Series Routers | 155](#)
- [Configuring PIC-Level Symmetrical Hashing for Load Balancing on 802.3ad LAGs for MX Series Routers | 163](#)
- [Examples: Configuring PIC-Level Symmetrical Hashing for Load Balancing on 802.3ad LAGs on MX Series Routers | 166](#)
- [Example: Configuring Aggregated Ethernet Load Balancing | 169](#)

When you bundle several physical aggregated Ethernet Interfaces to form a single logical interface, it is called link aggregation. Link aggregation increases bandwidth, provides graceful degradation as failure occurs, increases availability and provides load-balancing capabilities. Load balancing enables the device to divide incoming and outgoing traffic along multiple interfaces to reduce congestion in the network. This topic describes load balancing and how to configure load balancing on your device.

Load Balancing and Ethernet Link Aggregation Overview

You can create a link aggregation group (LAG) for a group of Ethernet ports. Layer 2 bridging traffic is load balanced across the member links of this group, making the configuration attractive for congestion concerns as well as for redundancy. You can configure up to 128 LAG bundles on M Series, and T Series routers, and 480 LAG bundles on MX Series routers and EX9200 switches. Each LAG bundle contains up to 16 links. (Platform support depends on the Junos OS release in your installation.)

By default, the hash key mechanism to load-balance frames across LAG interfaces is based on Layer 2 fields (such as frame source and destination address) as well as the input *logical interface* (unit). The default LAG algorithm is optimized for Layer 2 switching. Starting with Junos OS Release 10.1, you can also configure the load balancing hash key for Layer 2 traffic to use fields in the Layer 3 and Layer 4 headers using the **payload** statement. However, note that the load-balancing behavior is platform-specific and based on appropriate hash-key configurations.

For more information, see *Configuring Load Balancing on a LAG Link*. In a Layer 2 switch, one link is overutilized and other links are underutilized.

SEE ALSO

| *payload*

Understanding Aggregated Ethernet Load Balancing

The link aggregation feature is used to bundle several physical aggregated Ethernet interfaces to form one logical interface. One or more links are aggregated to form a virtual link or link aggregation group (LAG). The MAC client treats this virtual link as if it were a single link. Link aggregation increases bandwidth, provides graceful degradation as failure occurs, and increases availability.

In addition to these benefits, an aggregated Ethernet bundle is enhanced to provide load-balancing capabilities that ensure that the link utilization among the member links of the aggregated Ethernet bundle are fully and efficiently utilized.

The load-balancing feature allows a device to divide incoming and outgoing traffic along multiple paths or interfaces in order to reduce congestion in the network. Load balancing improves the utilization of various network paths and provides more effective network bandwidth.

Typically, the applications that use load balancing include:

- Aggregated Interfaces (Layer 2)

Aggregated Interfaces (also called AE for aggregated Ethernet, and AS for aggregated SONET) are a Layer 2 mechanism for load-balancing across multiple interfaces between two devices. Because this is a Layer 2 load-balancing mechanism, all of the individual component links must be between the

same two devices on each end. Junos OS supports a non-signaled (static) configuration for Ethernet and SONET, as well as the 802.3ad standardized LACP protocol for negotiation over Ethernet links.

- Equal-Cost Multipath (ECMP) (Layer 3)

By default, when there are multiple equal-cost paths to the same destination for the active route, Junos OS uses a hash algorithm to choose one of the next-hop addresses to install in the forwarding table. Whenever the set of next hops for a destination changes in any way, the next-hop address is rechosen using the hash algorithm. There is also an option that allows multiple next-hop addresses to be installed in the forwarding table, known as per-packet load balancing.

ECMP load balancing can be:

- Across BGP paths (BGP multipath)
- Within a BGP path, across multiple LSPs

In complex Ethernet topologies, traffic imbalances occur due to increased traffic flow, and load balancing becomes challenging for some of the following reasons:

- Incorrect load balancing by aggregate next hops
- Incorrect packet hash computation
- Insufficient variance in the packet flow
- Incorrect pattern selection

As a result of traffic imbalance, the load is not well distributed causing congestion in certain links, whereas some other links are not efficiently utilized.

To overcome these challenges, Junos OS provides the following solutions for resolving the genuine traffic imbalance on aggregated Ethernet bundles (IEEE 802.3ad).

- Adaptive Load Balancing

Adaptive load balancing uses a feedback mechanism to correct a genuine traffic imbalance. To correct the imbalance weights, the bandwidth and packet stream of links are adapted to achieve efficient traffic distribution across the links in an AE bundle.

To configure adaptive load balancing, include the **adaptive** statement at the **[edit interfaces aeX aggregated-ether-options load-balance]** hierarchy level.

NOTE: Adaptive load balancing is not supported if the VLAN ID is configured on the aggregated Ethernet interface. This limitation affects the PTX Series Packet Transport Routers and QFX10000 switches only.

To configure the tolerance value as a percentage, include the **tolerance** optional keyword at the **[edit interfaces aex aggregated-ether-options load-balance adaptive]** hierarchy level.

To configure adaptive load balancing based on packets per second (instead of the default bits per second setting), include the **pps** optional keyword at the **[edit interfaces aex aggregated-ether-options load-balance adaptive]** hierarchy level.

To configure the scan interval for the hash value based on the sample rate for the last two seconds, include the **scan-interval** optional keyword at the **[edit interfaces aex aggregated-ether-options load-balance adaptive]** hierarchy level.

NOTE: The **pps** and **scan-interval** optional keywords are supported on PTX Series Packet Transport Routers only.

- Per-Packet Random Spray Load Balancing

When the adaptive load-balancing option fails, per-packet random spray load balancing serves as a last resort. It ensures that the members of an AE bundle are equally loaded without taking bandwidth into consideration. Per packet causes packet reordering and hence is recommended only if the applications absorb reordering. Per-packet random spray eliminates traffic imbalance that occurs as a result of software errors, except for packet hash.

To configure per-packet random spray load balancing, include the **per-packet** statement at the **[edit interfaces aex aggregated-ether-options load-balance]** hierarchy level.

The aggregated Ethernet load-balancing solutions are mutually exclusive. When more than one of the load-balancing solutions is configured, the solution that is configured last overrides the previously configured one. You can verify the load-balancing solution being used by issuing the **show interfaces aex aggregated-ether-options load-balance** command.

SEE ALSO

show interfaces (Aggregated Ethernet)

Stateful Load Balancing for Aggregated Ethernet Interfaces Using 5-Tuple Data

IN THIS SECTION

- [Guidelines for Configuring Stateful Load Balancing for Aggregated Ethernet Interfaces or LAG Bundles | 152](#)

When multiple flows are transmitted out of an aggregated Ethernet (ae) interface, the flows must be distributed across the different member links evenly to enable an effective and optimal load-balancing behavior. To obtain a streamlined and robust method of load-balancing, the member link of the aggregated Ethernet interface bundle that is selected each time for load balancing plays a significant part. In Junos OS releases earlier than Release 13.2R1, on MX Series routers with Trio-based FPCs (MPCs), the selection of a member link of the ae interface bundle or the next-hop (or unilist of next-hops) for equal-cost multipath (ECMP) links is performed using a balanced mode next-hop selection methodology and an unbalanced mode of member link or next-hop selection methodology. The balanced mode of link selection uses 'n' bits in a precomputed hash value if it needs to select one of 2^n (2 raised to the power of n) next-hop in the unilist. The unbalanced mode of member-link or next-hop selection uses 8 bits in a precomputed hash to select an entry in a selector table, which is randomly done with the member link IDs of the link aggregation group (LAG) or ae bundle.

The term balanced versus unbalanced indicates whether a selector table is used for load balancing mechanism or not. The LAG bundle uses the unbalanced mode (selector table balancing) to balance the traffic across member links. When the traffic flows are minimal, the following problems might occur with the unbalanced mode: The link selection logic utilizes only subset bits of the precomputed hash. Regardless of the efficiency of the hashing algorithm, it is only the compressed representation of a flow. Because the inter-flow variance is very low, the resultant hashes and the subset that are computed do not provide the necessary variability to effectively utilize all the LAG member links. An excessive amount of random nature exists in the hash computation and also in the selector table. As a result, the deviation from being an optimal load-balancing technique for each child link that is selected is higher when the number of flows is lower.

The deviation per child link is defined as

$$V_i = ((C_i - (M/N))) / N$$

where

- V_i denotes the deviation for that child link 'i'.
- i denotes the child link member/index.
- C_i represents the packets transmitted for that child link 'i'.
- M signifies the total packets transmitted on that LAG bundle.
- N denotes the number of child links in that LAG.

Because of these drawbacks, for smaller number of flows, or flows with less inter-flow variance, the link utilization is skewed, and a high probability of a few child links not being utilized entirely exists. Starting with Junos OS Release 13.2R1, the capability to perform uniform load balancing and also perform rebalancing is introduced on MX Series routers with MPCs, except MPC3Es and MPC4Es. Rebalancing is not supported when load-balancing is skewed or distorted owing to a change in the number of flows.

The mechanism to record and retain states for the flows and distribute the traffic load accordingly is added. As a result, for m number of flows, they are distributed among n member links of a LAG bundle or among the unilist of next-hops in an ECMP link. This method of splitting the load among member links is called *stateful load balancing* and it uses 5-tuple information (source and destination addresses, protocol, source and destination ports). Such a method can be mapped directly to the flows, or to a precompute hash based on certain fields in the flow. As a result, the deviation observed on each child link is reduced.

This mechanism works efficiently only for minimal number of flows (less than thousands of flows, approximately). For a larger number of flows (between 1000 and 10,000 flows), we recommend that distributed Trio-based load-balancing mechanism is used.

Consider a sample scenario in which ' n ' links in the LAG are identified with link IDs of 0 through $n-1$. A hash table or a flow table is used to record the flows as and when they show up. The hashing key is constructed using the fields that uniquely identify a flow. The result of the lookup identifies the `link_id` that the flow is currently using. For each packet, the flow table based on the flow identifier is examined. If a match is found, it denotes a packet that belongs to a flow that is previously processed or detected. The link ID is associated with the flow. If a match is not found, it is the first packet that belongs to the flow. The link ID is used to select the link and the flow is inserted into the flow table.

To enable per-flow load balancing based on hash values, include the **per-flow** statement at the at the **[edit interfaces aeXunit logical-unit-number forwarding-options load-balance-stateful]** hierarchy level. By default, Junos OS uses a hashing method based only on the destination address to elect a forwarding next hop when multiple equal-cost paths are available. All Packet Forwarding Engine slots are assigned the same hash value by default. To configure the load-balancing algorithm to dynamically rebalance the LAG using existing parameters, include the **rebalance interval** statement at the **[edit interfaces aeXunit logical-unit-number forwarding-options load-balance-stateful]** hierarchy level. This parameter periodically load balances traffic by providing a synchronized rebalance switchover across all the ingress Packet Forwarding Engines (PFEs) over a rebalance interval. You can specify the interval as a value in the range of 1 through 1000 flows per minute. To configure the load type, include the **load-type (low | medium | high)** statement at the **[edit interfaces aeXunit logical-unit-number forwarding-options load-balance-stateful]** hierarchy level.

The **stateful per-flow** option enables the load-balancing capability on AE bundles. The **rebalance** option clears the load balance state at specified intervals. The **load** option informs the Packet Forwarding Engine regarding the appropriate memory pattern to be used. If the number of flows that flow on this aggregated Ethernet interface is less (between 1 and 100 flows), then the **low** keyword can be used. Similarly for relatively higher flows (between 100 and 1000 flows), the **medium** keyword can be used and the **large** keyword can be used for the maximum flows (between 1000 and 10,000 flows). The approximate number of flows for effective load-balancing for each keyword is a derivative.

The **clear interfaces aeXunit logical-unit-number forwarding-options load-balance state** command clears the load balance state at the hardware level and enables rebalancing from the cleaned up, empty state. This clear state is triggered only when you use this command. The **clear interfaces aggregate**

forwarding-options load-balance state command clears all the aggregate Ethernet interface load balancing states and re-creates them newly.

Guidelines for Configuring Stateful Load Balancing for Aggregated Ethernet Interfaces or LAG Bundles

Keep the following points in mind while configuring stateful load-balancing for aggregated Ethernet interfaces:

- When a child link is removed or added, a new aggregate selector is selected and traffic flows onto the new selector. Because the selector is empty, flows are filled in the selector. This behavior causes redistribution of flows because the old state is lost. This is the existing behavior without enabling stateful per-flow load-balancing.
- Stateful per-flow load-balancing functions on AE interfaces if the incoming traffic reaches the MPC1E, MPC2E, MPC3E-3D, MPC5E, and MPC6E line cards. Any other type of line card does not trigger this functionality. Appropriate CLI errors are displayed if the MPCs do not support this capability.

With the ingress line card as MPC and the egress line card as MPC or DPC, this feature works properly. Stateful load-balancing is not supported if the ingress line card is a DPC and the egress line card is a DPC or an MPC.

- This capability is not supported for multicast traffic (native/flood).
- Enabling the rebalance option or clearing the load balance state can cause packet reordering for active flows because different sets of links can be selected for traffic flows.
- Although the feature performance is high, it consumes significant amount of line card memory. Approximately, 4000 logical interfaces or 16 aggregated Ethernet logical interfaces can have this feature enabled on supported MPCs. However, when the Packet Forwarding Engine hardware memory is low, depending upon the available memory, it falls back to the default load balancing mechanism. A system logging message is generated in such a situation and sent to the Routing Engine. A restriction on the number of AE interfaces that support stateful load-balancing does not exist; the limit is determined by the line cards.
- If the traffic flows become aged frequently, then the device needs to remove or refresh the load balancing states. As a result, you must configure rebalancing or run the clear command at periodic intervals for proper load-balancing. Otherwise, traffic skewing can occur. When a child link goes down or comes up, the load balancing behavior does not undergo changes on existing flows. This condition is to avoid packet reordering. New flows pick up the child link that come up. If you observe load distribution to be not very effective, you can clear the load-balancing states or use rebalancing functionality to cause an automatic clearance of the hardware states. When you configure the rebalancing facility, traffic flows can get redirected to different links, which can cause packet reordering.

SEE ALSO

[Link Protection of Aggregated Ethernet Interfaces](#) | 0

Configuring Stateful Load Balancing on Aggregated Ethernet Interfaces

The mechanism to record and retain states for the flows and distribute the traffic load accordingly is added. As a result, for m number of flows, they are distributed among n member links of a LAG bundle or among the unilist of next-hops in an ECMP link. This method of splitting the load among member links is called *stateful load balancing* and it uses 5-tuple information (source and destination addresses, protocol, source and destination ports). Such a method can be mapped directly to the flows, or to a precompute hash based on certain fields in the flow. As a result, the deviation observed on each child link is reduced.

To configure stateful load balancing on **ae** interface bundles:

1. Specify that you want to configure an aggregated Ethernet interface.

[edit]

```
user@R2# set interfaces aeXunit logical-unit-number
```

2. Specify that you want to configure stateful load-balancing.

[edit interfaces aeXunit logical-unit-number]

```
user@R2# edit forwarding-options load-balance-stateful
```

3. Enable the mechanism to perform an even, effective distribution of traffic flows across member links of an aggregated Ethernet interface (**ae**) bundle on MX Series routers with MPCs, except MPC3Es and MPC4Es.

[edit interfaces aeXunit logical-unit-number load-balance-stateful]

```
user@R2# set per-flow
```

4. Configure periodic rebalancing of traffic flows of an aggregated Ethernet bundle by clearing the load balance state at a specified interval.

[edit interfaces aeXunit logical-unit-number load-balance-stateful]

```
user@R2# set rebalance interval
```

5. Define the load-balancing type to inform the Packet Forwarding Engine regarding the appropriate memory pattern to be used for traffic flows. The approximate number of flows for effective load-balancing for each keyword is a derivative.

```
[edit interfaces aeXunit logical-unit-number load-balance-stateful]
user@R2# set load-type (low | medium | large)
```

6. Configure the address family and IP address for the ae interface.

```
[edit interfaces aeXunit logical-unit-number]
user@R2# set family family-name address address
```

SEE ALSO

[Link Protection of Aggregated Ethernet Interfaces](#) | 0

Configuring Adaptive Load Balancing

This topic describes how to configure adaptive load balancing. Adaptive load balancing maintains efficient utilization of member link bandwidth for an aggregated Ethernet (AE) bundle. Adaptive load balancing uses a feedback mechanism to correct traffic load imbalance by adjusting the bandwidth and packet streams on links within an AE bundle.

Before you begin:

- Configure a set of interfaces with a protocol family and IP address. These interfaces can make up the membership for the AE bundle.
- Create an AE bundle by configuring a set of router interfaces as aggregated Ethernet and with a specific AE group identifier.

To configure adaptive load balancing for an AE bundles:

1. Enable adaptive load balancing on the AE bundle:

```
[edit interfaces ae-x aggregated-ether-options load-balance]
user@router# set adaptive
```

2. Configure the scan interval value for adaptive load balancing on the AE bundle. The scan interval value determines the length of the traffic scan by multiplying the integer value with a 30-second time period:

```
[edit interfaces ae-x aggregated-ether-options load-balance adaptive]
user@router# set scan-interval multiplier
```

3. Configure the tolerance percentage value. The tolerance value determines the allowed deviation in the traffic rates among the members of the AE bundle before the router triggers an adaptive load balancing update:

```
[edit interfaces ae-x aggregated-ether-options load-balance adaptive]
user@router# set tolerance percentage
```

4. (Optional) Enable packet-per-second-based adaptive load balancing on the AE bundle:

```
[edit interfaces ae-x aggregated-ether-options load-balance adaptive]
user@router# set pps
```

SEE ALSO

[adaptive](#) | [658](#)

Configuring Symmetrical Load Balancing on an 802.3ad Link Aggregation Group on MX Series Routers

IN THIS SECTION

- [Symmetrical Load Balancing on an 802.3ad LAG on MX Series Routers Overview](#) | [156](#)
- [Configuring Symmetric Load Balancing on an 802.3ad LAG on MX Series Routers](#) | [156](#)
- [Configuring Symmetrical Load Balancing on Trio-Based MPCs](#) | [160](#)
- [Example Configurations](#) | [162](#)

Symmetrical Load Balancing on an 802.3ad LAG on MX Series Routers Overview

MX Series routers with Aggregated Ethernet PICs support symmetrical load balancing on an 802.3ad LAG. This feature is significant when two MX Series routers are connected transparently through deep packet inspection (DPI) devices over an LAG bundle. DPI devices keep track of flows and require information of a given flow in both forward and reverse directions. Without symmetrical load balancing on an 802.3ad LAG, the DPIs could misunderstand the flow, leading to traffic disruptions. By using this feature, a given flow of traffic (duplex) is ensured for the same devices in both directions.

Symmetrical load balancing on an 802.3ad LAG utilizes a mechanism of interchanging the source and destination addresses for a hash computation of fields, such as source address and destination address. The result of a hash computed on these fields is used to choose the link of the LAG. The hash-computation for the forward and reverse flow must be identical. This is achieved by swapping source fields with destination fields for the reverse flow. The swapped operation is referred to as *complement hash computation* or **symmetric-hash complement** and the regular (or unswapped) operation as *symmetric-hash computation* or **symmetric-hash**. The swappable fields are MAC address, IP address, and port.


Configuring Symmetric Load Balancing on an 802.3ad LAG on MX Series Routers

You can specify whether symmetric hash or complement hash is done for load-balancing traffic. To configure symmetric hash, use the **symmetric-hash** statement at the **[edit forwarding-options hash-key family inet]** hierarchy level. To configure symmetric hash complement, use the **symmetric-hash complement** statement and option at the **[edit forwarding-options hash-key family inet]** hierarchy level.

These operations can also be performed at the PIC level by specifying a *hash key*. To configure a hash key at the PIC level, use the **symmetric-hash** or **symmetric-hash complement** statement at the **[edit chassis hash-key family inet]** and **[edit chassis hash-key family multiservice]** hierarchy levels.

Consider the example in [Figure 6 on page 157](#).

Figure 6: Symmetric Load Balancing on an 802.3ad LAG on MX Series Routers

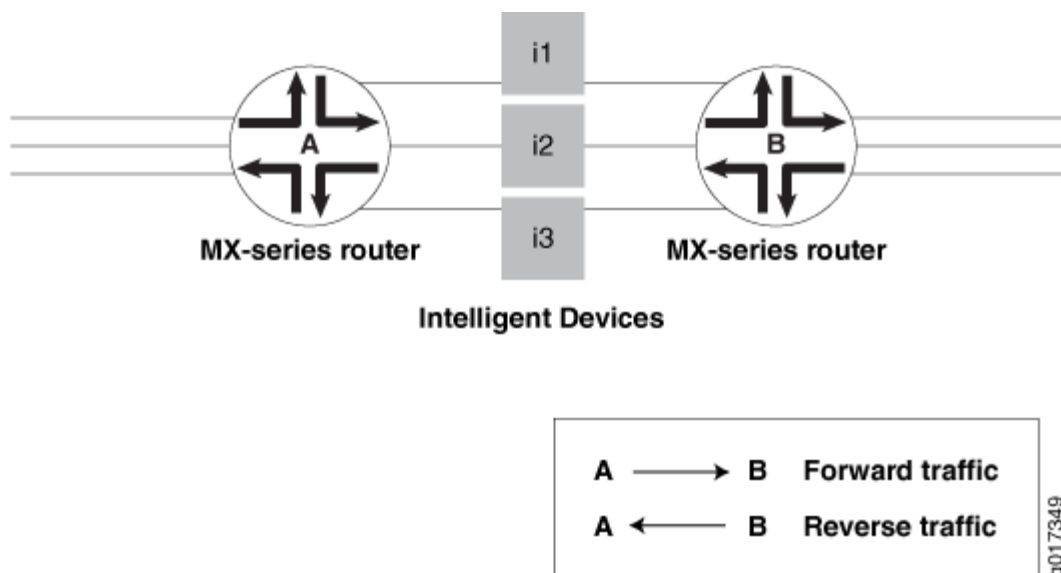

Router A is configured with symmetric hash and Router B is configured with symmetric hash complement. Thus, for a given flow fx , post hash computation is from Router A to Router B through i2. The reverse traffic for the same flow fx is from Router B to Router A through the same i2 device as its hashing (done after swapping source and destination fields) and returns the same link index; since it is performed on the interchanged source and destination addresses.

However, the link chosen may or may not correspond to what was attached to the DPI. In other words, the hashing result should point to the same links that are connected, so that the traffic flows through the same DPI devices in both directions. To make sure this happens, you need to also configure the counterpart ports (ports that are connected to same DPI-iN) with the identical link index. This is done when configuring a child-link into the LAG bundle. This ensures that the link chosen for a given hash result is always the same on either router.

Note that any two links connected to each other should have the same link index and these link indices must be unique in a given bundle.

NOTE: The following restrictions apply when configuring symmetric load balancing on an 802.3ad LAG on MX Series routers:

- The Packet Forwarding Engine (PFE) can be configured to hash the traffic in either symmetric or complement mode. A single PFE complex cannot work simultaneously in both operational modes and such a configuration can yield undesirable results.
- The per-PFE setting overrides the chassis-wide setting only for the family configured. For the other families, the PFE complex still inherits the chassis-wide setting (when configured) or the default setting.
- This feature supports VPLS, INET, and bridged traffic only.
- This feature cannot work in tandem with the **per-flow-hash-seed load-balancing** option. It requires that all the PFE complexes configured in complementary fashion share the same seed. A change in the seed between two counterpart PFE complexes may yield undesired results.

For additional information, see the [Junos OS VPNs Library for Routing Devices](#) and the [Junos OS Administration Library for Routing Devices](#).

Example Configuration Statements

To configure 802.3ad LAG parameters at the bundle level:

```
[edit interfaces]
g(x)e-fpc/pic/port {
  gigether-options {
    802.3ad {
      bundle;
      link-index number;
    }
  }
}
```

where the **link-index *number*** ranges from 0 through 15.

You can check the link index configured above using the **show interfaces** command:

```
[edit forwarding-options hash-key]
family inet {
  layer-3;
  layer-4;
  symmetric-hash {
    [complement;]
```

```

    }
}
family multiservice {
    source-mac;
    destination-mac;
    payload {
        ip {
            layer-3 {
                source-ip-only | destination-ip-only;
            }
            layer-4;
        }
    }
    symmetric-hash {
        [complement;]
    }
}
}

```

For load-balancing Layer 2 traffic based on Layer 3 fields, you can configure 802.3ad LAG parameters at a per PIC level. These configuration options are available under the chassis hierarchy as follows:

```

[edit chassis]
fpc X {
    pic Y {
        .
        .
        .
        hash-key {
            family inet {
                layer-3;
                layer-4;
                symmetric-hash {
                    [complement;]
                }
            }
        }
        family multiservice {
            source-mac;
            destination-mac;
            payload {
                ip {
                    layer-3 {
                        source-ip-only | destination-ip-only;

```



```

        }
        layer-4;
    }
}
symmetric-hash {
    [complement;]
}
}
}
.
.
.
}
}

```

Configuring Symmetrical Load Balancing on Trio-Based MPCs

With some configuration differences, symmetrical load-balancing over an 802.3ad link aggregation group is supported on MX Series routers with Trio-based MPCs.

To achieve symmetrical load-balancing on Trio-Based MPCs, the following needs to be done:

- Compute a Symmetrical Hash

Both routers must compute the same hash value from the flow in the forward and reverse directions. On Trio-based platforms, the calculated hash value is independent of the direction of the flow, and hence is always symmetric in nature. For this reason, no specific configuration is needed to compute a symmetric hash value on Trio-based platforms.

However, it should be noted that the fields used to configure the hash should have identical include and exclude settings on both ends of the LAG.

- Configure Link Indexes

To allow both routers to choose the same link using the same hash value, the links within the LAG must be configured with the same link index on both routers. This can be achieved with the **link-index** statement.

- Enable Symmetric Load Balancing

To configure symmetric load balancing on Trio-based MPCs, include the **symmetric** statement at the **[edit forwarding-options enhanced-hash-key]** hierarchy level. This statement is applicable to Trio-based platforms only.

The **symmetric** statement can be used with any protocol family and enables symmetric load-balancing for all aggregated Ethernet bundles on the router. The statement needs to be enabled at both ends of the LAG. This statement is disabled by default.

- Achieve Symmetry for Bridged and Routed Traffic

In some deployments, the LAG bundle on which symmetry is desired is traversed by Layer 2 bridged traffic in the upstream direction and by IPv4 routed traffic in the downstream direction. In such cases, the computed hash is different in each direction because the Ethernet MAC addresses are taken into account for bridged packets. To overcome this, you can exclude source and destination MAC addresses from the enhanced-hash-key computation.


To exclude source and destination MAC addresses from the enhanced-hash-key computation, include the **no-mac-addresses** statement at the **[edit forwarding-options enhanced-hash-key family multiservice]** hierarchy level. This statement is disabled by default.

When symmetrical load balancing is enabled on Trio-based MPCs, keep in mind the following caveats:

- Traffic polarization is a phenomenon that occurs when using topologies that distribute traffic by using hashing of the same type. When routers are cascaded, traffic polarization can occur, and this can lead to unequal traffic distribution.

Traffic polarization occurs when LAGs are configured on cascaded routers. For example, in [Figure 7 on page 161](#), if a certain flow uses Link 1 of the aggregated Ethernet bundle between Device R1 and Device R2, the flow also uses Link 1 of the aggregated Ethernet bundle between Device R2 and Device R3.

Figure 7: Traffic Polarization on Cascaded Routers When Symmetrical Load Balancing is Enabled on Trio-based MPCs

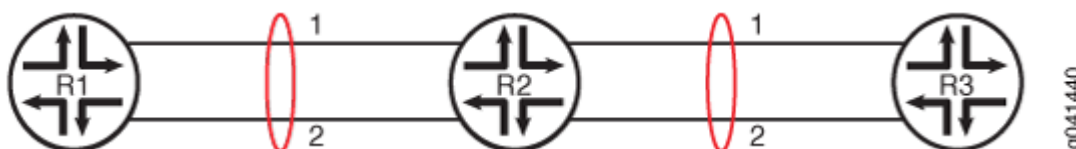

This is unlike having a random link selection algorithm, where a flow might use Link 1 of the aggregated Ethernet bundle between Device R1 and Device R2, and Link 2 of the aggregated Ethernet bundle between Device R2 and Device R3.

- Symmetric load balancing is not applicable to per-prefix load-balancing where the hash is computed based on the route prefix.
- Symmetric load balancing is not applicable to MPLS or VPLS traffic, because in these scenarios the labels are not the same in both directions.

Example Configurations

IN THIS SECTION

- [Example Configurations of Chassis Wide Settings | 162](#)
- [Example Configurations of Per-Packet-Forwarding-Engine Settings | 163](#)

Example Configurations of Chassis Wide Settings

Router A

```
user@host> show configuration forwarding-options hash-key
family multiservice {
    payload {
        ip {
            layer-3;
        }
    }
    symmetric hash;
}
```

Router B

```
user@host> show configuration forwarding-options hash-key
family multiservice {
    payload {
        ip {
            layer-3;
        }
    }
    symmetric-hash {
        complement;
    }
}
```

Example Configurations of Per-Packet-Forwarding-Engine Settings

Router A

```
user@host> show configuration chassis fpc 2 pic 2 hash-key
family multiservice {
    payload {
        ip {
            layer-3;
        }
    }
    symmetric hash;
}
```

Router B

```
user@host> show configuration chassis fpc 2 pic 3 hash-key
family multiservice {
    payload {
        ip {
            layer-3;
        }
    }
    symmetric-hash {
        complement;
    }
}
```

RELATED DOCUMENTATION

[Junos OS VPNs Library for Routing Devices](#)

[Junos OS Administration Library for Routing Devices](#)

Configuring PIC-Level Symmetrical Hashing for Load Balancing on 802.3ad LAGs for MX Series Routers

Symmetrical hashing for load balancing on an 802.3ad Link Aggregation Group (LAG) is useful when two MX Series routers (for example, Router A and Router B) are connected transparently through Deep Packet Inspection (DPI) devices over a LAG bundle. The DPI devices keep track of traffic flows in both the forward and reverse directions.

If symmetrical hashing is configured, the reverse flow of traffic is also directed through the same child link on the LAG and is bound to flow through the same DPI device. This enables proper accounting on the DPI of the traffic in both the forward and reverse flows.

If symmetrical hashing is not configured, a different child link on the LAG might be chosen for the reverse flow of traffic through a different DPI device. This results in incomplete information about the forward and reverse flows of traffic on the DPI device leading to incomplete accounting of the traffic by the DPI device.

Symmetrical hashing is computed based on fields like source address and destination address. You can configure symmetrical hashing both at the chassis level and the PIC level for load balancing based on Layer 2, Layer 3, and Layer 4 data unit fields for family inet (IPv4 protocol family) and multiservice (switch or bridge) traffic. Symmetrical hashing configured at the chassis level is applicable to the entire router, and is inherited by all its PICs and Packet Forwarding Engines. Configuring PIC-level symmetrical hashing provides you more granularity at the Packet Forwarding Engine level.

For the two routers connected through the DPI devices over a LAG bundle, you can configure **symmetric-hash** on one router and **symmetric-hash complement** on the remote-end router or vice-versa.

To configure symmetrical hashing at the chassis level, include the **symmetric-hash** or the **symmetric-hash complement** statements at the **[edit forwarding-options hash-key family]** hierarchy level. For information about configuring symmetrical hashing at the chassis level and configuring the link index, see the [Junos OS Network Interfaces Library for Routing Devices](#) and the [Junos OS VPNs Library for Routing Devices](#).

NOTE: On MX Series DPCs, configuring symmetrical hashing at the PIC level refers to configuring symmetrical hashing at the Packet Forwarding Engine level.

To configure symmetrical hashing at the PIC level on the inbound traffic interface (where traffic enters the router), include the **symmetric-hash** or **symmetric-hash complement** statement at the **[edit chassis fpc slot-number pic pic-number hash-key]** hierarchy level:

```
[edit chassis fpc slot-number pic pic-number hash-key]
family multiservice {
    source-mac;
    destination-mac;
    payload {
        ip {
            layer-3 (source-ip-only | destination-ip-only);
            layer-4;
        }
    }
}
```

```

    symmetric-hash {
        complement;
    }
}

```

```

family inet {
    layer-3;
    layer-4;
    symmetric-hash {
        complement;
    }
}

```

NOTE:

- PIC-level symmetrical hashing overrides the chassis-level symmetrical hashing configured at the **[edit chassis forwarding-options hash-key]** hierarchy level.
- Symmetrical hashing for load balancing on 802.3ad Link Aggregation Groups is currently supported for the VPLS, INET and bridged traffic only.
- Hash key configuration on a PIC or Packet Forwarding Engine can be either in the “symmetric hash” or the “symmetric hash complement” mode, but not both at the same time.

SEE ALSO

family

hash-key

inet

multiservice

payload

symmetric-hash

Examples: Configuring PIC-Level Symmetrical Hashing for Load Balancing on 802.3ad LAGs on MX Series Routers

IN THIS SECTION

- [Configuring Symmetrical Hashing for family multiservice on Both Routers | 166](#)
- [Configuring Symmetrical Hashing for family inet on Both Routers | 167](#)
- [Configuring Symmetrical Hashing for family inet and family multiservice on the Two Routers | 168](#)

NOTE: These examples are applicable only to the DPCs Supported on MX240, MX480, and MX960 Routers. For the list of DPCs supported, see *DPCs Supported on MX240, MX480, and MX960 Routers* in the Related Documentation section.

The following examples show how to configure symmetrical hashing at the PIC level for load balancing on MX Series routers:

Configuring Symmetrical Hashing for family multiservice on Both Routers

On the inbound traffic interface where traffic enters Router A, include the **symmetric-hash** statement at the **[edit chassis fpc slot-number pic pic-number hash-key family multiservice]** hierarchy level:

```
[edit chassis fpc 2 pic 2 hash-key]
family multiservice {
  source-mac;
  destination-mac;
  payload {
    ip {
      layer-3;
      layer-4;
    }
  }
  symmetric-hash;
}
```

On the inbound traffic interface where traffic enters Router B, include the **symmetric-hash complement** statement at the **[edit chassis fpc *slot-number* pic *pic-number* hash-key family multiservice]** hierarchy level:

```
[edit chassis fpc 0 pic 3 hash-key]
family multiservice {
    source-mac;
    destination-mac;
    payload {
        ip {
            layer-3;
            layer-4;
        }
    }
    symmetric-hash {
        complement;
    }
}
```

Configuring Symmetrical Hashing for family inet on Both Routers

On the inbound traffic interface where traffic enters Router A, include the **symmetric-hash** statement at the **[edit chassis fpc *slot-number* pic *pic-number* hash-key family inet]** hierarchy level:

```
[edit chassis fpc 0 pic 1 hash-key]
family inet {
    layer-3;
    layer-4;
    symmetric-hash;
}
```

On the inbound traffic interface where traffic enters Router B, include the **symmetric-hash complement** statement at the **[edit chassis fpc *slot-number* pic *pic-number* hash-key family inet]** hierarchy level:

```
[edit chassis fpc 1 pic 2 hash-key]
family inet {
    layer-3;
    layer-4;
    symmetric-hash {
        complement;
    }
}
```



```
    }
}
```

Configuring Symmetrical Hashing for family inet and family multiservice on the Two Routers

On the inbound traffic interface where traffic enters Router A, include the **symmetric-hash** statement at the **[edit chassis fpc *slot-number* pic *pic-number* hash-key family multiservice]** hierarchy level:

```
[edit chassis fpc 1 pic 0 hash-key]
family multiservice {
    payload {
        ip {
            layer-3;
            layer-4;
        }
    }
    symmetric-hash;
}
```

On the inbound traffic interface where traffic enters Router B, include the **symmetric-hash complement** statement at the **[edit chassis fpc *slot-number* pic *pic-number* hash-key family inet]** hierarchy level:

```
[edit chassis fpc 0 pic 3 hash-key]
family inet {
    layer-3;
    layer-4;
    symmetric-hash {
        complement;
    }
}
```

SEE ALSO

| [DPCs Supported on MX240, MX480, and MX960 Routers](#)

Example: Configuring Aggregated Ethernet Load Balancing

IN THIS SECTION

- [Example: Configuring Aggregated Ethernet Load Balancing | 169](#)

Example: Configuring Aggregated Ethernet Load Balancing

IN THIS SECTION

- [Requirements | 169](#)
- [Overview | 169](#)
- [Configuration | 172](#)
- [Verification | 186](#)

This example shows how to configure aggregated Ethernet load balancing.

Requirements

This example uses the following hardware and software components:

- Three MX Series routers with MIC and MPC interfaces or three PTX Series Packet Transport Routers with PIC and FPC interfaces
- Junos OS Release 13.3 or later running on all devices

Overview

IN THIS SECTION

- [Topology | 172](#)

Load balancing is required on the forwarding plane when there are multiple paths or interfaces available to the next hop router, and it is best if the incoming traffic is load balanced across all available paths for better link utilization.

Aggregated Ethernet bundle is a typical application that uses load balancing to balance traffic flows across the member links of the bundle (IEEE 802.3ad).

Starting with Junos OS Release 13.3, aggregated Ethernet load balancing is enhanced to provide two solutions for resolving genuine traffic imbalance on aggregated Ethernet bundles on MICs or MPCs of MX Series routers. Starting with Junos OS Release 14.1, aggregated Ethernet load balancing is enhanced to provide two solutions for resolving genuine traffic imbalance on aggregated Ethernet bundles on PICs or FPCs of PTX Series Packet Transport Routers.

The aggregated Ethernet load-balancing solutions are:

- **Adaptive**—Adaptive load balancing is used in scenarios where flow-based hashing is not sufficient to achieve a uniform load distribution. This load-balancing solution implements a real-time feedback and control mechanism to monitor and manage imbalances in network load.

The adaptive load-balancing solution corrects the traffic flow imbalance by modifying the selector entries, and periodically scanning the link utilization on each member link of the AE bundle to detect any deviations. When a deviation is detected, an adjustment event is triggered and fewer flows are mapped to the affected member link. As a result, the offered bandwidth of that member link goes down. This causes a continuous feedback loop, which over a period of time ensures that the same amount of byte rate is offered to all the member links, thus providing efficient traffic distribution across each member link in the AE bundle.

To configure adaptive load balancing, include the **adaptive** statement at the **[edit interfaces aeX aggregated-ether-options load-balance]** hierarchy level.

NOTE: Adaptive load balancing is not supported if the VLAN ID is configured on the aggregated Ethernet interface. This limitation affects the PTX Series Packet Transport Routers only.

The **pps** option enables load balancing based on the packets-per-second rate. The default setting is bits-per-second load balancing.

The **scan-interval** value configures the length of time for scanning as a multiple of 30 seconds.

The **tolerance** value is the limit to the variance in the packet traffic flow to the aggregated Ethernet links in the bundle. You can specify a maximum of 100-percent variance. When the tolerance attribute is not configured, a default value of 20 percent is enabled for adaptive load balancing. A smaller tolerance value balances better bandwidth, but takes a longer convergence time.

NOTE: The **pps** and **scan-interval** optional keywords are supported on PTX Series Packet Transport Routers only.

- Per-packet random spray—When the adaptive load-balancing solution fails, per-packet random spray acts as a last resort. The per-packet random spray load-balancing solution helps to address traffic imbalance by randomly spraying the packets to the aggregate next hops. This ensures that all the member links of the AE bundle are equally loaded, resulting in packet reordering.

In addition, per-packet random spray identifies the ingress Packet Forwarding Engine that caused the traffic imbalance and eliminates traffic imbalance that occurs as a result of software errors, except for packet hash.

To configure per-packet random spray load balancing, include the **per-packet** statement at the **[edit interfaces ae x aggregated-ether-options load-balance]** hierarchy level.


NOTE: The Per-Packet option for load balancing is not supported on the PTX Series Packet Transport Routers.

The aggregated Ethernet load-balancing solutions are mutually exclusive. When more than one of the load-balancing solutions is configured, the solution that is configured last overrides the previously configured one. You can verify the load-balancing solution being implemented by issuing the **show interfaces ae x aggregated-ether-options load-balance** command.

Topology

In this topology, two aggregated Ethernet bundles - ae0 and ae1 - are configured on the links between the R2 and R3 routers.

Figure 8: Aggregated Ethernet Load Balancing

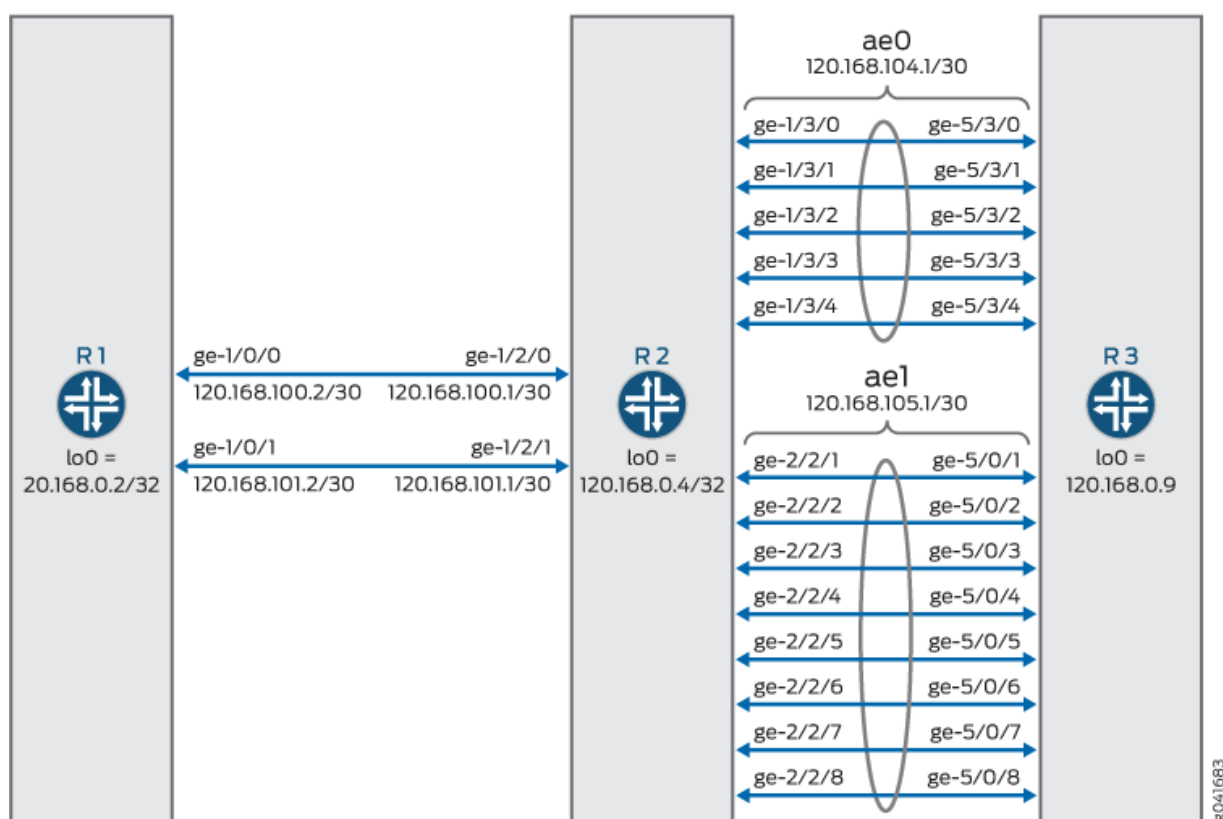

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 173](#)
- [Configuring Adaptive Load Balancing | 178](#)
- [Results | 182](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

R1

```
set chassis aggregated-devices ethernet device-count 12
set interfaces xe-0/0/0 unit 0 family inet address 120.168.1.1/30
set interfaces xe-0/0/0 unit 0 family iso
set interfaces xe-0/0/0 unit 0 family mpls
set interfaces xe-0/0/1 unit 0 family inet address 120.168.2.1/30
set interfaces xe-0/0/1 unit 0 family iso
set interfaces xe-0/0/1 unit 0 family mpls
set interfaces ge-1/0/0 unit 0 family inet address 120.168.100.2/30
set interfaces ge-1/0/0 unit 0 family iso
set interfaces ge-1/0/0 unit 0 family mpls
set interfaces ge-1/0/1 unit 0 family inet address 120.168.101.2/30
set interfaces ge-1/0/1 unit 0 family iso
set interfaces ge-1/0/1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 120.168.0.2/32
set interfaces lo0 unit 0 family iso address 49.0001.1201.6800.0002.00
set routing-options router-id 120.168.0.2
set routing-options autonomous-system 55
set protocols rsvp interface ge-1/0/0.0
set protocols rsvp interface ge-1/0/1.0
set protocols mpls label-switched-path videl-to-sweets to 120.168.0.9
set protocols mpls label-switched-path v-2-s-601 to 60.0.1.0
set protocols mpls label-switched-path v-2-s-601 primary v-2-s-601-primary hop-limit 5
set protocols mpls label-switched-path v-2-s-602 to 60.0.2.0
set protocols mpls label-switched-path v-2-s-602 primary v-2-s-602-primary hop-limit 5
set protocols mpls label-switched-path v-2-s-603 to 60.0.3.0
set protocols mpls label-switched-path v-2-s-604 to 60.0.4.0
set protocols mpls path v-2-s-601-primary 120.168.100.1 strict
set protocols mpls path v-2-s-601-primary 120.168.104.2 strict
set protocols mpls path v-2-s-602-primary 120.168.101.1 strict
set protocols mpls path v-2-s-602-primary 120.168.105.2 strict
set protocols mpls interface ge-1/0/0.0
set protocols mpls interface ge-1/0/1.0
set protocols mpls interface xe-0/0/1.0
```

```
set protocols mpls interface xe-0/0/0.0
set protocols bgp group pe-routers type internal
set protocols bgp group pe-routers local-address 120.168.0.2
set protocols bgp group pe-routers family inet unicast
set protocols bgp group pe-routers family inet-vpn unicast
set protocols bgp group pe-routers neighbor 120.168.0.9
set protocols isis traffic-engineering family inet shortcuts
set protocols isis level 1 disable
set protocols isis interface ge-1/0/0.0
set protocols isis interface ge-1/0/1.0
set protocols isis interface lo0.0
set policy-options policy-statement nhs then next-hop self
set policy-options policy-statement vpn-m5-export term 1 from protocol bgp
set policy-options policy-statement vpn-m5-export term 1 from protocol direct
set policy-options policy-statement vpn-m5-export term 1 then community add vpn-m5-target
set policy-options policy-statement vpn-m5-export term 1 then accept
set policy-options policy-statement vpn-m5-export term 2 then reject
set policy-options policy-statement vpn-m5-import term 1 from protocol bgp
set policy-options policy-statement vpn-m5-import term 1 from community vpn-m5-target
set policy-options policy-statement vpn-m5-import term 1 then accept
set policy-options policy-statement vpn-m5-import term 2 then reject
set policy-options community vpn-m5-target members target:55:100
set routing-instances vpn-m5 instance-type vrf
set routing-instances vpn-m5 interface xe-0/0/0.0
set routing-instances vpn-m5 interface xe-0/0/1.0
set routing-instances vpn-m5 route-distinguisher 120.168.0.2:1
set routing-instances vpn-m5 vrf-import vpn-m5-import
set routing-instances vpn-m5 vrf-export vpn-m5-export
set routing-instances vpn-m5 protocols bgp group ce type external
set routing-instances vpn-m5 protocols bgp group ce peer-as 100
set routing-instances vpn-m5 protocols bgp group ce as-override
set routing-instances vpn-m5 protocols bgp group ce neighbor 120.168.1.2
set routing-instances vpn-m5 protocols bgp group ce neighbor 120.168.2.2
set routing-instances vpn-m5 protocols ospf domain-id 1.0.0.0
set routing-instances vpn-m5 protocols ospf export vpn-m5-import
set routing-instances vpn-m5 protocols ospf area 0.0.0.0 interface xe-0/0/1.0
set routing-instances vpn-m5 protocols ospf area 0.0.0.0 interface xe-0/0/0.0
```

R2

```
set chassis aggregated-devices ethernet device-count 5
set interfaces ge-1/2/0 unit 0 family inet address 120.168.100.1/30
set interfaces ge-1/2/0 unit 0 family iso
set interfaces ge-1/2/0 unit 0 family mpls
set interfaces ge-1/2/1 unit 0 family inet address 120.168.101.1/30
set interfaces ge-1/2/1 unit 0 family iso
set interfaces ge-1/2/1 unit 0 family mpls
set interfaces ge-1/3/0 gigether-options 802.3ad ae0
set interfaces ge-1/3/1 gigether-options 802.3ad ae0
set interfaces ge-1/3/2 gigether-options 802.3ad ae0
set interfaces ge-1/3/3 gigether-options 802.3ad ae0
set interfaces ge-1/3/4 gigether-options 802.3ad ae0
set interfaces ge-2/2/1 gigether-options 802.3ad ae1
set interfaces ge-2/2/2 gigether-options 802.3ad ae1
set interfaces ge-2/2/3 gigether-options 802.3ad ae1
set interfaces ge-2/2/4 gigether-options 802.3ad ae1
set interfaces ge-2/2/5 gigether-options 802.3ad ae1
set interfaces ge-2/2/6 gigether-options 802.3ad ae1
set interfaces ge-2/2/7 gigether-options 802.3ad ae1
set interfaces ge-2/2/8 gigether-options 802.3ad ae1
set interfaces ae0 aggregated-ether-options load-balance adaptive tolerance 10
set interfaces ae0 aggregated-ether-options link-speed 1g
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 unit 0 family inet address 120.168.104.1/30
set interfaces ae0 unit 0 family iso
set interfaces ae0 unit 0 family mpls
set interfaces ae1 aggregated-ether-options load-balance adaptive tolerance 10
set interfaces ae1 aggregated-ether-options link-speed 1g
set interfaces ae1 aggregated-ether-options lacp active
set interfaces ae1 unit 0 family inet address 120.168.105.1/30
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 120.168.0.4/32
set interfaces lo0 unit 0 family iso address 49.0001.1201.6800.0004.00
set accounting-options selective-aggregate-interface-stats disable
set protocols rsvp interface ge-1/2/0.0
set protocols rsvp interface ge-1/2/1.0
set protocols rsvp interface ae0.0
```



```

set protocols rsvp interface ae1.0
set protocols mpls interface ge-1/2/0.0
set protocols mpls interface ge-1/2/1.0
set protocols mpls interface ae0.0
set protocols mpls interface ae1.0
set protocols isis traffic-engineering family inet shortcuts
set protocols isis level 1 disable
set protocols isis interface ge-1/2/0.0
set protocols isis interface ge-1/2/1.0
set protocols isis interface ae0.0
set protocols isis interface ae1.0
set protocols isis interface lo0.0

```

R3

```

set chassis aggregated-devices ethernet device-count 5
set interfaces xe-4/0/0 unit 0 family inet address 120.168.9.1/30
set interfaces xe-4/0/0 unit 0 family mpls
set interfaces xe-4/0/1 unit 0 family inet address 120.168.10.1/30
set interfaces xe-4/0/1 unit 0 family mpls
set interfaces ge-5/0/1 gigether-options 802.3ad ae1
set interfaces ge-5/0/2 gigether-options 802.3ad ae1
set interfaces ge-5/0/3 gigether-options 802.3ad ae1
set interfaces ge-5/0/4 gigether-options 802.3ad ae1
set interfaces ge-5/0/5 gigether-options 802.3ad ae1
set interfaces ge-5/0/6 gigether-options 802.3ad ae1
set interfaces ge-5/0/7 gigether-options 802.3ad ae1
set interfaces ge-5/0/8 gigether-options 802.3ad ae1
set interfaces ge-5/3/0 gigether-options 802.3ad ae0
set interfaces ge-5/3/1 gigether-options 802.3ad ae0
set interfaces ge-5/3/2 gigether-options 802.3ad ae0
set interfaces ge-5/3/3 gigether-options 802.3ad ae0
set interfaces ge-5/3/4 gigether-options 802.3ad ae0
set interfaces ae0 aggregated-ether-options link-speed 1g
set interfaces ae0 aggregated-ether-options lacp active
set interfaces ae0 unit 0 family inet address 120.168.104.2/30
set interfaces ae0 unit 0 family iso
set interfaces ae0 unit 0 family mpls
set interfaces ae1 aggregated-ether-options link-speed 1g
set interfaces ae1 aggregated-ether-options lacp active

```

```
set interfaces ae1 unit 0 family inet address 120.168.105.2/30
set interfaces ae1 unit 0 family iso
set interfaces ae1 unit 0 family mpls
set interfaces lo0 unit 0 family inet address 120.168.0.9/32
set interfaces lo0 unit 0 family iso address 49.0001.1201.6800.0009.00
set routing-options router-id 120.168.0.9
set routing-options autonomous-system 55
set protocols rsvp interface xe-4/0/0.0
set protocols rsvp interface xe-4/0/1.0
set protocols rsvp interface ae0.0
set protocols rsvp interface ae1.0
set protocols mpls label-switched-path to-videl to 120.168.0.2
set protocols mpls interface xe-4/0/0.0
set protocols mpls interface xe-4/0/1.0
set protocols mpls interface ae0.0
set protocols mpls interface ae1.0
set protocols bgp group pe-routers type internal
set protocols bgp group pe-routers local-address 120.168.0.9
set protocols bgp group pe-routers family inet unicast
set protocols bgp group pe-routers family inet-vpn unicast
set protocols bgp group pe-routers neighbor 120.168.0.2
set protocols isis traffic-engineering family inet shortcuts
set protocols isis level 1 disable
set protocols isis interface ae0.0
set protocols isis interface ae1.0
set protocols isis interface lo0.0
set policy-options policy-statement nhs then next-hop self
set policy-options policy-statement vpn-m5-export term 1 from protocol bgp
set policy-options policy-statement vpn-m5-export term 1 from protocol direct
set policy-options policy-statement vpn-m5-export term 1 then community add vpn-m5-target
set policy-options policy-statement vpn-m5-export term 1 then accept
set policy-options policy-statement vpn-m5-export term 2 then reject
set policy-options policy-statement vpn-m5-import term 1 from protocol bgp
set policy-options policy-statement vpn-m5-import term 1 from protocol direct
set policy-options policy-statement vpn-m5-import term 1 from community vpn-m5-target
set policy-options policy-statement vpn-m5-import term 1 then accept
set policy-options policy-statement vpn-m5-import term 2 then reject
set policy-options community vpn-m5-target members target:55:100
set routing-instances vpn-m5 instance-type vrf
set routing-instances vpn-m5 interface xe-4/0/0.0
```

```

set routing-instances vpn-m5 interface xe-4/0/1.0
set routing-instances vpn-m5 route-distinguisher 120.168.0.9:1
set routing-instances vpn-m5 vrf-import vpn-m5-import
set routing-instances vpn-m5 vrf-export vpn-m5-export
set routing-instances vpn-m5 protocols bgp group ce type external
set routing-instances vpn-m5 protocols bgp group ce peer-as 100
set routing-instances vpn-m5 protocols bgp group ce as-override
set routing-instances vpn-m5 protocols bgp group ce neighbor 120.168.9.2
set routing-instances vpn-m5 protocols bgp group ce neighbor 120.168.10.2
set routing-instances vpn-m5 protocols ospf domain-id 1.0.0.0
set routing-instances vpn-m5 protocols ospf export vpn-m5-import
set routing-instances vpn-m5 protocols ospf area 0.0.0.0 interface xe-4/0/0.0
set routing-instances vpn-m5 protocols ospf area 0.0.0.0 interface xe-4/0/1.0

```

Configuring Adaptive Load Balancing

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For information about navigating the CLI, see *Using the CLI Editor in Configuration Mode*.

To configure the R2 router:

NOTE: Repeat this procedure for the other routers, after modifying the appropriate interface names, addresses, and any other parameters for each router.

1. Specify the number of aggregated Ethernet interfaces to be created.

```

[edit chassis]
user@R2# set aggregated-devices ethernet device-count 5

```

2. Configure the Gigabit Ethernet interface link connecting R2 to R1.

```

[edit interfaces]
user@R2# set ge-1/2/0 unit 0 family inet address 120.168.100.1/30
user@R2# set ge-1/2/0 unit 0 family iso
user@R2# set ge-1/2/0 unit 0 family mpls
user@R2# set ge-1/2/1 unit 0 family inet address 120.168.101.1/30

```

```

user@R2# set ge-1/2/1 unit 0 family iso
user@R2# set ge-1/2/1 unit 0 family mpls
user@R2# set lo0 unit 0 family inet address 120.168.0.4/32
user@R2# set lo0 unit 0 family iso address 49.0001.1201.6800.0004.00

```

3. Configure the five member links of the ae0 aggregated Ethernet bundle.

```

[edit interfaces]
user@R2# set ge-1/3/0 gigether-options 802.3ad ae0
user@R2# set ge-1/3/1 gigether-options 802.3ad ae0
user@R2# set ge-1/3/2 gigether-options 802.3ad ae0
user@R2# set ge-1/3/3 gigether-options 802.3ad ae0
user@R2# set ge-1/3/4 gigether-options 802.3ad ae0

```

4. Configure the eight member links of the ae1 aggregated Ethernet bundle.

```

[edit interfaces]
user@R2# set ge-2/2/1 gigether-options 802.3ad ae1
user@R2# set ge-2/2/2 gigether-options 802.3ad ae1
user@R2# set ge-2/2/3 gigether-options 802.3ad ae1
user@R2# set ge-2/2/4 gigether-options 802.3ad ae1
user@R2# set ge-2/2/5 gigether-options 802.3ad ae1
user@R2# set ge-2/2/6 gigether-options 802.3ad ae1
user@R2# set ge-2/2/7 gigether-options 802.3ad ae1
user@R2# set ge-2/2/8 gigether-options 802.3ad ae1

```

5. Enable aggregate Ethernet load balancing on ae0 of R2.

```

[edit interfaces]
user@R2# set ae0 aggregated-ether-options load-balance adaptive tolerance 10

```

6. Configure the link speed for the ae0 aggregated Ethernet bundle.

```

[edit interfaces]
user@R2# set ae0 aggregated-ether-options link-speed 1g

```

7. Configure LACP on the ae0 aggregated Ethernet bundle.

```
[edit interfaces]
user@R2# set ae0 aggregated-ether-options lacp active
```

8. Configure the interface parameters for the ae0 aggregated Ethernet bundle.

```
[edit interfaces]
user@R2# set ae0 unit 0 family inet address 120.168.104.1/30
user@R2# set ae0 unit 0 family iso
user@R2# set ae0 unit 0 family mpls
```

9. Enable aggregate Ethernet load balancing on ae1 of R2.

```
[edit interfaces]
user@R2# set ae1 aggregated-ether-options load-balance adaptive tolerance 10
```

10. Configure the link speed for the ae1 aggregated Ethernet bundle.

```
[edit interfaces]
user@R2# set ae1 aggregated-ether-options link-speed 1g
```

11. Configure LACP on the ae1 aggregated Ethernet bundle.

```
[edit interfaces]
user@R2# set ae1 aggregated-ether-options lacp active
```

12. Configure the interface parameters for the ae1 aggregated Ethernet bundle.

```
[edit interfaces]
user@R2# set ae1 unit 0 family inet address 120.168.105.1/30
user@R2# set ae1 unit 0 family iso
user@R2# set ae1 unit 0 family mpls
```

13. Disable selective aggregate Ethernet statistics.

```
[edit accounting-options]
user@R2# set selective-aggregate-interface-stats disable
```

14. Configure RSVP on all the interfaces of R2 and on the AE bundles.

```
[edit protocols]
user@R2# set rsvp interface ge-1/2/0.0
user@R2# set rsvp interface ge-1/2/1.0
user@R2# set rsvp interface ae0.0
user@R2# set rsvp interface ae1.0
```

15. Configure MPLS on all the interfaces of R2 and on the AE bundles.

```
[edit protocols]
user@R2# set mpls interface ge-1/2/0.0
user@R2# set mpls interface ge-1/2/1.0
user@R2# set mpls interface ae0.0
user@R2# set mpls interface ae1.0
```

16. Configure IS-IS on all the interfaces of R2 and on the AE bundles.

```
[edit protocols]
user@R2# set isis traffic-engineering family inet shortcuts
user@R2# set isis level 1 disable
user@R2# set isis interface ge-1/2/0.0
user@R2# set isis interface ge-1/2/1.0
user@R2# set isis interface ae0.0
user@R2# set isis interface ae1.0
user@R2# set isis interface lo0.0
```

Results

From configuration mode, confirm your configuration by entering the **show chassis**, **show interfaces**, **show accounting-options**, and **show protocols** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
user@R2# show chassis
aggregated-devices {
    ethernet {
        device-count 5;
    }
}
```

```
user@R2# show interfaces
ge-1/2/0 {
    unit 0 {
        family inet {
            address 120.168.100.1/30;
        }
        family iso;
        family mpls;
    }
}
ge-1/2/1 {
    unit 0 {
        family inet {
            address 120.168.101.1/30;
        }
        family iso;
        family mpls;
    }
}
ge-1/3/0 {
    gigether-options {
        802.3ad ae0;
    }
}
ge-1/3/1 {
    gigether-options {
        802.3ad ae0;
    }
}
```

```
}
ge-1/3/2 {
    gigether-options {
        802.3ad ae0;
    }
}
ge-1/3/3 {
    gigether-options {
        802.3ad ae0;
    }
}
ge-1/3/4 {
    gigether-options {
        802.3ad ae0;
    }
}
ge-2/2/1 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-2/2/2 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-2/2/3 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-2/2/4 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-2/2/5 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-2/2/6 {
    gigether-options {
```



```

        802.3ad ae1;
    }
}
ge-2/2/7 {
    gigether-options {
        802.3ad ae1;
    }
}
ge-2/2/8 {
    gigether-options {
        802.3ad ae1;
    }
}
ae0 {
    aggregated-ether-options {
        load-balance {
            adaptive tolerance 10;
        }
        link-speed 1g;
        lacp {
            active;
        }
    }
    unit 0 {
        family inet {
            address 120.168.104.1/30;
        }
        family iso;
        family mpls;
    }
}
ae1 {
    aggregated-ether-options {
        load-balance {
            adaptive tolerance 10;
        }
        link-speed 1g;
        lacp {
            active;
        }
    }
    unit 0 {
        family inet {

```

```

        address 120.168.105.1/30;
    }
    family iso;
    family mpls;
}
}
lo0 {
    unit 0 {
        family inet {
            address 120.168.0.4/32;
        }
        family iso {
            address 49.0001.1201.6800.0004.00;
        }
    }
}
}

```

```

user@R2# show accounting-options
selective-aggregate-interface-stats disable;

```

```

user@R2# show protocols
rsvp {
    interface ge-1/2/0.0;
    interface ge-1/2/1.0;
    interface ae0.0;
    interface ae1.0;
}
mpls {
    interface ge-1/2/0.0;
    interface ge-1/2/1.0;
    interface ae0.0;
    interface ae1.0;
}
isis {
    traffic-engineering {
        family inet {
            shortcuts;
        }
    }
    level 1 disable;
}

```

```

interface ge-1/2/0.0;
interface ge-1/2/1.0;
interface ae0.0;
interface ae1.0;
interface lo0.0;
}

```

Verification

IN THIS SECTION

- [Verifying Adaptive Load Balancing on ae0 | 186](#)

Confirm that the configuration is working properly.

Verifying Adaptive Load Balancing on ae0

Purpose

Verify that packets received on the ae0 aggregated Ethernet bundle are load-balanced among the five member links.

Action

From operational mode, run the **show interfaces ae0 extensive** command.

```

user@R2> show interfaces ae0 extensive
Logical interface ae0.0 (Index 325) (SNMP ifIndex 917) (Generation 134)
  Flags: SNMP-Traps 0x4004000 Encapsulation: ENET2
  Statistics          Packets          pps          Bytes          bps
Bundle:
  Input :             848761             9           81247024         7616
  Output: 166067308909    3503173 126900990064983 21423804256
Adaptive Statistics:
  Adaptive Adjusts:         264
  Adaptive Scans :        27682
  Adaptive Updates:         10
Link:
  ge-1/3/0.0

```

```

Input :      290888      5      29454436      3072
Output:  33183442699    704569 25358563587277  4306031760
ge-1/3/1.0
Input :      162703      1      14806325      992
Output:  33248375409    705446 25406995966732  4315342152
ge-1/3/2.0
Input :      127448      1      12130566      992
Output:  33184552729    697572 25354827700261  4267192376
ge-1/3/3.0
Input :      121044      1      11481262      1280
Output:  33245875402    697716 25405953405192  4265750584
ge-1/3/4.0
Input :      146678      1      13374435      1280
Output:  33205071207    697870 25374651121458  4269487384

```

Meaning

The member links of the ae0 aggregated Ethernet bundle are fully utilized with adaptive load balancing.

SEE ALSO

[Aggregated Ethernet Interfaces](#) | 0

Release History Table

Release	Description
14.1	Starting with Junos OS Release 14.1, aggregated Ethernet load balancing is enhanced to provide two solutions for resolving genuine traffic imbalance on aggregated Ethernet bundles on PICs or FPCs of PTX Series Packet Transport Routers.
13.3	Starting with Junos OS Release 13.3, aggregated Ethernet load balancing is enhanced to provide two solutions for resolving genuine traffic imbalance on aggregated Ethernet bundles on MICs or MPCs of MX Series routers.

Release History Table

Release	Description
14.1	Starting with Junos OS Release 14.1, aggregated Ethernet load balancing is enhanced to provide two solutions for resolving genuine traffic imbalance on aggregated Ethernet bundles on PICs or FPCs of PTX Series Packet Transport Routers.

13.3	Starting with Junos OS Release 13.3, aggregated Ethernet load balancing is enhanced to provide two solutions for resolving genuine traffic imbalance on aggregated Ethernet bundles on MICs or MPCs of MX Series routers.
13.2R1	Starting with Junos OS Release 13.2R1, the capability to perform uniform load balancing and also perform rebalancing is introduced on MX Series routers with MPCs, except MPC3Es and MPC4Es.
10.1	Starting with Junos OS Release 10.1, you can also configure the load balancing hash key for Layer 2 traffic to use fields in the Layer 3 and Layer 4 headers using the payload statement.

RELATED DOCUMENTATION

Aggregated Ethernet Interfaces

Link Protection of Aggregated Ethernet Interfaces

Understanding Ethernet Link Aggregation on ACX Series Routers

Configuring Adaptive Load Balancing

This topic describes how to configure adaptive load balancing. Adaptive load balancing maintains efficient utilization of member link bandwidth for an aggregated Ethernet (AE) bundle. Adaptive load balancing uses a feedback mechanism to correct traffic load imbalance by adjusting the bandwidth and packet streams on links within an AE bundle.

Before you begin:

- Configure a set of interfaces with a protocol family and IP address. These interfaces can make up the membership for the AE bundle.
- Create an AE bundle by configuring a set of router interfaces as aggregated Ethernet and with a specific AE group identifier.

To configure adaptive load balancing for an AE bundles:

1. Enable adaptive load balancing on the AE bundle:

```
[edit interfaces ae-x aggregated-ether-options load-balance]
user@router# set adaptive
```

2. Configure the scan interval value for adaptive load balancing on the AE bundle. The scan interval value determines the length of the traffic scan by multiplying the integer value with a 30-second time period:

```
[edit interfaces ae-x aggregated-ether-options load-balance adaptive]
user@router# set scan-interval multiplier
```

3. Configure the tolerance percentage value. The tolerance value determines the allowed deviation in the traffic rates among the members of the AE bundle before the router triggers an adaptive load balancing update:

```
[edit interfaces ae-x aggregated-ether-options load-balance adaptive]
user@router# set tolerance percentage
```

4. (Optional) Enable packet-per-second-based adaptive load balancing on the AE bundle:

```
[edit interfaces ae-x aggregated-ether-options load-balance adaptive]
user@router# set pps
```

RELATED DOCUMENTATION

| [adaptive](#) | [658](#)



Configuring Graceful Routing Engine Switchover (GRES)

Understanding How GRES Enables Uninterrupted Packet Forwarding During a Routing Engine Switchover | 191

GRES System Requirements | 201

Configuring GRES | 207

Configuring Ethernet Automatic Protection Switching for High Availability | 219

Understanding How GRES Enables Uninterrupted Packet Forwarding During a Routing Engine Switchover

IN THIS CHAPTER

- [Understanding Graceful Routing Engine Switchover | 191](#)

Understanding Graceful Routing Engine Switchover

IN THIS SECTION

- [Graceful Routing Engine Switchover Concepts | 191](#)
- [Effects of a Routing Engine Switchover | 197](#)
- [Graceful Routing Engine Switchover on Aggregated Services interfaces | 199](#)

This topic contains the following sections:

Graceful Routing Engine Switchover Concepts

The graceful Routing Engine switchover (GRES) feature in Junos OS and Junos OS Evolved enables a router with redundant Routing Engines to continue forwarding packets, even if one Routing Engine fails. GRES preserves interface and kernel information. Traffic is not interrupted. However, GRES does not preserve the control plane.

NOTE: On PTX10008 platforms running Junos OS Evolved, GRES is enabled by default and cannot be disabled.

NOTE: On T Series routers, TX Matrix routers, and TX Matrix Plus routers, the control plane is preserved in case of GRES with nonstop active routing (NSR), and nearly 75 percent of line rate worth of traffic per Packet Forwarding Engine remains uninterrupted during GRES.

Neighboring routers detect that the router has experienced a restart and react to the event in a manner prescribed by individual routing protocol specifications.

To preserve routing during a switchover, GRES must be combined with either:

- Graceful restart protocol extensions
- *Nonstop active routing* (NSR)

Any updates to the primary Routing Engine are replicated to the backup Routing Engine as soon as they occur.

NOTE: Because of its synchronization requirements and logic, NSR/GRES performance is limited by the slowest Routing Engine in the system.

Primary Role switches to the backup Routing Engine if:

- The primary Routing Engine kernel stops operating.
- The primary Routing Engine experiences a hardware failure.
- The administrator initiates a manual switchover.

NOTE: To quickly restore or to preserve routing protocol state information during a switchover, GRES must be combined with either graceful restart or nonstop active routing, respectively. For more information about graceful restart, see ["Graceful Restart Concepts" on page 308](#). For more information about nonstop active routing, see ["Nonstop Active Routing Concepts" on page 269](#).

If the backup Routing Engine does not receive a keepalive from the primary Routing Engine after 2 seconds (4 seconds on M20 routers), it determines that the primary Routing Engine has failed; and assumes primary role.

The Packet Forwarding Engine:

- Seamlessly disconnects from the old primary Routing Engine
- Reconnects to the new primary Routing Engine
- Does not reboot
- Does not interrupt traffic

The new primary Routing Engine and the Packet Forwarding Engine then become synchronized. If the new primary Routing Engine detects that the Packet Forwarding Engine state is not up to date, it resends state update messages.

NOTE: Starting with Junos OS Release 12.2, if adjacencies between the restarting router and the neighboring peer 'helper' routers time out, graceful restart protocol extensions are unable to notify the peer 'helper' routers about the impending restart. Graceful restart can then stop and cause interruptions in traffic.

To ensure that these adjacencies are maintained, change the *hold-time* for IS-IS protocols from the default of 27 seconds to a value higher than 40 seconds.

NOTE: Successive Routing Engine switchover events must be a minimum of 240 seconds (4 minutes) apart after both Routing Engines have come up.

If the router or switch displays a warning message similar to **Standby Routing Engine is not ready for graceful switchover. Packet Forwarding Engines that are not ready for graceful switchover might be reset**, do not attempt switchover. If you choose to proceed with switchover, only the Packet Forwarding Engines that were not ready for graceful switchover are reset. None of the FPCs should spontaneously restart. We recommend that you wait until the warning no longer appears and then proceed with the switchover.

NOTE: Starting from Junos OS Release 14.2, when you perform GRES on MX Series routers, you must execute the **clear synchronous-ethernet wait-to-restore** operational mode command on the new primary Routing Engine to clear the wait-to-restore timer on it. This is because the **clear synchronous-ethernet wait-to-restore** operational mode command clears the wait-to-restore timer only on the local Routing Engine.

NOTE: In a routing matrix with TX Matrix Plus router with 3D SIBs, for successive Routing Engine switchover, events must be a minimum of 900 seconds (15 minutes) apart after both Routing Engines have come up.

GRES must be performed on one line-card chassis (LCC) (of a TX Matrix router with 3D SIBs) at a time to avoid synchronization issues.


NOTE:

- We do *not* recommend performing a commit operation on the backup Routing Engine when GRES is enabled on the router or switch.
- We do *not* recommend enabling GRES on the backup Routing Engine in *any* scenario.

NOTE: On QFX10000 switches, we strongly recommend that you configure the `nsr-phantom-holdtime seconds` statement at the **[edit routing-options]** hierarchy level when nonstop routing is enabled with GRES. Doing so helps to prevent traffic loss. When you configure this statement, phantom IP addresses remain in the kernel during a switchover until the specified hold-time interval expires. After the interval expires, these routes are added to the appropriate routing tables. In an Ethernet VPN (EVPN)/VXLAN environment, we recommend that you specify a hold-time value of 300 seconds (5 minutes).

Figure 9 on page 195 shows the system architecture of graceful Routing Engine switchover and the process a routing platform follows to prepare for a switchover.

Figure 9: Preparing for a Graceful Routing Engine Switchover

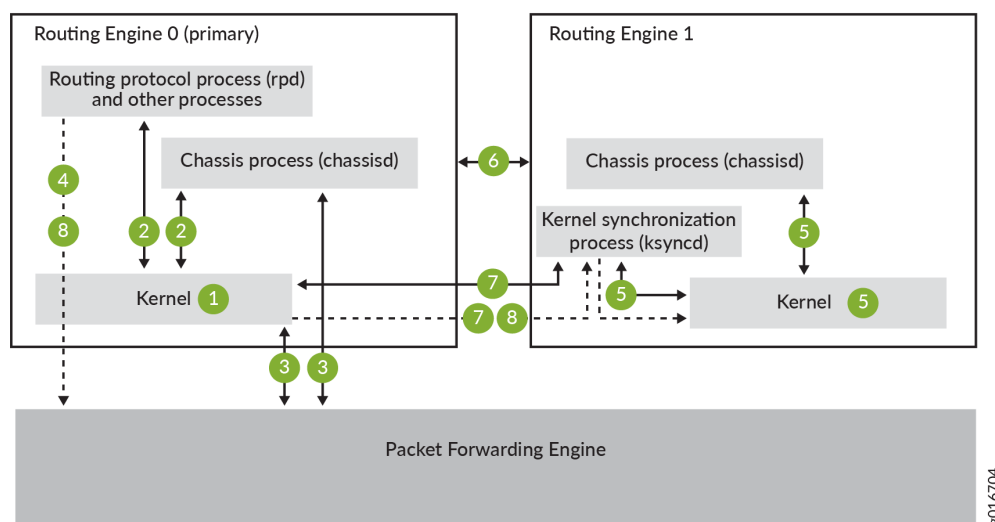

NOTE: Check GRES readiness by executing both:

- The **request chassis routing-engine master switch check** command from the primary Routing Engine
- The **show system switchover** command from the Backup Routing Engine

The switchover preparation process for GRES is as follows:

1. The primary Routing Engine starts.
2. The routing platform processes (such as the chassis process [chassisd]) start.
3. The Packet Forwarding Engine starts and connects to the primary Routing Engine.
4. All state information is updated in the system.
5. The backup Routing Engine starts.
6. The system determines whether GRES has been enabled.

NOTE: For MX Series routers using enhanced subscriber management, the new backup Routing Engine (the former primary Routing Engine) will reboot when a graceful Routing Engine switchover is performed. This cold restart resynchronizes the backup Routing Engine state with that of the new primary Routing Engine, preventing discrepancies in state that might have occurred during the switchover.

NOTE: During GRES on T Series and M320 routers during GRES, the Switch Interface Boards (SIBs) are taken offline and restarted one by one. This is done to provide the Switch Processor Mezzanine Board (SPMB) that manages the SIB enough time to populate state information for its associated SIB. However, on a fully populated chassis where all FPCs are sending traffic at full line rate, there might be momentary packet loss during the switchover.

NOTE: When GRES is configured and the **restart chassis-control** command is executed on a TX Matrix Plus router with 3D SIBs, you cannot ascertain which Routing Engine becomes the primary. This is because the chassisd process restarts with the execution of the **restart chassis-control** command. The chassisd process is responsible for maintaining and retaining primary role and when it is restarted, the new chassisd is processed based on the router or switch load. As a result, any one of the Routing Engines is made the primary.

Effects of a Routing Engine Switchover

Table 4 on page 198 describes the effects of a Routing Engine switchover when different features are enabled:

- No high availability features
- Graceful Routing Engine switchover
- Graceful restart
- Nonstop active routing

Table 4: Effects of a Routing Engine Switchover

Feature	Benefits	Considerations
Dual Routing Engines only (no features enabled)	• When the switchover to the new primary Routing Engine is complete, routing convergence takes place and traffic is resumed.	• All physical interfaces are taken offline. • Packet Forwarding Engines restart. • The backup Routing Engine restarts the routing protocol process (rpd). • All hardware and interfaces are discovered by the new primary Routing Engine. • The switchover takes several minutes. • All of the router's adjacencies are aware of the physical (interface alarms) and routing (topology) changes.
GRES enabled	• During the switchover, interface and kernel information is preserved. • The switchover is faster because the Packet Forwarding Engines are not restarted.	• The new primary Routing Engine restarts the routing protocol process (rpd). • All hardware and interfaces are acquired by a process that is similar to a warm restart. • All adjacencies are aware of the router's change in state.

Table 4: Effects of a Routing Engine Switchover (*Continued*)

Feature	Benefits	Considerations
GRES <i>and</i> NSR enabled	- Traffic is not interrupted during the switchover. - Interface and kernel information are preserved.	Unsupported protocols must be refreshed using the normal recovery mechanisms inherent in each protocol.
GRES <i>and</i> graceful restart enabled	- Traffic is not interrupted during the switchover. - Interface and kernel information are preserved. - Graceful restart protocol extensions quickly collect and restore routing information from the neighboring routers.	- Neighbors are required to support graceful restart, and a wait interval is required. - The routing protocol process (rpd) restarts. - For certain protocols, a significant change in the network can cause graceful restart to stop. - Starting with Junos OS Release 12.2, if adjacencies between the restarting router and the neighboring peer 'helper' routers time out, graceful restart can stop and cause interruptions in traffic.

Graceful Routing Engine Switchover on Aggregated Services interfaces

If a graceful Routing Engine switchover (GRES) is triggered by an operational mode command, the state of aggregated services interfaces (ASIs) are not preserved. For example:

```
request interface <switchover | revert> asi-interface
```


However, if GRES is triggered by a CLI commit or FPC restart or crash, the backup Routing Engine updates the ASI state. For example:

```
set interface si-x/y/z disable
commit
```

Or:

```
request chassis fpc restart
```

Release History Table

Release	Description
14.2	Starting from Junos OS Release 14.2, when you perform GRES on MX Series routers, you must execute the clear synchronous-ethernet wait-to-restore operational mode command on the new primary Routing Engine to clear the wait-to-restore timer on it.
12.2	Starting with Junos OS Release 12.2, if adjacencies between the restarting router and the neighboring peer 'helper' routers time out, graceful restart protocol extensions are unable to notify the peer 'helper' routers about the impending restart.
12.2	Starting with Junos OS Release 12.2, if adjacencies between the restarting router and the neighboring peer 'helper' routers time out, graceful restart can stop and cause interruptions in traffic.

RELATED DOCUMENTATION

Understanding High Availability Features on Juniper Networks Routers	2
Graceful Routing Engine Switchover System Requirements	201
Configuring Graceful Routing Engine Switchover	208
Configuring Graceful Routing Engine Switchover in a Virtual Chassis	211
Configuring Graceful Routing Engine Switchover in a Virtual Chassis	211
Requirements for Routers with a Backup Router Configuration	207
Example: Configuring IS-IS for GRES with Graceful Restart	214
<i>hold-time</i>	

GRES System Requirements

IN THIS CHAPTER

- [Graceful Routing Engine Switchover System Requirements | 201](#)

Graceful Routing Engine Switchover System Requirements

IN THIS SECTION

- [Graceful Routing Engine Switchover Platform Support | 201](#)
- [Graceful Routing Engine Switchover Feature Support | 202](#)
- [Graceful Routing Engine Switchover DPC Support | 204](#)
- [Graceful Routing Engine Switchover and Subscriber Access | 204](#)
- [Graceful Routing Engine Switchover PIC Support | 205](#)

Graceful Routing Engine switchover is supported on all routing (or switching) platforms that contain dual Routing Engines. All Routing Engines configured for graceful Routing Engine switchover must run the same Junos OS release. Hardware and software support for graceful Routing Engine switchover is described in the following sections:

Graceful Routing Engine Switchover Platform Support

To enable graceful Routing Engine switchover, your system must meet these minimum requirements:

- M20 and M40e routers—Junos OS Release 5.7 or later
- M10i router—Junos OS Release 6.1 or later
- M320 router—Junos OS Release 6.2 or later

- T320 router, T640 router, and TX Matrix router—Junos OS Release 7.0 or later
- M120 router—Junos OS Release 8.2 or later
- MX960 router—Junos OS Release 8.3 or later
- MX480 router—Junos OS Release 8.4 or later (8.4R2 recommended)
- MX240 router—Junos OS Release 9.0 or later
- PTX5000 router—Junos OS Release 12.1X48 or later
- Standalone T1600 router—Junos OS Release 8.5 or later
- Standalone T4000 router—Junos OS Release 12.1R2 or later
- TX Matrix Plus router—Junos OS Release 9.6 or later
- TX Matrix Plus router with 3D SIBs—Junos Release 13.1 or later
- EX Series switches with dual Routing Engines or in a Virtual Chassis — Junos OS Release 9.2 or later for EX Series switches
- QFX Series switches in a Virtual Chassis —Junos OS Release 13.2 or later for the QFX Series
- EX Series or QFX Series switches in a Virtual Chassis Fabric —Junos OS Release 13.2X51-D20 or later for the EX Series and QFX Series switches

For more information about support for graceful Routing Engine switchover, see the sections that follow.

Graceful Routing Engine Switchover Feature Support

Graceful Routing Engine switchover supports most Junos OS features in Release 5.7 and later. Particular Junos OS features require specific versions of Junos OS. See [Table 5 on page 202](#).

Table 5: Graceful Routing Engine Switchover Feature Support

Application	Junos OS Release
Aggregated Ethernet interfaces with Link Aggregation Control Protocol (LACP) and aggregated SONET interfaces	6.2
Asynchronous Transfer Mode (ATM) virtual circuits (VCs)	6.2

Table 5: Graceful Routing Engine Switchover Feature Support *(Continued)*

Application	Junos OS Release
Logical systems NOTE: In Junos OS Release 9.3 and later, the logical router feature is renamed to logical system.	6.3
Multicast	6.4 (7.0 for TX Matrix router)
Multilink Point-to-Point Protocol (MLPPP) and Multilink Frame Relay (MLFR)	7.0
Automatic Protection Switching (APS)—The current active interface (either the designated working or the designated protect interface) remains the active interface during a Routing Engine switchover.	7.4
Point-to-multipoint Multiprotocol Label Switching MPLS LSPs (transit only)	7.4
Compressed Real-Time Transport Protocol (CRTP)	7.6
Virtual private LAN service (VPLS)	8.2
Ethernet Operation, Administration, and Management (OAM) as defined by IEEE 802.3ah	8.5
Extended DHCP relay agent	8.5
Ethernet OAM as defined by IEEE 802.1ag	9.0
Packet Gateway Control Protocol (PGCP) process (pgcpd) on Multiservices 500 PICs on T640 routers.	9.0
Subscriber access	9.4

Table 5: Graceful Routing Engine Switchover Feature Support *(Continued)*

Application	Junos OS Release
Layer 2 Circuit and LDP-based VPLS pseudowire redundant configuration	9.6

The following constraints apply to graceful Routing Engine switchover feature support:

- When graceful Routing Engine switchover and aggregated Ethernet interfaces are configured in the same system, the aggregated Ethernet interfaces must not be configured for fast-polling LACP. When fast polling is configured, the LACP polls time out at the remote end during the Routing Engine primary-role switchover. When LACP polling times out, the aggregated link and interface are disabled. The Routing Engine primary role change is fast enough that standard and slow LACP polling do not time out during the procedure. However, note that this restriction does not apply to MX Series Routers that are running Junos OS Release 9.4 or later and have distributed periodic packet management (PPM) enabled—which is the default configuration—on them. In such cases, you can configure graceful Routing Engine switchover and have aggregated Ethernet interfaces configured for fast-polling LACP on the same device.

NOTE: MACSec sessions will flap upon Graceful Routing Engine switchover.

Starting with Junos OS Release 13.2, when a graceful Routing Engine switchover occurs, the VRRP state does not change. VRRP is supported by graceful Routing Engine switchover only in the case that PPM delegation is enabled (which the default).

Graceful Routing Engine Switchover DPC Support

Graceful Routing Engine switchover supports all Dense Port Concentrators (DPCs) on the MX Series 5G Universal Routing Platforms running the appropriate version of Junos OS as shown in ["Graceful Routing Engine Switchover Platform Support" on page 201](#). For more information about DPCs, see the *MX Series DPC Guide*.

Graceful Routing Engine Switchover and Subscriber Access

Graceful Routing Engine switchover currently supports most of the features directly associated with dynamic DHCP and dynamic PPPoE subscriber access. Graceful Routing Engine switchover also supports the unified in-service software upgrade (ISSU) for the DHCP access model and the PPPoE access model used by subscriber access.

NOTE: When graceful Routing Engine switchover is enabled for subscriber management, all Routing Engines in the router must have the same amount of DRAM for stable operation.

Graceful Routing Engine Switchover PIC Support

Graceful Routing Engine switchover is supported on most PICs, except for the services PICs listed in this section. The PIC must be on a supported routing platform running the appropriate version of Junos OS. For information about FPC types, FPC/PIC compatibility, and the initial Junos OS Release in which an FPC supported a particular PIC, see the PIC guide for your router platform.

The following constraints apply to graceful Routing Engine switchover support for services PICs:

- You can include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level on a router with Adaptive Services, Multiservices, and Tunnel Services PICs configured on it and successfully commit the configuration. However, all services on these PICs—except the Layer 2 service packages and extension-provider and SDK applications on Multiservices PICs—are reset during a switchover.
- Graceful Routing Engine switchover is not supported on any Monitoring Services PICs or Multilink Services PICs. If you include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level on a router with either of these PIC types configured on it and issue the **commit** command, the commit fails.
- Graceful Routing Engine switchover is not supported on Multiservices 400 PICs configured for monitoring services applications. If you include the **graceful-switchover** statement, the commit fails.

NOTE: When an unsupported PIC is online, you cannot enable graceful Routing Engine switchover. If graceful Routing Engine switchover is already enabled, an unsupported PIC cannot come online.

Release History Table

Release	Description
13.2	Starting with Junos OS Release 13.2, when a graceful Routing Engine switchover occurs, the VRRP state does not change.

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

[Understanding Graceful Routing Engine Switchover | 191](#)

[Configuring Graceful Routing Engine Switchover | 208](#)

[Configuring Graceful Routing Engine Switchover in a Virtual Chassis | 211](#)

[Requirements for Routers with a Backup Router Configuration | 207](#)

Configuring GRES

IN THIS CHAPTER

- Requirements for Routers with a Backup Router Configuration | 207
- Configuring Graceful Routing Engine Switchover | 208
- Configuring Graceful Routing Engine Switchover in a Virtual Chassis | 211
- Preventing Graceful Routing Engine Switchover in the Case of Slow Disks | 213
- Resetting Local Statistics | 213
- Example: Configuring IS-IS for GRES with Graceful Restart | 214

Requirements for Routers with a Backup Router Configuration

If your Routing Engine configuration includes a **backup-router** statement or an **inet6-backup-router** statement, you can also use the **destination** statement to specify a subnet address or multiple subnet addresses for the backup router. Include destination subnets for the backup Routing Engine at the **[edit system (backup-router | inet6-backup-router) address]** hierarchy level. This requirement also applies to any T640 router connected to a TX Matrix router that includes a **backup-router** or **inet6-backup-router** statement.

NOTE: If you have a backup router configuration in which multiple static routes point to a gateway from the management Ethernet interface, you must configure prefixes that are more specific than the static routes or include the **retain** flag at the **[edit routing-options static route]** hierarchy level.

For example, if you configure the static route 172.16.0.0/12 from the management Ethernet interface for management purposes, you must specify the backup router configuration as follows:

```
backup-router 172.29.201.62 destination [172.16.0.0/13
172.16.128.0/13]
```


RELATED DOCUMENTATION

[Understanding Graceful Routing Engine Switchover | 191](#)

[Graceful Routing Engine Switchover System Requirements | 201](#)

Configuring Graceful Routing Engine Switchover

IN THIS SECTION

- [Enabling Graceful Routing Engine Switchover | 208](#)
- [Configuring Graceful Routing Engine Switchover with Graceful Restart | 209](#)
- [Synchronizing the Routing Engine Configuration | 209](#)
- [Verifying Graceful Routing Engine Switchover Operation | 210](#)

This section contains the following topics:

Enabling Graceful Routing Engine Switchover

By default, graceful Routing Engine switchover (GRES) is disabled. To configure GRES, include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level.

```
[edit chassis redundancy]  
graceful-switchover;
```

When you enable GRES, the command-line interface (CLI) indicates which Routing Engine you are using. For example:

```
{master} [edit]  
user@host#
```

To disable GRES, delete the **graceful-switchover** statement from the **[edit chassis redundancy]** hierarchy level.

Configuring Graceful Routing Engine Switchover with Graceful Restart

When using GRES with Graceful Restart, if adjacencies between the Routing Engine and the neighboring peer 'helper' routers time out, graceful restart protocol extensions are unable to notify the peer 'helper' routers about the impending restart. Graceful restart can then stop and cause interruptions in traffic.

To ensure that these adjacencies are kept, change the *hold-time* for IS-IS protocols from the default of 27 seconds to a value higher than 40 seconds.

Synchronizing the Routing Engine Configuration

NOTE: A newly inserted backup Routing Engine automatically synchronizes its configuration with the primary Routing Engine configuration.

When you configure GRES, you can bring the backup Routing Engine online after the primary Routing Engine is already running. There is no requirement to start the two Routing Engines simultaneously.

Only when you enable the graceful Routing Engine switchover, you can copy the running Junos OS version of the primary Routing Engine to the backup Routing Engine.

NOTE: If the system is in ISSU state, you cannot copy the running Junos OS version of the primary Router Engine.

Starting in Junos OS release 14.1, you can enable automatic synchronization of the primary Routing Engine configuration with the backup Routing Engine by including the events CHASSISD_SNMP_TRAP7 statement at the [edit event-options policy *policy-name*] hierarchy level.

CHASSISD_SNMP_TRAP7 is a system event logging message that the chassis process (chassisd) generates a Simple Network Management Protocol (SNMP) trap with the seven indicated argument-value pairs. An example of an event script to trigger automatic synchronization of primary to the backup Routing Engine is as follows:

```
[edit event-options]
policy UPGRADE-BACKUPRE {
  events CHASSISD_SNMP_TRAP7;
  attributes-match {
    CHASSISD_SNMP_TRAP7.value5 matches "Routing Engine";
    CHASSISD_SNMP_TRAP7.trap matches "Fru Online";
    CHASSISD_SNMP_TRAP7.argument5 matches jnxFruName;
  }
}
```

```

then {
  event-script auto-image-upgrade.slax {
    arguments {
      trap "${$.trap}";
      value5 "${$.value5}";
      argument5 "${$.argument5}";
    }
  }
}

event-script {
  file auto-image-upgrade.slax;
}

```

After receiving this event, the event policy on the primary Router Engine is triggered and the image available in the */var/sw/pkg* path is pushed to the backup Router Engine upgrade. During script execution, the image is copied to the backup Routing Engine's */var/sw/pkg* path.

NOTE: If the image is not available in the */var/sw/pkg* path, the script is terminated with an appropriate syslog message.

If the Routing Engine is running at the Junos OS Release 13.2 or later, the Junos automation scripts is synchronized automatically.

After the primary Router Engine is rebooted, the event script available at the */usr/libexec/scripts/event/auto-image-upgrade.slax* must be copied to the */var/db/scripts/event* path.

NOTE: For MX Series routers using enhanced subscriber management, the new backup Routing Engine (the former primary Routing Engine) will reboot when a graceful Routing Engine switchover is performed. This cold restart resynchronizes the backup Routing Engine state with that of the new primary Routing Engine, preventing discrepancies in state that might have occurred during the switchover.

Verifying Graceful Routing Engine Switchover Operation

To verify whether GRES is enabled on the backup Routing Engine, issue the **show system switchover** command. When the output of the command indicates that the **Graceful switchover** field is set to **On**,

GRES is operational. The status of the kernel database and configuration database synchronization between Routing Engines is also provided. For example:

```
Graceful switchover: On
Configuration database: Ready
Kernel database: Ready
Peer state: Steady state
```

NOTE: You must issue the **show system switchover** command on the backup Routing Engine. This command is not supported on the primary Routing Engine.

For more information about the **show system switchover** command, see the [CLI Explorer](#).

Release History Table

Release	Description
14.1	Starting in Junos OS release 14.1, you can enable automatic synchronization of the primary Routing Engine configuration with the backup Routing Engine by including the events CHASSISD_SNMP_TRAP7 statement at the [edit event-options policy policy-name] hierarchy level.

RELATED DOCUMENTATION

Understanding Graceful Routing Engine Switchover 191
Graceful Routing Engine Switchover System Requirements 201
Requirements for Routers with a Backup Router Configuration 207
Resetting Local Statistics 213
graceful-switchover 714
graceful-switchover 715
Example: Configuring IS-IS for GRES with Graceful Restart 214
<i>hold-time</i>

Configuring Graceful Routing Engine Switchover in a Virtual Chassis

In a Virtual Chassis, one member switch is assigned the primary role and has the primary Routing Engine. Another member switch is assigned the backup role and has the backup Routing Engine. Graceful

Routing Engine switchover (GRES) enables the primary and backup Routing Engines in a Virtual Chassis configuration to switch from the primary to backup without interruption to packet forwarding as a hitless failover solution. When you configure graceful Routing Engine switchover, the backup Routing Engine automatically synchronizes with the primary Routing Engine to preserve kernel state information and the forwarding state.

To set up the Virtual Chassis configuration to use graceful Routing Engine switchover (GRES):

1. Set up a minimum of two switches in a Virtual Chassis configuration with primary-role priority of 255:

```
[edit]
user@switch# set virtual-chassis member 0 mastership-priority 255

[edit]
user@switch# set virtual-chassis member 1 mastership-priority 255
```

2. Set up graceful Routing Engine switchover:

```
[edit]
user@switch# set chassis redundancy graceful-switchover
```

Commit the configuration.

NOTE: We recommend that you use the **commit synchronize** command to save any configuration changes that you make to a multimember Virtual Chassis.

RELATED DOCUMENTATION

Example: Configuring an EX4200 Virtual Chassis with a Primary and Backup in a Single Wiring Closet

[High Availability Features for EX Series Switches Overview](#)

Understanding EX Series Virtual Chassis

Understanding QFX Series Virtual Chassis

Preventing Graceful Routing Engine Switchover in the Case of Slow Disks

Unexpected slow disk access can happen for various reasons—a faulty or bad sector, for example—causing a hold up of the normal operation of processes such as the routing process (rpd). Eventually, the router's performance will be impacted. Under these circumstances, it may take longer for the typical failover mechanism to be triggered.

Juniper Networks has introduced a disk monitoring daemon to solve this dilemma. The daemon detects slow disk access and initiates failover. Failover can minimize the traffic impact and ease the load on the original primary Routing Engine for its backlog clean up.

However, there are instances when you might not want failover to occur. You might commit a large set of changes or even minor changes that might lead to a series of updates on the routing topology. Such activity could lead to extensive disk access delay and, therefore, trigger failover. For expected disk access delays like this, where you do not want to trigger failover, you can choose to not have failover occur by setting the **chassis redundancy failover not-on-disk-underperform** configuration command. Another way is to disable the disk monitoring daemon completely by setting the **system processes gstatd disable** command.

To prevent failovers in the case of slow disks in the Routing Engine:

- Set the option for preventing gstatd from initiating failovers in response to slow disks at the **[edit chassis redundancy failover]** hierarchy level.

```
[edit]
user@host# set chassis redundancy failover not-on-disk-underperform
```

RELATED DOCUMENTATION

[not-on-disk-underperform | 742](#)

[Understanding Graceful Routing Engine Switchover | 191](#)

Resetting Local Statistics

When you enable graceful Routing Engine switchover, the primary Routing Engine configuration is copied and loaded to the backup Routing Engine. User files, accounting information, and trace options information are not replicated to the backup Routing Engine.

When a graceful Routing Engine switchover occurs, local statistics such as process statistics and networking statistics are displayed as a cumulative value from the time the process first came online. Because processes on the primary Routing Engine can start at different times from the processes on the backup Routing Engine, the statistics on the two Routing Engines for the same process might differ. After a graceful Routing Engine switchover, we recommend that you issue the **clear interface statistics** (*interface-name* | **all**) command to reset the cumulative values for local statistics. Forwarding statistics are not affected by graceful Routing Engine switchover.

For information about how to use the **clear** command to clear statistics and protocol database information, see the [CLI Explorer](#).

NOTE: The **clear firewall** command cannot be used to clear the Routing Engine filter counters on a backup Routing Engine that is enabled for graceful Routing Engine switchover.

RELATED DOCUMENTATION

[Understanding Graceful Routing Engine Switchover | 191](#)

[Configuring Graceful Routing Engine Switchover | 208](#)

Example: Configuring IS-IS for GRES with Graceful Restart

IN THIS SECTION

- [Requirements | 215](#)
- [Overview | 215](#)
- [Configuration | 215](#)
- [Verification | 217](#)

This example shows how to configure the Routing Engine's graceful restart protocol extensions using the intermediate system to intermediate system (IS-IS) interior gateway protocol (IGP) to successfully enable graceful Routing Engine switchover (GRES) with graceful restart.

Requirements

GRES prevents interruptions in network traffic if the primary Routing Engine fails when combined with either:

- Graceful restart
- Nonstop active routing (NSR)

Before you follow the directions here to configure graceful restart, be sure you have enabled GRES, which is disabled by default. See ["Configuring Graceful Routing Engine Switchover" on page 208](#) for more information.

Overview

If adjacencies between the Routing Engine and the neighboring peer 'helper' routers time out, graceful restart protocol extensions are unable to notify the peer 'helper' routers about the impending restart. Graceful restart can then stop and cause interruptions in traffic.

To ensure that these adjacencies are kept, change the hold-time for IS-IS protocols from the default of 27 seconds to a value higher than 40 seconds.

If your system uses the open shortest pathway first (OSPF) protocol instead of IS-IS, see *Example: Configuring OSPF Timers* for configuration information.

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 215](#)
- [Configuring the IS-IS Protocol Hold Time for Graceful Restart | 216](#)
- [Results | 217](#)

CLI Quick Configuration

To quickly configure the hold-time, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the different hierarchy levels shown.

Each interface must be set individually, with a value for each level that the routing device operates on. The minimum recommended value of 41 seconds is used in this example, your system may require a higher value based on size and traffic.

Level 1 and level 2 can be set to different values.

[edit protocols]

```
set protocols isis interface ge-1/2/0 level 1 hold-time 41
set protocols isis interface ge-1/2/0 level 2 hold-time 41
```

[edit logical-systems logical-system-name]

```
set protocols isis interface ge-1/2/0 level 1 hold-time 41
set protocols isis interface ge-1/2/0 level 2 hold-time 41
```

[edit logical-systems logical-system-name routing-instances routing-instance-name]

```
set protocols isis interface ge-1/2/0 level 1 hold-time 41
set protocols isis interface ge-1/2/0 level 2 hold-time 41
```

[edit routing-instances routing-instance-name]

```
set protocols isis interface ge-1/2/0 level 1 hold-time 41
set protocols isis interface ge-1/2/0 level 2 hold-time 41
```

Configuring the IS-IS Protocol Hold Time for Graceful Restart

Step-by-Step Procedure

To configure the IS-IS hold-time for graceful restart:

1. Locate or set the interfaces.

```
set protocols isis interface interface-name
```

2. Set the network level and the hold-time in seconds for that level.

```
set protocols isis interface interface-name level 1 hold-time 41
```

3. If the routing device functions on more than one level, set the value for the other level.

```
set protocols isis interface interface-name level 2 hold-time 41
```

4. If you are done configuring the routing device, commit the configuration.

NOTE: Repeat the entire configuration on all routing devices in a shared network.

Results

Verification

IN THIS SECTION

- [Verifying the IS-IS Protocol Hold Time for Graceful Restart | 217](#)

Verifying the IS-IS Protocol Hold Time for Graceful Restart

Purpose

Verify that the IS-IS protocol hold-time is set to 41 seconds or greater to ensure that graceful restart is enabled.

Action

Confirm your configuration by entering the **show isis adjacency brief** command from operational mode. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

Meaning

A high enough IS-IS protocol hold-time value allows your system configuration to restart and ensures that even if a Routing Engine fails, traffic continues.

RELATED DOCUMENTATION

[Understanding Graceful Routing Engine Switchover | 191](#)

[Configuring Graceful Routing Engine Switchover | 208](#)

Example: Configuring IS-IS

Example: Configuring OSPF Timers

interface

level

hold-time

Configuring Ethernet Automatic Protection Switching for High Availability

IN THIS CHAPTER

- [Ethernet Automatic Protection Switching Overview | 219](#)
- [Mapping of CCM Defects to APS Events | 223](#)
- [Example: Configuring Protection Switching Between Psuedowires | 224](#)

Ethernet Automatic Protection Switching Overview

IN THIS SECTION

- [Unidirectional and Bidirectional Switching | 220](#)
- [Selective and Merging Selectors | 220](#)
- [Revertive and Nonrevertive Switching | 220](#)
- [Protection Switching Between VPWS Pseudowires | 221](#)
- [CLI Configuration Statements | 222](#)

Ethernet automatic protection switching (APS) is a linear protection scheme designed to protect VLAN based Ethernet networks.

With Ethernet APS, a protected domain is configured with two paths, a working path and a protection path. Both working and protection paths can be monitored using an Operations Administration Management (OAM) protocol like Connectivity Fault Management (CFM). Normally, traffic is carried on the working path (that is, the working path is the active path), and the protection path is disabled. If the working path fails, its protection status is marked as degraded (DG) and APS switches the traffic to the protection path, then the protection path becomes the active path.

APS uses two modes of operation, linear 1+1 protection switching architecture and linear 1:1 protection switching architecture. The linear 1+1 protection switching architecture operates with either unidirectional or bidirectional switching. The linear 1:1 protection switching architecture operates with bidirectional switching.

In the linear 1+1 protection switching architecture, the normal traffic is copied and fed to both working and protection paths with a permanent bridge at the source of the protected domain. The traffic on the working and protection transport entities is transmitted simultaneously to the sink of the protected domain, where a selection between the working and protection transport entities is made.

In the linear 1:1 protection switching architecture, the normal traffic is transported on either the working path or on the protection path using a selector bridge at the source of the protection domain. The selector at the sink of the protected domain selects the entity that carries the normal traffic.

Unidirectional and Bidirectional Switching

Unidirectional switching utilizes fully independent selectors at each end of the protected domain. Bidirectional switching attempts to configure the two end points with the same bridge and selector settings, even for a unidirectional failure. Unidirectional switching can protect two unidirectional failures in opposite directions on different entities.

Selective and Merging Selectors

In the linear 1:1 protection switching architecture, where traffic is sent only on the active path, there are two different ways in which the egress direction (the direction out of the protected segment) data forwarding can act: selective selectors and merging selectors. A selective selector forwards only traffic that is received from both the paths regardless of which one is currently active. In other words, with a merging selector the selection of the currently active path only affects the ingress direction. Merging selectors minimize the traffic loss during a protection switch, but they do not guarantee the delivery of the data packets in order.

Revertive and Nonrevertive Switching


For revertive switching, traffic is restored to the working path after the conditions causing the switch have cleared.

For nonrevertive switching, traffic is allowed to remain on the protection path even after the conditions causing the switch have cleared.

NOTE: The configuration on both the provider edge (PE) routers have to be either in revertive mode or non-revertive mode.

Protection Switching Between VPWS Pseudowires


Figure 11: Connections Terminating on Single PE

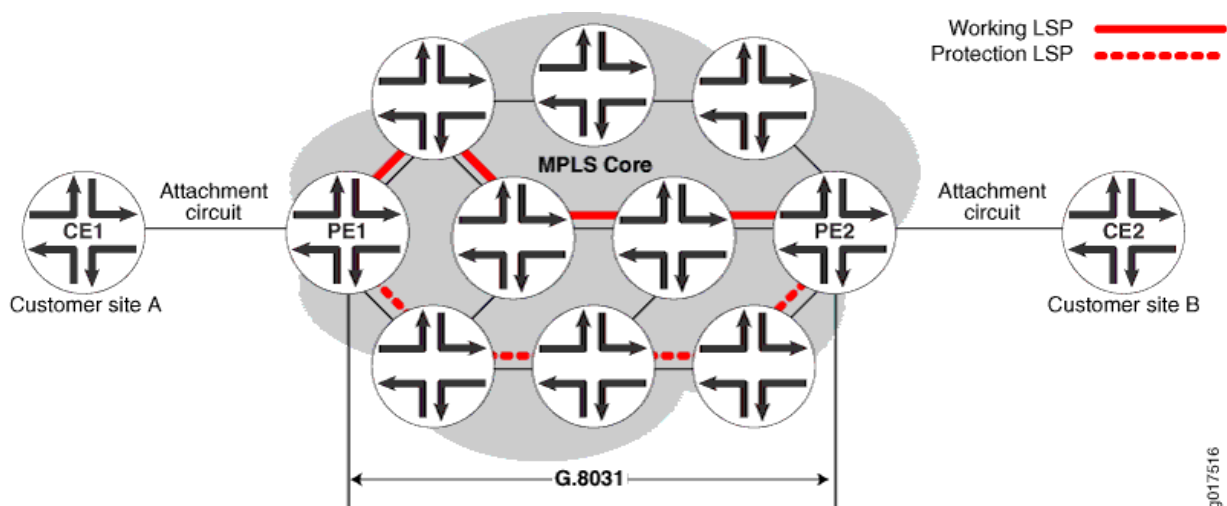

In the scenario diagrammed in [Figure 11 on page 221](#), a *Virtual Private Wire Service (VPWS)* is provisioned between customer sites A and B using a single pseudowire (layer 2 circuit) in the core network, and two Multiprotocol Label Switching (MPLS) Label Switched Paths (LSPs) are provisioned, one for the working path and the other one for the protection path. CFM CCM will be used to monitor the status of each LSP. Provider edge routers PE1 and PE2 run G.8031 Ethernet APS to select one of the LSPs as the active path. Once the active path is elected at the source end of the protection group, PE1 forwards to traffic from site A to the elected active path. At the sink end of the protection group, PE2

implements a merging selector, meaning it forwards the traffic coming from both the LSPs to the customer site B.

Figure 12: Connections Terminating on a Different PE

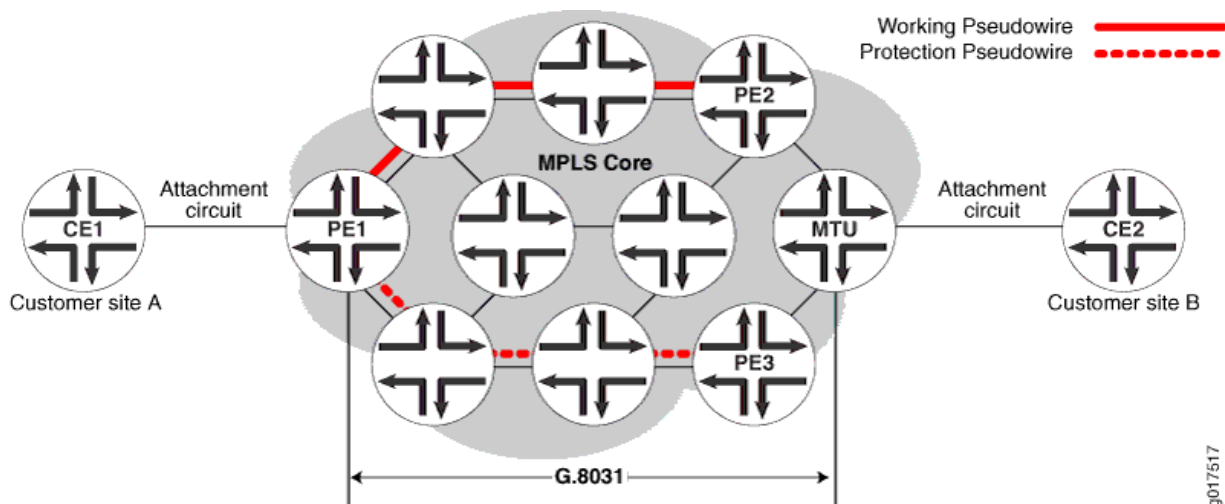

In the scenario represented in [Figure 12 on page 222](#), a VPWS is provisioned between customer sites A and B using two pseudowires (layer 2 circuit) in the core network, one for the working path and the other for the protection path. CFM CCM will be used to monitor the status of each pseudowire.

Provider edge router PE1 and MTU run G.8031 Ethernet APS to select one of the pseudowires as the active path. Once the active path is elected at the source end of the protection group, PE1 forwards the traffic from site A to the elected active path. At the sink end of the protection group, MTU implements a merging selector, meaning it forwards the traffic coming from both the pseudowires to customer site B.

CLI Configuration Statements

```
[edit protocols protection-group]
ethernet-aps profile1{
    protocol g8031;
    revert-time seconds;
    hold-time 0-10000ms;
    local-request lockout;
}
```

revert-time- By default, protection logic restores the use of the working path once it recovers. The revert-time statement specifies how much time should elapse before the path for data should be switched from Protection to Working once recovery for Working has occurred. A revert-time of zero indicates no reversion. It will default to 300 sec (5 minutes) if not configured.

hold-time- Once a failure is detected, APS waits until this timer expires before initiating the protection switch. The range of the hold-time timer is 0 to 10,000 milliseconds. It will default to zero if not configured.

local-request- Configuring this value to lockout or force-switch will trigger lockout or force-switch operation on the protection groups using this profile.

RELATED DOCUMENTATION

[Mapping of CCM Defects to APS Events | 223](#)

[Example: Configuring Protection Switching Between Psuedowires | 224](#)

Mapping of CCM Defects to APS Events

The continuity check message (CCM) engine marks the status of working and protected transport entities as either Down, Degraded, or Up.

Down—The monitored path is declared down if any of the following Multiple End Point (MEP) defects occur:


- Interface down
- CCM expiry
- RDI indicating signal failure

Degraded—The monitored path is declared degraded if any of the following MEP defects occur:

- FRR on
- FRR-ACK on

Up—The monitored path is declared up in the absence of any of the above events.

Figure 13: Understanding APS Events

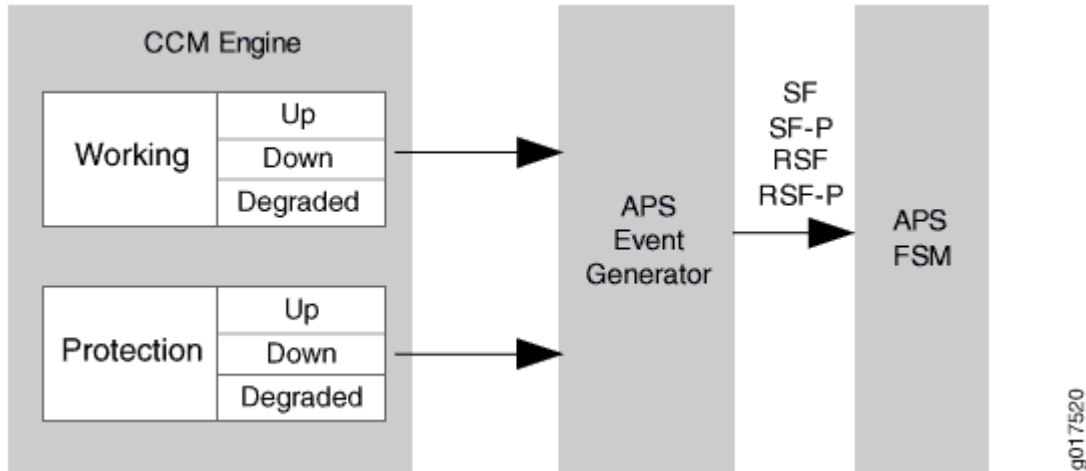

As show in [Figure 13 on page 224](#), the APS event generator generates the following APS events based on the status of the working and protection paths:

- **SF**—Signal failure on working path
- **RSF**—Working path recovers from signal failure
- **SF-P**—Signal failure on protection path
- **RSF-P**—Protection path recovers from signal failure

RELATED DOCUMENTATION

[Ethernet Automatic Protection Switching Overview | 219](#)

[Example: Configuring Protection Switching Between Psuedowires | 224](#)

Example: Configuring Protection Switching Between Psuedowires

IN THIS SECTION

- [Requirements | 225](#)

- Overview and Topology | [225](#)
- Configuration | [226](#)

Requirements

This example uses the following hardware and software components:

- Junos OS Release 11.2 or later
- 2 MX Series PE routers

Overview and Topology


IN THIS SECTION

- Topology | [226](#)

The physical topology of the protection switching between pseudowires example is shown in [Figure 14 on page 226](#).

Topology

Figure 14: Topology of a Network Using VPWS Psuedowires

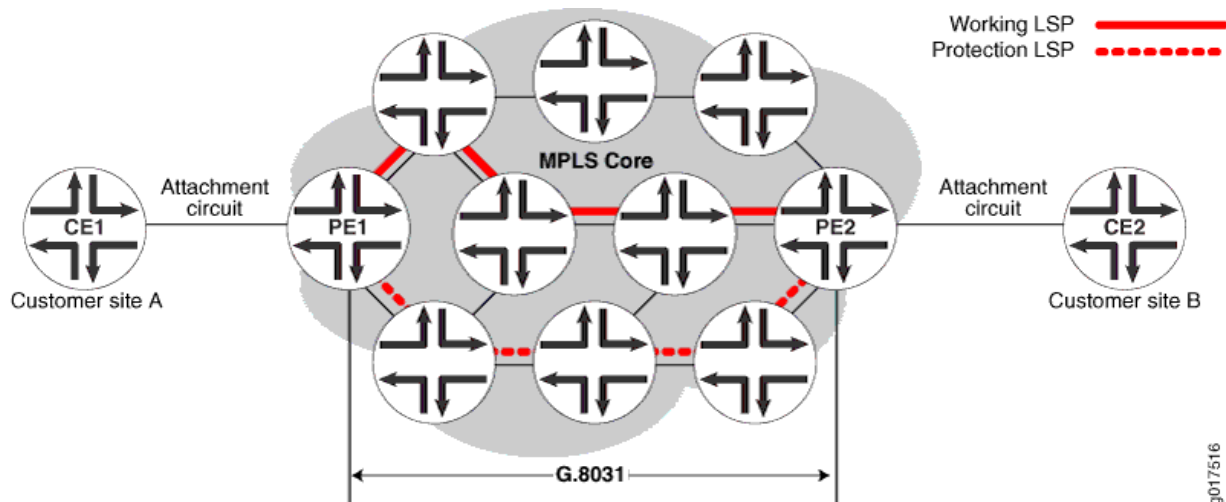

The following definitions describe the meaning of the device abbreviations used in [Figure 14 on page 226](#).

- Customer edge (CE) device—A device at the customer site that provides access to the service provider's VPN over a data link to one or more provider edge (PE) routers.
- Provider edge (PE) device—A device, or set of devices, at the edge of the provider network that presents the provider's view of the customer site.

Configuration

IN THIS SECTION

- [Procedure | 226](#)

Procedure

Step-by-Step Procedure

To configure protection switching between pseudowires, perform these tasks:

1. Configure automatic protection switching.

```
protocols {
  protection-group {
    ethernet-aps {
      profile-1 {
        protocol g8031;
        hold-time 1000s;
        revert-time 5m;
      }
    }
  }
}
```

2. Configure the connectivity fault management.

```
ethernet {
  oam {
    connectivity-fault-management {
      maintenance-domain mdl {
        level 5;
      }
    }
  }
}
```

3. Configure the continuity check message for the working path.

```
maintenance-association W {
  protect maintenance-association P {
    aps-profile profile-1;
  }
  continuity-check {
    interval 1s;
  }
  mep 100 {
    interface ge-1/0/0.0 working;
    direction down;
    auto-discovery;
  }
}
```

4. Configure the continuity check message for the protection path.

```

maintenance-association P {
    continuity-check {
        interval 1s;
    }
    mep 100 {
        interface ge-1/0/0.0 protect;
        direction down;
        auto-discovery;
    }
}

```

Results

Check the results of the configuration:

```

protocols {
  protection-group {
    ethernet-aps {
      profile-1 {
        protocol g8031;
        hold-time 1000s;
        revert-time 5m;
      }
    }
  }
}

ethernet {
  oam {
    connectivity-fault-management {
      maintenance-domain md1 {
        level 5;
        maintenance-association W {
          protect maintenance-association P {
            aps-profile profile-1;
          }
          continuity-check {
            interval 1s;
          }
        }
        mep 100 {
          interface ge-1/0/0.0 working;
        }
      }
    }
  }
}

```

```
        direction down;
        auto-discovery;
    }
}
maintenance-association P {
    continuity-check {
        interval 1s;
    }
    mep 100 {
        interface ge-1/0/0.0 protect;
        direction down;
        auto-discovery;
    }
}
}
```

RELATED DOCUMENTATION

[Ethernet Automatic Protection Switching Overview | 219](#)

[Mapping of CCM Defects to APS Events | 223](#)

7

PART

Configuring Ethernet Ring Protection Switching

[Configuring Ethernet Ring Protection Switching for High Availability | 231](#)

Configuring Ethernet Ring Protection Switching for High Availability

IN THIS CHAPTER

- [Ethernet Ring Protection Switching Overview | 231](#)
- [Understanding Ethernet Ring Protection Switching Functionality | 232](#)
- [Configuring Ethernet Ring Protection Switching | 241](#)
- [Example: Ethernet Ring Protection Switching Configuration on MX Routers | 242](#)

Ethernet Ring Protection Switching Overview

Ethernet ring protection switching (ERPS) helps achieve high reliability and network stability. Links in the ring will never form loops that fatally affect the network operation and services availability. The basic idea of an Ethernet ring is to use one specific link to protect the whole ring. This special link is called a *ring protection link (RPL)*. If no failure happens in other links of the ring, the RPL blocks the traffic and is not used. The RPL is controlled by a special node called an *RPL owner*. There is only one RPL owner in a ring. The RPL owner is responsible for blocking traffic over the RPL. Under ring failure conditions, the RPL owner is responsible for unblocking traffic over the RPL. A ring failure results in protection switching of the RPL traffic. An automatic protection switching (APS) protocol is used to coordinate the protection actions over the ring. Protection switching blocks traffic on the failed link and unblocks the traffic on the RPL. When the failure clears, revertive protection switching blocks traffic over the RPL and unblocks traffic on the link on which the failure is cleared.

NOTE: ERPS on AE interfaces is not supported on ACX Series routers except on ACX5000 Series routers.

The following standards provide detailed information on Ethernet ring protection switching:

- ITU-T Recommendation G.8032/Y.1344 version 1 and 2, *Ethernet Ring protection switching*. G.8032v1 supports a single ring topology and G.8032v2 supports multiple rings and ladder topology.

All devices with Ethernet ring protection switching support G.8032v1. MX Series and ACX Series routers also support G.8032v2.

- ITU-T Y.1731, *OAM functions and mechanisms for Ethernet-based networks*

For additional information on configuring Ethernet ring protection switching on EX Series switches, see *Example: Configuring Ethernet Ring Protection Switching on EX Series Switches*.

For additional information on configuring Ethernet ring protection switching on MX Series routers, see the *Layer 2 Configuration Guide* for a complete example of Ethernet rings and information about STP loop avoidance and prevention.

RELATED DOCUMENTATION

[Understanding Ethernet Ring Protection Switching Functionality | 232](#)

[Configuring Ethernet Ring Protection Switching | 241](#)

[Example: Ethernet Ring Protection Switching Configuration on MX Routers | 242](#)

[Example: Configuring Ethernet Ring Protection Switching on EX Series Switches](#)

[Ethernet Interfaces User Guide for Routing Devices](#)

Understanding Ethernet Ring Protection Switching Functionality

IN THIS SECTION

- [Acronyms | 233](#)
- [Ring Nodes | 233](#)
- [Ring Node States | 234](#)
- [Default Logging of Basic State Transitions on EX Series Switches | 234](#)
- [Logical Ring | 235](#)
- [FDB Flush | 235](#)
- [Traffic Blocking and Forwarding | 235](#)
- [RPL Neighbor Node | 235](#)
- [RAPS Message Blocking and Forwarding | 236](#)
- [Dedicated Signaling Control Channel | 238](#)
- [RAPS Message Termination | 238](#)

- [Revertive and Non-revertive Modes | 238](#)
- [Multiple Rings | 238](#)
- [Node ID | 239](#)
- [Ring ID | 239](#)
- [Bridge Domains with the Ring Port \(MX Series Routers Only\) | 239](#)
- [Wait-to-Block Timer | 239](#)
- [Adding and Removing a Node | 240](#)

Acronyms

The following acronyms are used in the discussion about Ethernet ring protection switching (ERPS):

- MA—Maintenance association
- MEP—Maintenance association end point
- OAM—Operations, administration, and management (Ethernet ring protection switching uses connectivity fault management daemon)
- FDB—MAC forwarding database
- STP—Spanning Tree Protocol
- RAPS—Ring automatic protection switching
- WTB—Wait to block. Note that WTB is always disabled on EX2300 and EX3400 switches because it is not supported in ERPSv1. Any configuration you make to the WTB setting on EX2300 and EX3400 switches has no effect. The output from the CLI command 'show protection-group ethernet-ring node-state detail' lists a WTB setting but that setting has no effect on EX2300 and EX3400 switches.
- WTR—Wait to restore. Note that on EX2300 and EX3400 switches only, the WTR configuration must be 5-12 minutes.
- RPL—Ring protection link

Ring Nodes

Multiple nodes are used to form a ring. There are two different node types:

- Normal node—The node has no special role on the ring.

- RPL owner node—The node owns the RPL and blocks or unblocks traffic over the RPL.

Ring Node States

The following are the different states for each node of a specific ring:

- init—Not a participant of a specific ring.
- idle—No failure on the ring; the node is performing normally. For a normal node, traffic is unblocked on both ring ports. For the RPL owner or RPL neighbor, traffic is blocked on the ring port that connects to the RPL and unblocked on the other ring port.
- protection—A failure occurred on the ring. For a normal node, traffic is blocked on the ring port that connects to the failing link and unblocked on working ring ports. For the RPL owner, traffic is unblocked on both ring ports if they connect to non-failure links.
- pending—The node is recovering from failure or its state after a **clear** command is used to remove the previous manual command. When a protection group is configured, the node enters the pending state. When a node is in pending state, the WTR or WTB timer will be running. All nodes are in pending state till WTR or WTB timer expiry.
- force switch—A force switch is issued. When a force switch is issued on a node in the ring all nodes in the ring will move into the force switch state.

NOTE: EX2300 and EX3400 switches do not support force switch.

- manual switch—A manual switch is issued. When a manual switch is issued on a node in the ring all nodes in the ring will move into the manual switch state.

NOTE: EX2300 and EX3400 switches do not support manual switch.

There can be only one RPL owner for each ring. The user configuration must guarantee this, because the APS protocol cannot check this.

Default Logging of Basic State Transitions on EX Series Switches

Starting with Junos OS Release 14.1X53-D15, EX Series switches automatically log basic state transitions for the ERPS protocol. Starting with Junos OS Release 18.2R1, EX2300 and EX3400 switches automatically log basic state transitions for the ERPS protocol. No configuration is required to initiate this logging. Basic state transitions include ERPS interface transitions from up to down, and down to up; and ERPS state transitions from idle to protection, and protection to idle.

The basic state transitions are logged in a single file named **erp-default**, which resides in the **/var/log** directory of the switch. The maximum size of this file is 15 MB.

Default logging for ERPS can capture initial ERPS interface and state transitions, which can help you troubleshoot issues that occur early in the ERPS protocol startup process. However, if more robust logging is needed, you can enable traceoptions for ERPS by entering the `traceoptions` statement in the **[edit protocols protection-group]** hierarchy.

Be aware that for ERPS, only default logging or traceoptions can be active at a time on the switch. That is, default logging for ERPS is automatically enabled and if you enable traceoptions for ERPS, the switch automatically disables default logging. Conversely, if you disable traceoptions for ERPS, the switch automatically enables default logging.

Logical Ring

You can define multiple logical-ring instances on the same physical ring. The logical ring feature currently supports only the physical ring, which means that two adjacent nodes of a ring must be physically connected and the ring must operate on the physical interface, not the VLAN. Multiple ring instances are usually defined with trunk mode ring interfaces.

FDB Flush

When ring protection switching occurs, normally an *FDB flush* is executed. The Ethernet ring control module uses the same mechanism as the STP to trigger the FDB flush. The Ethernet ring control module controls the ring port physical interface's default STP index to execute the FDB flush.

NOTE: Optimized flushing is not supported on EX2300 and EX3400 switches.

Starting with Junos OS Release 14.2, the FDB flush depends on the RAPS messages received on the both the ports of the ring node.

Traffic Blocking and Forwarding

Ethernet ring control uses the same mechanism as the STP to control forwarding or discarding of user traffic. The Ethernet ring control module sets the ring port physical interface default STP index state to forwarding or discarding in order to control user traffic.

RPL Neighbor Node

Starting with Junos OS Release 14.2, ring protection link neighbor nodes are supported. An RPL neighbor node is adjacent to the RPL and is not the RPL owner. If a node is configured with one

interface as the protection-link-end and no protection-link-owner is present in its configuration, the node is an RPL neighbor node.

NOTE: RPL neighbor node is not supported on EX2300 and EX3400 switches.

RAPS Message Blocking and Forwarding

The router or switch treats the ring automatic protection switching (RAPS) message the same as it treats user traffic for forwarding RAPS messages between two ring ports. The ring port physical interface default STP index state also controls forwarding RAPS messages between the two ring ports. Other than forwarding RAPS messages between the two ring ports, as shown in [Figure 15 on page 236](#), the system also needs to forward the RAPS message between the CPU (Ethernet ring control module) and the ring port. This type of forwarding does not depend on the ring port physical interfaces' STP index state. The RAPS message is always sent by the router or switch through the ring ports, as shown in [Figure 16 on page 236](#). A RAPS message received from a discarding ring port is sent to the Ethernet ring control module, but is not sent to the other ring port.

Figure 15: Protocol Packets from the Network to the Router


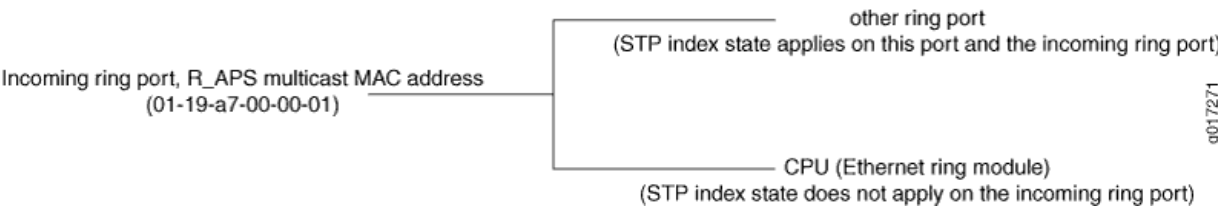


Figure 16: Protocol Packets from the Router or Switch to the Network

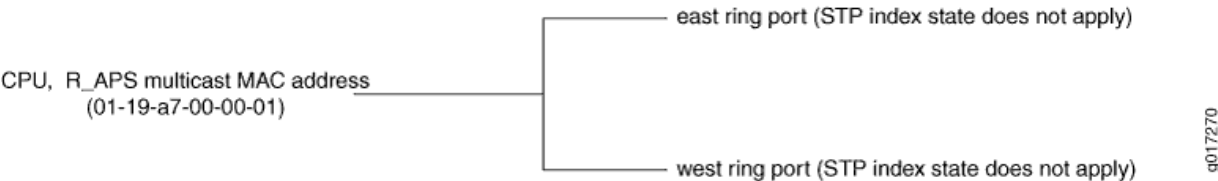

Juniper Networks switches and Juniper Networks routers use different methods to achieve these routes.

The switches use forwarding database entries to direct the RAPS messages. The forwarding database entry (keyed by the RAPS multicast address and VLAN) has a composite next hop associated with it—the composite next hop associates the two ring interfaces with the forwarding database entry and uses the split horizon feature to prevent sending the packet out on the interface that it is received on. This is an


```
{ send packet to CPU and send to the other ring port }
default term: accept packet.
```

Dedicated Signaling Control Channel

For each ring port, a dedicated signaling control channel with a dedicated VLAN ID must be configured. In Ethernet ring configuration, only this control *logical interface* is configured and the underlying physical interface is the physical ring port. Each ring requires that two control physical interfaces be configured. These two logical interfaces must be configured in a bridge domain for routers (or the same VLAN for switches) in order to forward RAPS protocol data units (PDUs) between the two ring control physical interfaces. If the router control channel logical interface is not a trunk port, only control logical interfaces will be configured in ring port configuration. If this router control channel logical interface is a trunk port, in addition to the control channel logical interfaces, a dedicated VLAN ID must be configured for routers. For switches, always specify either a VLAN name or VLAN ID for all links.

RAPS Message Termination

The RAPS message starts from the originating node, travels through the entire ring, and terminates in the originating node unless a failure is present in the ring. The originating node must drop the RAPS message if the source MAC address in the RAPS message belongs to itself. The source MAC address is the node's node ID.

Revertive and Non-revertive Modes

In revertive operation, once the condition causing a switch has cleared, traffic is blocked on the RPL and restored to the working transport entity. In nonrevertive operation, traffic is allowed to use the RPL if it has not failed, even after a switch condition has cleared.

NOTE: Non-revertive mode is not supported on EX2300 and EX3400 switches.

Multiple Rings

The Ethernet ring control module supports multiple rings in each node (two logical interfaces are part of each ring). The ring control module also supports the interconnection of multiple rings. Interconnection of two rings means that two rings might share the same link or share the same node. Ring interconnection is supported only using non-virtual-channel mode. Ring interconnection using virtual channel mode is not supported.

NOTE: Interconnection of multiple rings is not supported on EX2300 and EX3400 switches.

Node ID

For each node in the ring, a unique *node ID* identifies each node. The node ID is the node's MAC address.

For routers only, you can configure this node ID when configuring the ring on the node or automatically select an ID like STP does. In most cases, you will not configure this and the router will select a node ID, like STP does. It should be the manufacturing MAC address. The ring node ID should not be changed, even if you change the manufacturing MAC address. Any MAC address can be used if you make sure each node in the ring has a different node ID. The node ID on switches is selected automatically and is not configurable.

Ring ID

The ring ID is used to determine the value of the last octet of the MAC destination address field of the RAPS protocol data units (PDUs) generated by the ERP control process. The ring ID is also used to discard any RAPS PDU, received by this ERP control process with a non-matching ring ID. Ring ID values 1 through 239 are supported.

Bridge Domains with the Ring Port (MX Series Routers Only)

On the routers, the protection group is seen as an abstract logical port that can be configured to any bridge domain. Therefore, if you configure one ring port or its logical interface in a bridge domain, you must configure the other related ring port or its logical interface to the same bridge domain. The bridge domain that includes the ring port acts as any other bridge domain and supports the IRB Layer 3 interface.

Wait-to-Block Timer

The RPL owner node uses a delay timer before initiating an RPL block in revertive mode of operation or before reverting to IDLE state after clearing manual commands. The Wait-to-Block (WTB) timer is used when clearing **force switch** and **manual switch** commands. As multiple **force switch** commands are allowed to coexist in an Ethernet ring, the WTB timer ensures that clearing of a single **force switch** command does not trigger the re-blocking of the RPL. When clearing a **manual switch** command, the WTB timer prevents the formation of a closed loop due to a possible timing anomaly where the RPL Owner Node receives an outdated remote **manual switch** request during the recovery process.

When recovering from a **manual switch** command, the delay timer must be long enough to receive any latent remote **force switch**, signal failure, or **manual switch** commands. This delay timer is called the WTB timer and is defined to be 5 seconds longer than the guard timer. This delay timer is activated on the RPL Owner Node. When the WTB timer expires, the RPL Owner Node initiates the reversion process by transmitting an RAPS (NR, RB) message. The WTB timer is deactivated when any higher-priority request preempts it.

NOTE: The Wait To Block Timer (WTB) is always disabled on EX2300 and EX3400 switches because it is not supported in ERPSv1. Any configuration you make to the WTB setting has no effect. The output from the CLI command 'show protection-group ethernet-ring node-state detail' lists a WTB setting but that setting has no effect.

Adding and Removing a Node

Starting with Junos OS Release 14.2, you can add or remove a node between two nodes in an Ethernet ring. Nodes are added or removed using the **force switch** command.

NOTE: EX2300 and EX3400 switches do not support force switch.

Release History Table

Release	Description
18.2R1	Starting with Junos OS Release 18.2R1, EX2300 and EX3400 switches automatically log basic state transitions for the ERPS protocol.
14.2	Starting with Junos OS Release 14.2, the FDB flush depends on the RAPS messages received on the both the ports of the ring node.
14.2	Starting with Junos OS Release 14.2, ring protection link neighbor nodes are supported.
14.2	Starting with Junos OS Release 14.2, you can add or remove a node between two nodes in an Ethernet ring.
14.1X53-D15	Starting with Junos OS Release 14.1X53-D15, EX Series switches automatically log basic state transitions for the ERPS protocol.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching | 241](#)

[Example: Ethernet Ring Protection Switching Configuration on MX Routers | 242](#)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

Configuring Ethernet Ring Protection Switching

The inheritance model follows:

```

protection-group {
    ethernet-ring ring-name (
        node-id mac-address;
        ring-protection-link-owner;
        east-interface {
            control-channel channel-name {
                ring-protection-link-end;
            }
        }
        west-interface {
            node-id mac-address;
            control-channel channel-name {
                ring-protection-link-end;
            }
        }
        data-channel {
            vlan number;
        }
        guard-interval number;
        restore-interval number;
    }
}

```

For each ring, a protection group must be configured. There may be several rings in each node, so there should be multiple protection groups corresponding to the related Ethernet rings.

Three interval parameters (**restore-interval**, **guard-interval**, and **hold-interval**) can be configured at the protection group level. These configurations are global configurations and apply to all Ethernet rings if the Ethernet ring doesn't have a more specific configuration for these values. If no parameter is

configured at the protection group level, the global configuration of this parameter uses the default value.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Understanding Ethernet Ring Protection Switching Functionality | 232](#)

[Example: Ethernet Ring Protection Switching Configuration on MX Routers | 242](#)

[*Example: Configuring Ethernet Ring Protection Switching on EX Series Switches*](#)

[Ethernet Interfaces User Guide for Routing Devices](#)

Example: Ethernet Ring Protection Switching Configuration on MX Routers

IN THIS SECTION

- [Requirements | 242](#)
- [Ethernet Ring Overview and Topology | 243](#)
- [Configuring a Three-Node Ring | 243](#)

This example describes how to configure Ethernet ring protection switching on an MX Series router:

Requirements

This example uses the following hardware and software components:

- Router node 1 running Junos OS with two Gigabit Ethernet interfaces.
- Router node 2 running Junos OS with two Gigabit Ethernet interfaces.
- Router node 3 running Junos OS with two Gigabit Ethernet interfaces.


Ethernet Ring Overview and Topology

IN THIS SECTION

- [Topology | 243](#)

This section describes a configuration example for a three-node ring. The ring topology is shown in [Figure 17 on page 243](#).

Figure 17: Example of a Three-Node Ring Topology

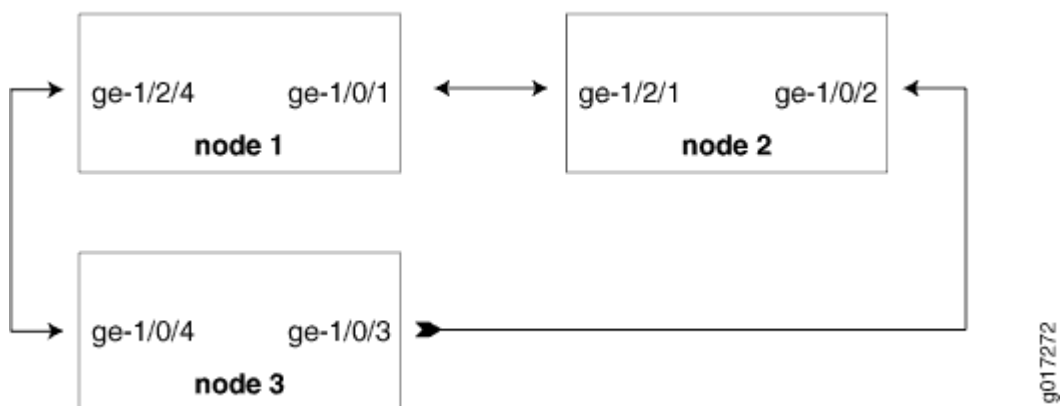

Topology

The configuration in this section is only for the RAPS channel. The bridge domain for user traffic is the same as the normal bridge domain. The only exception is if a bridge domain includes a ring port, then it must also include the other ring port of the same ring.

Configuring a Three-Node Ring

IN THIS SECTION

- [Configuring Ethernet Ring Protection Switching on a Three-Node Ring | 244](#)

To configure Ethernet Ring Protection Switching on a three-node ring, perform these tasks:

Configuring Ethernet Ring Protection Switching on a Three-Node Ring

Step-by-Step Procedure

1. Configuring Node 1

```

interfaces {
    ge-1/0/1 {
        vlan-tagging;
        encapsulation flexible-ethernet-services;
        unit 1 {
            encapsulation vlan-bridge;
            vlan-id 100;
        }
    }
    ge-1/2/4 {
        vlan-tagging;
        encapsulation flexible-ethernet-services;
        unit 1 {
            encapsulation vlan-bridge;
            vlan-id 100;
        }
    }
}
bridge-domains {
    bd1 {
        domain-type bridge;
        interface ge-1/2/4.1;
        interface ge-1/0/1.1;
    }
}
protocols {
    protection-group {
        ethernet-ring pgl01 {
            node-id 00:01:01:00:00:01;
            ring-protection-link-owner;
            east-interface {
                control-channel ge-1/0/1.1;
                ring-protection-link-end;
            }
            west-interface {
                control-channel ge-1/2/4.1;
            }
        }
    }
}

```

```

    }
  }
}
protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        action-profile rmep-defaults {
          default-action {
            interface-down;
          }
        }
        maintenance-domain d1 {
          level 0;
          maintenance-association 100 {
            mep 1 {
              interface ge-1/0/1;
              remote-mep 2 {
                action-profile rmep-defaults;
              }
            }
          }
        }
        maintenance-domain d2 {
          level 0;
          maintenance-association 100 {
            mep 1 {
              interface ge-1/2/4;
              remote-mep 2 {
                action-profile rmep-defaults;
              }
            }
          }
        }
      }
    }
  }
}

```

2. Configuring Node 2

```
interfaces {
    ge-1/0/2 {
        vlan-tagging;
        encapsulation flexible-ethernet-services;
        unit 1 {
            encapsulation vlan-bridge;
            vlan-id 100;
        }
    }

    ge-1/2/1 {
        vlan-tagging;
        encapsulation flexible-ethernet-services;
        unit 1 {
            encapsulation vlan-bridge;
            vlan-id 100;
        }
    }
}

bridge-domains {
    bd1 {
        domain-type bridge;
        interface ge-1/2/1.1;
        interface ge-1/0/2.1;
    }
}

protocols {
    protection-group {
        ethernet-ring pg102 {
            east-interface {
                control-channel ge-1/0/2.1;
            }
            west-interface {
                control-channel ge-1/2/1.1;
            }
        }
    }
}
```

```

}

protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        action-profile rmep-defaults {
          default-action {
            interface-down;
          }
        }
      }
      maintenance-domain d1 {
        level 0;
        maintenance-association 100 {
          mep 2 {
            interface ge-1/2/1;
            remote-mep 1 {
              action-profile rmep-defaults;
            }
          }
        }
      }
      maintenance-domain d3 {
        level 0;
        maintenance-association 100 {
          mep 1 {
            interface ge-1/0/2;
            remote-mep 2 {
              action-profile rmep-defaults;
            }
          }
        }
      }
    }
  }
}

```


3. Configuring Node 3

```
interfaces {
    ge-1/0/4 {
        vlan-tagging;
        encapsulation flexible-ethernet-services;
        unit 1 {
            encapsulation vlan-bridge;
            vlan-id 100;
        }
    }

    ge-1/0/3 {
        vlan-tagging;
        encapsulation flexible-ethernet-services;
        unit 1 {
            encapsulation vlan-bridge;
            vlan-id 100;
        }
    }
}

bridge-domains {
    bd1 {
        domain-type bridge;
        interface ge-1/0/4.1;
        interface ge-1/0/3.1;
    }
}

protocols {
    protection-group {
        ethernet-ring pg103 {
            east-interface {
                control-channel ge-1/0/3.1;
            }
            west-interface {
                control-channel ge-1/0/4.1;
            }
        }
    }
}
```

```

}

protocols {
  oam {
    ethernet {
      connectivity-fault-management {
        action-profile rmep-defaults {
          default-action {
            interface-down;
          }
        }
      }
      maintenance-domain d2 {
        level 0;
        maintenance-association 100 {
          mep 2 {
            interface ge-1/0/4;
            remote-mep 1 {
              action-profile rmep-defaults;
            }
          }
        }
      }
      maintenance-domain d3 {
        level 0;
        maintenance-association 100 {
          mep 2 {
            interface ge-1/0/3;
            remote-mep 1 {
              action-profile rmep-defaults;
            }
          }
        }
      }
    }
  }
}

```

Examples: Ethernet RPS Output

This section provides output examples based on the configuration shown in ["Example: Ethernet Ring Protection Switching Configuration on MX Routers" on page 242](#). The show commands used in these examples can help verify configuration and correct operation.

Normal Situation—RPL Owner Node

If the ring has no failure, the **show** command will have the following output for Node 1:

```
user@node1> show protection-group ethernet-ring aps
```

Ethernet Ring Name	Request/state	No Flush	Ring Protection Link Blocked
pg101	NR	No	Yes

Originator	Remote Node ID
Yes	

```
user@node1> show protection-group ethernet-ring interface
```

Ethernet ring port parameters for protection group pg101

Interface	Control Channel	Forward State	Ring Protection Link End
ge-1/0/1	ge-1/0/1.1	discarding	Yes
ge-1/2/4	ge-1/2/4.1	forwarding	No

Signal Failure	Admin State
Clear	IFF ready
Clear	IFF ready

```
user@node1> show protection-group ethernet-ring node-state
```

Ethernet ring	APS State	Event	Ring Protection Link Owner
pg101	idle	NR-RB	Yes

Restore Timer	Quard Timer	Operation state
disabled	disabled	operational

```
user@node1> show protection-group ethernet-ring statistics group-name pg101
```

Ethernet Ring statistics for PG pg101

RAPS sent	: 1
RAPS received	: 0
Local SF happened:	: 0

```

Remote SF happened:           : 0
NR event happened:            : 0
NR-RB event happened:         : 1

```

Normal Situation—Other Nodes

For Node 2 and Node 3, the outputs should be the same:

```

user@node2> show protection-group ethernet-ring aps
Ethernet Ring Name  Request/state  No Flush  Ring Protection Link Blocked
pg102              NR            No        Yes

Originator  Remote Node ID
No          00:01:01:00:00:01

user@node2> show protection-group ethernet-ring interface
Ethernet ring port parameters for protection group pg102

Interface      Control Channel  Forward State  Ring Protection Link End
ge-1/2/1       ge-1/2/1.1      forwarding     No
ge-1/0/2       ge-1/0/2.1      forwarding     No

Signal Failure  Admin State
Clear           IFF ready
Clear           IFF ready

user@node2> show protection-group ethernet-ring node-state
Ethernet ring      APS State  Event          Ring Protection Link Owner
pg102             idle      NR-RB          No

Restore Timer  Quard Timer  Operation state
disabled       disabled    operational

user@node2> show protection-group ethernet-ring statistics group-name pg102
Ethernet Ring statistics for PG pg101
RAPS sent              : 0
RAPS received          : 1
Local SF happened:     : 0
Remote SF happened:    : 0
NR event happened:     : 0
NR-RB event happened:  : 1

```

Failure Situation—RPL Owner Node

If the ring has a link failure between Node 2 and Node 3, the **show** command will have the following outputs for Node 1:

```
user@node1> show protection-group ethernet-ring aps
Ethernet Ring Name  Request/state  No Flush  Ring Protection Link Blocked
pg101               SF             NO        No

Originator  Remote Node ID
No          00:01:02:00:00:01

user@node1> show protection-group ethernet-ring interface
Ethernet ring port parameters for protection group pg101

Interface      Control Channel  Forward State  Ring Protection Link End
ge-1/0/1       ge-1/0/1.1      forwarding     Yes
ge-1/2/4       ge-1/2/4.1      forwarding     No

Signal Failure  Admin State
Clear           IFF ready
Clear           IFF ready

user@node1> show protection-group ethernet-ring node-state
Ethernet ring      APS State      Event          Ring Protection Link Owner
pg101             protected      SF             Yes

Restore Timer      Guard Timer      Operation state
disabled           disabled         operational

user@node1> show protection-group ethernet-ring statistics group-name pg101
Ethernet Ring statistics for PG pg101
RAPS sent          : 1
RAPS received      : 1
Local SF happened:  : 0
Remote SF happened: : 1
NR event happened:  : 0
NR-RB event happened: : 1
```

Failure Situation—Other Nodes

For Node 2 and Node 3, the outputs should be the same:

```

user@node2> show protection-group ethernet-ring aps
Ethernet Ring Name  Request/state  No Flush  Ring Protection Link Blocked
pg102              SF             No        No

Originator  Remote Node ID
Yes         00:00:00:00:00:00

user@node2> show protection-group ethernet-ring interface
Ethernet ring port parameters for protection group pg102

Interface      Control Channel  Forward State  Ring Protection Link End
ge-1/2/1       ge-1/2/1.1      forwarding     No
ge-1/0/2       ge-1/0/2.1      discarding     No

Signal Failure  Admin State
Clear           IFF ready
set            IFF ready

user@node2> show protection-group ethernet-ring node-state
Ethernet ring      APS State      Event          Ring Protection Link Owner
pg102             idle          NR-RB          No

Restore Timer  Quard Timer  Operation state
disabled      disabled    operational

user@node2> show protection-group ethernet-ring statistics group-name pg102
Ethernet Ring statistics for PG pg101
RAPS sent                : 1
RAPS received            : 1
Local SF happened:        : 1
Remote SF happened:       : 0
NR event happened:        : 0
NR-RB event happened:     : 1

```

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Understanding Ethernet Ring Protection Switching Functionality | 232](#)

8

PART

Configuring Nonstop Bridging

Understanding How Nonstop Bridging Preserves Layer 2 Protocol Information
During a Routing Engine Switchover | 256

Nonstop Bridging System Requirements | 260

Configuring Nonstop Bridging | 262

Understanding How Nonstop Bridging Preserves Layer 2 Protocol Information During a Routing Engine Switchover

IN THIS CHAPTER

- [Nonstop Bridging Concepts | 256](#)
- [Understanding Nonstop Bridging on EX Series Switches | 259](#)


Nonstop Bridging Concepts

Nonstop bridging uses the same infrastructure as *graceful Routing Engine switchover* (GRES) to preserve interface and kernel information. However, nonstop bridging also saves Layer 2 Control Protocol (L2CP) information by running the Layer 2 Control Protocol process (l2cpd) on the backup Routing Engine.

NOTE: To use nonstop bridging, you must first enable graceful Routing Engine switchover on your routing (or switching) platform. For more information about graceful Routing Engine switchover, see ["Understanding Graceful Routing Engine Switchover" on page 191](#).

Figure 18 on page 257 shows the system architecture of nonstop bridging and the process a routing (or switching) platform follows to prepare for a switchover.

Figure 18: Nonstop Bridging Switchover Preparation Process

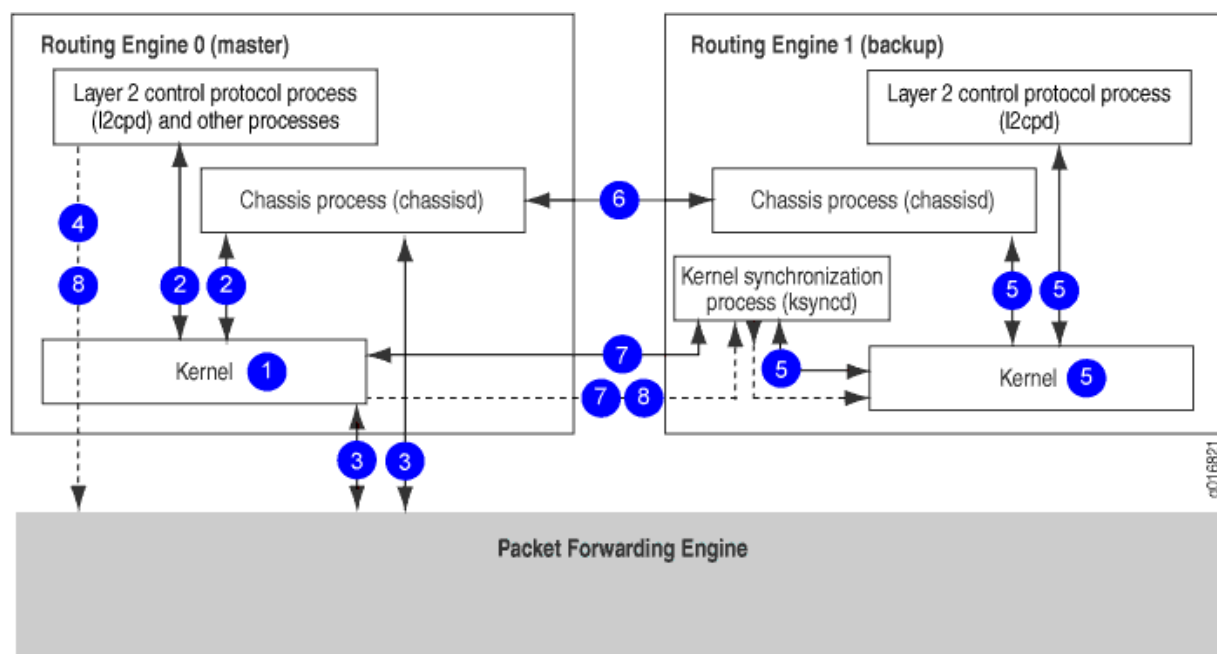


The switchover preparation process for nonstop bridging follows these steps:

1. The primary Routing Engine starts.
2. The routing platform processes on the primary Routing Engine (such as the chassis process [chassisd] and the Layer 2 Control Protocol process [l2cpd]) start.
3. The Packet Forwarding Engine starts and connects to the primary Routing Engine.
4. All state information is updated in the system.
5. The backup Routing Engine starts, including the chassis process (chassisd) and the Layer 2 Control Protocol process (l2cpd).
6. The system determines whether graceful Routing Engine switchover and nonstop bridging have been enabled.
7. The kernel synchronization process (ksyncd) synchronizes the backup Routing Engine with the primary Routing Engine.
8. For supported protocols, state information is updated directly between the l2cpds on the primary and backup Routing Engines.

Figure 19 on page 258 shows the effects of a switchover on the routing platform.

Figure 19: Nonstop Bridging During a Switchover

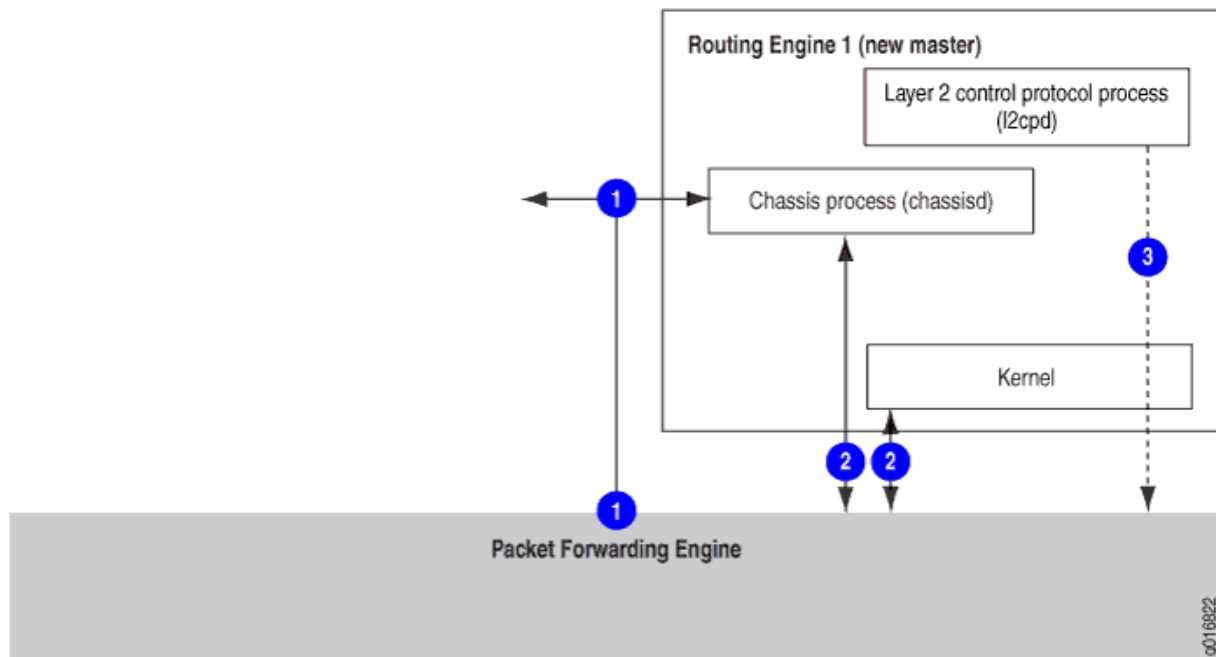

The switchover process follows these steps:

1. When keepalives from the primary Routing Engine are lost, the system switches over gracefully to the backup Routing Engine.
2. The Packet Forwarding Engine connects to the backup Routing Engine, which becomes the new primary. Because the Layer 2 Control Protocol process (l2cpd) and chassis process (chassisd) are already running, these processes do not need to restart.
3. State information learned from the point of the switchover is updated in the system. Forwarding and bridging are continued during the switchover, resulting in minimal packet loss.

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

[Nonstop Bridging System Requirements | 260](#)

[Configuring Nonstop Bridging | 262](#)

[Configuring Nonstop Bridging on Switches \(CLI Procedure\) | 264](#)

Understanding Nonstop Bridging on EX Series Switches

You can configure nonstop bridging (NSB) to provide resilience for Layer 2 protocol sessions on a Juniper Networks EX Series Ethernet Switch or on an EX Series *Virtual Chassis* with redundant Routing Engines.

NSB operates by synchronizing all protocol information for NSB-supported Layer 2 protocols between the primary and backup Routing Engines. If the switch has a Routing Engine switchover, the NSB-supported Layer 2 protocol sessions remain active because all session information is already synchronized to the backup Routing Engine. Traffic disruption for the NSB-supported Layer 2 protocol is minimal or nonexistent as a result of the switchover. The Routing Engine switchover is transparent to neighbor devices, which do not detect any changes related to the NSB-supported Layer 2 protocol sessions on the switch.

For a list of the EX Series switches and Layer 2 protocols that support NSB, see [EX Series Switch Software Features Overview](#) and [EX Series Virtual Chassis Software Features Overview](#).

NOTE: Nonstop bridging provides a transparent switchover mechanism only for Layer 2 protocol sessions. *Nonstop active routing* (NSR) provides a similar mechanism for Layer 3 protocol sessions. See "[Understanding Nonstop Active Routing on EX Series Switches](#)" on page 272.

RELATED DOCUMENTATION

[Configuring Nonstop Bridging on EX Series Switches \(CLI Procedure\)](#) | 266

[Configuring Nonstop Bridging on Switches \(CLI Procedure\)](#) | 264

Nonstop Bridging System Requirements

IN THIS CHAPTER

- [Nonstop Bridging System Requirements | 260](#)

Nonstop Bridging System Requirements

IN THIS SECTION

- [Platform Support | 260](#)
- [Protocol Support | 261](#)

This topic contains the following sections:

Platform Support

Nonstop bridging is supported on MX Series 5G Universal Routing Platforms. Your system must be running Junos OS Release 8.4 or later.

Nonstop bridging is supported on EX Series switches with redundant Routing Engines in a Virtual Chassis or in a Virtual Chassis Fabric.

Nonstop bridging is supported on QFX Series switches in a Virtual Chassis or in a Virtual Chassis Fabric.

For a list of the EX Series switches and Layer 2 protocols that support nonstop bridging, see [EX Series Switch Software Features Overview](#).

NOTE: All Routing Engines configured for nonstop bridging must be running the same Junos OS release.

Protocol Support

Nonstop bridging is supported for the following Layer 2 control protocols:

- Spanning Tree Protocol (STP)
- Rapid Spanning Tree Protocol (RSTP)
- Multiple Spanning Tree Protocol (MSTP)
- VLAN Spanning Tree Protocol (VSTP)

RELATED DOCUMENTATION

[Nonstop Bridging Concepts | 256](#)

[Configuring Nonstop Bridging | 262](#)

[Configuring Nonstop Bridging on Switches \(CLI Procedure\) | 264](#)

Configuring Nonstop Bridging

IN THIS CHAPTER

- [Configuring Nonstop Bridging | 262](#)
- [Configuring Nonstop Bridging on Switches \(CLI Procedure\) | 264](#)
- [Configuring Nonstop Bridging on EX Series Switches \(CLI Procedure\) | 266](#)

Configuring Nonstop Bridging

IN THIS SECTION

- [Enabling Nonstop Bridging | 262](#)
- [Synchronizing the Routing Engine Configuration | 263](#)
- [Verifying Nonstop Bridging Operation | 263](#)

This section includes the following topics:

Enabling Nonstop Bridging

Nonstop bridging requires you to configure graceful Routing Engine switchover (GRES). To enable graceful Routing Engine switchover, include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level:

```
[edit chassis redundancy]  
graceful-switchover;
```

By default, nonstop bridging is disabled. To enable nonstop bridging, include the **nonstop-bridging** statement at the **[edit protocols layer2-control]** hierarchy level:

```
[edit protocols layer2-control]  
nonstop-bridging;
```

To disable nonstop active routing, remove the **nonstop-bridging** statement from the **[edit protocols layer2-control]** hierarchy level.

Synchronizing the Routing Engine Configuration

When you configure nonstop bridging, you must also include the **commit synchronize** statement at the **[edit system]** hierarchy level so that, by default, when you issue the **commit** command, the configuration changes are synchronized on both Routing Engines. If you issue the **commit synchronize** command at the **[edit]** hierarchy level on the backup Routing Engine, the Junos OS displays a warning and commits the candidate configuration.

NOTE: A newly inserted backup Routing Engine automatically synchronizes its configuration with the primary Routing Engine configuration.

When you configure nonstop bridging, you can bring the backup Routing Engine online after the primary Routing Engine is already running. There is no requirement to start the two Routing Engines simultaneously.

Verifying Nonstop Bridging Operation

When you enable nonstop bridging, you can issue Layer 2 Control Protocol-related operational mode commands on the backup Routing Engine. However, the output of the commands might not match the output of the same commands issued on the primary Routing Engine.

RELATED DOCUMENTATION

[Nonstop Bridging Concepts | 256](#)

[Nonstop Bridging System Requirements | 260](#)

[nonstop-bridging | 778](#)

[Configuring Nonstop Bridging on EX Series Switches \(CLI Procedure\) | 266](#)

Configuring Nonstop Bridging on Switches (CLI Procedure)

NOTE: This task uses switches with support for the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that does not support ELS, see ["Configuring Nonstop Bridging on EX Series Switches \(CLI Procedure\)" on page 266](#). For ELS details, see *Using the Enhanced Layer 2 Software CLI*.

You can configure nonstop bridging (NSB) to provide resilience for Layer 2 protocol sessions on a Juniper Networks EX Series switch with multiple Routing Engines or an EX Series or QFX Series switch in a Virtual Chassis or Virtual Chassis Fabric configuration. Limited support for NSB is also provided on QFX5100 and EX4600 standalone switches, but NSB is enabled *only* during an ISSU.

NSB operates by synchronizing all protocol information for NSB-supported Layer 2 protocols between the primary and backup Routing Engines. If the switch has a Routing Engine switchover, the NSB-supported Layer 2 protocol sessions remain active because they are already synchronized on the backup Routing Engine. The Routing Engine switchover is transparent to neighbor devices, which do not detect any changes related to the Layer 2 protocol sessions. The neighboring devices and other devices on the network do not, therefore, have to resynchronize their Layer 2 protocol states to respond to the downtime on the switch—a process that adds network overhead and risks disrupting network performance—when a Routing Engine switchover occurs when NSB is enabled.

NOTE: If you are using a QFX5100 or EX4600 standalone switch and you want to use ISSU, configure Graceful Routing Engine switchover (GRES), NSB and nonstop active routing (NSR). You must configure NSB, GRES, and NSR in order to run ISSU. However, GRES, NSB and NSR are enabled *only* during the upgrade. During an ISSU, the Junos OS runs in two separate virtual machines (VMs)—one VM is in the primary role acting as the primary Routing Engine, and the other VM is in the backup role acting as the backup Routing Engine. The Junos OS is upgraded on the backup VM. After a successful software upgrade, the backup VM then becomes the primary VM, and the original primary VM is no longer needed and is shut down.

To configure NSB:

1. Enable graceful Routing Engine switchover (GRES):

```
[edit chassis redundancy]
user@switch# set graceful-switchover
```

2. Enable NSB:

```
[edit protocols layer2-control]
user@switch# set nonstop-bridging
```

3. Synchronize configuration changes between the Routing Engines:

```
[edit system]
user@switch# set commit synchronize
```

If you try to commit a configuration that includes NSB without including the **commit synchronize** statement, the commit fails.

NOTE: There is no requirement to start the two Routing Engines simultaneously. If the backup Routing Engine is not up when you use the **commit synchronize** statement, the candidate configuration is committed in the primary Routing Engine. When the backup Routing Engine comes online, its configuration is automatically synchronized with that of the primary.

BEST PRACTICE: After a graceful Routing Engine switchover, we recommend that you issue the **clear interface statistics (*interface-name* | all)** command to reset the cumulative values for local statistics on the new primary Routing Engine.

RELATED DOCUMENTATION

[Performing an In-Service Software Upgrade \(ISSU\) with Non-Stop Routing | 575](#)

[Understanding Nonstop Bridging on EX Series Switches | 259](#)

[Nonstop Bridging Concepts | 256](#)

[Understanding In-Service Software Upgrade \(ISSU\) | 504](#)

Configuring Nonstop Bridging on EX Series Switches (CLI Procedure)

NOTE: This task uses Junos OS for EX Series switches that do not support the Enhanced Layer 2 Software (ELS) configuration style. If your switch runs software that supports ELS, see ["Configuring Nonstop Bridging on Switches \(CLI Procedure\)" on page 264](#).

You can configure nonstop bridging (NSB) to provide resilience for Layer 2 protocol sessions on an EX Series switch with redundant Routing Engines.

Nonstop bridging operates by synchronizing all protocol information for NSB-supported Layer 2 protocols between the primary and backup Routing Engines. If the switch has a Routing Engine switchover, the NSB-supported Layer 2 protocol sessions remain active because they are already synchronized on the backup Routing Engine. The Routing Engine switchover is transparent to neighbor devices, which do not detect any changes related to the Layer 2 protocol sessions on the switch.

To configure nonstop bridging:

1. Enable graceful Routing Engine switchover (GRES):

```
[edit chassis redundancy]
user@switch# set graceful-switchover
```

2. Configure the switch to always synchronize configuration changes between the Routing Engines:

```
[edit system]
user@switch# set commit synchronize
```

If you try to commit a configuration in which nonstop bridging is configured but synchronization of configuration changes is not configured, the configuration is not committed.

3. Enable nonstop bridging:

```
[edit ethernet-switching-options]
user@switch# set nonstop-bridging
```

NOTE: There is no requirement to start both Routing Engines simultaneously. If the backup Routing Engine is not up when you commit the configuration, the candidate configuration is

committed in the primary Routing Engine. When the backup Routing Engine comes online, the configuration is automatically synchronized.

RELATED DOCUMENTATION

Example: Faster Convergence and Improved Network Stability with RSTP on EX Series Switches

[Understanding Nonstop Bridging on EX Series Switches](#) | 259

9

PART

Configuring Nonstop Active Routing (NSR)

Understanding How Nonstop Active Routing Preserves Routing Protocol
Information During a Routing Engine Switchover | 269

Nonstop Active Routing System Requirements | 274

Configuring Nonstop Active Routing | 290

Understanding How Nonstop Active Routing Preserves Routing Protocol Information During a Routing Engine Switchover

IN THIS CHAPTER

- Nonstop Active Routing Concepts | 269
- Understanding Nonstop Active Routing on EX Series Switches | 272

Nonstop Active Routing Concepts

Nonstop active routing (NSR) uses the same infrastructure as *graceful Routing Engine switchover* (GRES) to preserve interface and kernel information. However, NSR also saves routing protocol information by running the routing protocol process (rpd) on the backup Routing Engine. By saving this additional information, NSR is self-contained and does not rely on helper routers (or switches) to assist the routing platform in restoring routing protocol information. NSR is advantageous in networks in which neighbor routers (or switches) do not support graceful restart protocol extensions. As a result of this enhanced functionality, NSR is a natural replacement for graceful restart.

Starting with Junos OS Release 15.1R1, if you have NSR configured, it is never valid to issue the **restart routing** command in any form on the NSR primary Routing Engine. Doing so results in a loss of protocol adjacencies and neighbors and a drop in traffic.


NOTE: To use NSR, you must first enable GRES on your routing (or switching) platform. For more information about GRES, see "[Understanding Graceful Routing Engine Switchover](#)" on page 191.

NOTE: Starting with Junos OS Release 12.3, because of its synchronization requirements and logic, NSR or GRES performance is limited by the slowest Routing Engine in the system.

NOTE: If NSR is enabled, certain system log (syslog) messages are sent from the backup Routing Engine if the configured syslog host is reachable through the fxp0 interface.

Figure 20 on page 270 shows the system architecture of nonstop active routing and the process a routing (or switching) platform follows to prepare for a switchover.

Figure 20: Nonstop Active Routing Switchover Preparation Process

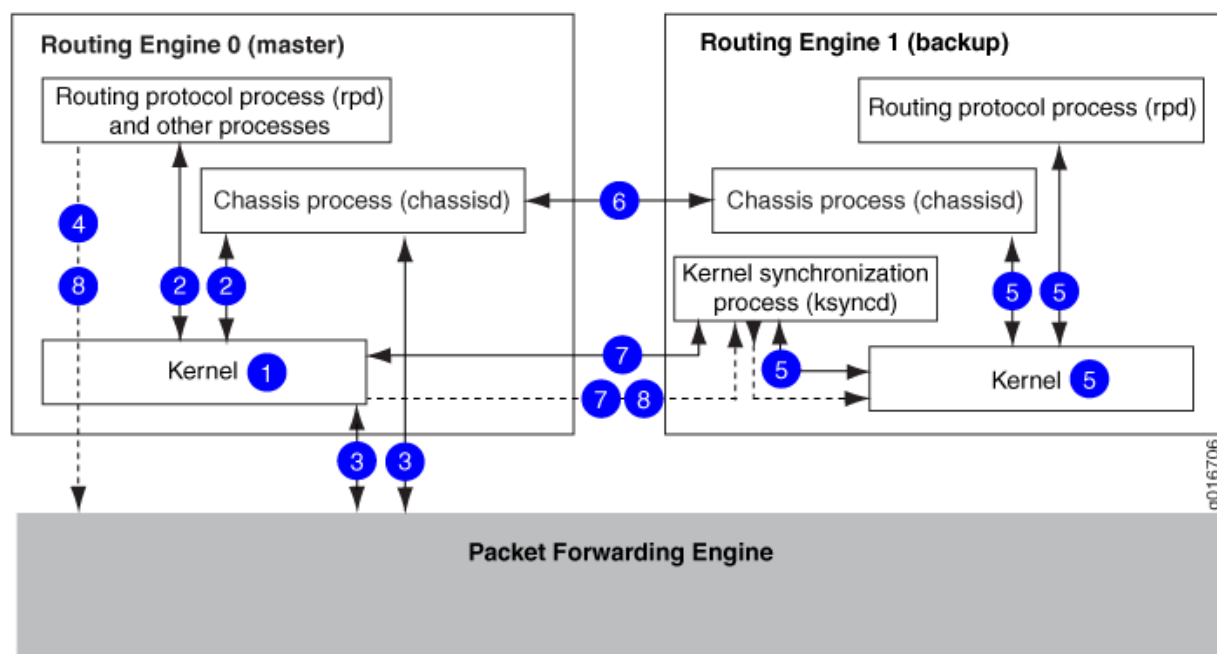


The switchover preparation process for NSR comprises the following steps:

1. The primary Routing Engine starts.
2. The routing (or switching) platform processes on the primary Routing Engine (such as the chassis process [chassisd] and the routing protocol process [rpdp]) start.
3. The Packet Forwarding Engine starts and connects to the primary Routing Engine.
4. All state information is updated in the system.
5. The backup Routing Engine starts, including the chassis process (chassisd) and the routing protocol process (rpdp).
6. The system determines whether GRES and NSR have been enabled.

7. The kernel synchronization process (ksyncd) synchronizes the backup Routing Engine with the primary Routing Engine.
8. For supported protocols, state information is updated directly between the routing protocol processes on the primary and backup Routing Engines.

Figure 21 on page 271 shows the effects of a switchover on the routing platform.

Figure 21: Nonstop Active Routing During a Switchover

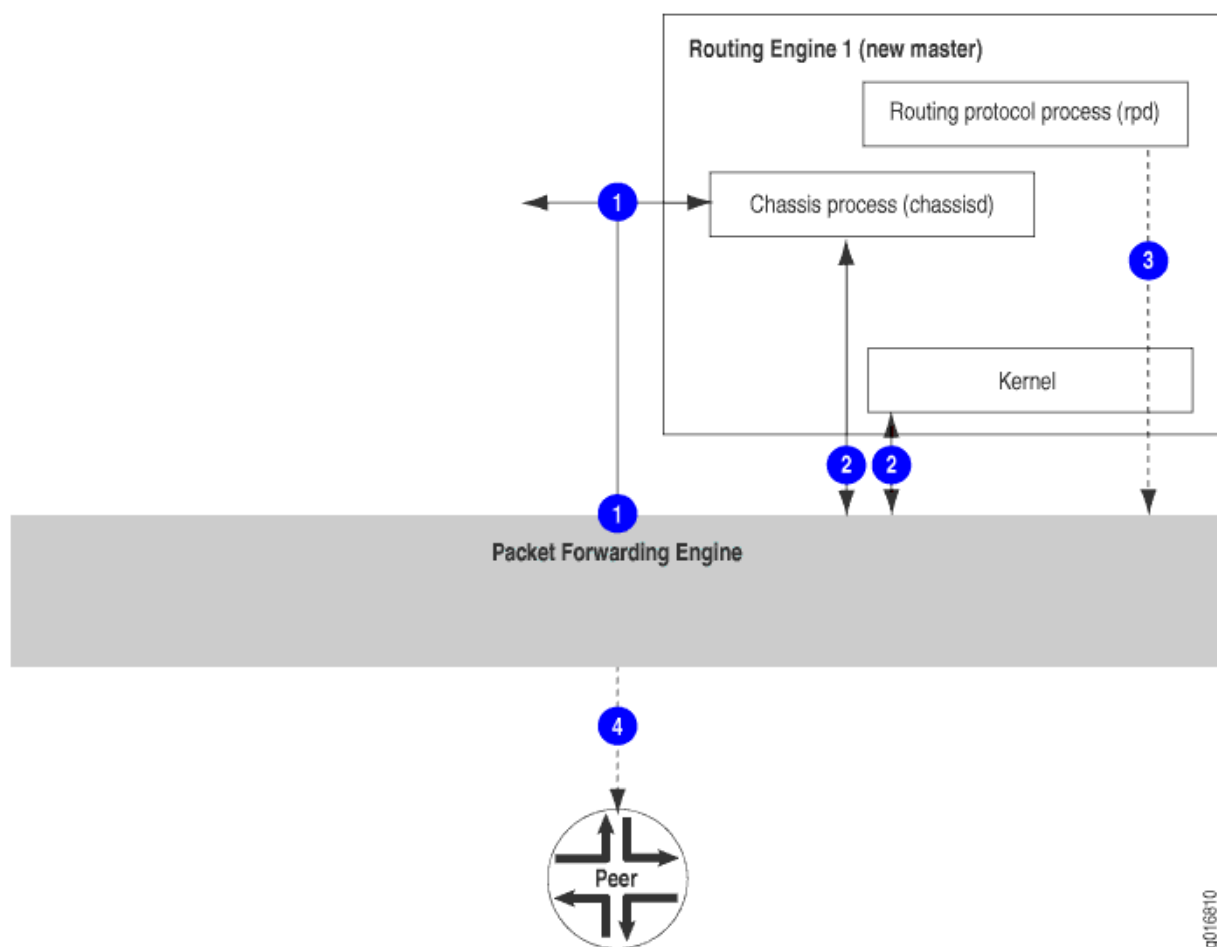

The switchover process comprises the following steps:

1. When keepalives from the primary Routing Engine are lost, the system switches over gracefully to the backup Routing Engine.
2. The Packet Forwarding Engine connects to the backup Routing Engine, which becomes the new primary. Because the routing protocol process (rpd) and chassis process (chassisd) are already running, these processes do not need to restart.

3. State information learned from the point of the switchover is updated in the system. Forwarding and routing are continued during the switchover, resulting in minimal packet loss.
4. Peer routers (or switches) continue to interact with the routing platform as if no change had occurred. Routing adjacencies and session state relying on underlying routing information are preserved and not reset.



CAUTION: We recommend that you do not restart the routing protocol process (rpd) on primary Routing Engine after enabling NSR, as it disrupts the protocol adjacency/peering sessions, resulting in traffic loss.

Release History Table

Release	Description
15.1R1	Starting with Junos OS Release 15.1R1, if you have NSR configured, it is never valid to issue the restart routing command in any form on the NSR primary Routing Engine.
12.3	Starting with Junos OS Release 12.3, because of its synchronization requirements and logic, NSR or GRES performance is limited by the slowest Routing Engine in the system.

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

[Nonstop Active Routing System Requirements | 274](#)

[Configuring Nonstop Active Routing | 290](#)

[Configuring Nonstop Active Routing on Switches | 293](#)

Understanding Nonstop Active Routing on EX Series Switches

You can configure *nonstop active routing* (NSR) on an EX Series switch with redundant Routing Engines or on an EX Series *Virtual Chassis* to enable the transparent switchover of the Routing Engines in the event that one of the Routing Engines goes down.

Nonstop active routing provides high availability for Routing Engines by enabling transparent switchover of the Routing Engines without requiring restart of supported routing protocols. Both Routing Engines are fully active in processing protocol sessions, and so each can take over for the other. The switchover is transparent to neighbor routing devices, which do not detect that a change has occurred.

Enable nonstop active routing when neighbor routing devices are not configured to support graceful restart of protocols or when you want to ensure graceful restart of protocols for which graceful restart is not supported—such as PIM.

You do not need to start the two Routing Engines simultaneously to synchronize them for nonstop active routing. If both Routing Engines are not present or not up when you issue a **commit synchronize** statement, the candidate configuration is committed in the primary Routing Engine and when the backup Routing Engine is inserted or comes online, its configuration is automatically synchronized with that of the primary.

Nonstop active routing uses the same infrastructure as *graceful Routing Engine switchover* (GRES) to preserve interface and kernel information. However, nonstop active routing also saves routing protocol information by running the routing protocol process (**rpd**) on the backup Routing Engine. By saving this additional information, nonstop active routing does not rely on other routing devices to assist in restoring routing protocol information.

NOTE: After a graceful Routing Engine switchover, we recommend that you issue the **clear interface statistics (*interface-name* | all)** command to reset the cumulative values for local statistics on the new primary Routing Engine.

If you suspect a problem with the synchronization of Routing Engines when nonstop active routing is enabled, you can gather troubleshooting information using trace options. For example, if certain protocols lose connectivity with neighbors after a graceful Routing Engine switchover with NSR enabled, you can use trace options to help isolate the problem. See ["Tracing Nonstop Active Routing Synchronization Events" on page 299](#).

NOTE: Graceful restart and nonstop active routing are mutually exclusive. You will receive an error message upon commit if both are configured.

NOTE: Nonstop active routing provides a transparent switchover mechanism only for Layer 3 protocol sessions. Nonstop bridging (NSB) provides a similar mechanism for Layer 2 protocol sessions. See ["Understanding Nonstop Bridging on EX Series Switches" on page 259](#).

RELATED DOCUMENTATION

[Configuring Nonstop Active Routing on Switches | 293](#)

[Example: Configuring Nonstop Active Routing on Switches | 301](#)

Nonstop Active Routing System Requirements

IN THIS CHAPTER

- [Nonstop Active Routing System Requirements | 274](#)

Nonstop Active Routing System Requirements

IN THIS SECTION

- [Nonstop Active Routing Platform and Switching Platform Support | 274](#)
- [Nonstop Active Routing Protocol and Feature Support | 276](#)
- [Nonstop Active Routing BFD Support | 281](#)
- [Nonstop Active Routing BGP Support | 282](#)
- [Nonstop Active Routing Layer 2 Circuit and VPLS Support | 283](#)
- [Nonstop Active Routing PIM Support | 284](#)
- [Nonstop Active Routing MSDP Support | 286](#)
- [Nonstop Active Routing Support for RSVP-TE LSPs | 287](#)

This section contains the following topics:

Nonstop Active Routing Platform and Switching Platform Support

[Table 6 on page 275](#) lists the platforms that support nonstop active routing (NSR).

Table 6: Nonstop Active Routing Platform Support

Platform	Junos OS Release
M10i router	8.4 or later
M20 router	8.4 or later
M40e router	8.4 or later
M120 router	9.0 or later
M320 router	8.4 or later
MX Series routers	9.0 or later
PTX Series Packet Transport Routers NOTE: Nonstop active routing (NSR) switchover on PTX series is supported only for the following MPLS and VPN protocols and applications using chained composite next hops: • Labeled BGP • Layer 2 VPNs excluding Layer 2 interworking (Layer 2 switching) • Layer 3 VPNs • LDP • RSVP	12.1R4 or later
T320 router, T640 router, and TX Matrix router	8.4 or later
Standalone T1600 router	8.5 or later

Table 6: Nonstop Active Routing Platform Support (Continued)

Platform	Junos OS Release
Standalone T4000 router	12.1R2 or later
TX Plus Matrix router	10.0 or later
TX Plus Matrix router with 3D SIBs	13.1 or later
EX Series switch with dual Routing Engines or in a Virtual Chassis	10.4 or later for EX Series switches
EX Series or QFX Series switches in a Virtual Chassis Fabric	13.2X51-D20 or later for the EX Series and QFX Series switches

NOTE: All Routing Engines configured for nonstop active routing must be running the same Junos OS release.

Nonstop Active Routing Protocol and Feature Support

Table 7 on page 276 lists the protocols that are supported by nonstop active routing.

Table 7: Nonstop Active Routing Protocol and Feature Support

Protocol	Junos OS Release
Aggregated Ethernet interfaces with Link Aggregation Control Protocol (LACP)	9.4 or later
Bidirectional Forwarding Detection (BFD) For more information, see "Nonstop Active Routing BFD Support" on page 281.	8.5 or later

Table 7: Nonstop Active Routing Protocol and Feature Support (*Continued*)

Protocol	Junos OS Release
BGP For more information, see "Nonstop Active Routing BGP Support" on page 282.	8.4 or later
EVPN • EVPN with ingress replication for BUM traffic • EVPN-ETREE • EVPN-VPWS • EVPN -VXLAN • PBB-EVPN • EVPN with P2MP mLDP replication for BUM traffic For more information, please see <i>NSR and Unified ISSU Support for EVPN</i> .	16.2R1 or later (for EVPN with ingress replication for BUM traffic) 17.2R1 or later (for (EVPN-ETREE, EVPN-VPWS, EVPN-VXLAN, and PBB-EVPN) 18.2R1 or later (for EVPN with P2MP mLDP replication for BUM traffic)
Labeled BGP (PTX Series Packet Transport Routers: only)	12.1R4 or later
IS-IS	8.4 or later
LDP	8.4 or later
LDP-based virtual private LAN service (VPLS)	9.3 or later
LDP OAM (operation, administration, and management) features	9.6 or later

Table 7: Nonstop Active Routing Protocol and Feature Support *(Continued)*

Protocol	Junos OS Release
LDP (PTX Series Packet Transport Routers only) Nonstop active routing support for LDP includes: • LDP unicast transit LSPs • LDP egress LSPs for labeled internal BGP (IBGP) and external BGP (EBGP) • LDP over RSVP transit LSPs • LDP transit LSPs with indexed next hops • LDP transit LSPs with unequal cost load balancing • LDP Point-to-Multipoint LSPs • LDP ingress LSPs	12.3R4 or later (for LDP Point-to-Multipoint LSPs) 13.3R1 or later (for LDP ingress LSPs) 13.3R1 or later
Layer 2 circuits	(on LDP-based VPLS) 9.2 or later (on RSVP-TE LSP) 11.1 or later
Layer 2 VPNs	9.1 or later
Layer 2 VPNs (PTX Series Packet Transport Routers only) NOTE: Nonstop active routing is not supported for Layer 2 interworking (Layer 2 stitching).	12.1R4 or later

Table 7: Nonstop Active Routing Protocol and Feature Support *(Continued)*

Protocol	Junos OS Release
Layer 3 VPNs (see the first Note after this table for restrictions) Nonstop active routing support for Layer 3 VPNs include: • IPv4 labeled-unicast (ingress or egress) • IPv4-vpn unicast (ingress or egress) • IPv6 labeled-unicast (ingress or egress) • IPv6-vpn unicast (ingress or egress)	9.2 or later
Layer 3 VPNs (PTX Series Packet Transport Routers only)	12.1R4 or later
Logical System support (Nonstop active routing support for logical systems to preserve interface and kernel information).	13.3R1 or later
Multicast Source Discovery Protocol (MSDP) For more information, see "Nonstop Active Routing MSDP Support" on page 286.	12.1 or later
OSPF/OSPFv3	8.4 or later
Protocol Independent Multicast (PIM) For more information, see "Nonstop Active Routing PIM Support" on page 284.	(for IPv4) 9.3 or later (for IPv6) 10.4 or later
RIP and RIP next generation (RIPng)	9.0 or later

Table 7: Nonstop Active Routing Protocol and Feature Support *(Continued)*

Protocol	Junos OS Release
RSVP (PTX Series Packet Transport Routers only) Nonstop active routing support for RSVP includes: • Point-to-Multipoint LSPs • RSVP Point-to-Multipoint ingress, transit, and egress LSPs using existing non-chained next hop. • RSVP Point-to-Multipoint transit LSPs using composite next hops for Point-to-Multipoint label routes. • Point-to-Point LSPs • RSVP Point-to-Point ingress, transit, and egress LSPs using non-chained next hops. • RSVP Point-to-Point transit LSPs using chained composite next hops.	12.1R4 or later
RSVP-TE LSP For more information, see "Nonstop Active Routing Support for RSVP-TE LSPs" on page 287 .	9.5 or later
VPLS	(LDP-based) 9.1 or later (RSVP-TE-based) 11.2 or later
VRRP	13.2 or later
VRRP	13.2 or later

NOTE: Layer 3 VPN support does not include dynamic GRE tunnels, multicast VPNs, or BGP flow routes.

NOTE: If you configure a protocol that is not supported by nonstop active routing, the protocol operates as usual. When a switchover occurs, the state information for the unsupported protocol is not preserved and must be refreshed using the normal recovery mechanisms inherent in the protocol.

NOTE: On routers that have logical systems configured on them, NSR is only supported in the main instance.

NOTE: Starting with Junos OS Release 13.3R5, on EX9214 switches, the VRRP primary state might change during graceful Routing Engine switchover, even when nonstop active routing is enabled.

Nonstop Active Routing BFD Support

Nonstop active routing supports the Bidirectional Forwarding Detection (BFD) protocol, which uses the topology discovered by routing protocols to monitor neighbors. The BFD protocol is a simple hello mechanism that detects failures in a network. Because BFD is streamlined to be efficient at fast liveness detection, when it is used in conjunction with routing protocols, routing recovery times are improved. With nonstop active routing enabled, BFD session states are not restarted when a Routing Engine switchover occurs.

NOTE: BFD session states are saved only for clients using aggregate or static routes or for BGP, IS-IS, OSPF/OSPFv3, PIM, or RSVP.

When a BFD session is distributed to the Packet Forwarding Engine, BFD packets continue to be sent during a Routing Engine switchover. If nondistributed BFD sessions are to be kept alive during a switchover, you must ensure that the session failure detection time is greater than the Routing Engine switchover time. The following BFD sessions are not distributed to the Packet Forwarding Engine: multihop sessions, tunnel-encapsulated sessions, and sessions over integrated routing and bridging (IRB) interfaces.

NOTE: BFD is an intensive protocol that consumes system resources. Specifying a minimum interval for BFD less than 100 ms for Routing Engine-based sessions and 10 ms for distributed

BFD sessions can cause undesired BFD flapping. The **minimum-interval** configuration statement is a BFD liveness detection parameter.

Depending on your network environment, these additional recommendations might apply:

- For large-scale network deployments with a large number of BFD sessions, specify a minimum interval of 300 ms for Routing Engine-based sessions, and 100 ms for distributed BFD sessions.
- For very large-scale network deployments with a large number of BFD sessions, contact Juniper Networks customer support for more information.
- For BFD sessions to remain up during a Routing Engine switchover event when nonstop active routing is configured, specify a minimum interval of 10 seconds for Routing Engine-based sessions. For distributed BFD sessions with nonstop active routing configured, the minimum interval recommendations are unchanged and depend only on your network deployment.

Nonstop Active Routing BGP Support

Nonstop active routing BGP support is subject to the following conditions:

- You must include the **path-selection external-router-ID** statement at the **[edit protocols bgp]** hierarchy level to ensure consistent path selection between the primary and backup Routing Engines during and after the nonstop active routing switchover.
- Starting with Junos OS Release 14.1, you must include the `advertise-from-main-vpn-tables` statement at the **[edit protocols bgp]** hierarchy level to prevent BGP sessions from going down when route reflector (RR) or autonomous system border router (ASBR) functionality is enabled or disabled on a routing device that has VPN address families configured.
- BGP session uptime and downtime statistics are not synchronized between the primary and backup Routing Engines during Nonstop Active Routing and ISSU. The backup Routing Engine maintains its own session uptime based on the time when the backup first becomes aware of the established sessions. For example, if the backup Routing Engine is rebooted (or if you run **restart routing** on the backup Routing Engine), the backup's uptime is a short duration, because the backup has just learned about the established sessions. If the backup is operating when the BGP sessions first come up on the primary, the uptime on the primary and the uptime on the backup are almost the same duration. After a Routing Engine switchover, the new primary continues from the time left on the backup Routing Engine.
- If the BGP peer in the primary Routing Engine has negotiated address-family capabilities that are not supported for nonstop active routing, then the corresponding BGP neighbor state on the backup

Routing Engine shows as idle. On switchover, the BGP session is reestablished from the new primary Routing Engine.

Only the following address families are supported for nonstop active routing.

NOTE: Address families are supported only on the main instance of BGP. Only unicast is supported on VRF instances.

- inet labeled-unicast
- inet-mdt
- inet multicast
- inet-mvpn
- inet unicast
- inet-vpn unicast
- inet6 labeled-unicast
- inet6 multicast
- inet6-mvpn
- inet6 unicast
- inet6-vpn unicast
- iso-vpn
- l2vpn signaling
- route-target
- BGP route dampening does not work on the backup Routing Engine when nonstop active routing is enabled.

Nonstop Active Routing Layer 2 Circuit and VPLS Support

Nonstop active routing supports Layer 2 circuit and VPLS on both LDP-based and RSVP-TE-based networks. Nonstop active routing support enables the backup Routing Engine to track the label advertised by Layer 2 circuit and VPLS on the primary Routing Engine, and to use the same label after the Routing Engine switchover.

in Junos OS Release 9.6 and later, nonstop active routing support is extended to the Layer 2 circuit and LDP-based VPLS pseudowire redundant configurations.

Nonstop Active Routing PIM Support

Nonstop active routing supports Protocol Independent Multicast (PIM) with stateful replication on backup Routing Engines. State information replicated on the backup Routing Engine includes information about neighbor relationships, join and prune events, rendezvous point (RP) sets, synchronization between routes and next hops, multicast session states, and the forwarding state between the two Routing Engines.

NOTE: Nonstop active routing for PIM is supported for IPv4 on Junos OS Release 9.3 and later, and for IPv6 on Junos OS Release 10.4 and later. Starting with Release 11.1, Junos OS also supports nonstop active routing for PIM on devices that have both IPv4 and IPv6 configured on them.

To configure nonstop active routing for PIM, include the same statements in the configuration as for other protocols: the **nonstop-routing** statement at the **[edit routing-options]** hierarchy level and the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level. To trace PIM nonstop active routing events, include the **flag nsr-synchronization** statement at the **[edit protocols pim traceoptions]** hierarchy level.

NOTE: The **clear pim join**, **clear pim register**, and **clear pim statistics** operational mode commands are not supported on the backup Routing Engine when nonstop active routing is enabled.

Nonstop active routing support varies for different PIM features. The features fall into the following three categories: supported features, unsupported features, and incompatible features.

Supported features:

- Auto-RP

NOTE: Nonstop active routing PIM support on IPv6 does not support auto-RP because IPv6 does not support auto-RP.

- Bootstrap router (BSR)
- Static RPs

- Embedded RP on non-RP IPv6 routers
- Local RP

NOTE: RP set information synchronization is supported for local RP and BSR (on IPv4 and IPv6), autoRP (on IPv4), and embedded RP (on IPv6).

- BFD
- Dense mode
- Sparse mode
- Source-specific multicast (SSM)
- Draft Rosen multicast VPNs (MVPNs)
- Anycast RP (anycast RP set information synchronization and anycast RP register state synchronization on IPv4 and IPv6 configurations)
- Flow maps
- Unified ISSU
- Policy features such as neighbor policy, bootstrap router export and import policies, scope policy, flow maps, and reverse path forwarding (RPF) check policies
- Upstream assert synchronization
- PIM join load balancing

Starting with Release 12.2, Junos OS extends the nonstop active routing PIM support to draft Rosen MVPNs. Nonstop active routing PIM support for draft Rosen MVPNs enables nonstop active routing-enabled devices to preserve draft Rosen MPVN-related information—such as default and data multicast distribution tree (MDT) states—across switchovers. In releases earlier than 12.2, nonstop active routing PIM configuration was incompatible with draft Rosen MPVN configuration.

The backup Routing Engine sets up the default MDT based on the configuration and the information it receives from the primary Routing Engine, and keeps updating the default MDT state information.

However, for data MDTs, the backup Routing Engine relies on the primary Routing Engine to provide updates when data MDTs are created, updated, or deleted. The backup Routing Engine neither monitors data MDT flow rates nor triggers a data MDT switchover based on variations in flow rates. Similarly, the backup Routing Engine does not maintain the data MDT delay timer or timeout timer. It does not send MDT join TLV packets for the data MDTs until it takes over as the primary Routing Engine. After the switchover, the new primary Routing Engine starts sending MDT join TLV packets for each data MDT,

and also resets the data MDT timers. Note that the expiration time for the timers might vary from the original values on the previous primary Routing Engine.

Starting with Release 12.3, Junos OS extends the Protocol Independent Multicast (PIM) nonstop active routing support to IGMP-only interfaces.

In Junos OS releases earlier than 12.3, the PIM joins created on IGMP-only interfaces were not replicated on the backup Routing Engine. Thus, the corresponding multicast routes were marked as pruned (meaning discarded) on the backup Routing Engine. Because of this limitation, after a switchover, the new primary Routing Engine had to wait for the IGMP module to come up and start receiving reports to create PIM joins and to install multicast routes. This caused traffic loss until the multicast joins and routes were reinstated.

However, in Junos OS Release 12.3 and later, the multicast joins on the IGMP-only interfaces are mapped to PIM states, and these states are replicated on the backup Routing Engine. If the corresponding PIM states are available on the backup, the multicast routes are marked as forwarding on the backup Routing Engine. This enables uninterrupted traffic flow after a switchover. This enhancement covers IGMPv2, IGMPv3, MLDv1, and MLDv2 reports and leaves.

Unsupported features: You can configure the following PIM features on a router along with nonstop active routing, but they function as if nonstop active routing is not enabled. In other words, during Routing Engine switchover and other outages, their state information is not preserved, and traffic loss is to be expected.

- Internet Group Management Protocol (IGMP) exclude mode
- IGMP snooping

Nonstop active routing is not supported for next-generation MVPNs with PIM provider tunnels. The commit operation fails if the configuration includes both nonstop active routing and next-generation MVPNs with PIM provider tunnels.

Junos OS provides a configuration statement that disables nonstop active routing for PIM only, so that you can activate incompatible PIM features and continue to use nonstop active routing for the other protocols on the router. Before activating an incompatible PIM feature, include the **nonstop-routing disable** statement at the **[edit protocols pim]** hierarchy level. Note that in this case, nonstop active routing is disabled for all PIM features, not just incompatible features.

Nonstop Active Routing MSDP Support

Starting with Release 12.1, Junos OS extends nonstop active routing support to the Multicast Source Discovery Protocol (MSDP).

Nonstop active routing support for MSDP preserves the following MSDP-related information across the switchover:

- MSDP configuration and peer information
- MSDP peer socket information
- Source-active and related information

However, note that the following restrictions or limitations apply to nonstop active routing MSDP support:

- Because the backup Routing Engine learns the active source information by processing the source-active messages from the network, synchronizing of source active information between the primary and backup Routing Engines might take up to 60 seconds. So, no planned switchover is allowed within 60 seconds of the initial replication of the sockets.
- Similarly, Junos OS does not support two planned switchovers within 240 seconds of each other.

Junos OS enables you to trace MSDP nonstop active routing events by including the **flag nsr-synchronization** statement at the **[edit protocols msdp traceoptions]** hierarchy level.

Nonstop Active Routing Support for RSVP-TE LSPs

Junos OS extends nonstop active routing support to label-switching routers (LSRs) and Layer 2 Circuits that are part of an RSVP-TE LSP. Nonstop active routing support on LSRs ensures that the primary to backup Routing Engine switchover on an LSR remains transparent to the network neighbors and that the LSP information remains unaltered during and after the switchover.

You can use the **show rsvp version** command to view the nonstop active routing mode and state on an LSR. Similarly, you can use the **show mpls lsp** and **show rsvp session** commands on the backup Routing Engine to view the state recreated on the backup Routing Engine.

The Junos OS nonstop active routing feature is also supported on RSVP point-to-multipoint LSPs. Nonstop active routing support for RSVP point-to-multipoint egress and transit LSPs was added in Junos OS Release 11.4, and for ingress LSPs in Release 12.1. During the switchover, the LSP comes up on the backup Routing Engine that shares and synchronizes the state information with the primary Routing Engine before and after the switchover. Nonstop active routing support for point-to-multipoint transit and egress LSPs ensures that the switchover remains transparent to the network neighbors, and preserves the LSP information across the switchover.

Starting with Release 14.1R1, Junos OS extends nonstop active routing support to the next-generation multicast VPNs (MVPNs).

The **show rsvp session detail** command enables you to check the point-to-multipoint LSP remerge state information (**P2MP LSP re-merge**; possible values are **head**, **member**, and **none**).

Starting with Release 14.1R1, Junos OS extends nonstop active routing support for point-to-multipoint LSPs used by VPLS and MVPN.

However, Junos OS does not support nonstop active routing for the following features:

- Generalized Multiprotocol Label Switching (GMPLS) and LSP hierarchy
- Interdomain or loose-hop expansion LSPs
- BFD liveness detection
- Starting with Junos OS Release 14.2, Setup protection

Nonstop active routing support for RSVP-TE LSPs is subject to the following limitations and restrictions:

- Detour LSPs are not maintained across a switchover and so, detour LSPs might fail to come back online after the switchover.
- Control plane statistics corresponding to the **show rsvp statistics** and **show rsvp interface detail | extensive** commands are not maintained across Routing Engine switchovers.
- Statistics from the backup Routing Engine are not reported for **show mpls lsp statistics** and **monitor mpls label-switched-path** commands. However, if a switchover occurs, the backup Routing Engine, after taking over as the primary, starts reporting statistics. Note that the **clear statistics** command issued on the old primary Routing Engine does not have any effect on the new primary Routing Engine, which reports statistics, including any uncleared statistics.
- State timeouts might take additional time during nonstop active routing switchover. For example, if a switchover occurs after a neighbor has missed sending two hello messages to the primary, the new primary Routing Engine waits for another three hello periods before timing out the neighbor.
- On the RSVP ingress router, if you configure auto-bandwidth functionality, the bandwidth adjustment timers are set in the new primary after the switchover. This causes a one-time increase in the length of time required for the bandwidth adjustment after the switchover occurs.
- Backup LSPs —LSPs that are established between the point of local repair (PLR) and the merge point after a node or link failure—are not preserved during a Routing Engine switchover.
- When nonstop active routing is enabled, graceful restart is not supported. However, graceful restart helper mode is supported.

Release History Table

Release	Description
14.2	Starting with Junos OS Release 14.2, Setup protection

14.1	Starting with Junos OS Release 14.1, you must include the <code>advertise-from-main-vpn-tables</code> statement at the <code>[edit protocols bgp]</code> hierarchy level to prevent BGP sessions from going down when route reflector (RR) or autonomous system border router (ASBR) functionality is enabled or disabled on a routing device that has VPN address families configured.
14.1	Starting with Release 14.1R1, Junos OS extends nonstop active routing support to the next-generation multicast VPNs (MVPNs).
14.1	Starting with Release 14.1R1, Junos OS extends nonstop active routing support for point-to-multipoint LSPs used by VPLS and MVPN.
13.3R5	Starting with Junos OS Release 13.3R5, on EX9214 switches, the VRRP primary state might change during graceful Routing Engine switchover, even when nonstop active routing is enabled.

RELATED DOCUMENTATION

[Nonstop Active Routing Concepts | 269](#)

[Configuring Nonstop Active Routing | 290](#)

[Configuring Nonstop Active Routing on Switches | 293](#)

[Example: Configuring Nonstop Active Routing on Switches | 301](#)

Configuring Nonstop Active Routing

IN THIS CHAPTER

- [Configuring Nonstop Active Routing | 290](#)
- [Configuring Nonstop Active Routing on Switches | 293](#)
- [Preventing Automatic Reestablishment of BGP Peer Sessions After NSR Switchovers | 295](#)
- [Example: Configuring Nonstop Active Routing | 296](#)
- [Tracing Nonstop Active Routing Synchronization Events | 299](#)
- [Resetting Local Statistics | 301](#)
- [Example: Configuring Nonstop Active Routing on Switches | 301](#)

Configuring Nonstop Active Routing

IN THIS SECTION

- [Enabling Nonstop Active Routing | 291](#)
- [Synchronizing the Routing Engine Configuration | 292](#)
- [Verifying Nonstop Active Routing Operation | 292](#)

This section includes the following topics:

Enabling Nonstop Active Routing

Nonstop active routing (NSR) requires you to configure graceful Routing Engine switchover (GRES). To enable graceful Routing Engine switchover, include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level:

```
[edit chassis redundancy]
graceful-switchover;
```

By default, nonstop active routing is disabled. To enable nonstop active routing, include the **nonstop-routing** statement at the **[edit routing-options]** hierarchy level:

```
[edit routing-options]
nonstop-routing;
```

To disable nonstop active routing, remove the **nonstop-routing** statement from the **[edit routing-options]** hierarchy level.

NOTE: When you enable nonstop active routing, you cannot enable automatic route distinguishers for multicast VPN routing instances. Automatic route distinguishers are enabled by configuring the **route-distinguisher-id** statement at the **[edit routing-instances instance-name]** hierarchy level; for more information, see the [Junos OS VPNs Library for Routing Devices](#).

If the routing protocol process (rpd) on the NSR primary Routing Engine crashes, the primary Routing Engine simply restarts rpd (with no Routing Engine switchover), which impacts routing protocol adjacencies and neighbors and results in traffic loss. To prevent this negative impact on traffic flow, configure the **switchover-on-routing-crash** statement at the **[edit system]** hierarchy level. This configuration forces an NSR Routing Engine switchover if rpd on the primary Routing Engine crashes.

```
[edit system]
user@host# set switchover-on-routing-crash
```

To enable the routing platform to switch over to the backup Routing Engine when the routing protocol process (rpd) fails rapidly three times in succession, include the **other-routing-engine** statement at the **[edit system processes routing failover]** hierarchy level.

For more information about the **other-routing-engine** statement, see the [Junos OS Administration Library for Routing Devices](#).

Synchronizing the Routing Engine Configuration

When you configure nonstop active routing, you must also include the **commit synchronize** statement at the **[edit system]** hierarchy level so that configuration changes are synchronized on both Routing Engines:

```
[edit system]
commit synchronize;
```

If you try to commit the nonstop active routing configuration without including the **commit synchronize** statement, the commit fails.

If you configure the **commit synchronize** statement at the **[edit system]** hierarchy level and issue a commit in the primary Routing Engine, the primary configuration is automatically synchronized with the backup.

However, if the backup Routing Engine is down when you issue the commit, the Junos OS displays a warning and commits the candidate configuration in the primary Routing Engine. When the backup Routing Engine comes up, its configuration will automatically be synchronized with the primary.

NOTE: A newly inserted backup Routing Engine automatically synchronizes its configuration with the primary Routing Engine configuration.

When you configure nonstop active routing, you can bring the backup Routing Engine online after the primary Routing Engine is already running. There is no requirement to start the two Routing Engines simultaneously.



CAUTION: We recommend that you do not restart Routing Protocol Process (rpd) on primary Routing Engine after enabling nonstop active routing, as it disrupts the protocol adjacency/peering sessions, resulting in traffic loss.

Verifying Nonstop Active Routing Operation

To see whether or not nonstop active routing is enabled, issue the **show task replication** command. For BGP nonstop active routing, you must also issue the **show bgp replication** command.



CAUTION: If BGP is configured, before attempting nonstop active routing switchover, check the output of **show bgp replication** to confirm that BGP routing table synchronization has completed on the backup Routing Engine. The **complete** status in the output of **show task replication** only indicates that the socket replication has

completed and the BGP synchronization is in progress. To determine whether BGP synchronization is complete, you must check the **Protocol state** and **Synchronization state** fields in the output of **show bgp replication** on the primary Routing Engine. The **Protocol state** must be **idle** and the **Synchronization state** must be **complete**. If you perform NSR switchover before the BGP synchronization has completed, the BGP session might flap.

For more information about these commands, see the [CLI Explorer](#).

When you enable nonstop active routing or graceful Routing Engine switchover and issue routing-related operational mode commands on the backup Routing Engine (such as **show route**, **show bgp neighbor**, **show ospf database**, and so on), the output might not match the output of the same commands issued on the primary Routing Engine. For example, it is normal for the routing table on the backup Routing Engine to contain persistent phantom routes that are not present in the routing table on the primary Routing Engine.

To display BFD state replication status, issue the **show bfd session** command. The **replicated** flag appears in the output for this command when a BFD session has been replicated to the backup Routing Engine. For more information, see the [CLI Explorer](#).

RELATED DOCUMENTATION

[Nonstop Active Routing Concepts | 269](#)

[Nonstop Active Routing System Requirements | 274](#)

[Tracing Nonstop Active Routing Synchronization Events | 299](#)

[Resetting Local Statistics | 301](#)

[Example: Configuring Nonstop Active Routing | 296](#)

[nonstop-routing | 768](#)

Configuring Nonstop Active Routing on Switches

Nonstop active routing (NSR) provides a mechanism for transparent switchover of the Routing Engines without necessitating restart of supported routing protocols. Both Routing Engines are fully active in processing protocol sessions, and so each can take over for the other. The switchover is transparent to neighbors.

You can configure NSR on an on a Juniper Networks EX Series switch with multiple Routing Engines or an EX Series or QFX Series switch in a Virtual Chassis or Virtual Chassis Fabric configuration.

To configure nonstop active routing:

1. Enable graceful Routing Engine switchover (GRES):

```
[edit chassis redundancy]
user@switch# set graceful-switchover
```

2. Enable nonstop active routing (by default, nonstop active routing is disabled):

```
[edit routing-options]
user@switch# set nonstop-routing
```

3. Synchronize configuration changes between the Routing Engines:

```
[edit system]
user@switch# set commit synchronize
```

If you try to commit the nonstop active routing configuration without including the **commit synchronize** statement, the commit fails.

- 4.

NOTE: There is no requirement to start the two Routing Engines simultaneously. If the backup Routing Engine is not up when you issue the **commit synchronize** command, the candidate configuration is committed in the primary Routing Engine. When the backup Routing Engine is inserted or comes online, its configuration is automatically synchronized with that of the primary.

BEST PRACTICE: After a graceful Routing Engine switchover, we recommend that you issue the **clear interface statistics (*interface-name* | all)** command to reset the cumulative values for local statistics on the new primary Routing Engine.

To disable nonstop active routing:

```
[edit routing-options]
user@switch# delete nonstop-routing
```

RELATED DOCUMENTATION

[Example: Configuring Nonstop Active Routing on Switches | 301](#)

[Tracing Nonstop Active Routing Synchronization Events | 299](#)

[Understanding Nonstop Active Routing on EX Series Switches | 272](#)

[Nonstop Active Routing Concepts | 269](#)

Preventing Automatic Reestablishment of BGP Peer Sessions After NSR Switchovers

It is useful to prevent a BGP peer session from automatically being reestablished after a nonstop active routing (NSR) switchover when you have applied routing policies configured in the dynamic database. When NSR is enabled, the dynamic database is not synchronized with the backup Routing Engine. Therefore, when a switchover occurs, import and export policies configured in the dynamic database might no longer be available. For more information about configuring dynamic routing policies, see the [Routing Policies, Firewall Filters, and Traffic Policers User Guide](#).

NOTE: The BGP established timers are not maintained across switchovers.

You can configure the routing device not to reestablish a BGP peer session after an NSR switchover either for a specified period or until you manually reestablish the session. Include the **idle-after-switch-over** statement at the **[edit protocols bgp]** hierarchy level:

```
idle-after-switch-over (forever | seconds);
```

For a list of hierarchy levels at which you can configure this statement, see the configuration statement summary for this statement.

For **seconds**, specify a value from 1 through 4294967295. The BGP peer session is not reestablished until after the specified period. If you specify the **forever** option, the BGP peer session is not reestablished until you issue the **clear bgp neighbor** command.

Example: Configuring Nonstop Active Routing

The following example enables graceful Routing Engine switchover, nonstop active routing, and nonstop active routing trace options for BGP, IS-IS, and OSPF.

```
[edit]
system commit {
    synchronize;
}
chassis {
    redundancy {
        graceful-switchover; # This enables graceful Routing Engine switchover on
# the routing platform.
    }
}
interfaces {
    so-0/0/0 {
        unit 0 {
            family inet {
                address 10.0.1.1/30;
            }
            family iso;
        }
    }
    so-0/0/1 {
        unit 0 {
            family inet {
                address 10.1.1.1/30;
            }
            family iso;
        }
    }
    so-0/0/2 {
        unit 0 {
            family inet {
                address 10.2.1.1/30;
            }
            family iso;
        }
    }
    so-0/0/3 {
```

```

    unit 0 {
        family inet {
            address 10.3.1.1/30;
        }
        family iso;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 192.168.2.1/32;
        }
        family iso {
            address 49.0004.1921.6800.2001.00;
        }
    }
}
}
routing-options {
    nonstop-routing; # This enables nonstop active routing on the routing platform.
    router-id 192.168.2.1;
    autonomous-system 65432;
}
protocols {
    bgp {
        traceoptions {
            flag nsr-synchronization detail; # This logs nonstop active routing
# events for BGP.
        }
        advertise-from-main-vpn-tables;
        local-address 192.168.2.1;
        group external-group {
            type external;
            export BGP_export;
            neighbor 192.168.1.1 {
                family inet {
                    unicast;
                }
                peer-as 65103;
            }
        }
        group internal-group {
            type internal;

```

```

        neighbor 192.168.10.1;
        neighbor 192.168.11.1;
        neighbor 192.168.12.1;
    }
}
isis {
    traceoptions {
        flag nsr-synchronization detail; # This logs nonstop active routing events
# for IS-IS.
    }
    interface all;
    interface fxp0.0 {
        disable;
    }
    interface lo0.0 {
        passive;
    }
}
ospf {
    traceoptions {
        flag nsr-synchronization detail; # This logs nonstop active routing events
# for OSPF.
    }
    area 0.0.0.0 {
        interface all;
        interface fxp0.0 {
            disable;
        }
        interface lo0.0 {
            passive;
        }
    }
}
}
policy-options {
    policy-statement BGP_export {
        term direct {
            from {
                protocol direct;
            }
            then accept;
        }
    }
}

```

```

        term final {
            then reject;
        }
    }
}

```

RELATED DOCUMENTATION

[Configuring Nonstop Active Routing | 290](#)

[Tracing Nonstop Active Routing Synchronization Events | 299](#)

Tracing Nonstop Active Routing Synchronization Events

To track the progress of nonstop active routing synchronization between Routing Engines, you can configure nonstop active routing trace options flags for each supported protocol and for BFD sessions and record these operations to a log file.

To configure nonstop active routing trace options for supported routing protocols, include the **nsr-synchronization** statement at the **[edit protocols *protocol-name* traceoptions flag]** hierarchy level and optionally specify one or more of the **detail**, **disable**, **receive**, and **send** options:

```

[edit protocols]
bgp {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
isis {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
ldp {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
mpls {

```

```

    traceoptions {
        flag nsr-synchronization;
        flag nsr-synchronization-detail;
    }
}
msdp {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
(ospf | ospf3) {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
rip {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
ripng {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
pim {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}

```

To configure nonstop active routing trace options for BFD sessions, include the **nsr-synchronization** and **nsr-packet** statements at the **[edit protocols bfd traceoptions flag]** hierarchy level.

```

[edit protocols]
bfd {
    traceoptions {
        flag nsr-synchronization;
        flag nsr-packet;
    }
}

```

To trace the Layer 2 VPN signaling state replicated from routes advertised by BGP, include the **nsr-synchronization** statement at the **[edit routing-options traceoptions flag]** hierarchy level. This flag also traces the label and logical interface association that VPLS receives from the kernel replication state.

```
[edit routing-options]
traceoptions {
    flag nsr-synchronization;
}
```

RELATED DOCUMENTATION

[Configuring Nonstop Active Routing | 290](#)

[Configuring Nonstop Active Routing on Switches | 293](#)

[Example: Configuring Nonstop Active Routing on Switches | 301](#)

[Example: Configuring Nonstop Active Routing | 296](#)

Resetting Local Statistics

After a graceful Routing Engine switchover, we recommend that you issue the **clear interface statistics** (*interface-name* | **all**) command to reset the cumulative values for local statistics on the new primary Routing Engine.

RELATED DOCUMENTATION

[Configuring Nonstop Active Routing | 290](#)

[Tracing Nonstop Active Routing Synchronization Events | 299](#)

Example: Configuring Nonstop Active Routing on Switches

IN THIS SECTION

● [Requirements | 302](#)

- [Overview and Topology | 302](#)
- [Configuration | 302](#)
- [Verification | 304](#)
- [Troubleshooting | 305](#)

Nonstop active routing (NSR) provides high availability for Routing Engines by enabling transparent switchover of the Routing Engines without necessitating restart of supported routing protocols. Both Routing Engines are fully active in processing protocol sessions, and so each can take over for the other. The switchover is transparent to neighbors.

This example describes how to configure nonstop active routing on switches with multiple Routing Engines or on an EX Series or a QFX series switch in a Virtual Chassis or Virtual Chassis Fabric configuration.

Requirements

This example uses the following hardware and software components:

- An EX Series with multiple Routing Engines or on an EX Series or a QFX series switch in a Virtual Chassis or Virtual Chassis Fabric configuration
- Junos OS Release 10.4 or later for EX Series switches
- Junos OS Release 13.2X51-D20 or later for QFX Series switches

Overview and Topology

Configure nonstop active routing on any EX Series with multiple Routing Engines or on an EX Series or a QFX series switch in a Virtual Chassis or Virtual Chassis Fabric configuration. Nonstop active routing is advantageous in networks where neighbor routing devices do not support graceful restart protocol extensions.

The topology used in this example consists of an EX8200 switch with redundant Routing Engines connected to neighbor routing devices that are not configured to support graceful restart of protocols.

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 303](#)

- [Procedure | 303](#)
- [Results | 304](#)

CLI Quick Configuration

To quickly configure nonstop active routing, copy the following commands and paste them into the switch terminal window:

```
[edit]
set chassis redundancy graceful-switchover
set routing-options nonstop-routing
set system commit synchronize
```

Procedure

Step-by-Step Procedure

To configure nonstop active routing on a switch:

1. Enable graceful Routing Engine switchover (GRES):

```
[edit chassis redundancy]
user@switch# set graceful-switchover
```

2. Enable nonstop active routing (by default, nonstop active routing is disabled):

```
[edit routing-options]
user@switch# set nonstop-routing
```

3. Synchronize configuration changes between the Routing Engines:

```
[edit system]
user@switch# set commit synchronize
```


If you try to commit the nonstop active routing configuration without including the **commit synchronize** statement, the commit fails.

NOTE: If the backup Routing Engine is down when you issue the commit, a warning is displayed and the candidate configuration is committed in the primary Routing Engine. When the backup Routing Engine comes up, its configuration is automatically synchronized with that of the primary. If you subsequently insert or bring up a backup Routing Engine, it automatically synchronizes its configuration with the primary Routing Engine configuration.

Results

Check the results of the configuration:

```
[edit]
user@switch# show
chassis {
    redundancy {
        graceful-switchover;
    }
}
routing-options {
    nonstop-routing;
}
system {
    commit synchronize;
}
```

Verification

IN THIS SECTION

- [Verifying That Nonstop Active Routing Is Working Correctly on the Switch | 305](#)

To confirm that the configuration is working properly, perform these tasks:

Verifying That Nonstop Active Routing Is Working Correctly on the Switch

Purpose

Verify that nonstop active routing is enabled.

Action

Issue the `show task replication` command:

```
user@switch# show task replication
Stateful Replication: Enabled
RE mode: Master

Protocol                Synchronization Status
-----                -
OSPF                    Complete
RIP                     Complete
PIM                     Complete
RSVP                    Complete
```

Meaning

This output shows that nonstop active routing (Stateful Replication) is enabled on primary routing engine. If nonstop routing is not enabled, instead of the output shown above:

- On the backup routing engine the following error message is displayed: **“error: the routing subsystem is not running.”**
- On the primary routing engine, the following output is displayed if nonstop routing is not enabled:

```
Stateful Replication: Disabled
RE mode: Master
```

Troubleshooting

IN THIS SECTION

- [Investigating Problems with Synchronization of Routing Engines When NSR Is Enabled | 306](#)

To troubleshoot nonstop active routing, perform these tasks:

Investigating Problems with Synchronization of Routing Engines When NSR Is Enabled

Problem

A protocol loses connectivity with neighbors after a graceful Routing Engine switchover (GRES) occurs with nonstop active routing (NSR) enabled.

Solution

Use trace options to help isolate the problem and gather troubleshooting information. Using the information gathered from trace options, you can confirm or eliminate the synchronization of the Routing Engines as the cause of the loss of connectivity for the protocol. See "[Tracing Nonstop Active Routing Synchronization Events](#)" on page 299.

RELATED DOCUMENTATION

[Configuring Nonstop Active Routing on Switches](#) | 293

[Tracing Nonstop Active Routing Synchronization Events](#) | 299

[Understanding Nonstop Active Routing on EX Series Switches](#) | 272

[Nonstop Active Routing Concepts](#) | 269

10

PART

Configuring Graceful Restart

Understanding How Graceful Restart Enables Uninterrupted Packet Forwarding
When a Router Is Restarted | 308

Graceful Restart System Requirements | 318

Configuring Graceful Restart | 319

Understanding How Graceful Restart Enables Uninterrupted Packet Forwarding When a Router Is Restarted

IN THIS CHAPTER

- Graceful Restart Concepts | 308
- Graceful Restart for Aggregate and Static Routes | 309
- Graceful Restart and Routing Protocols | 310
- Graceful Restart and MPLS-Related Protocols | 313
- Understanding Restart Signaling-Based Helper Mode Support for OSPF Graceful Restart | 314
- Graceful Restart and Layer 2 and Layer 3 VPNs | 315
- Graceful Restart on Logical Systems | 316

Graceful Restart Concepts

With routing protocols, any service interruption requires that an affected router recalculate adjacencies with neighboring routers, restore routing table entries, and update other protocol-specific information. An unprotected restart of a router can result in forwarding delays, route flapping, wait times stemming from protocol reconvergence, and even dropped packets. The main benefits of graceful restart are uninterrupted packet forwarding and temporary suppression of all routing protocol updates. Graceful restart enables a router to pass through intermediate convergence states that are hidden from the rest of the network.

Three main types of graceful restart are available on Juniper Networks routing platforms:

- Graceful restart for aggregate and static routes and for routing protocols—Provides protection for aggregate and static routes and for Border Gateway Protocol (BGP), End System-to-Intermediate System (ES-IS), Intermediate System-to-Intermediate System (IS-IS), Open Shortest Path First (OSPF), Routing Information Protocol (RIP), next-generation RIP (RIPng), and Protocol Independent Multicast (PIM) sparse mode routing protocols.

- Graceful restart for MPLS-related protocols—Provides protection for Label Distribution Protocol (LDP), Resource Reservation Protocol (RSVP), circuit cross-connect (CCC), and translational cross-connect (TCC). (Not supported on OCX Series switches.)
- Graceful restart for virtual private networks (VPNs)—Provides protection for Layer 2 and Layer 3 VPNs.

Graceful restart works similarly for routing protocols and MPLS protocols and combines components of these protocol types to enable graceful restart in VPNs. The main benefits of graceful restart are uninterrupted packet forwarding and temporary suppression of all routing protocol updates. Graceful restart thus enables a router to pass through intermediate convergence states that are hidden from the rest of the network.

Most graceful restart implementations define two types of routers—the restarting router and the helper router. The restarting router requires rapid restoration of forwarding state information so it can resume the forwarding of network traffic. The helper router assists the restarting router in this process. Graceful restart configuration statements typically affect either the restarting router or the helper router.

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

[Graceful Restart System Requirements | 318](#)

[Graceful Restart for Aggregate and Static Routes | 309](#)

[Graceful Restart and Routing Protocols | 310](#)

[Graceful Restart and MPLS-Related Protocols | 313](#)

[Graceful Restart and Layer 2 and Layer 3 VPNs | 315](#)

[Graceful Restart on Logical Systems | 316](#)

[Configuring Graceful Restart | 320](#)

[Configuring Graceful Restart for QFabric Systems | 370](#)

Graceful Restart for Aggregate and Static Routes

When you include the **graceful-restart** statement at the **[edit routing-options]** hierarchy level, any static routes or aggregated routes that have been configured are protected. Because no helper router assists in the restart, these routes are retained in the forwarding table while the router restarts (rather than being discarded or refreshed).

RELATED DOCUMENTATION

- [Graceful Restart Concepts | 308](#)
- [Graceful Restart System Requirements | 318](#)
- [Enabling Graceful Restart | 319](#)
- [Verifying Graceful Restart Operation | 379](#)
- [Configuring Graceful Restart | 320](#)

Graceful Restart and Routing Protocols

IN THIS SECTION

- [BGP | 310](#)
- [IS-IS | 311](#)
- [OSPF and OSPFv3 | 311](#)
- [PIM Sparse Mode | 312](#)
- [RIP and RIPng | 312](#)

This section covers the following topics:

BGP

When a router enabled for BGP graceful restart restarts, it retains BGP peer routes in its forwarding table and marks them as stale. However, it continues to forward traffic to other peers (or receiving peers) during the restart. To reestablish sessions, the restarting router sets the “restart state” bit in the BGP OPEN message and sends it to all participating peers. The receiving peers reply to the restarting router with messages containing end-of-routing-table markers. When the restarting router or switch receives all replies from the receiving peers, the restarting router performs route selection, the forwarding table is updated, and the routes previously marked as stale are discarded. At this point, all BGP sessions are reestablished and the restarting peer can receive and process BGP messages as usual.

While the restarting router does its processing, the receiving peers also temporarily retain routing information. When a receiving peer detects a TCP transport reset, it retains the routes received and marks the routes as stale. After the session is reestablished with the restarting router or switch, the stale routes are replaced with updated route information.

IS-IS

Normally, IS-IS routers move neighbor adjacencies to the down state when changes occur. However, a router enabled for IS-IS graceful restart sends out Hello messages with the Restart Request (RR) bit set in a restart type length value (TLV) message. This indicates to neighboring routers that a graceful restart is in progress and to leave the IS-IS adjacency intact. The neighboring routers must interpret and implement restart signaling themselves. Besides maintaining the adjacency, the neighbors send complete sequence number PDUs (CSNPs) to the restarting router and flood their entire database.

The restarting router never floods any of its own link-state PDUs (LSPs), including pseudonode LSPs, to IS-IS neighbors while undergoing graceful restart. This enables neighbors to reestablish their adjacencies without transitioning to the down state and enables the restarting router to reinitiate a smooth database synchronization.

OSPF and OSPFv3

When a router enabled for OSPF graceful restart restarts, it retains routes learned before the restart in its forwarding table. The router does not allow new OSPF link-state advertisements (LSAs) to update the routing table. This router continues to forward traffic to other OSPF neighbors (or helper routers), and sends only a limited number of LSAs during the restart period. To reestablish OSPF adjacencies with neighbors, the restarting router must send a grace LSA to all neighbors. In response, the helper routers enter helper mode and send an acknowledgement back to the restarting router. If there are no topology changes, the helper routers continue to advertise LSAs as if the restarting router had remained in continuous OSPF operation.

When the restarting router receives replies from all the helper routers, the restarting router selects routes, updates the forwarding table, and discards the old routes. At this point, full OSPF adjacencies are reestablished and the restarting router receives and processes OSPF LSAs as usual. When the helper routers no longer receive grace LSAs from the restarting router or the topology of the network changes, the helper routers also resume normal operation.

NOTE: For more information about the standard helper mode implementation, see RFC 3623, *Graceful OSPF Restart*.

Starting with Release 11.3, Junos OS supports the restart signaling-based helper mode for OSPF graceful restart configurations. The helper modes, both standard and restart signaling-based, are enabled by default. In restart signaling-based helper mode implementations, the restarting router relays the restart status to its neighbors only after the restart is complete. When the restart is complete, the restarting router sends hello messages to its helper routers with the **restart signal (RS)** bit set in the hello packet header. When a helper router receives a hello packet with the **RS** bit set in the header, the helper router returns a hello message to the restarting router. The reply hello message from the helper router contains the **ResyncState** flag and the **ResyncTimeout** timer that enable the restarting router to keep

track of the helper routers that are syncing up with it. When all helpers complete the synchronization, the restarting router exits the restart mode.

NOTE:

For more information about restart signaling-based graceful restart helper mode implementation, see RFC 4811, *OSPF Out-of-Band Link State Database (LSDB) Resynchronization*, RFC 4812, *OSPF Restart Signaling*, and RFC 4813, *OSPF Link-Local Signaling*.

Restart signaling-based graceful restart helper mode is not supported for OSPFv3 configurations.

PIM Sparse Mode

PIM sparse mode uses a mechanism called a *generation identifier* to indicate the need for graceful restart. Generation identifiers are included by default in PIM hello messages. An initial generation identifier is created by each PIM neighbor to establish device capabilities. When one of the PIM neighbors restarts, it sends a new generation identifier to its neighbors. All neighbors that support graceful restart and are connected by point-to-point links assist by sending multicast updates to the restarting neighbor.

The restart phase completes when either the PIM state becomes stable or when the restart interval timer expires. If the neighbors do not support graceful restart or connect to each other using multipoint interfaces, the restarting router uses the restart interval timer to define the restart period.

RIP and RIPng

When a router enabled for RIP graceful restart restarts, routes that have been configured are protected. Because no helper router assists in the restart, these routes are retained in the forwarding table while the router restarts (rather than being discarded or refreshed).

RELATED DOCUMENTATION

[Graceful Restart Concepts | 308](#)

[Graceful Restart System Requirements | 318](#)

[Configuring Routing Protocols Graceful Restart | 355](#)

[Verifying Graceful Restart Operation | 379](#)

[Configuring Graceful Restart | 320](#)

[Example: Configuring IS-IS for GRES with Graceful Restart | 214](#)

Graceful Restart and MPLS-Related Protocols

IN THIS SECTION

- LDP | 313
- RSVP | 314
- CCC and TCC | 314

This section contains the following topics:

LDP

LDP graceful restart enables a router whose LDP control plane is undergoing a restart to continue to forward traffic while recovering its state from neighboring routers. It also enables a router on which helper mode is enabled to assist a neighboring router that is attempting to restart LDP.

During session initialization, a router advertises its ability to perform LDP graceful restart or to take advantage of a neighbor performing LDP graceful restart by sending the graceful restart TLV. This TLV contains two fields relevant to LDP graceful restart: the reconnect time and the recovery time. The values of the reconnect and recovery times indicate the graceful restart capabilities supported by the router.

The default reconnect time is configured in Junos OS as 60 seconds and is user-configurable. The reconnect time is how long the helper router waits for the restarting router to establish a connection. If the connection is not established within the reconnect interval, graceful restart for the LDP session is terminated. The default maximum reconnect time is 120 seconds and is user-configurable. The maximum reconnect time is the maximum value that a helper router accepts from its restarting neighbor.

When a router discovers that a neighboring router is restarting, it waits until the end of the recovery time before attempting to reconnect. The recovery time is the length of time a router waits for LDP to restart gracefully. The recovery time period begins when an initialization message is sent or received. This time period is also typically the length of time that a neighboring router maintains its information about the restarting router, so it can continue to forward traffic.

You can configure LDP graceful restart both in the master instance for the LDP protocol and for a specific routing instance. You can disable graceful restart at the global level for all protocols, at the protocol level for LDP only, and for a specific routing instance only.

RSVP

RSVP graceful restart enables a router undergoing a restart to inform its adjacent neighbors of its condition. The restarting router requests a grace period from the neighbor or peer, which can then cooperate with the restarting router. The restarting router can still forward MPLS traffic during the restart period; convergence in the network is not disrupted. The restart is not visible to the rest of the network, and the restarting router is not removed from the network topology. RSVP graceful restart can be enabled on both transit routers and ingress routers. It is available for both point-to-point LSPs and point-to-multipoint LSPs.

CCC and TCC

CCC and TCC graceful restart enables Layer 2 connections between customer edge (CE) routers to restart gracefully. These Layer 2 connections are configured with the **remote-interface-switch** or **lsp-switch** statements. Because these CCC and TCC connections have an implicit dependency on RSVP LSPs, graceful restart for CCC and TCC uses the RSVP graceful restart capabilities.

RSVP graceful restart must be enabled on the provider edge (PE) routers and provider (P) routers to enable graceful restart for CCC and TCC. Also, because RSVP is used as the signaling protocol for signaling label information, the neighboring router must use helper mode to assist with the RSVP restart procedures.

RELATED DOCUMENTATION

[Graceful Restart Concepts | 308](#)

[Graceful Restart System Requirements | 318](#)

[Configuring Graceful Restart for MPLS-Related Protocols | 364](#)

[Configuring Graceful Restart | 320](#)

Understanding Restart Signaling-Based Helper Mode Support for OSPF Graceful Restart

Starting with Release 11.4, Junos OS supports restart signaling-based helper mode for OSPF graceful restart configurations.

NOTE:

- Restart signaling-based graceful restart helper mode is not supported for OSPFv3 configurations.
- Junos OS releases prior to Release 11.4 and OSPFv3 configurations support only standard helper mode as defined in RFC 3623 . For more information about the standard helper mode implementation, see RFC 3623 and the *Junos OS High Availability Configuration Guide*.

Both standard and restart signaling-based helper modes are enabled by default, irrespective of the graceful-restart configuration status on the device.

In restart signaling-based helper mode implementations, the restarting router informs the restart status to its neighbors only after the restart is complete. When the restart is complete, the restarting router sends hello messages to its helper routers with the **restart signal (RS)** bit set in the hello packet header. When a helper router receives a hello packet with the **RS** bit set in the header, the helper router returns a hello message to the restarting router. The reply hello message from the helper router contains the **ResyncState** flag and the **ResyncTimeout** timer that enable the restarting router to keep track of the helper routers that are syncing up with it. When all helpers complete the synchronization, the restarting router exits the restart mode.

For more information about restart signaling-based graceful restart helper mode implementation, see RFC 4811, *OSPF Out-of-Band Link State Database (LSDB) Resynchronization*, RFC 4812, *OSPF Restart Signaling* and RFC 4813, *OSPF Link-Local Signaling*.

RELATED DOCUMENTATION

[Example: Managing Helper Modes for OSPF Graceful Restart | 375](#)

[Tracing Restart Signaling-Based Helper Mode Events for OSPF Graceful Restart | 378](#)

Graceful Restart and Layer 2 and Layer 3 VPNs

VPN graceful restart uses three types of restart functionality:

1. BGP graceful restart functionality is used on all PE-to-PE BGP sessions. This affects sessions carrying any service signaling data for network layer reachability information (NLRI), for example, an IPv4 VPN or Layer 2 VPN NLRI.
2. OSPF, IS-IS, LDP, or RSVP graceful restart functionality is used in all core routers. Routes added by these protocols are used to resolve Layer 2 and Layer 3 VPN NLRI.

3. Protocol restart functionality is used for any Layer 3 protocol (RIP, OSPF, LDP, and so on) used between the PE and customer edge (CE) routers. This does not apply to Layer 2 VPNs because Layer 2 protocols used between the CE and PE routers do not have graceful restart capabilities.

Before VPN graceful restart can work properly, all of the components must restart gracefully. In other words, the routers must preserve their forwarding states and request neighbors to continue forwarding to the router in case of a restart. If all of the conditions are satisfied, VPN graceful restart imposes the following rules on a restarting router:

- The router must wait to receive all BGP NLRI information from other PE routers before advertising routes to the CE routers.
- The router must wait for all protocols in all routing instances to converge (or complete the restart process) before it sends CE router information to other PE routers. In other words, the router must wait for all instance information (whether derived from local configuration or advertisements received from a remote peer) to be processed before it sends this information to other PE routers.
- The router must preserve all forwarding state in the **instance.mpls.0** tables until the new labels and transit routes are allocated and announced to other PE routers (and CE routers in a carrier-of-carriers scenario).

If any condition is not met, VPN graceful restart does not succeed in providing uninterrupted forwarding between CE routers across the VPN infrastructure.

RELATED DOCUMENTATION

[Graceful Restart Concepts | 308](#)

[Graceful Restart System Requirements | 318](#)

[Configuring Logical System Graceful Restart | 368](#)

[Verifying Graceful Restart Operation | 379](#)

[Configuring Graceful Restart | 320](#)

Graceful Restart on Logical Systems

Graceful restart for a logical system functions much as graceful restart does in the main router. The only difference is the location of the **graceful-restart** statement:

- For a logical system, include the **graceful-restart** statement at the **[edit logical-systems *logical-system-name* routing-options]** hierarchy level.

- For a routing instance inside a logical system, include the **graceful-restart** statement at both the [edit logical-systems *logical-system-name* routing-options] and [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options] hierarchy levels.

RELATED DOCUMENTATION

[Graceful Restart Concepts | 308](#)

[Graceful Restart System Requirements | 318](#)

[Configuring Logical System Graceful Restart | 368](#)

[Verifying Graceful Restart Operation | 379](#)

[Configuring Graceful Restart | 320](#)

Graceful Restart System Requirements

IN THIS CHAPTER

- [Graceful Restart System Requirements | 318](#)

Graceful Restart System Requirements

Graceful restart is supported on all routing platforms. To implement graceful restart for particular features, your system must meet these minimum requirements:

- Junos OS Release 5.3 or later for aggregate route, BGP, IS-IS, OSPF, RIP, RIPng, or static route graceful restart.
- Junos OS Release 5.5 or later for RSVP on egress provider edge (PE) routers.
- Junos OS Release 5.5 or later for LDP graceful restart.
- Junos OS Release 5.6 or later for the CCC, TCC, Layer 2 VPN, or Layer 3 VPN implementations of graceful restart.
- Junos OS Release 6.1 or later for RSVP graceful restart on ingress PE routers.
- Junos OS Release 6.4 or later for PIM sparse mode graceful restart.
- Junos OS Release 7.4 or later for ES-IS graceful restart.
- Junos OS Release 8.5 or later for BFD session (helper mode only)—If a node is undergoing a graceful restart and its BFD sessions are distributed to the Packet Forwarding Engine, the peer node can help the peer with the graceful restart.
- Junos OS Release 9.2 or later for BGP to support helper mode without requiring that graceful restart be configured.

RELATED DOCUMENTATION

| [Graceful Restart Concepts | 308](#)

Configuring Graceful Restart

IN THIS CHAPTER

- [Enabling Graceful Restart | 319](#)
- [Configuring Graceful Restart | 320](#)
- [Configuring Routing Protocols Graceful Restart | 355](#)
- [Configuring Graceful Restart for MPLS-Related Protocols | 364](#)
- [Configuring VPN Graceful Restart | 366](#)
- [Configuring Logical System Graceful Restart | 368](#)
- [Configuring Graceful Restart for QFabric Systems | 370](#)
- [Example: Managing Helper Modes for OSPF Graceful Restart | 375](#)
- [Tracing Restart Signaling-Based Helper Mode Events for OSPF Graceful Restart | 378](#)
- [Verifying Graceful Restart Operation | 379](#)

Enabling Graceful Restart

Graceful restart is disabled by default. You must configure graceful restart at the **[edit routing-options]** or **[edit routing-instances *instance-name* routing-options]** hierarchy level to enable the feature globally.

For example:

```
routing-options {  
    graceful-restart;  
}
```

You can, optionally, modify the global settings at the individual protocol level or, as of Junos OS 15.1, at the individual routing instance level.

NOTE: If you configure graceful restart after a BGP or LDP session has been established, the BGP or LDP session restarts and the peers negotiate graceful restart capabilities.

To disable graceful restart, include the **disable** statement. You can do this globally for all protocols by including the **disable** statement at the **[edit routing-options]** hierarchy level, or you can disable graceful restart for a single protocol by including the **disable** statement at the **[edit protocols *protocol*/graceful-restart]** hierarchy level. To configure a time period for complete restart, include the **restart-duration** statement. You can specify a number between 120 and 900.

For a list of hierarchy levels at which you can include this statement, see the statement summary section for this statement.

When you include the **graceful-restart** statement at the **[edit routing-options]** hierarchy level, graceful restart is also enabled for aggregate and static routes.

Release History Table

Release	Description
15.1	You can, optionally, modify the global settings at the individual protocol level or, as of Junos OS 15.1, at the individual routing instance level.

RELATED DOCUMENTATION

- [Graceful Restart Concepts | 308](#)
- [Graceful Restart System Requirements | 318](#)
- [Graceful Restart for Aggregate and Static Routes | 309](#)
- [Configuring Graceful Restart | 320](#)

Configuring Graceful Restart

To enable graceful restart, include the **graceful-restart** statement at the **[edit routing-instance *instance-name* routing-options]** or **[edit routing-options]** hierarchy level. This enables graceful restart globally for all routing protocols. You can, optionally, modify or supplement the global settings at the individual protocol level.


NOTE: When set protocols bgp group *group-name* allow network is configured to accept dynamic BGP sessions, **unconfigured-peer-graceful-restart** statement should be configured to avoid traffic drop during graceful restart or graceful Routing Engine switchover.

For example:

```
protocols {
  bgp {
    group ext {
      graceful-restart {
        restart-time 400;
      }
    }
  }
  routing-options {
    graceful-restart;
  }
}
```

Figure 22 on page 321 shows a standard MPLS VPN network. Routers CE1 and CE2 are customer edge routers, PE1 and PE2 are provider edge routers, and P0 is a provider core router. Several Layer 3 VPNs are configured across this network, as well as one Layer 2 VPN. Interfaces are shown in the diagram and are not included in the configuration example that follows.

Figure 22: Layer 3 VPN Graceful Restart Topology

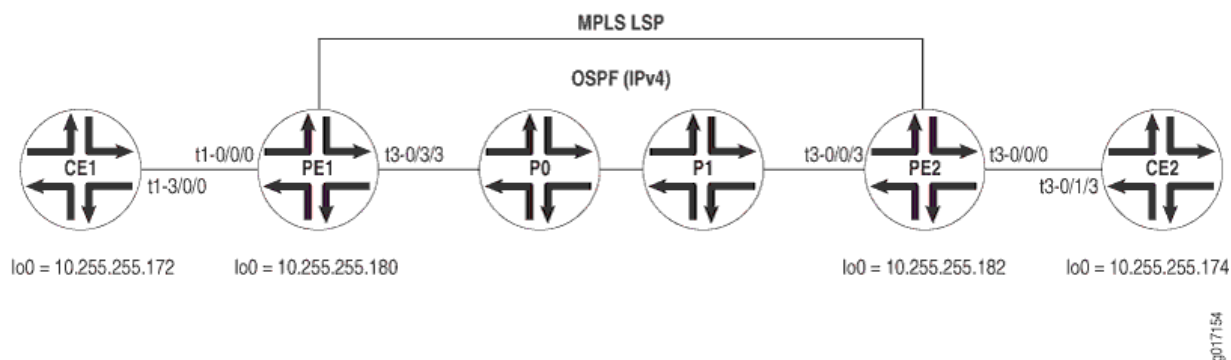

Router CE1

On Router CE1, configure the following protocols on the logical interfaces of **t3-3/1/0**: OSPF on unit 101, RIP on unit 102, BGP on unit 103, and IS-IS on unit 512. Also configure graceful restart, BGP, IS-IS, OSPF, and RIP on the main instance to be able to connect to the routing instances on Router PE1.

```
[edit]
interfaces {
  t3-3/1/0 {
    encapsulation frame-relay;
    unit 100 {
      dlci 100;
      family inet {
        address 10.96.100.2/30;
      }
    }
    unit 101 {
      dlci 101;
      family inet {
        address 10.96.101.2/30;
      }
    }
    unit 102 {
      dlci 102;
      family inet {
        address 10.96.102.2/30;
      }
    }
    unit 103 {
      dlci 103;
      family inet {
        address 10.96.103.2/30;
      }
    }
    unit 512 {
      dlci 512;
      family inet {
        address 10.96.252.1/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
```

```

        address 10.245.14.172/32;
        primary;
    }
    address 10.96.110.1/32;
    address 10.96.111.1/32;
    address 10.96.112.1/32;
    address 10.96.113.1/32;
    address 10.96.116.1/32;
}
family iso {
    address 47.0005.80ff.f800.0000.0108.0001.0102.4501.4172.00;
}
}
routing-options {
    graceful-restart;
    autonomous-system 65100;
}
protocols {
    bgp {
        group CE-PE-INET {
            type external;
            export BGP_INET_LB_DIRECT;
            neighbor 10.96.103.1 {
                local-address 10.96.103.2;
                family inet {
                    unicast;
                }
                peer-as 65103;
            }
        }
    }
    isis {
        export ISIS_L2VPN_LB_DIRECT;
        interface t3-3/1/0.512;
    }
    ospf {
        export OSPF_LB_DIRECT;
        area 0.0.0.0 {
            interface t3-3/1/0.101;
        }
    }
    rip {

```

```

        group RIP {
            export RIP_LB_DIRECT;
            neighbor t3-3/1/0.102;
        }
    }
}

policy-options {
    policy-statement OSPF_LB_DIRECT {
        term direct {
            from {
                protocol direct;
                route-filter 10.96.101.0/30 exact;
                route-filter 10.96.111.1/32 exact;
            }
            then accept;
        }
        term final {
            then reject;
        }
    }
}

policy-statement RIP_LB_DIRECT {
    term direct {
        from {
            protocol direct;
            route-filter 10.96.102.0/30 exact;
            route-filter 10.96.112.1/32 exact;
        }
        then accept;
    }
    term final {
        then reject;
    }
}

policy-statement BGP_INET_LB_DIRECT {
    term direct {
        from {
            protocol direct;
            route-filter 10.96.103.0/30 exact;
            route-filter 10.96.113.1/32 exact;
        }
        then accept;
    }
    term final {

```

```

        then reject;
    }
}
policy-statement ISIS_L2VPN_LB_DIRECT {
    term direct {
        from {
            protocol direct;
            route-filter 10.96.116.1/32 exact;
        }
        then accept;
    }
    term final {
        then reject;
    }
}
}
}

```

Router PE1

On Router PE1, configure graceful restart in the master instance, along with BGP, OSPF, MPLS, and LDP. Next, configure several protocol-specific instances of graceful restart. By including instances for BGP, OSPF, Layer 2 VPNs, RIP, and static routes, you can observe the wide range of options available when you implement graceful restart. Configure the following protocols in individual instances on the logical interfaces of **t3-0/0/0**: a static route on unit 100, OSPF on unit 101, RIP on unit 102, BGP on unit 103, and Frame Relay on unit 512 for the Layer 2 VPN instance.

```

[edit]
interfaces {
    t3-0/0/0 {
        dce;
        encapsulation frame-relay-ccc;
        unit 100 {
            dlci 100;
            family inet {
                address 10.96.100.1/30;
            }
            family mpls;
        }
        unit 101 {
            dlci 101;
            family inet {
                address 10.96.101.1/30;
            }
        }
    }
}

```

```

        }
        family mpls;
    }
    unit 102 {
        dlci 102;
        family inet {
            address 10.96.102.1/30;
        }
        family mpls;
    }
    unit 103 {
        dlci 103;
        family inet {
            address 10.96.103.1/30;
        }
        family mpls;
    }
    unit 512 {
        encapsulation frame-relay-ccc;
        dlci 512;
    }
}
t1-0/1/0 {
    unit 0 {
        family inet {
            address 10.96.0.2/30;
        }
        family mpls;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.245.14.176/32;
        }
        family iso {
            address 47.0005.80ff.f800.0000.0108.0001.0102.4501.4176.00;
        }
    }
}
}
routing-options {
    graceful-restart;
}

```

```

    router-id 10.245.14.176;
    autonomous-system 69;
}
protocols {
    mpls {
        interface all;
    }
    bgp {
        group PEPE {
            type internal;
            neighbor 10.245.14.182 {
                local-address 10.245.14.176;
                family inet-vpn {
                    unicast;
                }
                family l2vpn {
                    unicast;
                }
            }
        }
    }
    ospf {
        area 0.0.0.0 {
            interface t1-0/1/0.0;
            interface fxp0.0 {
                disable;
            }
            interface lo0.0 {
                passive;
            }
        }
    }
    ldp {
        interface all;
    }
}
policy-options {
    policy-statement STATIC-import {
        from community STATIC;
        then accept;
    }
    policy-statement STATIC-export {
        then {

```



```

        community add STATIC;
        accept;
    }
}
policy-statement OSPF-import {
    from community OSPF;
    then accept;
}
policy-statement OSPF-export {
    then {
        community add OSPF;
        accept;
    }
}
policy-statement RIP-import {
    from community RIP;
    then accept;
}
policy-statement RIP-export {
    then {
        community add RIP;
        accept;
    }
}
policy-statement BGP-INET-import {
    from community BGP-INET;
    then accept;
}
policy-statement BGP-INET-export {
    then {
        community add BGP-INET;
        accept;
    }
}
policy-statement L2VPN-import {
    from community L2VPN;
    then accept;
}
policy-statement L2VPN-export {
    then {
        community add L2VPN;
        accept;
    }
}

```

```

    }
    community BGP-INET members target:69:103;
    community L2VPN members target:69:512;
    community OSPF members target:69:101;
    community RIP members target:69:102;
    community STATIC members target:69:100;
}
routing-instances {
    BGP-INET {
        instance-type vrf;
        interface t3-0/0/0.103;
        route-distinguisher 10.245.14.176:103;
        vrf-import BGP-INET-import;
        vrf-export BGP-INET-export;
        routing-options {
            graceful-restart;
            autonomous-system 65103;
        }
        protocols {
            bgp {
                group BGP-INET {
                    type external;
                    export BGP-INET-import;
                    neighbor 10.96.103.2 {
                        local-address 10.96.103.1;
                        family inet {
                            unicast;
                        }
                        peer-as 65100;
                    }
                }
            }
        }
    }
    L2VPN {
        instance-type l2vpn;
        interface t3-0/0/0.512;
        route-distinguisher 10.245.14.176:512;
        vrf-import L2VPN-import;
        vrf-export L2VPN-export;
        protocols {# There is no graceful-restart statement for Layer 2 VPN
instances.
            l2vpn {

```

```

        encapsulation-type frame-relay;
        site CE1-ISIS {
            site-identifier 512;
            interface t3-0/0/0.512 {
                remote-site-id 612;
            }
        }
    }
}

OSPF {
    instance-type vrf;
    interface t3-0/0/0.101;
    route-distinguisher 10.245.14.176:101;
    vrf-import OSPF-import;
    vrf-export OSPF-export;
    routing-options {
        graceful-restart;
    }
    protocols {
        ospf {
            export OSPF-import;
            area 0.0.0.0 {
                interface all;
            }
        }
    }
}

RIP {
    instance-type vrf;
    interface t3-0/0/0.102;
    route-distinguisher 10.245.14.176:102;
    vrf-import RIP-import;
    vrf-export RIP-export;
    routing-options {
        graceful-restart;
    }
    protocols {
        rip {
            group RIP {
                export RIP-import;
                neighbor t3-0/0/0.102;
            }
        }
    }
}

```

```

    }
  }
}
STATIC {
  instance-type vrf;
  interface t3-0/0/0.100;
  route-distinguisher 10.245.14.176:100;
  vrf-import STATIC-import;
  vrf-export STATIC-export;
  routing-options {
    graceful-restart;
    static {
      route 10.96.110.1/32 next-hop t3-0/0/0.100;
    }
  }
}
}
}

```

Router P0

On Router P0, configure graceful restart in the main instance, along with OSPF, MPLS, and LDP. This allows the protocols on the PE routers to reach one another.

```

[edit]
interfaces {
  t3-0/1/3 {
    unit 0 {
      family inet {
        address 10.96.0.5/30;
      }
      family mpls;
    }
  }
  t1-0/2/0 {
    unit 0 {
      family inet {
        address 10.96.0.1/30;
      }
      family mpls;
    }
  }
  lo0 {

```

```

        unit 0 {
            family inet {
                address 10.245.14.174/32;
            }
            family iso {
                address 47.0005.80ff.f800.0000.0108.0001.0102.4501.4174.00;
            }
        }
    }

    routing-options {
        graceful-restart;
        router-id 10.245.14.174;
        autonomous-system 69;
    }

    protocols {
        mpls {
            interface all;
        }
        ospf {
            area 0.0.0.0 {
                interface t1-0/2/0.0;
                interface t3-0/1/3.0;
                interface fxp0.0 {
                    disable;
                }
                interface lo0.0 {
                    passive;
                }
            }
        }
        ldp {
            interface all;
        }
    }
}

```

Router PE2

On Router PE2, configure BGP, OSPF, MPLS, LDP, and graceful restart in the master instance. Configure the following protocols in individual instances on the logical interfaces of **t1-0/1/3**: a static route on unit 200, OSPF on unit 201, RIP on unit 202, BGP on unit 203, and Frame Relay on unit 612 for the Layer 2

VPN instance. Also configure protocol-specific graceful restart in all routing instances, except the Layer 2 VPN instance.

```
[edit]
interfaces {
  t3-0/0/0 {
    unit 0 {
      family inet {
        address 10.96.0.6/30;
      }
      family mpls;
    }
  }
  t1-0/1/3 {
    dce;
    encapsulation frame-relay-ccc;
    unit 200 {
      dlci 200;
      family inet {
        address 10.96.200.1/30;
      }
      family mpls;
    }
    unit 201 {
      dlci 201;
      family inet {
        address 10.96.201.1/30;
      }
      family mpls;
    }
    unit 202 {
      dlci 202;
      family inet {
        address 10.96.202.1/30;
      }
      family mpls;
    }
    unit 203 {
      dlci 203;
      family inet {
        address 10.96.203.1/30;
      }
    }
  }
}
```

```

        family mpls;
    }
    unit 612 {
        encapsulation frame-relay-ccc;
        dlci 612;
    }
}
lo0 {
    unit 0 {
        family inet {
            address 10.245.14.182/32;
        }
        family iso {
            address 47.0005.80ff.f800.0000.0108.0001.0102.4501.4182.00;
        }
    }
}
}
routing-options {
    graceful-restart;
    router-id 10.245.14.182;
    autonomous-system 69;
}
protocols {
    mpls {
        interface all;
    }
    bgp {
        group PEPE {
            type internal;
            neighbor 10.245.14.176 {
                local-address 10.245.14.182;
                family inet-vpn {
                    unicast;
                }
                family l2vpn {
                    unicast;
                }
            }
        }
    }
}
ospf {
    area 0.0.0.0 {

```

```

        interface t3-0/0/0.0;
        interface fxp0.0 {
            disable;
        }
        interface lo0.0 {
            passive;
        }
    }
}
ldp {
    interface all;
}
policy-options {
    policy-statement STATIC-import {
        from community STATIC;
        then accept;
    }
    policy-statement STATIC-export {
        then {
            community add STATIC;
            accept;
        }
    }
    policy-statement OSPF-import {
        from community OSPF;
        then accept;
    }
    policy-statement OSPF-export {
        then {
            community add OSPF;
            accept;
        }
    }
    policy-statement RIP-import {
        from community RIP;
        then accept;
    }
    policy-statement RIP-export {
        then {
            community add RIP;
            accept;
        }
    }
}

```



```

policy-statement BGP-INET-import {
    from community BGP-INET;
    then accept;
}
policy-statement BGP-INET-export {
    then {
        community add BGP-INET;
        accept;
    }
}
policy-statement L2VPN-import {
    from community L2VPN;
    then accept;
}
policy-statement L2VPN-export {
    then {
        community add L2VPN;
        accept;
    }
}
community BGP-INET members target:69:103;
community L2VPN members target:69:512;
community OSPF members target:69:101;
community RIP members target:69:102;
community STATIC members target:69:100;
}
routing-instances {
    BGP-INET {
        instance-type vrf;
        interface t1-0/1/3.203;
        route-distinguisher 10.245.14.182:203;
        vrf-import BGP-INET-import;
        vrf-export BGP-INET-export;
        routing-options {
            graceful-restart;
            autonomous-system 65203;
        }
        protocols {
            bgp {
                group BGP-INET {
                    type external;
                    export BGP-INET-import;
                    neighbor 10.96.203.2 {

```



```

    }
  }
}
RIP {
  instance-type vrf;
  interface t1-0/1/3.202;
  route-distinguisher 10.245.14.182:202;
  vrf-import RIP-import;
  vrf-export RIP-export;
  routing-options {
    graceful-restart;
  }
  protocols {
    rip {
      group RIP {
        export RIP-import;
        neighbor t1-0/1/3.202;
      }
    }
  }
}
STATIC {
  instance-type vrf;
  interface t1-0/1/3.200;
  route-distinguisher 10.245.14.182:200;
  vrf-import STATIC-import;
  vrf-export STATIC-export;
  routing-options {
    graceful-restart;
    static {
      route 10.96.210.1/32 next-hop t1-0/1/3.200;
    }
  }
}
}
}

```

Router CE2

On Router CE2, complete the Layer 2 and Layer 3 VPN configuration by mirroring the protocols already set on Routers PE2 and CE1. Specifically, configure the following on the logical interfaces of **t1-0/0/3**: OSPF on unit 201, RIP on unit 202, BGP on unit 203, and IS-IS on unit 612. Finally, configure graceful

restart, BGP, IS-IS, OSPF, and RIP on the main instance to be able to connect to the routing instances on Router PE2.

```
[edit]
interfaces {
  t1-0/0/3 {
    encapsulation frame-relay;
    unit 200 {
      dlci 200;
      family inet {
        address 10.96.200.2/30;
      }
    }
    unit 201 {
      dlci 201;
      family inet {
        address 10.96.201.2/30;
      }
    }
    unit 202 {
      dlci 202;
      family inet {
        address 10.96.202.2/30;
      }
    }
    unit 203 {
      dlci 203;
      family inet {
        address 10.96.203.2/30;
      }
    }
    unit 512 {
      dlci 512;
      family inet {
        address 10.96.252.2/30;
      }
    }
  }
  lo0 {
    unit 0 {
      family inet {
        address 10.245.14.180/32 {
```

```

        primary;
    }
    address 10.96.210.1/32;
    address 10.96.111.1/32;
    address 10.96.212.1/32;
    address 10.96.213.1/32;
    address 10.96.216.1/32;
    }
    family iso {
        address 47.0005.80ff.f800.0000.0108.0001.0102.4501.4180.00;
    }
    }
}
routing-options {
    graceful-restart;
    autonomous-system 65200;
}
protocols {
    bgp {
        group CE-PE-INET {
            type external;
            export BGP_INET_LB_DIRECT;
            neighbor 10.96.203.1 {
                local-address 10.96.203.2;
                family inet {
                    unicast;
                }
                peer-as 65203;
            }
        }
    }
    isis {
        export ISIS_L2VPN_LB_DIRECT;
        interface t1-0/0/3.612;
    }
    ospf {
        export OSPF_LB_DIRECT;
        area 0.0.0.0 {
            interface t1-0/0/3.201;
        }
    }
    rip {

```

```

        group RIP {
            export RIP_LB_DIRECT;
            neighbor t1-0/0/3.202;
        }
    }
}

policy-options {
    policy-statement OSPF_LB_DIRECT {
        term direct {
            from {
                protocol direct;
                route-filter 10.96.201.0/30 exact;
                route-filter 10.96.211.1/32 exact;
            }
            then accept;
        }
        term final {
            then reject;
        }
    }
    policy-statement RIP_LB_DIRECT {
        term direct {
            from {
                protocol direct;
                route-filter 10.96.202.0/30 exact;
                route-filter 10.96.212.1/32 exact;
            }
            then accept;
        }
        term final {
            then reject;
        }
    }
    policy-statement BGP_INET_LB_DIRECT {
        term direct {
            from {
                protocol direct;
                route-filter 10.96.203.0/30 exact;
                route-filter 10.96.213.1/32 exact;
            }
            then accept;
        }
        term final {

```

```

        then reject;
    }
}
policy-statement ISIS_L2VPN_LB_DIRECT {
    term direct {
        from {
            protocol direct;
            route-filter 10.96.216.1/32 exact;
        }
        then accept;
    }
    term final {
        then reject;
    }
}
}

```

Router PE1 Status Before a Restart

The following example displays neighbor relationships on Router PE1 before a restart happens:

```

user@PE1> show bgp neighbor
Peer: 10.96.103.2+3785 AS 65100 Local: 10.96.103.1+179 AS 65103
  Type: External      State: Established      Flags: <>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Export: [ BGP-INET-import ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
PeerAS Refresh>
  Address families configured: inet-unicast
  Local Address: 10.96.103.1 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.96.110.1      Local ID: 10.96.103.1      Active Holdtime: 90
  Keepalive Interval: 30
  Local Interface: t3-0/0/0.103
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120

```

```

NLRI that peer supports restart for: inet-unicast
NLRI peer can save forwarding state: inet-unicast
NLRI that peer saved forwarding for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Table BGP-INET.inet.0 Bit: 30001
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:        0
  Suppressed due to damping: 0
Last traffic (seconds): Received 8      Sent 3      Checked 3
Input messages:  Total 15      Updates 0      Refreshes 0      Octets 321
Output messages: Total 18      Updates 2      Refreshes 0      Octets 450
Output Queue[2]: 0

Peer: 10.245.14.182+4701 AS 69      Local: 10.245.14.176+179 AS 69
  Type: Internal      State: Established      Flags: <>
  Last State: OpenConfirm      Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
Rib-group Refresh>
  Address families configured: inet-vpn-unicast l2vpn
  Local Address: 10.245.14.176 Holdtime: 90 Preference: 170
  Number of flaps: 1
  Peer ID: 10.245.14.182      Local ID: 10.245.14.176      Active Holdtime: 90
  Keepalive Interval: 30
  NLRI for restart configured on peer: inet-vpn-unicast l2vpn
  NLRI advertised by peer: inet-vpn-unicast l2vpn
  NLRI for this session: inet-vpn-unicast l2vpn
  Peer supports Refresh capability (2)
  Restart time configured on the peer: 120
  Stale routes from peer are kept for: 300
  Restart time requested by this peer: 120
  NLRI that peer supports restart for: inet-vpn-unicast l2vpn
  NLRI peer can save forwarding state: inet-vpn-unicast l2vpn
  NLRI that peer saved forwarding for: inet-vpn-unicast l2vpn
  NLRI that restart is negotiated for: inet-vpn-unicast l2vpn
  NLRI of all end-of-rib markers sent: inet-vpn-unicast l2vpn
Table bgp.l3vpn.0 Bit: 10000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete

```



```

Send state: in sync
Active prefixes:          0
Received prefixes:       0
Suppressed due to damping: 0
Table bgp.l2vpn.0 Bit: 20000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          1
  Received prefixes:       1
  Suppressed due to damping: 0
Table BGP-INET.inet.0 Bit: 30000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:       0
  Suppressed due to damping: 0
Table OSPF.inet.0 Bit: 60000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:       0
  Suppressed due to damping: 0
Table RIP.inet.0 Bit: 70000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:       0
  Suppressed due to damping: 0
Table STATIC.inet.0 Bit: 80000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:       0
  Suppressed due to damping: 0
Table L2VPN.l2vpn.0 Bit: 90000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync

```

```

    Active prefixes:          1
    Received prefixes:       1
    Suppressed due to damping: 0
Last traffic (seconds): Received 28   Sent 28   Checked 28
Input messages:  Total 2       Updates 0       Refreshes 0       Octets 86
Output messages: Total 13      Updates 10      Refreshes 0       Octets 1073
Output Queue[0]: 0
Output Queue[1]: 0
Output Queue[2]: 0
Output Queue[3]: 0
Output Queue[4]: 0
Output Queue[5]: 0
Output Queue[6]: 0
Output Queue[7]: 0
Output Queue[8]: 0

user@PE1> show route instance detail
master:
  Router ID: 10.245.14.176
  Type: forwarding          State: Active
  Restart State: Complete Path selection timeout: 300
  Tables:
    inet.0                  : 17 routes (15 active, 0 holddown, 1 hidden)
    Restart Complete
    inet.3                  : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    iso.0                   : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
    mpls.0                  : 19 routes (19 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l3vpn.0             : 10 routes (10 active, 0 holddown, 0 hidden)
    Restart Complete
    inet6.0                 : 2 routes (2 active, 0 holddown, 0 hidden)
    Restart Complete
    bgp.l2vpn.0             : 1 routes (1 active, 0 holddown, 0 hidden)
    Restart Complete
BGP-INET:
  Router ID: 10.96.103.1
  Type: vrf                 State: Active
  Restart State: Complete Path selection timeout: 300
  Interfaces:
    t3-0/0/0.103
  Route-distinguisher: 10.245.14.176:103

```

```

Vrf-import: [ BGP-INET-import ]
Vrf-export: [ BGP-INET-export ]
Tables:
    BGP-INET.inet.0          : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Complete
L2VPN:
    Router ID: 0.0.0.0
    Type: l2vpn              State: Active
    Restart State: Complete Path selection timeout: 300
    Interfaces:
        t3-0/0/0.512
    Route-distinguisher: 10.245.14.176:512
    Vrf-import: [ L2VPN-import ]
    Vrf-export: [ L2VPN-export ]
    Tables:
        L2VPN.l2vpn.0        : 2 routes (2 active, 0 holddown, 0 hidden)
        Restart Complete
OSPF:
    Router ID: 10.96.101.1
    Type: vrf                State: Active
    Restart State: Complete Path selection timeout: 300
    Interfaces:
        t3-0/0/0.101
    Route-distinguisher: 10.245.14.176:101
    Vrf-import: [ OSPF-import ]
    Vrf-export: [ OSPF-export ]
    Tables:
        OSPF.inet.0          : 8 routes (7 active, 0 holddown, 0 hidden)
        Restart Complete
RIP:
    Router ID: 10.96.102.1
    Type: vrf                State: Active
    Restart State: Complete Path selection timeout: 300
    Interfaces:
        t3-0/0/0.102
    Route-distinguisher: 10.245.14.176:102
    Vrf-import: [ RIP-import ]
    Vrf-export: [ RIP-export ]
    Tables:
        RIP.inet.0           : 6 routes (6 active, 0 holddown, 0 hidden)
        Restart Complete
STATIC:
    Router ID: 10.96.100.1

```

```

Type: vrf                      State: Active
Restart State: Complete Path selection timeout: 300
Interfaces:
    t3-0/0/0.100
Route-distinguisher: 10.245.14.176:100
Vrf-import: [ STATIC-import ]
Vrf-export: [ STATIC-export ]
Tables:
    STATIC.inet.0              : 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
__juniper_privatel__:
Router ID: 0.0.0.0
Type: forwarding              State: Active

user@PE1> show route protocol l2vpn
inet.0: 16 destinations, 17 routes (15 active, 0 holddown, 1 hidden)
Restart Complete
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
BGP-INET.inet.0: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden)
Restart Complete
OSPF.inet.0: 7 destinations, 8 routes (7 active, 0 holddown, 0 hidden)
Restart Complete
RIP.inet.0: 6 destinations, 6 routes (6 active, 0 holddown, 0 hidden)
Restart Complete
STATIC.inet.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Complete
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
mpls.0: 20 destinations, 20 routes (20 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both
800003          *[L2VPN/7] 00:06:00
                 > via t3-0/0/0.512, Pop          Offset: 4
t3-0/0/0.512     *[L2VPN/7] 00:06:00
                 > via t1-0/1/0.0, Push 800003, Push 100004(top) Offset: -4
bgp.l3vpn.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Restart Complete
inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
L2VPN.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
+ = Active Route, - = Last Active, * = Both

```

```

10.245.14.176:512:512:611/96
          *[L2VPN/7] 00:06:01
          Discard

bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete

```

Router PE1 Status During a Restart

Before you can verify that graceful restart is working, you must simulate a router restart. To cause the routing process to refresh and simulate a restart, use the **restart routing** operational mode command:

```

user@PE1> restart routing
Routing protocol daemon started, pid 3558

```

The following sample output is captured during the router restart:

```

user@PE1> show bgp neighbor
Peer: 10.96.103.2      AS 65100 Local: 10.96.103.1      AS 65103
  Type: External      State: Active      Flags: <ImportEval>
  Last State: Idle      Last Event: Start
  Last Error: None
  Export: [ BGP-INET-import ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
PeerAS Refresh>
  Address families configured: inet-unicast
  Local Address: 10.96.103.1 Holdtime: 90 Preference: 170
  Number of flaps: 0
Peer: 10.245.14.182+179 AS 69      Local: 10.245.14.176+2131 AS 69
  Type: Internal      State: Established      Flags: <ImportEval>
  Last State: OpenConfirm      Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily Rib-
group Refresh>
  Address families configured: inet-vpn-unicast l2vpn
  Local Address: 10.245.14.176 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.245.14.182      Local ID: 10.245.14.176      Active Holdtime: 90
  Keepalive Interval: 30
  NLRI for restart configured on peer: inet-vpn-unicast l2vpn
  NLRI advertised by peer: inet-vpn-unicast l2vpn
  NLRI for this session: inet-vpn-unicast l2vpn

```

```

Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast l2vpn
NLRI peer can save forwarding state: inet-vpn-unicast l2vpn
NLRI that peer saved forwarding for: inet-vpn-unicast l2vpn
NLRI that restart is negotiated for: inet-vpn-unicast l2vpn
NLRI of received end-of-rib markers: inet-vpn-unicast l2vpn
Table bgp.l3vpn.0 Bit: 10000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          10
  Received prefixes:       10
  Suppressed due to damping: 0
Table bgp.l2vpn.0 Bit: 20000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          1
  Received prefixes:       1
  Suppressed due to damping: 0
Table BGP-INET.inet.0 Bit: 30000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:       2
  Suppressed due to damping: 0
Table OSPF.inet.0 Bit: 60000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:       2
  Suppressed due to damping: 0
Table RIP.inet.0 Bit: 70000
  RIB State: BGP restart is complete
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          2
  Received prefixes:       2

```

```

    Suppressed due to damping: 0
Table STATIC.inet.0 Bit: 80000
    RIB State: BGP restart is complete
    RIB State: VPN restart in progress
    Send state: in sync
    Active prefixes:          1
    Received prefixes:        1
    Suppressed due to damping: 0
Table L2VPN.l2vpn.0 Bit: 90000
    RIB State: BGP restart is complete
    RIB State: VPN restart in progress
    Send state: in sync
    Active prefixes:          1
    Received prefixes:        1
    Suppressed due to damping: 0
Last traffic (seconds): Received 0    Sent 0    Checked 0
Input messages:  Total 14    Updates 13    Refreshes 0    Octets 1053
Output messages: Total 3    Updates 0    Refreshes 0    Octets 105
Output Queue[0]: 0
Output Queue[1]: 0
Output Queue[2]: 0
Output Queue[3]: 0
Output Queue[4]: 0
Output Queue[5]: 0
Output Queue[6]: 0
Output Queue[7]: 0
Output Queue[8]: 0

user@PE1> show route instance detail
master:
    Router ID: 10.245.14.176
    Type: forwarding          State: Active
    Restart State: Pending    Path selection timeout: 300
    Tables:
        inet.0                  : 17 routes (15 active, 1 holddown, 1 hidden)
        Restart Pending: OSPF LDP
        inet.3                  : 2 routes (2 active, 0 holddown, 0 hidden)
        Restart Pending: OSPF LDP
        iso.0                   : 1 routes (1 active, 0 holddown, 0 hidden)
        Restart Complete
        mpls.0                  : 23 routes (23 active, 0 holddown, 0 hidden)
        Restart Pending: LDP VPN
        bgp.l3vpn.0             : 10 routes (10 active, 0 holddown, 0 hidden)

```

```

Restart Pending: BGP VPN
inet6.0           : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete
bgp.l2vpn.0       : 1 routes (1 active, 0 holddown, 0 hidden)
Restart Pending: BGP VPN
BGP-INET:
Router ID: 10.96.103.1
Type: vrf          State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
t3-0/0/0.103
Route-distinguisher: 10.245.14.176:103
Vrf-import: [ BGP-INET-import ]
Vrf-export: [ BGP-INET-export ]
Tables:
BGP-INET.inet.0   : 6 routes (5 active, 0 holddown, 0 hidden)
Restart Pending: VPN
L2VPN:
Router ID: 0.0.0.0
Type: l2vpn        State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
t3-0/0/0.512
Route-distinguisher: 10.245.14.176:512
Vrf-import: [ L2VPN-import ]
Vrf-export: [ L2VPN-export ]
Tables:
L2VPN.l2vpn.0     : 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: VPN L2VPN
OSPF:
Router ID: 10.96.101.1
Type: vrf          State: Active
Restart State: Pending Path selection timeout: 300
Interfaces:
t3-0/0/0.101
Route-distinguisher: 10.245.14.176:101
Vrf-import: [ OSPF-import ]
Vrf-export: [ OSPF-export ]
Tables:
OSPF.inet.0       : 8 routes (7 active, 1 holddown, 0 hidden)
Restart Pending: OSPF VPN
RIP:
Router ID: 10.96.102.1

```



```

Type: vrf                      State: Active
Restart State: Pending  Path selection timeout: 300
Interfaces:
  t3-0/0/0.102
Route-distinguisher: 10.245.14.176:102
Vrf-import: [ RIP-import ]
Vrf-export: [ RIP-export ]
Tables:
  RIP.inet.0                  : 8 routes (6 active, 2 holddown, 0 hidden)
  Restart Pending: RIP VPN
STATIC:
  Router ID: 10.96.100.1
  Type: vrf                      State: Active
  Restart State: Pending  Path selection timeout: 300
  Interfaces:
    t3-0/0/0.100
  Route-distinguisher: 10.245.14.176:100
  Vrf-import: [ STATIC-import ]
  Vrf-export: [ STATIC-export ]
  Tables:
    STATIC.inet.0             : 4 routes (4 active, 0 holddown, 0 hidden)
    Restart Pending: VPN
__juniper_private1__:
  Router ID: 0.0.0.0
  Type: forwarding              State: Active

```

```
user@PE1> show route instance summary
```

Instance	Type	Primary rib	Active/holddown/hidden
master	forwarding	inet.0	15/0/1
		iso.0	1/0/0
		mpls.0	35/0/0
		l3vpn.0	0/0/0
		inet6.0	2/0/0
		l2vpn.0	0/0/0
		l2circuit.0	0/0/0
BGP-INET	vrf	BGP-INET.inet.0	5/0/0
		BGP-INET.iso.0	0/0/0
		BGP-INET.inet6.0	0/0/0
L2VPN	l2vpn		

```

                                L2VPN.inet.0          0/0/0
                                L2VPN.iso.0           0/0/0
                                L2VPN.inet6.0         0/0/0
                                L2VPN.l2vpn.0         2/0/0
OSPF                            vrf
                                OSPF.inet.0          7/0/0
                                OSPF.iso.0           0/0/0
                                OSPF.inet6.0         0/0/0
RIP                             vrf
                                RIP.inet.0           6/0/0
                                RIP.iso.0            0/0/0
                                RIP.inet6.0          0/0/0
STATIC                         vrf
                                STATIC.inet.0        4/0/0
                                STATIC.iso.0         0/0/0
                                STATIC.inet6.0       0/0/0
__juniper_privatel__ forwarding
                                __juniper_priva.inet.0 0/0/0
                                __juniper_privat.iso.0 0/0/0
                                __juniper_priv.inet6.0 0/0/0

```

```
user@PE1> show route protocol l2vpn
```

```
inet.0: 16 destinations, 17 routes (15 active, 1 holddown, 1 hidden)
Restart Pending: OSPF LDP
```

```
inet.3: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: OSPF LDP
```

```
BGP-INET.inet.0: 5 destinations, 6 routes (5 active, 0 holddown, 0 hidden)
Restart Pending: VPN
```

```
OSPF.inet.0: 7 destinations, 8 routes (7 active, 1 holddown, 0 hidden)
Restart Pending: OSPF VPN
```

```
RIP.inet.0: 6 destinations, 8 routes (6 active, 2 holddown, 0 hidden)
Restart Pending: RIP VPN
```

```
STATIC.inet.0: 4 destinations, 4 routes (4 active, 0 holddown, 0 hidden)
Restart Pending: VPN
```

```
iso.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Complete
```

```

mpls.0: 24 destinations, 24 routes (24 active, 0 holddown, 0 hidden)
Restart Pending: LDP VPN
+ = Active Route, - = Last Active, * = Both

800001          *[L2VPN/7] 00:00:13
                 > via t3-0/0/0.512, Pop          Offset: 4
t3-0/0/0.512    *[L2VPN/7] 00:00:13
                 > via t1-0/1/0.0, Push 800003, Push 100004(top) Offset: -4

bgp.l3vpn.0: 10 destinations, 10 routes (10 active, 0 holddown, 0 hidden)
Restart Pending: BGP VPN

inet6.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Complete

L2VPN.l2vpn.0: 2 destinations, 2 routes (2 active, 0 holddown, 0 hidden)
Restart Pending: VPN L2VPN
+ = Active Route, - = Last Active, * = Both

10.245.14.176:512:512:611/96
                 *[L2VPN/7] 00:00:13
                 Discard
bgp.l2vpn.0: 1 destinations, 1 routes (1 active, 0 holddown, 0 hidden)
Restart Pending: BGP VPN

```

RELATED DOCUMENTATION

[Enabling Graceful Restart | 319](#)

[Configuring Routing Protocols Graceful Restart | 355](#)

[Configuring Graceful Restart for MPLS-Related Protocols | 364](#)

[Configuring VPN Graceful Restart | 366](#)

[Configuring Logical System Graceful Restart | 368](#)

[Verifying Graceful Restart Operation | 379](#)

Configuring Routing Protocols Graceful Restart

IN THIS SECTION

- [Enabling Graceful Restart | 355](#)
- [Configuring Graceful Restart Options for BGP | 356](#)
- [Using Control Plane Dependent BFD along with Graceful Restart Helper Mode | 357](#)
- [Configuring Graceful Restart Options for ES-IS | 358](#)
- [Configuring Graceful Restart Options for IS-IS | 359](#)
- [Configuring Graceful Restart Options for OSPF and OSPFv3 | 359](#)
- [Configuring Graceful Restart Options for RIP and RIPng | 361](#)
- [Configuring Graceful Restart Options for PIM Sparse Mode | 362](#)
- [Tracking Graceful Restart Events | 363](#)

This topic includes the following sections:

Enabling Graceful Restart

By default, graceful restart is disabled. To enable graceful restart, include the **graceful-restart** statement at the **[edit routing-instance *instance-name* routing-options]** or **[edit routing-options]** hierarchy level.

For example:

```
routing-options {  
    graceful-restart;  
}
```

To configure the duration of the graceful restart period, include the **restart-duration** at the **[edit routing-options graceful-restart]** hierarchy level.

NOTE: Helper mode (the ability to assist a neighboring router attempting a graceful restart) is enabled by default when you start the routing platform, even if graceful restart is not enabled. You can disable helper mode on a per-protocol basis.

```
[edit]
routing-options {
  graceful-restart {
    disable;
    restart-duration seconds;
  }
}
```

To disable graceful restart globally, include the **disable** statement at the **[edit routing-options graceful-restart]** hierarchy level.

When graceful restart is enabled for all routing protocols at the **[edit routing-options graceful-restart]** hierarchy level, you can disable graceful restart on a per-protocol basis.

NOTE: If you configure graceful restart after a BGP or LDP session has been established, the BGP or LDP session restarts and the peers negotiate graceful restart capabilities. Also, the BGP peer routing statistics are reset to zero.

Configuring Graceful Restart Options for BGP

To configure the duration of the BGP graceful restart period, include the **restart-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level. To set the length of time the router waits to receive messages from restarting neighbors before declaring them down, include the **stale-routes-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

```
[edit]
protocols {
  bgp {
    graceful-restart {
      disable;
      restart-time seconds;
      stale-routes-time seconds;
    }
  }
}
```

```

}
routing-options {
    graceful-restart;
}

```

To disable BGP graceful restart capability for all BGP sessions, include the **disable** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

NOTE: To set BGP graceful restart properties or disable them for a group, include the desired statements at the **[edit protocols bgp group *group-name* graceful-restart]** hierarchy level.

To set BGP graceful restart properties or disable them for a specific neighbor in a group, include the desired statements at the **[edit protocols bgp group *group-name* neighbor *ip-address* graceful-restart]** hierarchy level.

NOTE: Configuring graceful restart for BGP resets the BGP peer routing statistics to zero. Also, existing BGP sessions restart, and the peers negotiate graceful restart capabilities.

NOTE: Do not configure both Bidirectional Forwarding Detection (BFD) for BGP and graceful restart for BGP. Routing performance may be sub-optimal if you do this.

Using Control Plane Dependent BFD along with Graceful Restart Helper Mode

When BFD is control plane dependent and the device detects a BFD down event and is not already entering the graceful restart helper mode, this is treated as a regular BFD down event and the device enters the graceful restart helper mode. This behavior makes the control plane dependent BFD unusable in conjunction with graceful restart.

Include the **dont-help-shared-fate-bfd-down** statement at the **[edit protocols bgp graceful-restart]** hierarchy to ensure that the device does not enter the graceful restart helper mode and data traffic continues to be forwarded to an alternate path even if there is an interface failure (without a control plane restart on the BGP neighbor).

```

[edit]
protocols {
    bgp {
        graceful-restart {
            disable;
            dont-help-shared-fate-bfd-down;
        }
    }
}

```

```

        restart-time seconds;
        stale-routes-time seconds;
    }
}
}
routing-options {
    graceful-restart;
}

```

Starting in Junos OS Release 18.3R1, you can prevent SRX Series devices from entering the graceful restart helper mode when the device is configured with BFD with a single-hop external BGP (EBGP), by including the **dont-help-shared-fate-bfd-down** statement at the **[edit protocols bgp graceful-restart]** hierarchy.

SEE ALSO

[dont-help-shared-fate-bfd-down](#) | 723

Configuring Graceful Restart Options for ES-IS

On J Series Services Routers, to configure the duration of the ES-IS graceful restart period, include the **restart-duration** statement at the **[edit protocols esis graceful-restart]** hierarchy level.

```

[edit]
protocols {
    esis {
        graceful-restart {
            disable;
            restart-duration seconds;
        }
    }
}
routing-options {
    graceful-restart;
}

```

To disable ES-IS graceful restart capability, include the **disable** statement at the **[edit protocols esis graceful-restart]** hierarchy level.

Configuring Graceful Restart Options for IS-IS

To configure the duration of the IS-IS graceful restart period, include the **restart-duration** statement at the **[edit protocols isis graceful-restart]** hierarchy level.

```
[edit]
protocols {
  isis {
    graceful-restart {
      disable;
      helper-disable;
      restart-duration seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable IS-IS graceful restart helper capability, include the **helper-disable** statement at the **[edit protocols isis graceful-restart]** hierarchy level. To disable IS-IS graceful restart capability, include the **disable** statement at the **[edit protocols isis graceful-restart]** hierarchy level.

NOTE: Starting with Junos OS Release 12.3, if adjacencies between the Routing Engine and the neighboring peer 'helper' routers time out, graceful restart protocol extensions are unable to notify the peer 'helper' routers about the impending restart. Graceful restart can then stop and cause interruptions in traffic.

To ensure that these adjacencies are kept, change the hold-time for IS-IS protocols from the default of 27 seconds to a value higher than 40 seconds.

NOTE: You can also track graceful restart events with the **traceoptions** statement at the **[edit protocols isis]** hierarchy level. For more information, see ["Tracking Graceful Restart Events" on page 363](#).

Configuring Graceful Restart Options for OSPF and OSPFv3

To configure the duration of the OSPF/OSPFv3 graceful restart period, include the **restart-duration** statement at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level. To specify the length of time for which the router notifies helper routers that it has completed graceful restart, include the

notify-duration at the **[edit protocols (ospf | ospfv3) graceful-restart]** hierarchy level. Strict OSPF link-state advertisement (LSA) checking results in the termination of graceful restart by a helping router. To disable strict LSA checking, include the **no-strict-lsa-checking** statement at the **[edit protocols (ospf | ospfv3) graceful-restart]** hierarchy level.

```
[edit]
protocols {
  ospf | ospfv3 {
    graceful-restart {
      disable;
      helper-disable
      no-strict-lsa-checking;
      notify-duration seconds;
      restart-duration seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable OSPF/OSPFv3 graceful restart, include the **disable** statement at the **[edit protocols (ospf | ospfv3) graceful-restart]** hierarchy level.

Starting with Release 11.3, the Junos OS supports both the standard (based on RFC 3623, *Graceful OSPF Restart*) and the restart signaling-based (as specified in RFC 4811, RFC 4812, and RFC 4813) helper modes for OSPF version 2 graceful restart configurations. Both the standard and restart signaling-based helper modes are enabled by default. To disable the helper mode for OSPF version 2 graceful restart configurations, include the **helper-disable <both | restart-signaling | standard>** statement at the **[edit protocols ospf graceful-restart]** hierarchy level. Note that the last committed statement always takes precedence over the previous one.

```
[edit protocols ospf]
  graceful-restart {
    helper-disable <both | restart-signaling | standard>
  }
```

To reenabling the helper mode, delete the **helper-disable** statement from the configuration by using the **delete protocols ospf graceful-restart helper-disable <restart-signaling | standard | both>** command. In this case also, the last executed command takes precedence over the previous ones.

NOTE:

Restart signaling-based helper mode is not supported for OSPFv3 configurations. To disable helper mode for OSPFv3 configurations, include the **helper-disable** statement at the **[edit protocols ospfv3 graceful-restart]** hierarchy level.

TIP: You can also track graceful restart events with the **traceoptions** statement at the **[edit protocols (ospf | ospf3)]** hierarchy level. For more information, see ["Tracking Graceful Restart Events" on page 363](#).

NOTE: You cannot enable OSPFv3 graceful restart between a routing platform running Junos OS Release 7.5 and earlier and a routing platform running Junos OS Release 7.6 or later. As a workaround, make sure both routing platforms use the same Junos OS version.

Configuring Graceful Restart Options for RIP and RIPng

To configure the duration of the RIP or RIPng graceful restart period, include the **restart-time** statement at the **[edit protocols (rip | ripng) graceful-restart]** hierarchy level.

```
[edit]
protocols {
  (rip | ripng) {
    graceful-restart {
      disable;
      restart-time seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable RIP or RIPng graceful restart capability, include the **disable** statement at the **[edit protocols (rip | ripng) graceful-restart]** hierarchy level.

Configuring Graceful Restart Options for PIM Sparse Mode

PIM sparse mode continues to forward existing multicast packet streams during a graceful restart, but does not forward new streams until after the restart is complete. After a restart, the routing platform updates the forwarding state with any updates that were received from neighbors and occurred during the restart period. For example, the routing platform relearns the join and prune states of neighbors during the restart, but does not apply the changes to the forwarding table until after the restart.

PIM sparse mode-enabled routing platforms generate a unique 32-bit random number called a generation identifier. Generation identifiers are included by default in PIM hello messages, as specified in the IETF Internet draft *Protocol Independent Multicast - Sparse Mode (PIM-SM): Protocol Specification (Revised)*. When a routing platform receives PIM hellos containing generation identifiers on a point-to-point interface, Junos OS activates an algorithm that optimizes graceful restart.

Before PIM sparse mode graceful restart occurs, each routing platform creates a generation identifier and sends it to its multicast neighbors. If a PIM sparse mode-enabled routing platform restarts, it creates a new generation identifier and sends it to its neighbors. When a neighbor receives the new identifier, it resends multicast updates to the restarting router to allow it to exit graceful restart efficiently. The restart phase completes when either the PIM state becomes stable or when the restart interval timer expires.

If a routing platform does not support generation identifiers or if PIM is enabled on multipoint interfaces, the PIM sparse mode graceful restart algorithm does not activate, and a default restart timer is used as the restart mechanism.

To configure the duration of the PIM graceful restart period, include the **restart-duration** statement at the **[edit protocols pim graceful-restart]** hierarchy level:

```
[edit]
protocols {
  pim {
    graceful-restart {
      disable;
      restart-duration seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable PIM sparse mode graceful restart capability, include the **disable** statement at the **[edit protocols pim graceful-restart]** hierarchy level.

NOTE: Multicast forwarding can be interrupted in two ways. First, if the underlying routing protocol is unstable, multicast reverse-path-forwarding (RPF) checks can fail and cause an interruption. Second, because the forwarding table is not updated during the graceful restart period, new multicast streams are not forwarded until graceful restart is complete.

Tracking Graceful Restart Events

To track the progress of a graceful restart event, you can configure graceful restart trace options flags for IS-IS and OSPF/OSPFv3. To configure graceful restart trace options, include the **graceful-restart** statement at the **[edit protocols *protocol*/traceoptions flag]** hierarchy level:

```
[edit protocols]
isis {
    traceoptions {
        flag graceful-restart;
    }
}
(ospf | ospfv3) {
    traceoptions {
        flag graceful-restart;
    }
}
```

Release History Table

Release	Description
12.3	Starting with Junos OS Release 12.3, if adjacencies between the Routing Engine and the neighboring peer 'helper' routers time out, graceful restart protocol extensions are unable to notify the peer 'helper' routers about the impending restart.

RELATED DOCUMENTATION

- [Graceful Restart Concepts | 308](#)
- [Graceful Restart System Requirements | 318](#)
- [Graceful Restart and Routing Protocols | 310](#)
- [Verifying Graceful Restart Operation | 379](#)
- [Configuring Graceful Restart | 320](#)

Configuring Graceful Restart for MPLS-Related Protocols

IN THIS SECTION

- [Configuring Graceful Restart Globally | 364](#)
- [Configuring Graceful Restart Options for RSVP, CCC, and TCC | 364](#)
- [Configuring Graceful Restart Options for LDP | 365](#)

This section contains the following topics:

Configuring Graceful Restart Globally

To configure graceful restart globally for all MPLS-related protocols, include the **graceful-restart** statement at the **[edit routing-options]** hierarchy level. To configure the duration of the graceful restart period, include the **restart-duration** at the **[edit routing-options graceful-restart]** hierarchy level:

```
[edit]
routing-options {
  graceful-restart {
    disable;
    restart-duration seconds;
  }
}
```

To disable graceful restart globally, include the **disable** statement at the **[edit routing-options graceful-restart]** hierarchy level.

Configuring Graceful Restart Options for RSVP, CCC, and TCC

Because CCC and TCC rely on RSVP, you must modify these three protocols as a single group.

To configure how long the router retains the state of its RSVP neighbors while they undergo a graceful restart, include the **maximum-helper-recovery-time** statement at the **[edit protocols rsvp graceful-restart]** hierarchy level. This value is applied to all neighboring routers, so it should be based on the time required by the slowest RSVP neighbor to recover.

To configure the delay between when the router discovers that a neighboring router has gone down and when it declares the neighbor down, include the **maximum-helper-restart-time** statement at the **[edit**

protocols rsvp graceful-restart] hierarchy level. This value is applied to all neighboring routers, so it should be based on the time required by the slowest RSVP neighbor to restart.

```
[edit]
protocols {
  rsvp {
    graceful-restart {
      disable;
      helper-disable;
      maximum-helper-recovery-time;
      maximum-helper-restart-time;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable RSVP, CCC, and TCC graceful restart, include the **disable** statement at the **[edit protocols rsvp graceful-restart]** hierarchy level. To disable RSVP, CCC, and TCC helper capability, include the **helper-disable** statement at the **[edit protocols rsvp graceful-restart]** hierarchy level.

Configuring Graceful Restart Options for LDP

When configuring graceful restart for LDP, you can include the following optional statements at the **[edit protocols ldp graceful-restart]** hierarchy level:

```
[edit protocols ldp graceful-restart]
disable;
helper-disable;
maximum-neighbor-reconnect-time seconds;
maximum-neighbor-recovery-time seconds;
reconnect-time seconds;
recovery-time seconds;

[edit routing-options]
graceful-restart;
```

The statements have the following effects on the graceful restart process:

- To configure the length of time required to reestablish a session after a graceful restart, include the **reconnect-time** statement; the range is 30 through 300 seconds. To limit the maximum reconnect

time allowed from a restarting neighbor router, include the **maximum-neighbor-reconnect-time** statement; the range is 30 through 300 seconds.

- To configure the length of time that helper routers are required to maintain the old forwarding state during a graceful restart, include the **recovery-time** statement; the range is 120 through 1800 seconds. On the helper router, you can configure a statement that overrides the request from the restarting router and sets the maximum length of time the helper router will maintain the old forwarding state. To configure this feature, include the **maximum-neighbor-recovery-time** statement; the range is 140 through 1900 seconds.

NOTE: The value for the **recovery-time** and **maximum-neighbor-recovery-time** statements at the **[edit protocols ldp graceful-restart]** hierarchy level should be approximately 80 seconds longer than the value for the **restart-duration** statement at the **[edit routing-options graceful-restart]** hierarchy level. Otherwise, a warning message appears when you try to commit the configuration.

- To disable LDP graceful restart capability, include the **disable** statement. To disable LDP graceful restart helper capability, include the **helper-disable** statement.

SEE ALSO

[Graceful Restart Concepts | 308](#)

[Graceful Restart System Requirements | 318](#)

[Graceful Restart and MPLS-Related Protocols | 313](#)

[Verifying Graceful Restart Operation | 379](#)

[Configuring Graceful Restart | 320](#)

Configuring VPN Graceful Restart

IN THIS SECTION

- [Configuring Graceful Restart Globally | 367](#)
- [Configuring Graceful Restart for the Routing Instance | 367](#)

Graceful restart allows a router whose VPN control plane is undergoing a restart to continue to forward traffic while recovering its state from neighboring routers. Without graceful restart, a control plane restart disrupts any VPN services provided by the router. Graceful restart is supported on Layer 2 VPNs, Layer 3 VPNs, virtual-router routing instances, and VPLS.

To implement graceful restart for a Layer 2 VPN or Layer 3 VPN, perform the configuration tasks described in the following sections:

Configuring Graceful Restart Globally

To enable graceful restart, include the **graceful-restart** statement at the **[edit routing-options]** hierarchy level. To configure a global duration for the graceful restart period, include the **restart-duration** statement at the **[edit routing-options graceful-restart]** hierarchy level.

```
[edit]
routing-options {
  graceful-restart {
    disable;
    restart-duration seconds;
  }
}
```

To disable graceful restart globally, include the **disable** statement at the **[edit routing-options graceful-restart]** hierarchy level.

Configuring Graceful Restart for the Routing Instance

For Layer 3 VPNs only, you must also configure graceful restart for all routing and MPLS-related protocols within a routing instance by including the **graceful-restart** statement at the **[edit routing-instances *instance-name* routing-options]** hierarchy level. Because you can configure multi-instance BGP and multi-instance LDP, graceful restart for a carrier-of-carriers scenario is supported. To configure the duration of the graceful restart period for the routing instance, include the **restart-duration** statement at the **[edit routing-instances *instance-name* routing-options]**.

```
[edit]
routing-instances {
  instance-name {
    routing-options {
      graceful-restart {
        disable;
        restart-duration seconds;
      }
    }
  }
}
```



```
}
}
```

You can disable graceful restart for individual protocols with the **disable** statement at the **[edit routing-instances *instance-name* protocols *protocol-name* graceful-restart]** hierarchy level.

RELATED DOCUMENTATION

[Graceful Restart Concepts | 308](#)

[Graceful Restart System Requirements | 318](#)

[Graceful Restart and Layer 2 and Layer 3 VPNs | 315](#)

[Verifying Graceful Restart Operation | 379](#)

[Configuring Graceful Restart | 320](#)

Configuring Logical System Graceful Restart

IN THIS SECTION

- [Enabling Graceful Restart Globally | 368](#)
- [Configuring Graceful Restart for a Routing Instance | 369](#)

Graceful restart for a logical system functions much as graceful restart does in the main router. The only difference is the location of the **graceful-restart** statement.

The following topics describe what to configure to implement graceful restart in a logical system:

Enabling Graceful Restart Globally

To enable graceful restart in a logical system, include the **graceful-restart** statement at the **[edit logical-systems *logical-system-name* routing-options]** hierarchy level. To configure a global duration of the graceful restart period, include the **restart-duration** statement at the **[edit logical-systems *logical-system-name* routing-options graceful-restart]** hierarchy level.

```
[edit]
logical-systems {
```

```

    logical-system-name {
        routing-options {
            graceful-restart {
                disable;
                restart-duration seconds;
            }
        }
    }
}

```

To disable graceful restart globally, include the **disable** statement at the [edit logical-systems *logical-system-name* routing-options graceful-restart] hierarchy level.

Configuring Graceful Restart for a Routing Instance

For Layer 3 VPNs only, you must also configure graceful restart globally for a routing instance inside a logical system. To configure, include the **graceful-restart** statement at the [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options] hierarchy level. Because you can configure multi-instance BGP and multi-instance LDP, graceful restart for a carrier-of-carriers scenario is supported. To configure the duration of the graceful restart period for the routing instance, include the **restart-duration** statement at the [edit logical-systems *logical-system-name* routing-instances *instance-name* routing-options].

```

[edit]
logical-systems {
    logical-system-name {
        routing-instances {
            instance-name {
                routing-options {
                    graceful-restart {
                        disable;
                        restart-duration seconds;
                    }
                }
            }
        }
    }
}

```

To disable graceful restart for individual protocols with the **disable** statement at the [edit logical-systems *logical-system-name* routing-instances *instance-name* protocols *protocol-name* graceful-restart] hierarchy level.

RELATED DOCUMENTATION

- [Graceful Restart Concepts | 308](#)
- [Graceful Restart System Requirements | 318](#)
- [Graceful Restart on Logical Systems | 316](#)
- [Verifying Graceful Restart Operation | 379](#)
- [Configuring Graceful Restart | 320](#)

Configuring Graceful Restart for QFabric Systems

IN THIS SECTION

- [Enabling Graceful Restart | 370](#)
- [Configuring Graceful Restart Options for BGP | 371](#)
- [Configuring Graceful Restart Options for OSPF and OSPFv3 | 372](#)
- [Tracking Graceful Restart Events | 374](#)

When you configure graceful restart in the QFabric CLI, the QFabric system applies the configuration to the network Node group to participate in graceful restart operations with devices external to the QFabric system. Such configuration preserves routing table state and helps neighboring routing devices to resume routing operations more quickly after a system restart. This also enables the network Node group to resume routing operations rapidly if there is a restart in the QFabric system (such as a software upgrade). As a result, we recommend enabling graceful restart for routing protocols in the QFabric CLI.

NOTE: The QFabric system also uses graceful restart internally within the fabric to facilitate interfabric resiliency and recovery. This internal feature is enabled by default with no configuration required.

Enabling Graceful Restart

By default, graceful restart is disabled. To enable graceful restart, include the **graceful-restart** statement at the **[edit routing-instance *instance-name* routing-options]** or **[edit routing-options]** hierarchy level.

For example:

```
routing-options {
    graceful-restart;
}
```

To configure the duration of the graceful restart period, include the **restart-duration** at the **[edit routing-options graceful-restart]** hierarchy level.

NOTE: Helper mode (the ability to assist a neighboring router attempting a graceful restart) is enabled by default when you start the routing platform, even if graceful restart is not enabled. You can disable helper mode on a per-protocol basis.

```
[edit]
routing-options {
    graceful-restart {
        disable;
        restart-duration seconds;
    }
}
```

To disable graceful restart globally, include the **disable** statement at the **[edit routing-options graceful-restart]** hierarchy level.

When graceful restart is enabled for all routing protocols at the **[edit routing-options graceful-restart]** hierarchy level, you can disable graceful restart on a per-protocol basis.

NOTE: If you configure graceful restart after a BGP or LDP session has been established, the BGP or LDP session restarts and the peers negotiate graceful restart capabilities. Also, the BGP peer routing statistics are reset to zero.

Configuring Graceful Restart Options for BGP

To configure the duration of the BGP graceful restart period, include the **restart-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level. To set the length of time the router waits to receive

messages from restarting neighbors before declaring them down, include the **stale-routes-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

```
[edit]
protocols {
  bgp {
    graceful-restart {
      disable;
      restart-time seconds;
      stale-routes-time seconds;
    }
  }
}
routing-options {
  graceful-restart;
}
```

To disable BGP graceful restart capability for all BGP sessions, include the **disable** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

NOTE: To set BGP graceful restart properties or disable them for a group, include the desired statements at the **[edit protocols bgp group *group-name* graceful-restart]** hierarchy level.

To set BGP graceful restart properties or disable them for a specific neighbor in a group, include the desired statements at the **[edit protocols bgp group *group-name* neighbor *ip-address* graceful-restart]** hierarchy level.

NOTE: Configuring graceful restart for BGP resets the BGP peer routing statistics to zero. Also, existing BGP sessions restart, and the peers negotiate graceful restart capabilities.

Configuring Graceful Restart Options for OSPF and OSPFv3

To configure the duration of the OSPF/OSPFv3 graceful restart period, include the **restart-duration** statement at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level. To specify the length of time for which the router notifies helper routers that it has completed graceful restart, include the **notify-duration** at the **[edit protocols (ospf | ospf3) graceful-restart]** hierarchy level. Strict OSPF link-state advertisement (LSA) checking results in the termination of graceful restart by a helping router. To

disable strict LSA checking, include the **no-strict-lsa-checking** statement at the **[edit protocols (ospf | ospfv3) graceful-restart]** hierarchy level.

```
[edit]
protocols {
    ospf | ospfv3{
        graceful-restart {
            disable;
            helper-disable
            no-strict-lsa-checking;
            notify-duration seconds;
            restart-duration seconds;
        }
    }
}
routing-options {
    graceful-restart;
}
```

To disable OSPF/OSPFv3 graceful restart, include the **disable** statement at the **[edit protocols (ospf | ospfv3) graceful-restart]** hierarchy level.

Starting with Release 11.3, the Junos OS supports both the standard (based on RFC 3623, *Graceful OSPF Restart*) and the restart signaling-based (as specified in RFC 4811, RFC 4812, and RFC 4813) helper modes for OSPF version 2 graceful restart configurations. Both the standard and restart signaling-based helper modes are enabled by default. To disable the helper mode for OSPF version 2 graceful restart configurations, include the **helper-disable <both | restart-signaling | standard>** statement at the **[edit protocols ospf graceful-restart]** hierarchy level. Note that the last committed statement always takes precedence over the previous one.

```
[edit protocols ospf]
    graceful-restart {
        helper-disable <both | restart-signaling | standard>
    }
```

To reenble the helper mode, delete the **helper-disable** statement from the configuration by using the **delete protocols ospf graceful-restart helper-disable <restart-signaling | standard | both>** command. In this case also, the last executed command takes precedence over the previous ones.

NOTE:

Restart signaling-based helper mode is not supported for OSPFv3 configurations. To disable helper mode for OSPFv3 configurations, include the **helper-disable** statement at the **[edit protocols ospfv3 graceful-restart]** hierarchy level.

TIP: You can also track graceful restart events with the **traceoptions** statement at the **[edit protocols (ospf | ospf3)]** hierarchy level. For more information, see "[Tracking Graceful Restart Events](#)" on page 374.

NOTE: If you configure BFD and graceful restart for OSPF, graceful restart might not work as expected.

Tracking Graceful Restart Events

To track the progress of a graceful restart event, you can configure graceful restart trace options flags for IS-IS and OSPF/OSPFv3. To configure graceful restart trace options, include the **graceful-restart** statement at the **[edit protocols *protocol*/traceoptions flag]** hierarchy level:

```
[edit protocols]
isis {
  traceoptions {
    flag graceful-restart;
  }
}
(ospf | ospf3) {
  traceoptions {
    flag graceful-restart;
  }
}
```

RELATED DOCUMENTATION

[Graceful Restart Concepts](#)

[Verifying Graceful Restart Operation](#)

Example: Managing Helper Modes for OSPF Graceful Restart

IN THIS SECTION

- [Requirements | 377](#)
- [Overview | 377](#)
- [Verification | 377](#)

Configuration

Step-by-Step Procedure

Both standard and restart signaling-based helper modes are enabled by default, irrespective of the graceful-restart configuration status on the routing device. Junos OS allows you to disable or enable the helper modes based on your requirements.

To configure the helper mode options for graceful restart:

1. To enable graceful restart, add the **graceful-restart** statement at the **[edit routing-options]** hierarchy level.

```
[edit routing-options]
user@host# set graceful-restart
```

The helper modes, both standard and restart signaling-based, are enabled by default.

2. To disable one or both of the helper modes, add the **helper-disable <both | restart-signaling | standard>** statement at the **[edit protocols ospf graceful-restart]** hierarchy level.
 - To disable both standard and restart signaling-based helper modes:

```
[edit protocols ospf graceful-restart]
user@host# set helper-disable both
```


- To disable only the restart signaling-based helper mode:

```
[edit protocols ospf graceful-restart]
user@host# set helper-disable restart-signaling
```

- To disable only the standard helper mode:

```
[edit protocols ospf graceful-restart]
user@host# set helper-disable standard
```

NOTE: You must commit the configuration before the change takes effect.
The last committed statement always takes precedence over the previous one.

3. To enable one or both of the helper modes when the helper modes are disabled, delete the **helper-disable <both | restart-signaling | standard>** statement from the **[edit protocols ospf graceful-restart]** hierarchy level.

- To enable both standard and restart signaling-based helper modes:

```
[edit protocols ospf graceful-restart]
user@host# delete helper-disable
```

- To enable the restart signaling-based helper mode:

```
[edit protocols ospf graceful-restart]
user@host# delete helper-disable restart-signaling
```

- To enable the standard helper mode:

```
[edit protocols ospf graceful-restart]
user@host# delete helper-disable standard
```

NOTE: You must commit the configuration before the change takes effect.
The last committed statement always takes precedence over the previous one.

Requirements

M Series or T Series routers running Junos OS Release 11.4 or later and EX Series switches.

Overview

Junos OS Release 11.4 extends OSPF graceful restart support to include restart signaling-based helper mode. Both standard (RFC 3623-based) and restart signaling-based helper modes are enabled by default, irrespective of the graceful-restart configuration status on the routing device.

Junos OS, however, enables you to choose between the helper modes with the **helper-disable** `<standard | restart-signaling | both>` statement.

Verification

IN THIS SECTION

- [Verifying OSPF Graceful Restart and Helper Mode Configuration | 377](#)

Confirm that the configuration is working properly.

Verifying OSPF Graceful Restart and Helper Mode Configuration

Purpose

Verify the OSPF graceful restart and helper mode configuration on a router.

Action

- Enter the **run show ospf overview** command from configuration mode.

```
user@host# run show ospf overview

~
~
~
Restart: Enabled
  Restart duration: 180 sec
  Restart grace period: 210 sec
  Graceful restart helper mode: Enabled
```

```
Restart-signaling helper mode: Enabled
~
~
~
```

Meaning

The output shows that graceful restart and both of the helper modes are enabled.

RELATED DOCUMENTATION

[Understanding Restart Signaling-Based Helper Mode Support for OSPF Graceful Restart | 314](#)

[Tracing Restart Signaling-Based Helper Mode Events for OSPF Graceful Restart | 378](#)

Tracing Restart Signaling-Based Helper Mode Events for OSPF Graceful Restart

Junos OS provides a tracing option to log restart signaling-based helper mode events for OSPF graceful restart. To enable tracing for restart signaling-based helper mode events, include the **traceoptions flag restart-signaling** statement at the **[edit protocols ospf]** hierarchy level.

To enable tracing for restart signaling-based events:

1. Create a log file for saving the log.

```
[edit protocols ospf]
user@host# set traceoptions file ospf-log
```

where *ospf-log* is the name of the log file.

2. Enable tracing for restart signaling-based helper mode events.

```
[edit protocols ospf]
user@host# set traceoptions flag restart-signaling
```

3. Commit the configuration.

```
[edit protocols ospf]
user@host# commit
```

The logs are saved to the *ospf-log* file in the */var/log* folder.

Viewing the Log File

To view the restart signaling-based events from the log file, type:

```
user@host> file show /var/log/ospf-log | match "restart signaling"
Jun 25 14:44:08.890216 OSPF Restart Signaling: Start helper mode for nbr ip
14.19.3.2 id 10.10.10.1
Jun 25 14:44:11.358636 OSPF restart signaling: Received DBD with R bit set from
nbr ip=14.19.3.2 id=10.10.10.1. Start oob-resync.
Jun 25 14:44:11.380198 OSPF restart signaling: Received DBD with LR bit on from
nbr ip=14.19.3.2 id=10.10.10.1. Save its oob-resync capability 1
Jun 25 14:44:11.467200 OSPF restart signaling: nbr fsm for nbr ip=14.19.3.2
id=10.10.10.1 moving to state Full. Reset oob-resync parameters.
```

RELATED DOCUMENTATION

[Understanding Restart Signaling-Based Helper Mode Support for OSPF Graceful Restart | 314](#)

[Example: Managing Helper Modes for OSPF Graceful Restart | 375](#)

Verifying Graceful Restart Operation

IN THIS SECTION

- [Graceful Restart Operational Mode Commands | 380](#)
- [Verifying BGP Graceful Restart | 380](#)
- [Verifying IS-IS and OSPF Graceful Restart | 381](#)
- [Verifying CCC and TCC Graceful Restart | 382](#)

This topic contains the following sections:

Graceful Restart Operational Mode Commands

To verify proper operation of graceful restart, use the following commands:

- **show bgp neighbor** (for BGP graceful restart)
- **show log** (for IS-IS and OSPF/OSPFv3 graceful restart)
- **show (ospf | ospfv3) overview** (for OSPF/OSPFv3 graceful restart)
- **show rsvp neighbor detail** (for RSVP graceful restart—helper router)
- **show rsvp version** (for RSVP graceful restart—restarting router)
- **show ldp session detail** (for LDP graceful restart)
- **show connections** (for CCC and TCC graceful restart)
- **show route instance detail** (for Layer 3 VPN graceful restart and for any protocols using graceful restart in a routing instance)
- **show route protocol l2vpn** (for Layer 2 VPN graceful restart)

For more information about these commands and a description of their output fields, see the [CLI Explorer](#).

Verifying BGP Graceful Restart

To view graceful restart information for BGP sessions, use the **show bgp neighbor** command:

```
user@PE1> show bgp neighbor 192.0.2.10
Peer: 192.0.2.10+179 AS 64496 Local: 192.0.2.5+1106 AS 64496
  Type: Internal      State: Established      Flags: <>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: None
  Export: [ static ]
  Options:<Preference LocalAddress HoldTime GracefulRestart Damping PeerAS Refresh>
  Local Address: 192.0.2.5 Holdtime: 90 Preference: 170
  IPsec SA Name: hope
  Number of flaps: 0
  Peer ID: 192.0.2.10      Local ID: 192.0.2.5      Active Holdtime: 90
  Keepalive Interval: 30
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
```

```

NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 180
Stale routes from peer are kept for: 180
Restart time requested by this peer: 300
NLRI that peer supports restart for: inet-unicast
NLRI that peer saved forwarding for: inet-unicast
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Table inet.0 Bit: 10000
RIB State: restart is complete
  Send state: in sync
  Active prefixes: 0
  Received prefixes: 0
  Suppressed due to damping: 0
Last traffic (seconds): Received 19   Sent 19   Checked 19
Input messages:  Total 2       Updates 1       Refreshes 0       Octets 42
Output messages: Total 3       Updates 0       Refreshes 0       Octets 116
Output Queue[0]: 0

```

Verifying IS-IS and OSPF Graceful Restart

To view graceful restart information for IS-IS and OSPF, configure traceoptions (see ["Tracking Graceful Restart Events" on page 363](#)).

Here is the output of a traceoptions log from an OSPF restarting router:

```

Oct  8 05:20:12 Restart mode - sending grace lsas
Oct  8 05:20:12 Restart mode - estimated restart duration timer triggered
Oct  8 05:20:13 Restart mode - Sending more grace lsas

```

Here is the output of a traceoptions log from an OSPF helper router:

```

Oct  8 05:20:14 Helper mode for neighbor 192.0.2.5
Oct  8 05:20:14 Received multiple grace lsa from 192.0.2.5

```

Verifying CCC and TCC Graceful Restart

To view graceful restart information for CCC and TCC connections, use the **show connections** command. The following example assumes four remote interface CCC connections between CE1 and CE2:

```
user@PE1> show connections
```

```
CCC and TCC connections [Link Monitoring On]
```

```
Legend for status (St)
```

```
UN -- uninitialized
```

```
NP -- not present
```

```
WE -- wrong encapsulation
```

```
DS -- disabled
```

```
Dn -- down
```

```
-> -- only outbound conn is up
```

```
<- -- only inbound conn is up
```

```
Up -- operational
```

```
RmtDn -- remote CCC down
```

```
Restart -- restarting
```

```
Legend for connection types
```

```
if-sw: interface switching
```

```
rmt-if: remote interface switching
```

```
lsp-sw: LSP switching
```

```
Legend for circuit types
```

```
intf -- interface
```

```
tlsp -- transmit LSP
```

```
rlsp -- receive LSP
```

CCC Graceful restart : Restarting

Connection/Circuit	Type	St	Time last up	# Up trans
CE1-CE2-0	rmt-if	Restart	-----	0
fe-1/1/0.0	intf	Up		
PE1-PE2-0	tlsp	Up		
PE2-PE1-0	rlsp	Up		
CE1-CE2-1	rmt-if	Restart	-----	0
fe-1/1/0.1	intf	Up		
PE1-PE2-1	tlsp	Up		
PE2-PE1-1	rlsp	Up		
CE1-CE2-2	rmt-if	Restart	-----	0
fe-1/1/0.2	intf	Up		
PE1-PE2-2	tlsp	Up		
PE2-PE1-2	rlsp	Up		
CE1-CE2-3	rmt-if	Restart	-----	0
fe-1/1/0.3	intf	Up		
PE1-PE2-3	tlsp	Up		
PE2-PE1-3	rlsp	Up		

RELATED DOCUMENTATION

[Graceful Restart Concepts | 308](#)

[Configuring Graceful Restart for QFabric Systems | 370](#)

11

PART

Power Management Overview

[Understanding Power Management](#) | 385

[Redundant Power System Overview](#) | 395

Understanding Power Management

IN THIS CHAPTER

- [Understanding Power Management on EX Series Switches | 385](#)
- [Configuring the Power Priority of Line Cards \(CLI Procedure\) | 392](#)
- [Configuring Power Supply Redundancy \(CLI Procedure\) | 393](#)

Understanding Power Management on EX Series Switches

IN THIS SECTION

- [Power Priority of Line Cards | 386](#)
- [Power Supply Redundancy | 390](#)

The power management feature for Juniper Networks Ethernet Switches helps ensure that normal operation of the system is not disrupted because of insufficient power to the switch. For example:

- Power management ensures that operating line cards continue to receive power if a user installs a new line card in an operating switch when power is insufficient for both the new and existing line cards.
- Power management reserves a certain amount of power to power supply redundancy, so that if a power supply fails, the switch can continue to operate normally. If power management must use some of this reserved power to provide power to switch components, it raises an alarm to indicate that power supply redundancy no longer exists and that normal operations might be disrupted if a power supply fails.
- If power supply failure requires power management to power down some components, it does so gracefully by powering down line cards and PoE ports in the order specified by the user.

Power management manages power to switch components by employing a power budget policy. In its power budget policy, power management:

- Budgets power for each installed switch component that requires power. With the exception of *PoE* power for line cards that support PoE, the amount that power management budgets for each component is the maximum power that component might consume under worst case operating conditions. For example, for the fan tray, power management budgets the amount of power required to run the fans at their maximum speed setting, even if the current fan speed is much lower.
- Reserves a set amount of power for power supply redundancy. In its default configuration, power management manages the switch for $N+1$ power redundancy, which ensures uninterrupted system operation if one power supply fails. For example, if a switch has four online 3000 W power supplies, power management reserves 3000 W in its power budget policy for redundancy. It allocates the remaining 9000 W to normal operating power.
- Specifies the rules under which components receive power. These rules are designed to ensure the least disruption to switch operation under conditions of insufficient power. For example, power management provides power to core system components, such as the Routing Engines, before it provides power to line cards.

You can configure certain aspects of power management's budget policy, specifically:

- The power priority of individual line cards. By assigning different power priorities to the line cards, you can determine which line cards are more likely to receive power in the event of insufficient power.
- The power redundancy configuration. The default power redundancy configuration is $N+1$; you can optionally configure $N+N$. For example, if you have deployed two independent AC power feeds to the switch, configure $N+N$ redundancy. When you configure power management for $N+N$ redundancy, it reserves the appropriate amount of power in its power budget and reports insufficient power conditions accordingly.

These configurable items are discussed further in:

Power Priority of Line Cards

The power priority of line cards determines:

- The order in which line cards are allocated power
- The order in which line cards that support PoE are allocated power for PoE
- How power is reallocated in cases of changes in power availability or demand in an operating switch

NOTE: On EX6200 switches, the four 10-Gigabit Ethernet *SFP+* uplink ports on a Switch Fabric and Routing Engine (SRE) module are treated like a line card in the power budget.

This section covers:

How a Line Card's Power Priority Is Determined

Using the CLI, you can assign an explicit power priority to a line-card slot. If more than one slot has the same assigned priority, the power priority is determined by slot number, with the lowest-numbered slots receiving power first.

By default, all slots in an EX8200 switch are assigned the lowest priority. Thus if you do not explicitly assign priorities to slots, power priority is determined by slot number, with slot 0 having the highest priority.

In an EX6200 switch, all slots are assigned the lowest priority, except for the slots containing an SRE module. Slots containing an SRE module are automatically assigned the highest priority. This means that the line cards that represent the 10-Gigabit Ethernet SFP+ ports on SRE modules have the highest priority among the line cards.

Line Card Priority and Line Card Power

When an EX6200 or EX8200 switch is powered on, power management allocates power to components according to its power budget policy. After power management has allocated power to the base chassis components, it allocates the remaining available power to the line cards. It powers on the line cards in priority order until all line cards are powered on or the available power (including reserved power, if necessary) is exhausted. Thus if available power is exhausted before all line cards receive power, higher-priority cards are powered on while lower-priority cards remain powered off.

A lower-priority card might receive power while a higher-priority card does not if the remaining available power is sufficient to power on the lower-priority card but not the higher-priority card. For example, if a line card requiring 450 W is in a higher-priority slot than line card requiring 330 W, the line card requiring 330 W receives the power if there is less than 450 W but more than 330 W remaining in the power budget.

Line cards that have been administratively taken offline are not allocated power.

NOTE: Because power management does not allocate power to a line card that has been administratively taken offline, a line card that has been taken offline in an EX6200 or EX8200 switch is not automatically brought online when you commit a configuration. You must explicitly

use the **request chassis fpc slot *slot-number* online** command to bring a line card online that was taken offline previously. This behavior differs from other platforms running Juniper Networks Junos operating system (Junos OS), which automatically bring an offline FPC online when you commit a configuration.

If power management cannot power on a line card because of insufficient power, it raises a major (red) alarm.

Line Card Priority and PoE Power

After all line cards have been powered on, power management allocates any remaining available power, including reserved power, to the PoE power budgets of line cards that have PoE ports. Power management allocates PoE power to line cards in the order of power priority. If enough power is available, a line card receives its full PoE power budget before power management allocates PoE power to the next highest-priority line card. If not enough power is available, a line card receives partial PoE power and lower-priority line cards receive no PoE power.

If power management is unable to allocate enough power to meet the PoE power budget for a line card, it logs a message to the system log.

The default PoE power budget for a line card is the amount of power needed to supply the maximum supported power to all PoE ports. In cases where powered devices do not require the maximum power or in which some PoE ports are not used for powered devices, you can configure a smaller PoE power budget for a line card. By configuring a smaller PoE power budget, you make more power available for the PoE power budgets of lower-priority line cards.

You can also configure the power priority of the PoE ports on a line card. If power management is unable to allocate enough power to a line card to meet its PoE power budget, the line card PoE controller will turn off power to PoE ports in reverse priority order as required to meet the reduced power allocation.

See *Configuring PoE Interfaces on EX Series Switches* for more information on how to configure the PoE power budget for a line card and how to configure PoE port priorities.

Line Card Priority and Changes in the Power Budget

In an operating switch, power management dynamically reallocates power in response to changes in power availability or demand or changes in line card priority. Power management uses line card priority to determine how to reallocate power in response to the following events:

- A power supply fails, is removed, or is taken offline:

- If power is insufficient to meet the PoE power allocations of all PoE line cards, power management deallocates PoE power from the line cards in reverse priority order until power is sufficient to meet the remaining PoE power allocations.
- If power is insufficient to meet the base (non-PoE) power requirements of all the line cards, all PoE power is deallocated. If, after the deallocation of PoE power, power is still not sufficient, power management turns off line cards in reverse priority order until power is sufficient for the remaining line cards.
- A new line card is inserted or a line card is brought online:
 - If the line card supports PoE and there is insufficient power to meet its PoE power budget, PoE power is reallocated from lower-priority line cards. If not enough PoE power can be reallocated from lower-priority line cards, the new line card receives a partial PoE power allocation.
 - If there is insufficient power to power on the new line card, PoE power is removed from PoE line cards in reverse priority order until the new line card can be powered on.
 - If the removal of all PoE power is insufficient to free up enough power to power on the line card, the line card remains powered off and the PoE line cards continue to receive their PoE power allocations. To minimize disruption on an operating switch, lower-priority line cards are not turned off to provide power to the new line card. However, if you restart the switch, power management reruns the current power budget policy and powers line cards on or off based on their priority. As a result, line cards receive power strictly by priority order and previously operating line cards might no longer receive power.
- A new power supply is brought online:
 - Any line cards that were powered off because of insufficient power are powered on in priority order.
 - After all line cards are powered on, remaining power is allocated to the PoE power budgets of line cards in priority order.
- A line card is removed or taken offline, freeing up power:
 - Any line cards that were powered down because of insufficient power are powered on in priority order.
 - After all line cards are powered on, any remaining power is allocated to the PoE power budgets of line cards in priority order.
- A user changes the assigned power priority of one or more line cards when power is insufficient to meet the power budget:
 - PoE power to the line cards is reallocated based on the new power priorities.

- Base power allocation to the line cards is not changed—in other words, power management does not power down line cards that had been receiving power because they are now a lower priority. However, if you restart the switch, power management reruns the current power budget policy and powers line cards on or off based on their priority. As a result, line cards receive power strictly by priority order and previously operating line cards might no longer receive power.

If, because of insufficient power, power management reduces or eliminates the PoE power budget for a line card, it logs a message to the system log. If power management must power down a line card because of insufficient power, it raises a major (red) alarm.

Power Supply Redundancy

By default, power management in EX Series switches is configured to manage the power supplies for $N+1$ redundancy, in which one power supply is held in reserve for backup if one of the other power supplies is removed or fails.

You can configure power management to manage the power supplies for $N+N$ redundancy. In $N+N$ redundancy, power management holds N power supplies in reserve for backup. For example, if your switch has six power supplies and you configure $N+N$ redundancy, power management makes three power supplies available for normal operating power and reserves three power supplies for redundancy (3+3). If you have an odd number of power supplies, power management allocates one more power supply to normal operating power than to redundant power. For example, if you have five power supplies, the $N+N$ configuration is 3+2.

Given the same number of power supplies, an $N+N$ configuration usually provides less normal operating power than an $N+1$ configuration because the $N+N$ configuration holds more power in reserve for backup. [Table 8 on page 390](#) shows the effect on normal operating power in $N+1$ and $N+N$ configurations.

Table 8: Available Operating Power in $N+1$ and $N+N$ Redundancy Configurations

Number of Power Supplies at n W Each	Normal Operating Power in $N+1$ Configuration	Normal Operating Power in $N+N$ Configuration
2	1 x (n W)	1 x (n W)
3	2 x (n W)	2 x (n W)
4	3 x (n W)	2 x (n W)

Table 8: Available Operating Power in N+1 and N+N Redundancy Configurations (Continued)

Number of Power Supplies at n W Each	Normal Operating Power in $N+1$ Configuration	Normal Operating Power in $N+N$ Configuration
5 (EX8200 switches only)	$4 \times (n \text{ W})$	$3 \times (n \text{ W})$
6 (EX8200 switches only)	$5 \times (n \text{ W})$	$3 \times (n \text{ W})$

To compensate for the reduced normal operating power, power management on EX8200 switches allocates less power to the chassis in an $N+N$ configuration than in an $N+1$ configuration. This reduction in allocated chassis power allows a switch in an $N+N$ configuration to power more line cards than it could without the reduction. For the EX8208 switch, the power allocated for the chassis is reduced to 1200 W from 1600 W; for the EX8216 switch, it is reduced to 1800 W from 2400 W.

NOTE: To achieve the reduction in allocated chassis power in an EX8200 switch, power management reduces the maximum fan speed to 60 percent in an $N+N$ configuration from 80 percent in an $N+1$ configuration. Because the maximum fan speed is reduced, it is possible that a line card that overheats would be shut down sooner in an $N+N$ configuration than in an $N+1$ configuration.

On EX6200 switches, the same amount of power is allocated for the chassis in $N+N$ configurations as in $N+1$ configurations.

Power management automatically recalculates the reserved power and normal operating power as power supplies go online or offline. For example, if you have an $N+N$ configuration with three online 2000 W power supplies, power management allocates 2000 W to reserved power. If you bring a fourth 2000 W power supply online, power management then allocates 4000 W to reserved power. If a power supply goes offline again, power management once again allocates 2000 W to reserved power.

When power is insufficient to meet the budgeted power requirements, power management raises alarms as follows:

- A minor (yellow) alarm is raised when insufficient power exists to maintain the configured $N+1$ or $N+N$ power reserves, but all line cards are still receiving their base and PoE power allocations. If this condition persists for 5 minutes, the alarm becomes a major (red) alarm. Even though operation of the switch is unaffected in this condition, you should remedy it as quickly as possible because a power supply failure might cause a disruption in switch operation.

- A major (red) alarm is raised when insufficient power exists to provide all the line cards with their base and PoE power allocations. One or more PoE ports might be down or one or more line cards might be down.

Power management clears all alarms when sufficient power is available to meet normal operating and reserved power requirements.

RELATED DOCUMENTATION

Understand Alarm Types and Severity Levels on EX Series Switches

[Configuring the Power Priority of Line Cards \(CLI Procedure\) | 392](#)

[Configuring Power Supply Redundancy \(CLI Procedure\) | 393](#)

[Understanding Power Management on EX Series Switches | 385](#)

Configuring the Power Priority of Line Cards (CLI Procedure)

The power management facility on EX6200 and EX8200 switches allows you to assign power priorities to the slots occupied by line cards. Power management provides power to the slots in priority order, which means that line cards in higher priority slots are more likely to receive power than line cards in lower priority slots if power to the switch is insufficient to power all the line cards.

The power priority you assign to a PoE line card affects both the order in which it receives base power and the order in which it receives PoE power. Base power is allocated first to all line cards in priority order. PoE power is then allocated to the PoE line cards in priority order.

When assigning power priority to slots, keep these points in mind:

- 0 is the highest priority. The number of priority levels depends on the number of slots in a switch—for example, for an EX8208 switch, which has eight slots, you can assign a priority of 0 through 7 to a slot.
- All slots are assigned the lowest priority by default.
- If a group of slots shares the same assigned priority, each slot's power priority within the group is based on its slot number, with the lowest-numbered slots receiving power first. For example, if slot 3 and slot 7 each have an assigned power priority of 2, slot 3 has the higher power priority.
- On EX6200 switches, slots containing a Switch Fabric and Routing Engine (SRE) module are automatically assigned the highest priority. If you assign a priority of 0 to a slot that has a lower number than a slot an SRE module is in, the slot with an SRE module still receives power first. You cannot change the power priority of slot containing an SRE module.

To assign or change the power priority for a slot:

```
[edit chassis]
user@switch# set fpc slot power-budget-priority priority
```

For example, to set slot 6 to priority 0, enter:

```
[edit chassis]
user@switch# set fpc 6 power-budget-priority 0
```

RELATED DOCUMENTATION

[Configuring Power Supply Redundancy \(CLI Procedure\) | 393](#)

[Understanding Power Management on EX Series Switches | 385](#)

[Understanding Power Management on EX Series Switches | 385](#)

Configuring Power Supply Redundancy (CLI Procedure)

By default, the power management feature in EX Series switches is configured to manage the power supplies for $N+1$ redundancy, in which one power supply is held in reserve for backup if any one of the other power supplies is removed or fails.

You can configure power management to manage the power supplies for $N+N$ redundancy. For example, to set up your AC power supplies for dual power feed, $N+N$ redundancy is required. In $N+N$ redundancy, power management allocates half of the online power supplies to normal operating power and half to redundant power. If you have an odd number of online power supplies, power management allocates one more power supply to normal operating power than to redundant power.

This topic describes how to configure power management for $N+N$ redundancy and how to revert back to $N+1$ redundancy if your deployment needs change.

Before you configure power management for $N+N$ redundancy, ensure that you have sufficient power supplies to meet the power requirements of an $N+N$ configuration. Use the `show chassis power-budget-statistics` command to display your current power budget.

NOTE: To allow more power to be available to line cards in an EX8200 switch, power management compensates for the reduced normal operating power in an $N+N$ configuration by allocating less power to the chassis than it does in an $N+1$ configuration. For the EX8208 switch, the power allocated to the chassis is reduced to 1200 W from 1600 W. For the EX8216 switch, it is reduced to 1800 W from 2400 W. In determining whether you have enough power for an $N+N$ configuration, take this reduction of allocated chassis power into account.

The reduction in allocated chassis power is achieved by reducing the maximum fan speed to 60 percent in an $N+N$ configuration from 80 percent in an $N+1$ configuration. Because the maximum fan speed is reduced, it is possible that a line card that overheats would be shut down sooner in an $N+N$ configuration than in an $N+1$ configuration.

On EX6200 switches, the same amount of power is allocated for the chassis in $N+N$ configurations as in $N+1$ configurations.

To configure $N+N$ redundancy:

```
[edit chassis]user@switch# set psu redundancy n-plus-n
```

To revert back to $N+1$ redundancy:

```
[edit chassis]user@switch# delete chassis psu redundancy n-plus-n
```

RELATED DOCUMENTATION

[Understanding Power Management on EX Series Switches | 385](#)

[Understanding Power Management on EX Series Switches | 385](#)

Redundant Power System Overview

IN THIS CHAPTER

- [EX Series Redundant Power System Hardware Overview | 395](#)
- [Understanding How Power Priority Is Determined and Set for Switches Connected to the EX Series Redundant Power System | 399](#)
- [Determining and Setting Priority for Switches Connected to an EX Series RPS | 402](#)

EX Series Redundant Power System Hardware Overview

IN THIS SECTION

- [Benefits of the EX Series Redundant Power System | 396](#)
- [Switch Models and Configurations Supported by the RPS | 396](#)
- [When a Switch's Power Supply Fails | 398](#)
- [Components of the RPS | 398](#)

You can use the EX Series Redundant Power System (RPS) to provide backup power for Juniper Networks EX2200 Ethernet Switches, (except Juniper Networks EX2200-C Ethernet Switches) and Juniper Networks EX3300 Ethernet Switches that are standalone switches or are members of a *Virtual Chassis*.

Most EX Series switches have a built-in capability for redundant power supplies—therefore, if one power supply fails on those switches, the other power supply takes over. However, EX2200 switches and EX3300 switches have only one internal fixed power supply. If an EX2200 switch or EX3300 switch is deployed in a critical situation, we recommend that you connect a an RPS to that switch to supply backup power during a loss of power.

RPS is not a primary power supply—it only provides backup power to switches when the single dedicated power supply fails. An RPS operates in parallel with the single dedicated power supplies of

the switches connected to it and provides all connected switches enough power to support either Power over Ethernet (PoE) or non-PoE devices when the power supplies on the switches fail.

An RPS can hold up to three power supplies connected to as many as six switches—how that power is allocated is up to you. You determine whether or not to connect switches that provide PoE and you determine which switches have priority. Priority becomes an issue when you connect more than three switches that provide PoE to a fully loaded RPS because a switch providing PoE requires more power than a switch that does not provide PoE. Because a power supply can support only one switch providing PoE, the RPS can become oversubscribed when too many switches that must have enough power for PoE have a power failure.

Benefits of the EX Series Redundant Power System

Provides power backup—You connect up to six EX2200, EX3300, or a combination of these switches and supply power to any three of them.

Protection from high-voltage input and short circuits—RPS provides protection from high-voltage input and short circuits.

Switch Models and Configurations Supported by the RPS

The RPS supports all EX3300 switches and EX2200 switches except EX2200-C switches. You can simultaneously connect any supported switches to the same RPS, whether the switches are standalone switches or are configured in a Virtual Chassis.

All power provided by RPS is either PoE or non-PoE. By default, RPS supports switches that provide PoE. If even one switch provides PoE, then the RPS must be configured to provide enough power for PoE. When enough power for PoE is supplied, one switch can be powered by each power supply. If the switches are not providing PoE power, two switches can be powered by one RPS power supply—you can reconfigure an RPS to provide non-PoE power using a feature called multi-backup.

[Table 9 on page 396](#) lists some possible scenarios and RPS solutions. These examples assume that each RPS is fully loaded with three power supplies.

Table 9: Sample Requirements and RPS Solutions

Switches Requiring Backup	You need this RPS configuration:
Six switches that do not provide PoE to attached devices	One RPS can simultaneously provide power to all six switches if you change the power default to multi-backup—this indicates that no attached switch provides PoE to any devices.

Table 9: Sample Requirements and RPS Solutions *(Continued)*

Switches Requiring Backup	You need this RPS configuration:
One switch that provides PoE to other devices or two switches that do not provide PoE to any devices	One RPS will always back up all three switches, whether or not they provide PoE to connected devices. Leave the power at the default setting (no multi-backup) and let RPS determine that two switches need only minimum power and one switch provides PoE and therefore needs extra power. RPS automatically supplies the correct level of power.
One EX Series Virtual Chassis member that supplies PoE, one switch that supplies PoE, and one switch that does not supply PoE to any connected devices	One RPS will always back up all three switches. Leave the power default setting (no multi-backup) and let RPS determine that one switch needs only minimum power, one switch needs extra power because it supplies PoE, and the Virtual Chassis member also provides PoE to connected devices.
One switch that supplies PoE and five switches that do not supply PoE	You have two options. Option 1—Use one RPS: Up to three switches that do or do not supply PoE can be backed up simultaneously. You can prioritize the six switches to determine which three are most important if all six fail at once. You must leave the power default setting (no multi-backup) because you have one switch that supplies PoE to attached devices and therefore requires more power. Option 2—Use Two RPSs: In this case, you can connect three switches to each RPS and all switches will be backed up if they all fail at once. Alternatively, you can change the power default to multi-backup on one RPS and connect all five switches that do not supply PoE to that RPS, leaving the other RPS to back up the switch that supplies PoE.
EX Series Virtual Chassis	Use as many RPSs as needed to back up all members of the Virtual Chassis.

When a Switch’s Power Supply Fails

Because the power supplies for both EX3300 switches and EX2200 switches are internal, if the switch’s power supply fails, you must replace the switch. You should remove or replace a switch with a failed power supply as soon as possible.

Do not try to use an RPS as a primary power supply because an RPS cannot boot or reboot a switch. Each switch connected to the RPS must have its own dedicated power supply and must have booted up using the internal power supply.

If a switch is deployed in a large network center where RPS has a separate source of electricity than the switches it supports, the RPS supplies power when only the switch’s electricity fails. In this case, you would not have to replace the switch because the power supply is still functional. The switch will resume using its own internal power supply when electricity to the switch is restored.

Components of the RPS

[Table 10 on page 398](#) lists and describes the components of an RPS:

Table 10: Redundant Power System Components

Component	Value
Power supplies that can be installed	Up to three EX-PWR3-930-AC power supplies. One is included and additional power supplies must be ordered separately.
Switch connector ports on RPS	6 (2 per power supply)
Power cords (for connecting power supplies to the AC power source outlet)	Up to three power cords, one per power supply.
RPS cables (for connecting a switch to a power supply installed in the RPS)	6 (1 for each RPS-to-switch connection). One cable is supplied with the RPS. Additional cables must be ordered separately.

Understanding How Power Priority Is Determined and Set for Switches Connected to the EX Series Redundant Power System

IN THIS SECTION

- [Default RPS Priority | 399](#)
- [Changing the Priority of Switches on an EX Series RPS | 400](#)


The Redundant Power System (RPS) is designed to provide backup power to switches that lack built-in redundant power supplies. The RPS provides backup power to switches that either supply power over Ethernet (PoE), which require more power, or switches that do not supply PoE, which require less power. A power supply can either power one PoE device or two non-PoE devices. That means if an RPS is fully loaded with three power supplies, supports PoE switches, and more than three PoE switches have a power failure, some switches will not be powered. You can, however, determine which switches will be powered when an RPS is oversubscribed. When too many connected switches fail, the switches are given power based on their priority. Priority is also reconfigured when any power change takes place. For example, if three switches are already being backed up and another switch has a power failure, the RPS detects this, reconfigures the current top priorities, and allots power accordingly.

Default RPS Priority

While six non-PoE switches can all simultaneously be backed up with three power supplies, only three PoE switches can be backed up (because PoE uses more power). This means that an RPS with four or more PoE switches connected will have to select three of them for backup. You can determine priority by the connector positions you use to connect the switches. By default, an RPS assigns priority to switches based on their switch connector port location, with the leftmost port having the lowest priority and the rightmost port having the highest priority. If the PoE switches shown in [Figure 23 on page 400](#)

all fail, the manufacturing, support, and finance switches will be backed up because they are connected to the rightmost connectors.

Figure 23: Default PoE Switch Priority Is Determined by Connector Port Location

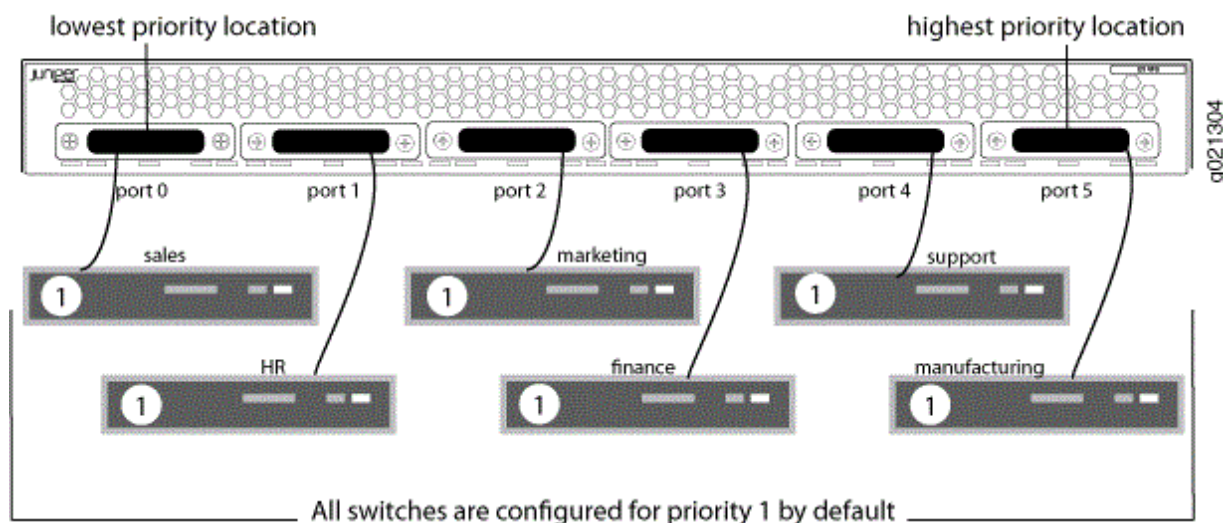


Changing the Priority of Switches on an EX Series RPS

There is a way to alter the priority of PoE switches on an RPS without disconnecting the cables. You can optionally reconfigure any of the attached switches from their CLIs to establish a switch's RPS priority—this CLI configuration overcomes the priority determined by the switch connector port location. Priority ranges from zero (off) to 1 (lowest) through 6 (highest). By default, all switches are configured to 1, the lowest priority. Let's say that the sales switch is reconfigured from the switch's CLI for priority 5 (second highest).

Now in [Figure 24 on page 401](#), with the sales switch configured for RPS 5 from the CLI, the highest priority changes to sales (because 5 is higher than 1), then manufacturing, and then support.

Figure 24: Switch Priority After CLI Configuration

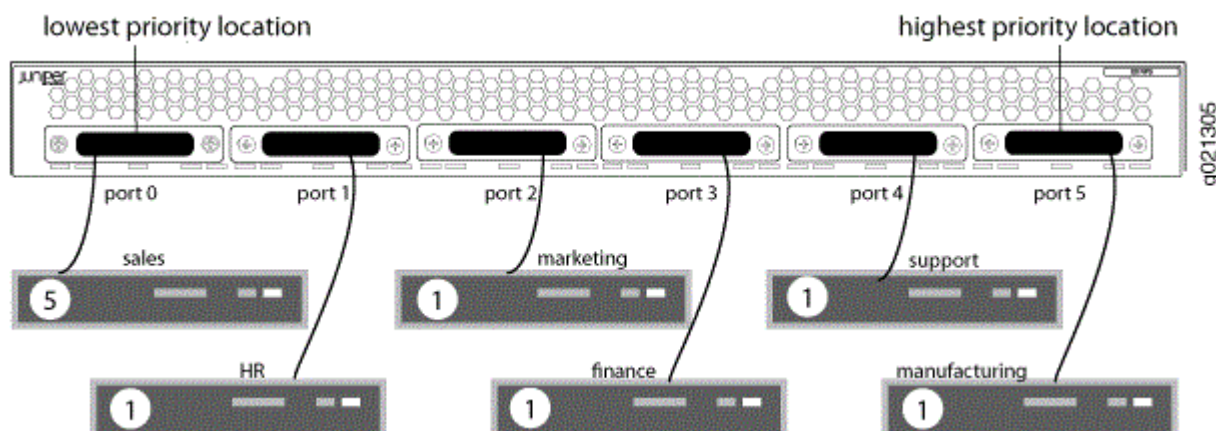

When assigning power priority to switches by using the CLI on the switch, keep these points in mind:

- By default, all switches are assigned priority 1 (lowest) and derive precedence from the location of their connector port on the RPS, with the rightmost port having highest priority.
- Priority 0 assigned from a switch CLI means that the RPS does not provide any backup power to the switch. Essentially, this turns off RPS support.
- Priority 6 assigned from a switch CLI is the highest priority and priority 1 is the lowest priority.
- The CLI command that assigns priority to EX2200 switches is slightly different from the CLI command that assigns priority to EX3300 switches because EX3300 switches can be configured as a *Virtual Chassis*.
- If two or more switches are assigned the same priority value from the switches' CLIs, then the power priority for those switches is determined by the RPS switch connector port location, with the ports to the right receiving priority.
- If a single power supply is installed, the RPS can provide backup power to one switch out of all the switches connected to the RPS. If you do not need any PoE power backup on any switch, you can increase the number of supported switches to two per power supply. Switches connected to an RPS must be either all PoE or all non-PoE.
- The RPS discontinues supplying backup power to a lower-priority switch if it detects a backup power need for a higher-priority switch at the same time.

RELATED DOCUMENTATION

[Determining and Setting Priority for Switches Connected to an EX Series RPS](#) | 402

Determining and Setting Priority for Switches Connected to an EX Series RPS

IN THIS SECTION

- [Using RPS Default Configuration](#) | 403
- [Setting the EX Series RPS Priority for a Switch \(CLI\)](#) | 403

A Redundant Power System (RPS) provides backup power according to the RPS priority configured on the standalone EX Series switches or Virtual Chassis member switches connected to it. If all switches connected to the RPS are set to the default priority of 1, the priority is determined on the basis of the RPS port to which they are connected, with higher port numbers having the higher priorities.

The number of switches for which an RPS can provide backup power depends on whether the switches provide power over Ethernet (PoE).

- **PoE:** A fully loaded RPS provides backup power to a maximum of three switches that are enabled for PoE—the result in this case is one switch powered per power supply. If more than three PoE-enabled switches are connected to the RPS and the RPS is already providing backup power to three switches when another switch's power supply fails, the RPS detects this and re-allots backup power as required. It would then stop providing backup power to a low-priority switch to provide backup power to a higher-priority switch.
- **Non-PoE:** If you changed the RPS power setting to non-PoE with the command `request redundant-power-system multi-backup`, your RPS is configured to provide back up power to as many as six non-PoE switches on a fully loaded RPS. Each power supply can support two switches when the switches do not need enough power for PoE.

NOTE: Before an RPS can back up a switch connected to it, the switch's RPS status must be ARMED. There are two ways to determine whether a switch's RPS status is ARMED—either check that the corresponding port LED on the RPS is lit and on steady or issue this command from the switch's CLI: `show chassis redundant-power-system`.

This topic describes how to determine and set the power priority for a switch connected to an RPS.

Using RPS Default Configuration

No configuration is required on an RPS if you:

- Plan to back up as many as six non-PoE switches
- Back up three PoE switches with three RPS power supplies
- Back up four or more PoE switches with RPS three power supplies and let the RPS port to which the switch is connected determine the priority

By default, an RPS assigns priority to switches on the basis of their switch connector port location, with the with higher port numbers having the higher priorities. By default, all switches are themselves configured with the same RPS priority (priority 1, the lowest), which is why priority is derived from the RPS connector port numbers.

Setting the EX Series RPS Priority for a Switch (CLI)

Each switch connected to RPS has an RPS priority value—that priority value determines which PoE switches receive power first from the RPS. By default, all switches are configured for priority 1 so priority is then determined by switch connector port location, left (lowest) to right (highest).

You can change the priority of a switch to 0 (off), or 1 (lowest) through 6 (highest) from the switch itself—this configuration takes precedence over switch connector port location.

To set or change the priority for a switch that does not support Virtual Chassis:

```
[edit]
user@switch# set redundant-power-system priority
```

To set or change the priority for a switch that supports Virtual Chassis:

```
[edit]
user@switch# set redundant-power-system membervc-member-id priority priority-
number
```

Where member is 0 for a switch that has never been configured in a Virtual Chassis.

RELATED DOCUMENTATION

[Understanding How Power Priority Is Determined and Set for Switches Connected to the EX Series Redundant Power System](#) | 399

12

PART

Configuring Virtual Router Redundancy Protocol (VRRP)

Understanding How the VRRP Router Failover Mechanism Prevents Network
Failures | 405

Configuring VRRP | 424

Understanding How the VRRP Router Failover Mechanism Prevents Network Failures

IN THIS CHAPTER

- [Understanding VRRP | 405](#)
- [Understanding VRRP Between QFabric Systems | 410](#)
- [Junos OS Support for VRRPv3 | 414](#)
- [VRRP failover-delay Overview | 421](#)

Understanding VRRP

For Ethernet, Fast Ethernet, Gigabit Ethernet, 10-Gigabit Ethernet, and logical interfaces, you can configure the Virtual Router Redundancy Protocol (VRRP) or VRRP for IPv6. VRRP enables hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts. The VRRP routing platforms share the IP address corresponding to the default route configured on the hosts. At any time, one of the VRRP routing platforms is the primary (active) and the others are backups. If the primary routing platform fails, one of the backup routing platforms becomes the new primary routing platform, providing a virtual default routing platform and enabling traffic on the LAN to be routed without relying on a single routing platform. Using VRRP, a backup device can take over a failed default device within a few seconds. This is done with minimum VRRP traffic and without any interaction with the hosts. Virtual Router Redundancy Protocol is not supported on management interfaces.

Devices running VRRP dynamically elect primary and backup devices. You can also force assignment of primary and backup devices using priorities from 1 through 255, with 255 being the highest priority. In VRRP operation, the default primary device sends advertisements to backup devices at regular intervals. The default interval is 1 second. If a backup device does not receive an advertisement for a set period, the backup device with the next highest priority takes over as primary and begins forwarding packets.

NOTE: Priority 255 cannot be set for routed VLAN interfaces (RVIs).

NOTE: To minimize network traffic, VRRP is designed in such a way that only the device that is acting as the primary sends out VRRP advertisements at any given point in time. The backup devices do not send any advertisement until and unless they take over primary role.

VRRP for IPv6 provides a much faster switchover to an alternate default router than IPv6 neighbor discovery procedures. Typical deployments use only one backup router.

NOTE: Do not confuse the VRRP primary and backup routing platforms with the primary and backup member switches of a *Virtual Chassis* configuration. The primary and backup members of a Virtual Chassis configuration compose a single host. In a VRRP topology, one host operates as the primary routing platform and another operates as the backup routing platform, as shown in [Figure 27 on page 409](#).


VRRP is defined in RFC 3768, *Virtual Router Redundancy Protocol*. VRRP for IPv6 is defined in draft-ietf-vrrp-ipv6-spec-08.txt, *Virtual Router Redundancy Protocol for IPv6*. See also draft-ietf-vrrp-unified-mib-06.txt, *Definitions of Managed Objects for the VRRP over IPv4 and IPv6*.

NOTE: Even though VRRP, as defined in RFC 3768, does not support authentication, the Junos OS implementation of VRRP supports authentication as defined in RFC 2338. This support is achieved through the backward compatibility options in RFC 3768.

NOTE: On EX2300 and EX3400 switches, the VRRP protocol must be configured with a Hello interval of 2 seconds or more with dead interval not less than 6 seconds to prevent flaps during CPU intensive operations events such as routing engine switchover, interface flaps, and exhaustive data collection from the packet forwarding engine.

Figure 25 on page 407 illustrates a basic VRRP topology. In this example, Routers A, B, and C are running VRRP and together make up a virtual router. The IP address of this virtual router is 10.10.0.1 (the same address as the physical interface of Router A).

Figure 25: Basic VRRP

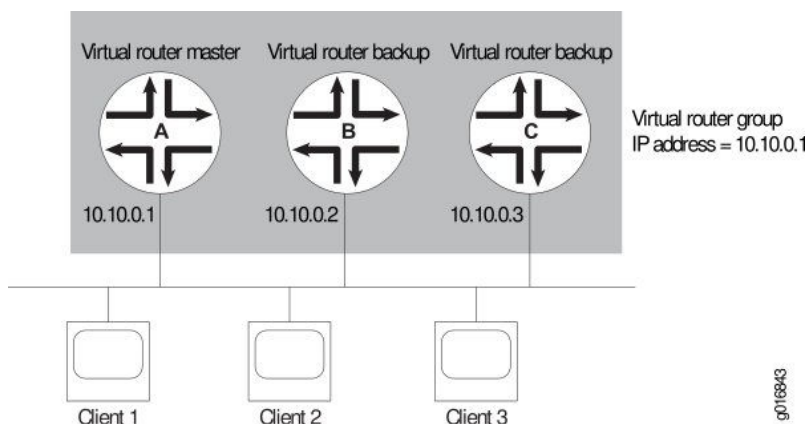

Because the virtual router uses the IP address of the physical interface of Router A, Router A is the primary VRRP router, while routers B and C function as backup VRRP routers. Clients 1 through 3 are configured with the default gateway IP address of 10.10.0.1. As the primary router, Router A forwards packets sent to its IP address. If the primary virtual router fails, the router configured with the higher priority becomes the primary virtual router and provides uninterrupted service for the LAN hosts. When Router A recovers, it becomes the primary virtual router again.

NOTE: In some cases, during an inherit session, there is a small time frame during which two routers are in Primary-Primary state. In such cases, the VRRP groups that inherit the state do send out VRRP advertisements every 120 seconds. So, it takes the routers up to 120 seconds to recover after moving to Primary-Backup state from Primary-Primary state.

ACX series routers can support up to 64 VRRP group entries. These can be a combination of IPv4 or IPv6 families. If either of the family (IPv4 or IPv6) is solely configured for VRRP, then 64 unique VRRP group identifiers are supported. If both IPv4 and IPv6 families share the same VRRP group, then only 32 unique VRRP identifiers are supported.

NOTE: ACX Series routers support VRRP version 3 for IPv6 addresses.

ACX5448 router supports RFC 3798 VRRP version 2 and RFC 5798 VRRP version 3. ACX5448 router also supports configuring VRRP over aggregated Ethernet and integrated routing and bridging (IRB) interfaces.

The following limitations apply while configuring VRRP on ACX5448 router:

- Configure a maximum of 16 VRRP groups.
- Interworking of VRRP version 2 and VRRP version 3 is not supported.
- VRRP delegate processing is not supported.
- VRRP version 2 authentication is not supported.

Figure 25 on page 407 illustrates a basic VRRP topology with EX Series switches. In this example, Switches A, B, and C are running VRRP and together they make up a virtual routing platform. The IP address of this virtual routing platform is **10.10.0.1** (the same address as the physical interface of Switch A).

Figure 26: Basic VRRP on EX Series Switches


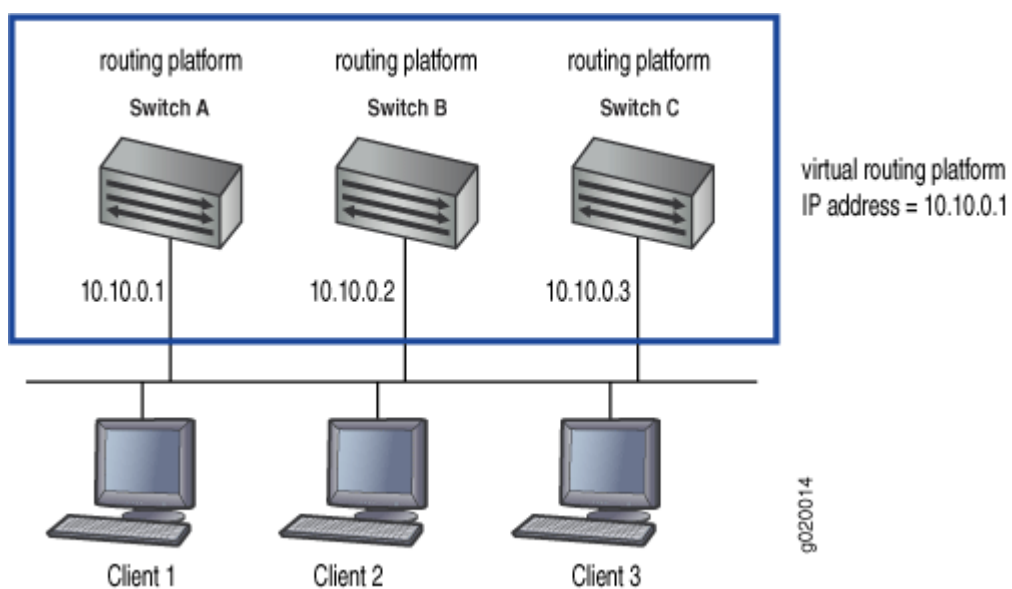


Figure 27 on page 409 illustrates a basic VRRP topology using Virtual Chassis configurations. Switch A, Switch B, and Switch C are each composed of multiple interconnected Juniper Networks EX4200 Ethernet Switches. Each Virtual Chassis configuration operates as a single switch, which is running

VRRP, and together they make up a virtual routing platform. The IP address of this virtual routing platform is **10.10.0.1** (the same address as the physical interface of Switch A).

Figure 27: VRRP on Virtual Chassis Switches

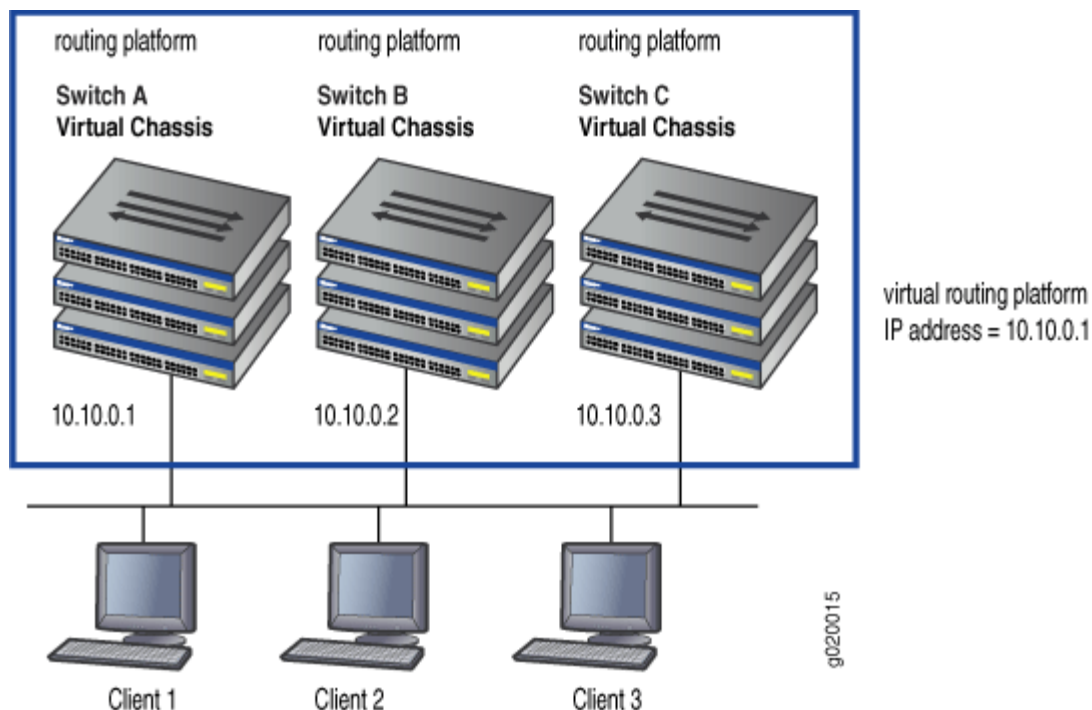

Because the virtual routing platform uses the IP address of the physical interface of Switch A, Switch A is the primary VRRP routing platform, while Switch B and Switch C function as backup VRRP routing platforms. Clients 1 through 3 are configured with the default gateway IP address of **10.10.0.1** as the primary router. Switch A, forwards packets sent to its IP address. If the primary routing platform fails, the switch configured with the higher priority becomes the primary virtual routing platform and provides uninterrupted service for the LAN hosts. When Switch A recovers, it becomes the primary virtual routing platform again.

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

[High Availability Features for EX Series Switches Overview | 9](#)

[Junos OS Support for VRRPv3 | 414](#)

[Configuring Basic VRRP Support | 425](#)

[Configuring VRRP | 431](#)

[Configuring VRRP for IPv6 \(CLI Procedure\) | 436](#)

Understanding VRRP Between QFabric Systems

IN THIS SECTION

- [VRRP Differences on QFabric Systems | 410](#)
- [Configuration Details | 411](#)

Juniper Networks QFabric systems support the Virtual Router Redundancy Protocol (VRRP). This topic covers:

VRRP Differences on QFabric Systems

Configuring servers on your network with static routes to a default gateway minimizes configuration effort and complexity and reduces processing overhead. However, a failure of the default gateway normally results in a catastrophic event, isolating the servers. Using Virtual Router Redundancy Protocol (VRRP) enables you to dynamically provide alternative gateways for servers if the primary gateway fails.

Switches configured with VRRP share a virtual IP (VIP) address, which is the address you configure as the default route on the servers. In normal VRRP operation, one of the switches is the VRRP primary, meaning that it owns the VIP and is the active default gateway. The other devices are backups. The switches dynamically assign primary and backup roles based on priorities that you configure. If the primary fails, the backup switch with the highest priority becomes the primary and takes ownership of the VIP within a few seconds. This is done without any interaction with the servers.

You can configure two QFabric systems to participate in a VRRP configuration as if they were two standalone switches. However, in normal VRRP operation, only one system can be the primary for a given VRRP group at any one time, which means that only one system can act as a default gateway using the VIP configured for the group. When running VRRP over two QFabric systems, you might want both systems to simultaneously use the VIP to act as a gateway and forward traffic. To achieve this, you can configure a firewall filter to block the VRRP advertisement packets between the QFabric systems on the link between the two network Node groups. When you do this, both QFabric systems act as primary and forward traffic received by the VIP (which is the default gateway address that you configure on servers connected to both QFabric systems). If you use VMware's vMotion, this configuration allows virtual machines to transition between servers connected to the QFabric systems without updating their default gateway information. For example, a virtual machine running on a server connected to a QFabric system in data center A can transition to a server connected to a QFabric system in data center B without needing to resolve a new gateway IP address and MAC address because both QFabric systems use the same VIP.

NOTE: To use a firewall filter to block VRRP traffic, create a firewall term that matches traffic for **protocol vrrp** and discards that traffic.

Configuration Details

Configuring a VRRP group across two QFabric systems is similar to configuring VRRP on two switches. The main differences are listed here:

- All the interfaces in both QFabric systems that participate in VRRP must be members of the same VLAN.
- You must create routed VLAN interfaces (RVIs) in that VLAN on both QFabric systems.
- The IP addresses that you assign to both RVIs must be in the same subnet.
- You must configure VRRP on the RVIs.
- Both RVIs must be members of the same VRRP group. This is what allows the two QFabric systems to share a virtual IP address.

The following tables list the elements of an example VRRP configuration running on two QFabric systems—QFabric system A and QFabric system B. This example is configured so that both QFabric systems act as the VRRP primary for VIP 10.1.1.50/24 and assumes that a firewall filter blocks the VRRP advertisements between the systems. [Table 11 on page 411](#) lists the required characteristics of the RVIs in the example configuration.

NOTE: Most of the configuration settings in the following tables would also apply in a traditional VRRP configuration. However, the advertisement interval and priority settings would need to be different (as noted).

Table 11: RVIs on QFabric systems in example VRRP configuration

RVI on QFabric System A	RVI on QFabric System B
vlan.100	vlan.200
Member of VLAN 100. (Note that the VLAN is the same on both QFabric systems.)	Member of VLAN 100

IP address 10.1.1.100/24	IP address 10.1.1.200/24
Member of VRRP group 500	Member of VRRP group 500
Virtual IP address 10.1.1.50/24	Virtual IP address 10.1.1.50/24

You must configure VRRP on the RVIs on both QFabric systems. [Table 12 on page 412](#) lists the elements of a sample VRRP configuration on each RVI. Note that with the exception of the priority, the parameters *must* be the same on both systems.

Table 12: Sample VRRP configuration each RVI

VRRP on RVI on QFabric System A	VRRP on RVI on QFabric System B
VRRP group 500	VRRP group 500
Virtual IP address 10.1.1.50/24	Virtual IP address 10.1.1.50/24
Advertisement interval 60 seconds. (In a normal VRRP configuration, you would set this interval to be much smaller, such as 1 second. However, in this configuration these packets are blocked by the firewall filter on the interface that connects to QFabric system B, so there is no need to send them frequently.)	Advertisement interval 60 seconds
Authentication type md5	Authentication type md5
Authentication key \$9\$1.4EIMVb2aGi4aZjkqzFRhSeWx7-wY2aM8	Authentication key \$9\$1.4EIMVb2aGi4aZjkqzFRhSeWx7-wY2aM8
Priority 254. (In a normal VRRP configuration, this value would be different on the two systems and the system with the higher value would be the primary. However, in this configuration both systems are acting as primary, so you do not have to configure different values.)	Priority 254

NOTE: Priority 255 is not supported for RVIs.

Table 13 on page 413 lists the all the interfaces on QFabric system A in the example configuration and identifies what they connect to.

Table 13: Interfaces on QFabric system A. All interfaces are members of VLAN 100.

VLAN 100 Interfaces on QFabric System A	Connects To
vlan.100	vlan.200
Network Node group interface QFA-NNG:xe-0/0/0	QFB-NNG:xe-0/0/0 on QFabric system B
Network Node group interface QFA-NNG:xe-0/0/1	Redundant server Node group interface QFA-RSNG:xe-0/0/0
Redundant server Node group interface QFA-RSNG:xe-0/0/0	Connects to a network Node group interface QFA-NNG:xe-0/0/1
Redundant server Node group interface QFA-RSNG:xe-0/0/1	LAN with servers running virtual machines

Table 14 on page 413 lists the all the interfaces on QFabric system B in the example configuration and identifies what they connect to.

Table 14: Interfaces on QFabric system B. All interfaces are members of VLAN 100 (same as on QFabric system A).

VLAN 100 Interfaces on QFabric System B	Connects To
vlan.200	vlan.100
Network Node group interface QFB-NNG:xe-0/0/0	QFA-NNG:xe-0/0/0 on QFabric system A

Network Node group interface QFB-NNG:xe-0/0/1	Redundant server Node group interface QFB-RSNG:xe-0/0/0
Redundant server Node group interface QFB-RSNG:xe-0/0/0	Connects to a network Node group interface QFB-NNG:xe-0/0/1
Redundant server Node group interface QFB-RSNG:xe-0/0/1	LAN with servers running virtual machines

RELATED DOCUMENTATION

Understanding VRRP 405
Configuring Basic VRRP Support for QFX
Example: Configuring VRRP for Load Sharing 484

Junos OS Support for VRRPv3

IN THIS SECTION

- [Junos OS VRRP Support | 415](#)
- [IPv6 VRRP Checksum Behavioral Differences | 415](#)
- [VRRP Interoperability | 416](#)
- [Upgrading from VRRPv2 to VRRPv3 | 417](#)
- [Functionality of VRRPv3 Features | 419](#)

The advantage of using VRRPv3 is that VRRPv3 supports both IPv4 and IPv6 address families, whereas VRRPv2 supports only IPv4 addresses.

The following topics describe the Junos OS support for and interoperability of VRRPv3, as well as some differences between VRRPv3 and its precursors:

Junos OS VRRP Support

In releases earlier than Release 12.2, Junos OS supported RFC 3768, *Virtual Router Redundancy Protocol (VRRP)* (for IPv4) and Internet draft draft-ietf-vrrp-ipv6-spec-08, *Virtual Router Redundancy Protocol for IPv6*.

VRRPv3 is not supported on routers that use releases earlier than Junos OS Release 12.2 and is also not supported for IPv6 on QFX10000 switches.

NOTE: VRRPv3 for IPv6 is supported on QFX10002-60C.

Starting with Release 12.2, Junos OS supports:

- RFC 3768, *Virtual Router Redundancy Protocol (VRRP)*
- RFC 5798, *Virtual Router Redundancy Protocol (VRRP) Version 3 for IPv4 and IPv6*
- RFC 6527, *Definitions of Managed Objects for Virtual Router Redundancy Protocol Version 3 (VRRPv3)*

NOTE: VRRP (for IPv6) on routers that use Junos OS Release 12.2 and later releases does not interoperate with VRRP (for IPv6) on routers with earlier Junos OS releases because of the differences in VRRP checksum calculations. See ["IPv6 VRRP Checksum Behavioral Differences" on page 415](#).

IPv6 VRRP Checksum Behavioral Differences

You must consider the following checksum differences when enabling IPv6 VRRP networks:

- In releases earlier than Junos OS Release 12.2, when VRRP for IPv6 is configured, the VRRP checksum is calculated according to section 5.3.8 of RFC 3768, *Virtual Router Redundancy Protocol (VRRP)*.
- Starting with Junos OS Release 12.2, when VRRP for IPv6 is configured, irrespective of VRRPv3 being enabled or not, the VRRP checksum is calculated according to section 5.2.8 of RFC 5798, *Virtual Router Redundancy Protocol (VRRP) Version 3 for IPv4 and IPv6*.

Moreover, the pseudoheader is included only when calculating the IPv6 VRRP checksum. The pseudoheader is not included when calculating the IPv4 VRRP checksum.

To make the router with Junos OS Release 12.2 (or later Junos OS releases) IPv6 VRRP interoperate with the router running a Junos OS release earlier than Release 12.2, include the **checksum-without-**

pseudoheader configuration statement at the **[edit protocols vrrp]** hierarchy level in the router running Junos OS Release 12.2 or later.

- The **tcpdump** utility in Junos OS Release 12.2 and later calculates the VRRP checksum according to RFC 5798, *Virtual Router Redundancy Protocol (VRRP) Version 3 for IPv4 and IPv6*. Therefore, when **tcpdump** parses IPv6 VRRP packets that are received from older Junos OS releases (earlier than Junos OS Release 12.2), the **bad vrrp cksum** message is displayed:

```
23:20:32.657328 Out
...
-----original packet-----
00:00:5e:00:02:03 > 33:33:00:00:00:12, ethertype IPv6 (0x86dd),
length 94: (class 0xc0, hlim 255, next-header: VRRP (112), length: 40)
fe80::224:dcff:fe47:57f > ff02::12: VRRPv3-advertisement 40: vrid=3 prio=100
intvl=100 (centisec) (bad vrrp cksum b4e2!) addrs(2):
fe80::200:5eff:fe00:3,2001:4818:f000:14::1
3333 0000 0012 0000 5e00 0203 86dd 6c00
0000 0028 70ff fe80 0000 0000 0000 0224
dcff fe47 057f ff02 0000 0000 0000 0000
0000 0000 0012 3103 6402 0064 b4e2 fe80
0000 0000 0000 0200 5eff fe00 0003 2001
4818 f000 0014 0000 0000 0000 0000 0001
```

You can ignore this message because it does not indicate VRRP failure.

VRRP Interoperability

In releases earlier than Junos OS Release 12.2, VRRP (IPv6) followed Internet draft draft-ietf-vrrp-ipv6-spec-08, but checksum was calculated based on RFC 3768 section 5.3.8. Starting with Release 12.2, VRRP (IPv6) follows RFC 5798 and checksum is calculated based on RFC 5798 section 5.2.8. Because of the differences in VRRP checksum calculations, IPv6 VRRP configured on routers that use Junos OS Release 12.2 and later releases does not interoperate with IPv6 VRRP configured in releases before Junos OS Release 12.2.

To make the router with Junos OS Release 12.2 (or later Junos OS releases) IPv6 VRRP interoperate with the router running Junos OS releases earlier than Release 12.2, include the **checksum-without-pseudoheader** configuration statement at the **[edit protocols vrrp]** hierarchy level in the router with Junos OS Release 12.2 or later.

Here are some general points to know about VRRP interoperability:

- If you have configured VRRPv3 (IPv4 or IPv6) on routers that use Junos OS Release 12.2 or later releases, it will not operate with routers that use Junos OS Release 12.1 or earlier releases. This is because only Junos OS Release 12.2 and later releases support VRRPv3.
- VRRP (IPv4 or IPv6) configured on routers that use Junos OS Release 12.2 and later releases interoperate with VRRP (IPv4 or IPv6) configured on routers that use releases earlier than Junos OS Release 12.2.
- VRRPv3 for IPv4 does not interoperate with the previous versions of VRRP. If VRRPv2 IPv4 advertisement packets are received by a router on which VRRPv3 is enabled, the router transitions itself to the backup state to avoid creating multiple primaries in the network. Due to this behavior, you must be cautious when enabling VRRPv3 on your existing VRRPv2 networks. See ["Upgrading from VRRPv2 to VRRPv3" on page 417](#) for more information.

NOTE: VRRPv3 advertisement packets are ignored by the routers on which previous versions of VRRP are configured.

Upgrading from VRRPv2 to VRRPv3

Enable VRRPv3 in your network only if VRRPv3 can be enabled on all the VRRP routers in your network.

Enable VRRPv3 on your VRRPv2 network only when upgrading from VRRPv2 to VRRPv3. Mixing the two versions of VRRP is not a permanent solution.



CAUTION: VRRP version change is considered catastrophic and disruptive and may not be hitless. The packet loss duration depends on many factors, such as number of VRRP groups, the interfaces and FPCs involved, and the load of other services and protocols running on the router.

Upgrading from VRRPv2 to VRRPv3 must be done very carefully to avoid traffic loss, due to these considerations:

- It is not possible to configure VRRPv3 on all routers simultaneously.
- During the transition period, both VRRPv2 and VRRPv3 operate in the network.
- Changing VRRP versions restarts the state machine for all VRRP groups.
- VRRPv3 (for IPv4) routers default to the backup state when they get VRRPv2 (for IPv4) advertisement packets.
- VRRPv2 (for IPv4) packets are always given the highest priority.

- Checksum differences between VRRPv2 and VRRPv3 (for IPv6) can create multiple primary routers.
- Disable VRRPv3 (for IPv6) on the backup routers while upgrading to avoid creating multiple primary routers.

Table 15 on page 418 illustrates the steps and events that take place during a VRRPv2 to VRRPv3 transition. In Table 15 on page 418, two VRRPv2 routers, R1 and R2, are configured in two groups, G1 and G2. Router R1 acts as the primary for G1, and Router R2 acts as the primary for G2.

Table 15: VRRPv2 to VRRPv3 Transition Steps and Events

1. Upgrade Router R1 with Junos OS Release 12.2 or later.
 - Router R2 becomes the primary for both G1 and G2.
 - After the upgrade of Router R1 is completed, Router R1 becomes the primary for G1.
 - Router R2 remains the primary for G2.
2. Upgrade Router R2 with Junos OS Release 12.2 or later.
 - Router R1 becomes the primary for both G1 and G2.
 - After the upgrade of Router R2 is completed, Router R2 becomes the primary for G2.
 - Router R1 remains the primary for G1.

For IPv4	For IPv6
1. Enable VRRPv3 on Router R1. • Router R1 becomes the backup for both G1 and G2 because VRRPv2 IPv4 advertisement packets are given higher priority. 2. Enable VRRPv3 on Router R2. • Router R1 becomes the primary for G1. • Router R2 becomes the primary for G2.	1. Deactivate G1 and G2 on Router R2. • G1 and G2 on Router R1 become primary. 2. Enable VRRPv3 on Router R1. • Router R1 becomes the primary for both G1 and G2. 3. Enable VRRPv3 on Router R2. 4. Activate G1 and G2 on Router R2. • Router R2 becomes the primary for G2. • Router R1 remains the primary for G1.

When enabling VRRPv3, make sure that VRRPv3 is enabled on all the VRRP routers in the network because VRRPv3 (IPv4) does not interoperate with the previous versions of VRRP. For example, if VRRPv2 IPv4 advertisement packets are received by a router on which VRRPv3 is enabled, the router transitions itself to the backup state to avoid creating multiple primaries in the network.

You can enable VRRPv3 by configuring the **version-3** statement at the **[edit protocols vrrp]** hierarchy level (for IPv4 or IPv6 networks). Configure the same protocol version on all VRRP routers on the LAN.

Functionality of VRRPv3 Features

Some Junos OS features differ in VRRPv3 from previous VRRP versions.

VRRPv3 Authentication

When VRRPv3 (for IPv4) is enabled, it does not allow authentication.

- The **authentication-type** and **authentication-key** statements cannot be configured for any VRRP groups.
- You must use non-VRRP authentication.

VRRPv3 Advertisement Intervals

VRRPv3 (for IPv4 and IPv6) advertisement intervals must be set with the **fast-interval** statement at the **[edit interfaces *interface-name* unit 0 family inet address *ip-address* vrrp-group *group-name*]** hierarchy level.

- Do not use the **advertise-interval** statement (for IPv4).
- Do not use the **inet6-advertise-interval** statement (for IPv6).

Unified ISSU for VRRPv3

Design changes for VRRP unified in-service software upgrade (ISSU) are made in Junos OS Release 15.1 to achieve the following functionality:

- Maintain protocol adjacency with peer routers during unified ISSU. Protocol adjacency created on peer routers for the router undergoing unified ISSU should not flap, which means that VRRP on the remote peer router should not flap.
- Maintain interoperability with competitive or complementary equipment.
- Maintain interoperability with other Junos OS releases and other Juniper Network products.

The values of the following configurations (found at the `[edit interfaces interface-name unit 0 family inet address ip-address vrrp-group group-name]` hierarchy level) need to be kept at maximum values to support unified ISSU:

- On the primary router, the advertisement interval (the **fast-interval** statement) needs to be kept at 40950 milliseconds.
- On the backup router, the primary-down interval (the **advertisements-threshold** statement) needs to be kept at the largest threshold value.

This VRRP unified ISSU design only works for VRRPv3. It is not supported on VRRPv1 or VRRPv2. Other limitations include the following:

- The VRRP unified ISSU takes care of VRRP only. Packet forwarding is the responsibility of the Packet Forwarding Engine. The Packet Forwarding Engine unified ISSU should ensure uninterrupted traffic flow.
- VRRP is not affected by any change event during unified ISSU, for example, the switchover of the primary Routing Engine to backup or the backup Routing Engine to primary.
- VRRP might stop and discard any running timer before entering into unified ISSU. This means the expected action upon the expiry of the timer never takes place. However, you can defer unified ISSU until the expiration of all running timers.
- Unified ISSU at both local and remote routers cannot be done simultaneously.

Release History Table

Release	Description
12.2	Junos OS Release 12.2 and later releases support VRRPv3.

RELATED DOCUMENTATION

Understanding VRRP 405
Configuring Basic VRRP Support 425

VRRP failover-delay Overview

IN THIS SECTION

- [When failover-delay Is Not Configured | 421](#)
- [When failover-delay Is Configured | 422](#)

Failover is a backup operational mode in which the functions of a network device are assumed by a secondary device when the primary device becomes unavailable because of a failure or a scheduled down time. Failover is typically an integral part of mission-critical systems that must be constantly available on the network.

VRRP does not support session synchronization between members. If the primary device fails, the backup device with the highest priority takes over as primary and will begin forwarding packets. Any existing sessions will be dropped on the backup device as out-of-state.

A fast failover requires a short delay. Thus, failover-delay configures the failover delay time, in milliseconds, for VRRP and VRRP for IPv6 operations. Junos OS supports a range of 50 through 100000 milliseconds for delay in failover time.

The VRRP process (vrrpd) running on the Routing Engine communicates a VRRP primary role change to the Packet Forwarding Engine for every VRRP session. Each VRRP group can trigger such communication to update the Packet Forwarding Engine with its own state or the state inherited from an active VRRP group. To avoid overloading the Packet Forwarding Engine with such messages, you can configure a failover-delay to specify the delay between subsequent Routing Engine to Packet Forwarding Engine communications.

The Routing Engine communicates a VRRP primary role change to the Packet Forwarding Engine to facilitate necessary state change on the Packet Forwarding Engine, such as reprogramming of Packet Forwarding Engine hardware filters, VRRP sessions and so on. The following sections elaborate the Routing Engine to Packet Forwarding Engine communication in two scenarios:

When failover-delay Is Not Configured

Without failover-delay configured, the sequence of events for VRRP sessions operated from the Routing Engine is as follows:

1. When the first VRRP group detected by the Routing Engine changes state, and the new state is primary, the Routing Engine generates appropriate VRRP announcement messages. The Packet Forwarding Engine is informed about the state change, so that hardware filters for that group are

reprogrammed without delay. The new primary then sends gratuitous ARP message to the VRRP groups.

2. The delay in failover timer starts. By default, failover-delay timer is:
 - 500 milliseconds—when the configured VRRP announcement interval is less than 1 second.
 - 2 seconds—when the configured VRRP announcement interval is 1 second or more, and the total number of VRRP groups on the router is 255.
 - 10 seconds—when the configured VRRP announcement interval is 1 second or more, and the number of VRRP groups on the router is more than 255.
3. The Routing Engine performs one-by-one state change for subsequent VRRP groups. Every time there is a state change, and the new state for a particular VRRP group is primary, the Routing Engine generates appropriate VRRP announcement messages. However, communication toward the Packet Forwarding Engine is suppressed until the failover-delay timer expires.
4. After failover-delay timer expires, the Routing Engine sends message to the Packet Forwarding Engine about all VRRP groups that managed to change the state. As a consequence, hardware filters for those groups are reprogrammed, and for those groups whose new state is primary, gratuitous ARP messages are sent.

This process repeats until state transition for all VRRP groups is complete.

Thus, without configuring failover-delay, the full state transition (including states on the Routing Engine and the Packet Forwarding Engine) for the first VRRP group is performed immediately, while state transition on the Packet Forwarding Engine for remaining VRRP groups is delayed by at least 0.5-10 seconds, depending on the configured VRRP announcement timers and the number of VRRP groups. During this intermediate state, receiving traffic for VRRP groups for state changes that were not yet completed on the Packet Forwarding Engine might be dropped at the Packet Forwarding Engine level due to deferred reconfiguration of hardware filters.

When failover-delay Is Configured

When failover-delay is configured, the sequence of events for VRRP sessions operated from the Routing Engine is modified as follows:

1. The Routing Engine detects that some VRRP groups require a state change.
2. The failover-delay starts for the period configured. The allowed failover-delay timer range is 50 through 100000 milliseconds.
3. The Routing Engine performs one-by-one state change for the VRRP groups. Every time there is a state change, and the new state for a particular VRRP group is primary, the Routing Engine generates

appropriate VRRP announcement messages. However, communication toward the Packet Forwarding Engine is suppressed until the failover-delay timer expires.

4. After failover-delay timer expires, the Routing Engine sends message to the Packet Forwarding Engine about all VRRP groups that managed to change the state. As a consequence, hardware filters for those groups are reprogrammed, and for those groups whose new state is primary, gratuitous ARP messages are sent.

This process repeats until state transition for all VRRP groups is complete.

Thus, when failover-delay is configured even the Packet Forwarding Engine state for the first VRRP group is deferred. However, the network operator has the advantage of configuring a failover-delay value that best suits the need of the network deployment to ensure minimal outage during VRRP state change.

failover-delay influences only VRRP sessions operated by the VRRP process (vrrpd) running on the Routing Engine. For VRRP sessions distributed to the Packet Forwarding Engine, failover-delay configuration has no effect.

RELATED DOCUMENTATION

| [failover-delay](#)

Configuring VRRP

IN THIS CHAPTER

- [Configuring Basic VRRP Support | 425](#)
- [Configuring VRRP | 431](#)
- [VRRP and VRRP for IPv6 Overview | 433](#)
- [Configuring VRRP and VRRP for IPv6 | 434](#)
- [Configuring VRRP for IPv6 \(CLI Procedure\) | 436](#)
- [Example: Configuring VRRP for IPv6 | 438](#)
- [Configuring VRRP Authentication \(IPv4 Only\) | 446](#)
- [Configuring VRRP Preemption and Hold Time | 448](#)
- [Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)
- [Configuring the Startup Period for VRRP Operations | 452](#)
- [Configuring a Backup Router to Preempt the VRRP Primary Router | 453](#)
- [Configuring a Backup to Accept Packets Destined for the Virtual IP Address | 454](#)
- [Modifying the Preemption Hold-Time Value for the VRRP Primary Router | 455](#)
- [Configuring the Asymmetric Hold Time for VRRP Routers | 456](#)
- [Configuring Passive ARP Learning for Backup VRRP Routers | 456](#)
- [Configuring VRRP Route Tracking | 457](#)
- [Configuring a Logical Interface to Be Tracked for a VRRP Group | 459](#)
- [Configuring a Route to Be Tracked for a VRRP Group | 462](#)
- [Example: Configuring Multiple VRRP Owner Groups | 465](#)
- [Configuring Inheritance for a VRRP Group | 474](#)
- [Configuring an Interface to Accept All Packets Destined for the Virtual IP Address of a VRRP Group | 475](#)
- [Configuring the Silent Period to Avoid Alarms Due to Delay in Receiving VRRP Advertisement Packets | 477](#)
- [Enabling the Distributed Periodic Packet Management Process for VRRP | 478](#)
- [Improving the Convergence Time for VRRP | 479](#)
- [Configuring VRRP to Improve Convergence Time | 481](#)
- [Tracing VRRP Operations | 483](#)

- [Example: Configuring VRRP for Load Sharing | 484](#)
- [Troubleshooting VRRP | 492](#)

Configuring Basic VRRP Support

NOTE: Starting in Junos OS Release 13.2, VRRP nonstop active routing (NSR) is enabled only when you configure the **nonstop-routing** statement at the **[edit routing-options]** or **[edit logical system *logical-system-name* routing-options]** hierarchy level.

The Virtual Router Redundancy Protocol (VRRP) groups multiple routing devices into a virtual router. At any time, one of the VRRP routing platforms is the primary (active) and the others are backups. If the primary fails, one of the backup routing platforms becomes the new primary router.

To configure basic VRRP support, configure VRRP groups on interfaces by including the **vrrp-group** statement:

```
vrrp-group group-id {
    priority number;
    virtual-address [ addresses ];
}
```

An interface can be a member of multiple VRRP groups. Within a VRRP group, the primary virtual router and the backup virtual router must be configured on different routing platforms.

You can include this statement at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address*]**

Mandatory parameters to configure a VRRP group are as follows (examples will follow):

1. Configure the group identifier (mandatory).
2. Configure the group:
 - Configure the virtual IP address of one or more virtual routers that are members of the VRRP group (mandatory).
 - Configure the virtual link-local address (VRRP for IPv6 only). The virtual link-local address is autogenerated when you enable VRRPv3 on the interface. You may explicitly define a virtual link-

local address for each VRRP for the IPv6 group. The virtual link-local address must be on the same subnet as the physical interface address.

- Configure the priority for the routing platform to become the primary virtual router (mandatory).

When choosing a VRRP group identifier, consider the following:

- In Junos OS releases prior to 17.3R1, you should not use the same VRRP group identifier on more than one subinterface on a given physical interface. This causes the VRRP virtual MAC address to be deleted from the packet forwarding engine, resulting in packet drops due to unknown MAC address. If your VRRP configuration needs to scale beyond 255 groups, consider configuring VRRP over an integrated routing and bridging (IRB) interface, since this restriction does not apply to IRB interfaces.
- Starting in Junos OS release 17.3R1, if network-services is configured in IP mode, don't configure the same VRRP group ID for multiple VRRP sessions on the same physical interface unless VRRP delegation is disabled. If multiple VRRP sessions are configured on the same physical interface with the same VRRP group ID while VRRP delegation is enabled, the other VRRP virtual IP addresses become unreachable when one of the logical interfaces is deleted.
- Starting in Junos OS release 17.3R1, if network-services is configured in enhanced-ip mode, you can use the same VRRP group ID for multiple VRRP sessions.

When configuring a virtual IP address, consider the following:

- The virtual IP address must be the same for all routing platforms in the VRRP group.
- If you configure a virtual IP address to be the same as the physical interface's address, the interface becomes the primary virtual router for the group. In this case, you must configure the priority to be 255, and you must configure preemption by including the **preempt** statement.
- If the virtual IP address you choose is not the same as the physical interface's address, you must ensure that the virtual IP address does not appear anywhere else in the routing platform's configuration. Verify that you do not use this address for other interfaces, for the IP address of a tunnel, or for the IP address of static ARP entries.
- You cannot configure a virtual IP address to be the same as the interface's address for an aggregated Ethernet interface. This configuration is not supported.
- For VRRP for IPv6, the **EUI-64** option cannot be used. In addition, the Duplicate Address Detection (DAD) process will not run for virtual IPv6 addresses.
- You cannot configure the same virtual IP address on interfaces that belong to the same logical system and routing instance combination. However, you can configure the same virtual IP address on interfaces that belong to different logical systems and routing instance combinations.

In determining what priority will make a given routing platform in a VRRP group a primary or backup, consider the following:

- You can force assignment of primary and backup routers using priorities from 1 through 255, where 255 is the highest priority.
- The priority value for the VRRP router that owns the IP address(es) associated with the virtual router must be 255.
- VRRP routers backing up a virtual router must use priority values from 1 through 254.
- The default priority value for VRRP routers backing up a virtual router is 100.
- Are there tracked interfaces or routes with priority costs?

The priority cost is the value associated with a tracked logical interface or route that is to be subtracted from the configured VRRP priority when the tracked logical interface or route goes down, forcing a new primary router election. The value of a priority cost can be from 1 through 254. The sum of the priority costs for all tracked logical interfaces or routes must be less than or equal to the configured priority of the VRRP group.

NOTE: Mixed tagging (configuring two logical interfaces on the same Ethernet port, one with single-tag framing and one with dual-tag framing) is supported only for interfaces on Gigabit Ethernet IQ2 and IQ PICs. If you include the **flexible-vlan-tagging** statement at the **[edit interfaces *interface-name*]** hierarchy level for a VRRP-enabled interface on a PIC that does not support mixed tagging, VRRP on that interface is disabled. In the output of the **show vrrp summary** operational command, the interface status is listed as **Down**.

NOTE: If you enable MAC source address filtering on an interface, you must include the virtual MAC address in the list of source MAC addresses that you specify in the **source-address-filter** statement at the **[edit interfaces *interface-name*]** hierarchy level. (For more information, see the [Junos OS Network Interfaces Library for Routing Devices](#).) MAC addresses ranging from 00:00:5e:00:01:00 through 00:00:5e:00:01:ff are reserved for VRRP, as defined in RFC 2378. The VRRP group number must be the decimal equivalent of the last hexadecimal byte of the virtual MAC address.

Here are specific examples of configuring a VRRP group.

Configuring for VRRP IPv4 Groups

To configure basic VRRP (IPv4) groups on interfaces:

NOTE: You can also configure a VRRP IPv4 group at the [edit logical-systems *logical-system-name*] hierarchy level.

1. Configure the group identifier.

```
[edit interfaces interface-name unit logical-unit-number family inet address
address]
user@device# set vrrp-group group-id
```

Assign a value from 0 through 255.

2. Configure the VRRP for IPv4 group:

- Configure the virtual IP address of one or more virtual routers that are members of the VRRP group.

```
[edit interfaces interface-name unit logical-unit-number family inet
address address]
user@device# set vrrp-group group-id virtual-address [ addresses ]
```

Normally, you configure only one virtual IP address per group. However, you can configure up to eight addresses. Do not include a prefix length in a virtual IP address.

- Configure the priority for this routing platform to become the primary virtual router.

```
[edit interfaces interface-name unit logical-unit-number family inet
address address]
user@device# set vrrp-group group-id priority number
```

Configure the value used to elect the primary virtual router in the VRRP group. It can be a number from 1 through 255. The default value for backup routers is 100. A larger value indicates a higher priority. The routing platform with the highest priority within the group becomes the primary router. Primary router sends periodic VRRP advertisement messages to each virtual routers. The backup routers do not attempt to preempt the primary router unless it has higher priority. This eliminates service disruption unless a more preferred path becomes available. It is possible to administratively prohibit all preemption attempts, with the exception of a VRRP router becoming primary router of any virtual router associated with addresses it owns.

Configuring VRRP for IPv6 Groups

To configure basic VRRP for IPv6 groups on interfaces:

NOTE: You can also configure a VRRP IPv6 group at the `[edit logical-systems logical-system-name]` hierarchy level.

1. Configure the group identifier.

```
[edit interfaces interface-name unit logical-unit-number family inet6 address
ipv6-address]
user@device# set vrrp-inet6-group group-id
```

Assign a value from 0 through 255.

2. Configure the VRRP for IPv6 group:

- Configure the virtual IP address of one or more virtual routers that are members of the VRRP group.

```
[edit interfaces interface-name unit logical-unit-number family inet6
address ipv6-address]
user@device# set vrrp-inet6-group group-id virtual-inet6-address [ipv6-addresses]
```

Normally, you configure only one virtual IP address per group. However, you can configure up to eight addresses. Do not include a prefix length in a virtual IP address.

- Configure the virtual link-local address.

```
[edit interfaces interface-name unit logical-unit-number family inet6
address ipv6-address]
user@device# set vrrp-inet6-group group-id virtual-link-local-address ipv6-address
```

You must explicitly define a virtual link-local address for each VRRP for IPv6 group. Otherwise, when you attempt to commit the configuration, the commit request fails. The virtual link-local address must be on the same subnet as the physical interface address.

- Configure the priority for this routing platform to become the primary virtual router.

```
[edit interfaces interface-name unit logical-unit-number family inet6
address ipv6-address]
user@device# set vrrp-inet6-group group-id priority number
```

Configure the value used to elect the primary virtual router in the VRRP group. It can be a number from 1 through 255. The default value for backup routers is 100. A larger value indicates a higher priority. The routing platform with the highest priority within the group becomes the primary router. If there are two or more backup routers with the same priority, the router that has the highest primary address becomes the primary.

Release History Table

Release	Description
18.1R1	Primary router sends periodic VRRP advertisement messages to each virtual routers. The backup routers do not attempt to preempt the primary router unless it has higher priority. This eliminates service disruption unless a more preferred path becomes available. It is possible to administratively prohibit all preemption attempts, with the exception of a VRRP router becoming primary router of any virtual router associated with addresses it owns.
17.3R1	Starting in Junos OS release 17.3R1, if network-services is configured in IP mode, don't configure the same VRRP group ID for multiple VRRP sessions on the same physical interface unless VRRP delegation is disabled.
17.3R1	Starting in Junos OS release 17.3R1, if network-services is configured in enhanced-ip mode, you can use the same VRRP group ID for multiple VRRP sessions.
13.2	Starting in Junos OS Release 13.2, VRRP nonstop active routing (NSR) is enabled only when you configure the nonstop-routing statement at the [edit routing-options] or [edit logical system logical-system-name routing-options] hierarchy level.

RELATED DOCUMENTATION

[Configuring a Logical Interface to Be Tracked for a VRRP Group | 459](#)

[Configuring a Route to Be Tracked for a VRRP Group | 462](#)

[Junos OS Support for VRRPv3 | 414](#)

[Understanding VRRP | 405](#)

[Configuring the Startup Period for VRRP Operations | 452](#)

[Configuring VRRP Authentication \(IPv4 Only\) | 446](#)[Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)[Configuring VRRP | 431](#)

Configuring VRRP

Configure one primary (Router A) and one backup (Router B) routing platform. The address configured in the **virtual-address** statements differs from the addresses configured in the **address** statements. When you configure multiple VRRP groups on an interface, you configure one to be the primary virtual router for that group.

On Router A

```
[edit interfaces]
ge-0/0/0 {
  unit 0 {
    family inet {
      address 192.168.1.20/24 {
        vrrp-group 27 {
          virtual-address 192.168.1.15;
          priority 254;
          authentication-type simple;
          authentication-key booJUM;
        }
      }
    }
  }
}
```

On Router B

```
[edit interfaces]
ge-4/2/0 {
  unit 0 {
    family inet {
      address 192.168.1.24/24 {
        vrrp-group 27 {
          virtual-address 192.168.1.15;
          priority 200;
        }
      }
    }
  }
}
```



```

        authentication-type simple;
        authentication-key booJUM;
    }
}
}
}
}

```

Configuring One Router to Be the Primary Virtual Router for the Group

```

[edit interfaces]
ge-0/0/0 {
    unit 0 {
        family inet {
            address 192.168.1.20/24 {
                vrrp-group 2 {
                    virtual-address 192.168.1.20;
                    priority 255;
                    advertise-interval 3;
                    preempt;
                }
                vrrp-group 10 {
                    virtual-address 192.168.1.55;
                    priority 201;
                    advertise-interval 3;
                }
                vrrp-group 1 {
                    virtual-address 192.168.1.54;
                    priority 22;
                    advertise-interval 4;
                }
            }
        }
    }
}

```

Configuring VRRP and MAC Source Address Filtering

The VRRP group number is the decimal equivalent of the last byte of the virtual MAC address.

```

[edit interfaces]
ge-5/2/0 {

```

```

gigether-options {
    source-filtering;
    source-address-filter {
        00:00:5e:00:01:0a; # Virtual MAC address
    }
}
unit 0 {
    family inet {
        address 192.168.1.10/24 {
            vrrp-group 10; # VRRP group number
            virtual-address 192.168.1.10;
            priority 255;
            preempt;
        }
    }
}

```

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

Example: Configuring VRRP for IPv6

[Configuring VRRP Route Tracking | 457](#)

VRRP and VRRP for IPv6 Overview

You can configure the Virtual Router Redundancy Protocol (VRRP) and VRRP for IPv6 for the following interfaces:

- Ethernet
- Fast Ethernet
- Tri-Rate Ethernet copper
- Gigabit Ethernet
- 10-Gigabit Ethernet LAN/WAN PIC
- Ethernet logical interfaces

VRRP and VRRP for IPv6 allow hosts on a LAN to make use of redundant routers on that LAN without requiring more than the static configuration of a single default route on the hosts. The VRRP routers share the IP address corresponding to the default route configured on the hosts. At any time, one of the VRRP routers is the primary (active) and the others are backups. If the primary fails, one of the backup routers becomes the new primary router, thus always providing a virtual default router and allowing traffic on the LAN to be routed without relying on a single router.

VRRP is defined in RFC 3768, *Virtual Router Redundancy Protocol*.

For VRRP and VRRP for IPv6 overview information, configuration guidelines, and statement summaries, see the [Junos OS High Availability User Guide](#).

RELATED DOCUMENTATION

[Configuring VRRP and VRRP for IPv6 | 434](#)

[Ethernet Interfaces User Guide for Routing Devices](#)

Configuring VRRP and VRRP for IPv6

To configure VRRP or VRRP for IPv6, include the **vrrp-group** or **vrrp-inet6-group** statement, respectively. These statements are available at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet address *address*]

The VRRP and VRRP IPv6 configuration statements are as follows:

```
(vrrp-group | vrrp-inet-group) group-number {
    (accept-data | no-accept-data);
    advertise-interval seconds;
    authentication-key key;
    authentication-type authentication;
    fast-interval milliseconds;
    (preempt | no-preempt) {
        hold-time seconds;
    }
    priority-number number;
    track {
        priority-hold-time;
```

```

        interface interface-name {
            priority-cost priority;
            bandwidth-threshold bits-per-second {
                priority-cost;
            }
        }
    }
    virtual-address [ addresses ];
}

```

You can configure VRRP IPv6 with a global unicast address.

To trace VRRP and VRRP for IPv6 operations, include the **traceoptions** statement at the **[edit protocols vrrp]** hierarchy level:

```

[edit protocols vrrp]
traceoptions {
    file <filename> <files number> <match regular-expression> <microsecond-stamp>
    <size size> <world-readable | no-world-readable>;
    flag flag;
    no-remote-trace;
}

```

When there are multiple VRRP groups, there is a few seconds delay between the time the first gratuitous ARP is sent out and the rest of the gratuitous ARP are sent. Configuring failover-delay compensates for this delay. To configure the failover delay from 500 to 2000 milliseconds for VRRP and VRRP for IPv6 operations, include the **failover-delay *milliseconds*** statement at the **[edit protocols vrrp]** hierarchy level:

```

[edit protocols vrrp]
failover-delay milliseconds;

```

To configure the startup period for VRRP and VRRP for IPv6 operations, include the **startup-silent-period** statement at the **[edit protocols vrrp]** hierarchy level:

```

[edit protocols vrrp]
startup-silent-period seconds;

```

To enable VRRPv3, set the **version-3** statement at the **[edit protocols vrrp]** hierarchy level:

```
[edit protocols vrrp]
version-3;
```

RELATED DOCUMENTATION

[failover-delay | 855](#)

traceoptions

[failover-delay | 855](#)

[vrrp-group | 899](#)

[VRRP and VRRP for IPv6 Overview | 433](#)

[Ethernet Interfaces User Guide for Routing Devices](#)

Configuring VRRP for IPv6 (CLI Procedure)

By configuring the Virtual Router Redundancy Protocol (VRRP) on EX Series switches, you can enable hosts on a LAN to make use of redundant routing platforms on that LAN without requiring more than the static configuration of a single default route on the hosts. You can configure VRRP for IPv6 on Gigabit Ethernet, 10-Gigabit Ethernet, and logical interfaces.

To configure VRRP for IPv6:

1. Configure VRRP group support on interfaces:

```
[edit interfaces interface-name unit logical-unit-number family inet6 address
address]

user@switch# set vrrp-inet6-group group-id priority number virtual-inet6-address address virtual-link-
local-address ipv6-address
```

You must explicitly define a virtual link local address for each VRRP for IPv6 group. Otherwise, when you attempt to commit the configuration, the commit request fails. The virtual link local address must be on the same subnet as the physical interface address.

2. If you want to configure the priority order in which this switch functioning as a backup router becomes the primary router if the primary router becomes nonoperational, configure a priority for this switch:

```
[edit interfaces interface-name unit logical-unit-number family inet6 address
address vrrp-inet6-group group-id]
```

```
user@switch# set priority number
```

3. Specify the interval in milliseconds in which the primary router sends advertisement packets to the members of the VRRP group:

```
[edit interfaces interface-name unit logical-unit-number family inet6 address
address vrrp-inet6-group group-id]
```

```
user@switch# set inet6-advertise-interval milliseconds
```

4. By default, a higher-priority backup router preempts a lower-priority primary router.

- To explicitly enable the primary router to be preempted:

```
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id]
```

```
user@switch# set preempt
```

- To prohibit a higher-priority backup router from preempting a lower priority primary router:

```
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id]
```

```
user@switch# set no-preempt
```

RELATED DOCUMENTATION

[show vrrp](#)

[Understanding VRRP | 405](#)

Example: Configuring VRRP for IPv6

IN THIS SECTION

- [Requirements | 438](#)
- [Overview | 438](#)
- [Configuring VRRP | 438](#)
- [Verification | 445](#)

This example shows how to configure VRRP properties for IPv6 in one primary (Router A) and one backup (Router B).

Requirements

This example uses the following hardware and software components:

- Two routers
- Junos OS Release 11.3 or later
- Junos OS Release 18.1 R1 or later for SRX Series Services Gateways.
- Static routing or a dynamic routing protocol enabled on both routers.

Overview

This example uses a VRRP group, which has its own virtual IPv6 address. Devices on the LAN use this virtual IPv6 address as their default gateway. If the primary router fails, the backup router takes over for it.

Configuring VRRP

IN THIS SECTION

- [Configuring Router A | 439](#)
- [Configuring Router B | 442](#)

Configuring Router A

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::5:0:0:6/64
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64 vrrp-inet6-group 3 virtual-inet6-
address 2001:db8::6:0:0:7
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64 vrrp-inet6-group 3 virtual-link-
local-address 2001:db8::5:0:0:7
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64 vrrp-inet6-group 3 priority 200
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64 vrrp-inet6-group 3 preempt
set protocols router-advertisement interface ge-1/0/0.0 prefix 2001:db8::/64
set protocols router-advertisement interface ge-1/0/0.0 max-advertisement-interval 4
set protocols router-advertisement interface ge-1/0/0.0 virtual-router-only
```

Step-by-Step Procedure

To configure this example:

1. Configure the interfaces.

```
[edit interfaces]
user@hostA# set ge-1/0/0 unit 0 family inet6 address 2001:db8::5:0:0:6/64
user@hostA# set ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64
```

2. Configure the IPv6 VRRP group identifier.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64]
user@hostA# set vrrp-inet6-group 3
```


3. Configure the virtual IP address of a virtual router that is a member of the VRRP group.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64]
user@hostA# set vrrp-inet6-group 3 virtual-inet6-address 2001:db8::6:0:0:7
```

4. Configure the virtual link-local address.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64]
user@hostA# set vrrp-inet6-group 3 virtual-link-local-address 2001:db8::5:0:0:7
```

5. Configure the priority for this routing platform to become the primary virtual router.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64]
user@hostA# set vrrp-inet6-group 3 priority 200
```

6. By default, a higher-priority backup router preempts a lower-priority primary router. To explicitly enable the primary router to be preempted, include the **preempt** statement.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:6/64]
user@hostA# set vrrp-inet6-group 3 preempt
```

7. For VRRP for IPv6, you must configure the interface on which VRRP is configured to send IPv6 router advertisements for the VRRP group. When an interface receives an IPv6 router solicitation message, it sends an IPv6 router advertisement to all VRRP groups configured on it.

```
[edit protocols router-advertisement interface ge-1/0/0.0]
user@hostA# set prefix 2001:db8::/64
user@hostA# set max-advertisement-interval 4
```

8. Configure router advertisements to be sent only for VRRP IPv6 groups configured on the interface if the groups are in the primary state.

```
[edit protocols router-advertisement interface ge-1/0/0.0]
user@hostA# set virtual-router-only
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols router-advertisement** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@hostA# show interfaces
ge-1/0/0 {
  unit 0 {
    family inet6 {
      address 2001:db8::5:0:0:6/64;
      address 2001:db8::6:0:0:6/64 {
        vrrp-inet6-group 3;
        vrrp-inet6-group 3 virtual-inet6-address
2001:db8::6:0:0:7;
        vrrp-inet6-group 3 virtual-link-local-address
2001:db8::5:0:0:7;
        vrrp-inet6-group 3 priority 200;
        vrrp-inet6-group 3 preempt;
      }
    }
  }
}
```

```
[edit]
user@hostA# show protocols router-advertisement
interface ge-1/0/0.0 {
  prefix 2001:db8::/64;
  max-advertisement-interval 4;
  virtual-router-only;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Configuring Router B

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

```
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::5:0:0:8/64
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64 vrrp-inet6-group 3 virtual-inet6-address 2001:db8::6:0:0:7
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64 vrrp-inet6-group 3 virtual-link-local-address 2001:db8::5:0:0:7
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64 vrrp-inet6-group 3 priority 100
set interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64 vrrp-inet6-group 3 preempt
set protocols router-advertisement interface ge-1/0/0.0 prefix 2001:db8::/64
set protocols router-advertisement interface ge-1/0/0.0 max-advertisement-interval 4
set protocols router-advertisement interface ge-1/0/0.0 virtual-router-only
```

Step-by-Step Procedure

To configure this example:

1. Configure the interfaces.

```
[edit interfaces]
user@hostB# set ge-1/0/0 unit 0 family inet6 address 2001:db8::5:0:0:8/64
user@hostB# set ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64
```

2. Configure the IPv6 VRRP group identifier.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64]
user@hostB# set vrrp-inet6-group 3
```

3. Configure the virtual IP address of a virtual router that is a member of the VRRP group.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64]
user@hostB# set vrrp-inet6-group 3 virtual-inet6-address 2001:db8::6:0:0:7
```

4. Configure the virtual link-local address.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64]
user@hostB# set vrrp-inet6-group 3 virtual-link-local-address 2001:db8::5:0:0:7
```

5. Configure the priority for this routing platform to become the primary virtual router.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64]
user@hostB# set vrrp-inet6-group 3 priority 100
```

6. By default, a higher-priority backup router preempts a lower-priority primary router. To explicitly enable the primary router to be preempted, include the **preempt** statement.

```
[edit interfaces ge-1/0/0 unit 0 family inet6 address 2001:db8::6:0:0:8/64]
user@hostB# set vrrp-inet6-group 3 preempt
```

7. Configure the interface on which VRRP is configured to send IPv6 router advertisements for the VRRP group. When an interface receives an IPv6 router solicitation message, it sends an IPv6 router advertisement to all VRRP groups configured on it.

```
[edit protocols router-advertisement interface ge-1/0/0.0]
user@hostB# set prefix 2001:db8::/64
user@hostB# set max-advertisement-interval 4
```

8. Configure router advertisements to be sent only for VRRP IPv6 groups configured on the interface if the groups are in the primary state.

```
[edit protocols router-advertisement interface ge-1/0/0.0]
user@hostB# set virtual-router-only
```

Results

From configuration mode, confirm your configuration by entering the **show interfaces** and **show protocols router-advertisement** commands. If the output does not display the intended configuration, repeat the instructions in this example to correct the configuration.

```
[edit]
user@hostB# show interfaces
ge-1/0/0 {
    unit 0 {
        family inet6 {
            address 2001:db8::5:0:0:8/64;
            address 2001:db8::6:0:0:8/64
        }
        vrrp-inet6-group 3;
        vrrp-inet6-group 3 virtual-inet6-address
2001:db8::6:0:0:7;
        vrrp-inet6-group 3 virtual-link-local-address
2001:db8::5:0:0:7;
        vrrp-inet6-group 3 priority
100;
        vrrp-inet6-group 3
preempt;
    }
}
```

```
[edit]
user@hostB# show protocols router-advertisement
interface ge-1/0/0.0 {
    prefix 2001:db8::/64;
    max-advertisement-interval
4;
    virtual-router-only;
}
```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

IN THIS SECTION

- [Verifying that VRRP Is Working on Router A | 445](#)
- [Verifying that VRRP Is Working on Router B | 446](#)

Verifying that VRRP Is Working on Router A

Purpose

Verify that VRRP is active on Router A and that its role in the VRRP group is correct.

Action

Use the following command to verify that VRRP is active on Router A and that the router is primary for group 3.

```
user@hostA> show vrrp
```

Interface	State	Group	VR state	Timer	Type
Address					
ge-1/0/0.0	up	3		master	A .0327
lcl	2001:db8::6:0:0:6/64				
				vip	2001:db8::6:0:0:7

Meaning

The **show vrrp** command displays fundamental information about the VRRP configuration. This output shows that the VRRP group is active and that this router has assumed the primary role. The **lcl** address is the physical address of the interface and the **vip** address is the virtual address shared by both routers. The **Timer** value (**A .0327**) indicates the remaining time (in seconds) in which this router expects to receive a VRRP advertisement from the other router.

Verifying that VRRP Is Working on Router B

Purpose

Verify that VRRP is active on Router B and that its role in the VRRP group is correct.

Action

Use the following command to verify that VRRP is active on Router B and that the router is backup for group 3.

```
user@hostB> show vrrp
```

Interface	State	Group	VR state	Timer	Type
Address				ge-1/0/0.0	up 3
backup	A .0327	1c1	2001:db8::6:0:0:8/64	vip 2001:db8::6:0:0:7	

Meaning

The **show vrrp** command displays fundamental information about the VRRP configuration. This output shows that the VRRP group is active and that this router has assumed the backup role. The **lcl** address is the physical address of the interface and the **vip** address is the virtual address shared by both routers. The **Timer** value (**A .0327**) indicates the remaining time (in seconds) in which this router expects to receive a VRRP advertisement from the other router.

RELATED DOCUMENTATION

- [Understanding VRRP](#)
- [Configuring VRRP](#)
- [Configuring VRRP Route Tracking](#)

Configuring VRRP Authentication (IPv4 Only)

VRRP (IPv4 only) protocol exchanges can be authenticated to guarantee that only trusted routing platforms participate in routing in an autonomous system (AS). By default, VRRP authentication is

disabled. You can configure one of the following authentication methods. Each VRRP group must use the same method.

- Simple authentication—Uses a text password included in the transmitted packet. The receiving routing platform uses an authentication key (password) to verify the packet.
- Message Digest 5 (MD5) algorithm—Creates the authentication data field in the IP authentication header. This header is used to encapsulate the VRRP PDU. The receiving routing platform uses an authentication key (password) to verify the authenticity of the IP authentication header and VRRP PDU.

To enable authentication and specify an authentication method, include the **authentication-type** statement:

```
authentication-type authentication;
```

authentication can be **simple** or **md5**. The authentication type must be the same for all routing platforms in the VRRP group.

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]

If you include the **authentication-type** statement, you can configure a key (password) on each interface by including the **authentication-key** statement:

```
authentication-key key;
```

key (the password) is an ASCII string. For simple authentication, it can be from 1 through 8 characters long. For MD5 authentication, it can be from 1 through 16 characters long. If you include spaces, enclose all characters in quotation marks (" "). The key must be the same for all routing platforms in the VRRP group.

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]

NOTE: When VRRPv3 is enabled, the **authentication-type** and **authentication-key** statements cannot be configured for any VRRP groups. Therefore, if authentication is required, you need to configure alternative non-VRRP authentication mechanisms.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Junos OS Support for VRRPv3 | 414](#)

[Configuring Basic VRRP Support | 425](#)

[Configuring VRRP | 431](#)

Configuring VRRP Preemption and Hold Time

IN THIS SECTION

- [Configuring VRRP Preemption | 448](#)
- [Configuring the Preemption Hold Time | 449](#)

Configuring VRRP Preemption

By default, a higher-priority VRRP backup switch preempts a lower-priority primary switch. To explicitly enable this behavior, include the following statement:

```
preempt;
```

To prohibit a higher-priority VRRP backup switch from preempting a lower-priority primary switch, include the following statement on the lower-priority switch:

```
no-preempt;
```

You can include these statements at the following hierarchy level:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]

Configuring the Preemption Hold Time

You can also configure a preemption hold time, which is the number of seconds a higher-priority backup router that has just started up waits before preempting the primary router. You might want to configure a hold time so that routing protocols or other Junos OS components converge before preemption occurs.

The hold time is applied only on startup. By default, the hold-time value is 0 seconds, meaning that preemption can occur immediately after the backup router starts up.

To modify the preemption hold-time value, configure the following statement:

```
hold-time seconds;
```

The hold time can be from 0 through 3600 seconds.

You can include this statement at the following hierarchy level:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet *address* vrrp-group *group-id*]
preempt

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring Basic VRRP Support | 425](#)

[Example: Configuring VRRP for Load Sharing | 484](#)

[asymmetric-hold-time | 845](#)

Configuring the Advertisement Interval for the VRRP Primary Router

IN THIS SECTION

- [Modifying the Advertisement Interval in Seconds | 450](#)
- [Modifying the Advertisement Interval in Milliseconds | 451](#)

By default, the primary router sends VRRP advertisement packets every second to all members of the VRRP group. These packets indicate that the primary router is still operational. If the primary router fails or becomes unreachable, the backup router with the highest priority value becomes the new primary router.

You can modify the advertisement interval in seconds or in milliseconds. The interval must be the same for all routing platforms in the VRRP group.

For VRRP for IPv6, you must configure IPv6 router advertisements for the interface on which VRRP is configured to send IPv6 router advertisements for the VRRP group. To do so, include the **interface *interface-name*** statement at the **[edit protocols router-advertisement]** hierarchy level. (For information about this statement and guidelines, see the [Junos OS Routing Protocols Library for Routing Devices](#).) When an interface receives an IPv6 router solicitation message, it sends an IPv6 router advertisement to all VRRP groups configured on it. In the case of logical systems, IPv6 router advertisements are not sent to VRRP groups.

NOTE: The primary VRRP for an IPv6 router must respond to a router solicitation message with the virtual IP address of the router. However, when the **interface *interface-name*** statement is included at the **[edit protocols router-advertisement]** hierarchy level, the backup VRRP for an IPv6 router might send a response before the VRRP primary responds, so that the default route of the client is not set to the primary VRRP router's virtual IP address. To avoid this situation, include the **virtual-router-only** statement at the **[edit protocols router-advertisement interface *interface-name*]** hierarchy level. When this statement is included, router advertisements are sent only for VRRP IPv6 groups configured on the interface (if the groups are in the primary state). You must include this statement on both the primary and backup VRRP for IPv6 routers.

NOTE: In an EVPN network, including the **virtual-router-only** statement at the **[edit protocols router-advertisement interface *interface-name*]** hierarchy level restricts the router advertisements to be sent only for the link local virtual-gateway-address.

This topic contains the following sections:

Modifying the Advertisement Interval in Seconds

To modify the time, in seconds, between the sending of VRRP advertisement packets, include the **advertise-interval** statement:

```
advertise-interval seconds;
```

The interval can be from 1 through 255 seconds.

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]

NOTE: When VRRPv3 is enabled, the **advertise-interval** statement cannot be used to configure advertisement intervals. Instead, use the **fast-interval** statement to configure advertisement intervals.

Modifying the Advertisement Interval in Milliseconds

To modify the time, in milliseconds, between the sending of VRRP advertisement packets, include the **fast-interval** statement:

```
fast-interval milliseconds;
```

The interval can be from 10 through 40,950 milliseconds.

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id*]

NOTE: In the VRRP PDU, Junos OS sets the advertisement interval to 0. When you configure VRRP with other vendors' routers, the **fast-interval** statement works correctly only when the other routers also have an advertisement interval set to 0 in the VRRP PDUs. Otherwise, Junos OS interprets other routers' settings as advertisement timer errors.

To modify the time, in milliseconds, between the sending of VRRP for IPv6 advertisement packets, include the **inet6-advertise-interval** statement:

```
inet6-advertise-interval ms;
```

The range of values is from 100 through 40,950 milliseconds (ms).

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet6 address *address* vrrp-inet6-group *group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet6 address *address* vrrp-inet6-group *group-id*]

NOTE: When VRRPv3 is enabled, the **inet6-advertise-interval** statement cannot be used to configure advertisement intervals. Instead, use the **fast-interval** statement to configure advertisement intervals.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Junos OS Support for VRRPv3 | 414](#)

[Configuring Basic VRRP Support | 425](#)

[Configuring a Backup Router to Preempt the VRRP Primary Router | 453](#)

[Modifying the Preemption Hold-Time Value for the VRRP Primary Router | 455](#)

[Configuring the Asymmetric Hold Time for VRRP Routers | 456](#)

[Configuring the Silent Period to Avoid Alarms Due to Delay in Receiving VRRP Advertisement Packets | 477](#)

[Configuring VRRP | 431](#)

Configuring the Startup Period for VRRP Operations

To configure the startup period for VRRP operations, include the **startup-silent-period** statement at the [edit protocols vrrp] hierarchy level:

```
[edit protocols vrrp]
startup-silent-period seconds;
```

NOTE: During the silent startup period, the **show vrrp detail** command output shows a value of 0 for **Master priority**, and your own IP address for **Master router**. These values indicate that the Primary selection is not completed yet, and these values can be ignored.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring Basic VRRP Support | 425](#)

[Configuring VRRP Authentication \(IPv4 Only\) | 446](#)

[Configuring VRRP | 431](#)

Configuring a Backup Router to Preempt the VRRP Primary Router

By default, a higher-priority backup router preempts a lower-priority primary router. To explicitly enable the primary router to be preempted, include the **preempt** statement:

```
preempt;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id*]

To prohibit a higher-priority backup router from preempting a lower-priority primary router, include the **no-preempt** statement:

```
no-preempt;
```

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)

[Modifying the Preemption Hold-Time Value for the VRRP Primary Router | 455](#)

[Configuring the Asymmetric Hold Time for VRRP Routers | 456](#)

[Configuring VRRP | 431](#)

Configuring a Backup to Accept Packets Destined for the Virtual IP Address

By default, a switch configured to be a VRRP backup but acting as the primary does not process packets sent to the virtual IP address—that is, packets in which the destination address is the virtual IP address. To configure a backup switch to process packets sent to the virtual IP address while it is acting as the primary, include the **accept-data** statement on the backup:

```
accept-data;
```

You can include this statement at the following hierarchy level:

- **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]**

To explicitly prohibit the backup from accepting packets destined for the virtual IP address while acting as primary, include the **no-accept-data** statement:

```
no-accept-data;
```

If you include the **accept-data** statement, configure the connected hosts so that they:

- Process gratuitous ARP requests.
- Do not use packets other than ARP replies to update their ARP cache.

This statement is disabled by default. If you enable it, your configuration does not comply with RFC 3768.

To restrict incoming IP packets to ICMP only, you must configure firewall filters to accept only ICMP packets.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring Basic VRRP Support | 425](#)

[Example: Configuring VRRP for Load Sharing | 484](#)

Modifying the Preemption Hold-Time Value for the VRRP Primary Router

The hold time is the maximum number of seconds that can elapse before a higher-priority backup router preempts the primary router. You might want to configure a hold time so that all Junos OS components converge before preemption.

By default, the hold-time value is 0 seconds. A value of 0 means that preemption can occur immediately after the backup router comes online. Note that the hold time is counted from the time the backup router comes online. The hold time is only valid when the VRRP router is just coming online.

To modify the preemption hold-time value, include the **hold-time** statement:

```
hold-time seconds;
```

The hold time can be from 0 through 3600 seconds.

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id* preempt]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id* preempt]

RELATED DOCUMENTATION

[Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)

[Configuring a Backup Router to Preempt the VRRP Primary Router | 453](#)

[Configuring the Asymmetric Hold Time for VRRP Routers | 456](#)

[Configuring VRRP | 431](#)

Configuring the Asymmetric Hold Time for VRRP Routers

In Junos OS Release 9.5 and later, the `asymmetric-hold-time` statement at the `[edit protocols vrrp]` hierarchy level enables you to configure a VRRP primary router to switch over to the backup router immediately—that is, without waiting for the priority hold time to expire—when a tracked interface or route goes down or when the bandwidth of a tracked interface decreases. Such events can cause an immediate reduction in the priority based on the configured priority cost for the event, and trigger a primary-role election.

However, when the tracked route or interface comes up again, or when the bandwidth for a tracked interface increases, the backup (original primary) router waits for the hold time to expire before it updates the priority and initiates the switchover if the priority is higher than the priority for the VRRP primary (original backup) router.

If the `asymmetric-hold-time` statement is not configured, the VRRP primary waits for the hold time to expire before it initiates a switchover when a tracked route goes down or when the bandwidth of a tracked interface decreases.

Example: Configuring Asymmetric Hold Time

```
[edit]
user@host# set protocols vrrp asymmetric-hold-time
[edit]
user@host# show protocols vrrp
asymmetric-hold-time;
```

RELATED DOCUMENTATION

[Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)

[Configuring a Backup Router to Preempt the VRRP Primary Router | 453](#)

[Modifying the Preemption Hold-Time Value for the VRRP Primary Router | 455](#)

[Configuring VRRP | 431](#)

Configuring Passive ARP Learning for Backup VRRP Routers

By default, the backup VRRP router drops ARP requests for the VRRP-IP to VRRP-MAC address translation. This means that the backup router does not learn the ARP (IP-to-MAC address) mappings for the hosts sending the requests. When it detects a failure of the primary router and transitions to

become the new primary router, the backup router must re-learn all the entries that were present in the ARP cache of the primary router. In environments with many directly attached hosts, such as metro Ethernet environments, the number of ARP entries to learn can be high. This can cause a significant transition delay, during which the traffic transmitted to some of the hosts might be dropped.

Passive ARP learning enables the ARP cache in the backup router to hold approximately the same contents as the ARP cache in the primary router, thus preventing the problem of learning ARP entries in a burst. To enable passive ARP learning, include the **passive-learning** statement at the **[edit system arp]** hierarchy level:

```
[edit system arp]
passive-learning;
```

We recommend setting passive learning on both the backup and primary VRRP routers. Doing so prevents the need to manually intervene when the primary router becomes the backup router. While a router is operating as the primary router, the passive learning configuration has no operational impact. The configuration takes effect only when the router is operating as a backup router.

For information about configuring gratuitous ARP and the ARP aging timer, see the [Junos OS Administration Library for Routing Devices](#).

RELATED DOCUMENTATION

| [Understanding VRRP](#) | 405

Configuring VRRP Route Tracking

Configure Routers R1 and R2 to run VRRP. Configure static routes and a policy for exporting the static routes on Router R3. The VRRP routing instances on R2 track the routes that are advertised by R3.

On Router R1

```
[edit interfaces]
ge-1/0/3 {
  unit 0 {
    vlan-id 1;
    family inet {
      address 200.100.50.2/24 {
        vrrp-group 0 {
```

```

        virtual-address 200.100.50.101;
        priority 195;
    }
}
}
}
}

```

On Router R2

```

[edit interfaces]
ge-1/0/1 {
    unit 0 {
        vlan-id 1;
        family inet {
            address 200.100.50.1/24 {
                vrrp-group 0 {
                    virtual-address 200.100.50.101;
                    priority 200;
                    track {
                        route 59.0.58.153/32 routing-instance default priority-
cost 5;
                        route 59.0.58.154/32 routing-instance default priority-
cost 5;
                        route 59.0.58.155/32 routing-instance default priority-
cost 5;
                    }
                }
            }
        }
    }
}

```

On Router R3

```

[edit]
policy-options {
    policy-statement static-policy {
        term term1 {
            then accept;
        }
    }
}

```

```

    }
}
protocols {
    ospf {
        export static-policy;
        reference-bandwidth 4g;
        area 0.0.0.0 {
            interface all;
            interface fxp0.0 {
                disable;
            }
        }
    }
}
routing-options {
    static {
        route 59.0.0.153/32 next-hop 45.45.45.46;
        route 59.0.0.154/32 next-hop 45.45.45.46;
        route 59.0.0.155/32 next-hop 45.45.45.46;
    }
}
}

```

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring a Route to Be Tracked for a VRRP Group | 462](#)

[Configuring VRRP | 431](#)

Example: Configuring VRRP for IPv6

Configuring a Logical Interface to Be Tracked for a VRRP Group

VRRP can track whether a logical interface is up, down, or not present, and can also dynamically change the priority of the VRRP group based on the state of the tracked logical interface, triggering a new primary router election. VRRP can also track the operational speed of a logical interface and dynamically update the priority of the VRRP group when the speed crosses a configured threshold.

When interface tracking is enabled, you cannot configure a priority of 255 (a priority of 255 designates the primary router). For each VRRP group, you can track up to 10 logical interfaces.

To configure a logical interface to be tracked, include the following statements:

```
track {
    interface interface-name {
        bandwidth-threshold bits-per-second priority-cost priority;
        priority-cost priority;
    }
    priority-hold-time seconds;
}
```

```
interface et-0/0/0 {
    priority-cost 30;
}
```

You can include these statements at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* *vrrp-group group-id*]
- [edit interfaces *interface-name* unit *logical-unit-number* family inet6 address *address* *vrrp-inet6-group group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet address *address* *vrrp-group group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet6 address *address* *vrrp-inet6-group group-id*]

The interface specified is the interface to be tracked for the VRRP group. The priority hold time is the minimum length of time that must elapse between dynamic priority changes. A tracking event, such as an interface state change (up or down) or a change in bandwidth, triggers one of the following responses:

- The first tracking event initiates the priority hold timer, and also initializes the pending priority based on the current priority and the priority cost. However, the current priority remains unchanged.
- A tracking event or a manual configuration change that occurs while the priority hold timer is on triggers a pending priority update. However, the current priority remains unchanged.

This ensures that Junos OS does not initiate primary role elections every time a tracked interface flaps.

When the priority hold time expires, the current priority inherits the value from the pending priority, and the pending priority ceases.

NOTE: If you have configured **asymmetric-hold-time**, VRRP does not wait for the priority hold time to expire before initiating primary role elections if a tracked interface fails (state changes from **up** to **down**), or if the available bandwidth for a tracked interface decreases. For more information about **asymmetric-hold-time**, see ["Configuring the Asymmetric Hold Time for VRRP Routers" on page 456](#).

There are two **priority-cost** statements that show at this hierarchy level. The **bandwidth-threshold** statement specifies a threshold for the tracked interface. When the bandwidth of the tracked interface drops below the configured bandwidth threshold value, the VRRP group uses the bandwidth threshold priority cost. You can track up to five bandwidth threshold statements for each tracked interface. Just under the **interface** statement there is a **priority-cost** statement that gives the value to subtract from priority when the interface is down.

The sum of the priority costs for all tracked logical interfaces must be less than or equal to the configured priority of the VRRP group. If you are tracking more than one interface, the router applies the sum of the priority costs for the tracked interfaces (at most, only one priority cost for each tracked interface) to the VRRP group priority.

Prior to Junos OS Release 15.1, an adjusted priority could not be zero. If the difference between the priority costs and the configured priority of the VRRP group was zero, the adjusted priority would become 1.

NOTE: In Junos OS Release 15.1 and later, an adjusted priority can be zero.

The priority value zero (0) indicates that the current primary router has stopped participating in VRRP. Such a priority value is used to trigger one of the backup routers to quickly transition to the primary router without having to wait for the current primary to time out.

If you are tracking more than one interface, the router applies the sum of the priority costs for the tracked interfaces (at most, only one priority cost for each tracked interface) to the VRRP group priority. However, the interface priority cost and bandwidth threshold priority cost values for each VRRP group are not cumulative. The router uses only one priority cost to a tracked interface as indicated in [Table 16 on page 462](#).

Table 16: Interface State and Priority Cost Usage

Tracked Interface State	Priority Cost Usage
Down	priority-cost <i>priority</i>
Not down; media speed below one or more bandwidth thresholds	Priority cost of the lowest applicable bandwidth threshold

You must configure an interface priority cost only if you have configured no bandwidth thresholds. If you have not configured an interface priority cost value, and the interface is down, the interface uses the bandwidth threshold priority cost value of the lowest bandwidth threshold.

Release History Table

Release	Description
15.1	In Junos OS Release 15.1 and later, an adjusted priority can be zero.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring a Route to Be Tracked for a VRRP Group | 462](#)

[Configuring VRRP | 431](#)

Configuring a Route to Be Tracked for a VRRP Group

VRRP can track whether a route is reachable (that is, the route exists in the routing table of the routing instance included in the configuration) and dynamically change the priority of the VRRP group based on the reachability of the tracked route, triggering a new primary router election.

To configure a route to be tracked, include the following statements:

```
track {
  priority-hold-time seconds;
  route prefix/prefix-length routing-instance instance-name priority-cost
```

```
priority;
}
```

You can include these statements at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* *vrrp-group group-id*]
- [edit interfaces *interface-name* unit *logical-unit-number* family inet6 address *address* *vrrp-inet6-group group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet address *address* *vrrp-group group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family inet6 address *address* *vrrp-inet6-group group-id*]

The route prefix specified is the route to be tracked for the VRRP group. The priority hold time is the minimum length of time that must elapse between dynamic priority changes. A route tracking event, such as adding a route to or removing a route from the routing table, might trigger one or more of the following:

- The first tracking event initiates the priority hold timer, and also initializes the pending priority based on the current priority and the priority cost. However, the current priority remains unchanged.
- A tracking event or a manual configuration change that occurs while the priority hold timer is on triggers a pending priority update. However, the current priority remains unchanged.

When the priority hold time expires, the current priority inherits the value from the pending priority, and the pending priority ceases.

This ensures that Junos OS does not initiate primary role elections every time a tracked route flaps.

NOTE: If you have configured **asymmetric-hold-time**, VRRP does not wait for the priority hold time to expire before initiating primary role elections if a tracked route is removed from the routing table. For more information about **asymmetric-hold-time**, see ["Configuring the Asymmetric Hold Time for VRRP Routers" on page 456](#).

The routing instance is the routing instance in which the route is to be tracked. If the route is in the default, or global, routing instance, specify the instance name as **default**.

NOTE: Tracking a route that belongs to a routing instance from a different logical system is not supported.

The priority cost is the value to be subtracted from the configured VRRP priority when the tracked route goes down, forcing a new primary router election. The value can be from 1 through 254.

The sum of the priority costs for all tracked routes must be less than or equal to the configured priority of the VRRP group. If you are tracking more than one route, the router applies the sum of the priority costs for the tracked routes (at most, only one priority cost for each tracked route) to the VRRP group priority.

Prior to Junos OS Release 15.1, an adjusted priority could not be zero. If the difference between the priority costs and the configured priority of the VRRP group was zero, the adjusted priority would become 1.

NOTE: In Junos OS Release 15.1 and later, an adjusted priority can be zero.

The priority value zero (0) indicates that the current primary router has stopped participating in VRRP. Such a priority value is used to trigger one of the backup routers to quickly transition to the primary router without having to wait for the current primary to time out.

Release History Table

Release	Description
15.1	Prior to Junos OS Release 15.1, an adjusted priority could not be zero.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring a Logical Interface to Be Tracked for a VRRP Group | 459](#)

[Configuring VRRP Route Tracking | 457](#)

Example: Configuring Multiple VRRP Owner Groups

IN THIS SECTION

- [Requirements | 465](#)
- [Overview | 465](#)
- [Configuration | 465](#)
- [Verification | 474](#)

These examples show how to configure multiple virtual router redundancy protocol (VRRP) IPv4 and IPv6 owner groups.

Requirements

This example uses the following hardware and software components:

- A EX-Series, M-Series, MX-Series, or T-Series router.
- Junos OS release 12.3 or later

Overview

Multiple VRRP owner groups allows users to reuse interface address identifiers (IFAs) as virtual IP addresses (VIPs). You can configure multiple IPv4 owner groups, multiple IPv6 owner groups, or a mix of IPv4 and IPv6 owner groups.

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 466](#)
- [Configuring multiple IPv4 owner groups | 467](#)
- [Configuring multiple IPv6 owner groups | 468](#)
- [Configuring multiple IPv4 and IPv6 owner groups | 469](#)
- [Results | 471](#)

CLI Quick Configuration

To quickly configure this section of the example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, and then copy and paste the commands into the CLI at the **[edit]** hierarchy level.

Multiple IPv4 owner groups

```
edit interfaces ge-1/0/0 unit 0 family inet
set address 10.0.0.2/24 vrrp-group 2 virtual-address 10.0.0.4 accept-data
set address 20.0.0.2/24 vrrp-group 3 virtual-address 20.0.0.2 priority 255
set address 30.0.0.2/24 vrrp-group 4 virtual-address 30.0.0.2 priority 255
```

Multiple IPv6 owner groups

```
edit interfaces ge-1/0/0 unit 0 family inet6
set address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-inet6-address 2001:4818:f000:20::1
set address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-link-local-address fe80:4818:f000:20::1
set address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 priority 255
set address fe80:4818:f000:13::2/64
set address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-inet6-address 2001:1000:f000:20::1
set address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-link-local-address fe80:1000:f000:20::1
set address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 priority 255
set address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-inet6-address 2001:2000:f000:20::2
set address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-link-local-address fe80:2000:f000:20::2
set address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 priority 250
```

Multiple IPv4 and IPv6 owner groups

```
edit interfaces ge-1/0/0 unit 0
set family inet address 10.0.0.1/24 vrrp-group 5 virtual-address 10.0.0.1
set family inet address 10.0.0.1/24 vrrp-group 5 priority 255
set family inet6 address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-inet6-address 2001:4818:f000:20::1
set family inet6 address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-link-local-address fe80:4818:f000:20::1
set family inet6 address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 priority 255
set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-inet6-address 2001:1000:f000:20::1
set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-link-local-address
```

```
fe80:1000:f000:20::1
set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 priority 255
set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-inet6-address
2001:2000:f000:20::2
set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-link-local-address
fe80:2000:f000:20::2
set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 priority 250
```

Configuring multiple IPv4 owner groups

Step-by-Step Procedure

To configure multiple IPv4 owner groups:

1. Create an IPv4 interface on the device

```
[edit]
user@host# edit interfaces ge-1/0/0 unit 0 family inet
```

2. Configure the first IPv4 owner group

```
[edit interfaces ge-1/0/0 unit 0 family inet]
user@host# set address 10.0.0.2/24 vrrp-group 2 virtual-address 10.0.0.4 accept-data
```

3. Configure the second IPv4 owner group

```
[edit interfaces ge-1/0/0 unit 0 family inet]
user@host# set address 20.0.0.2/24 vrrp-group 3 virtual-address 20.0.0.2 priority 255
```

4. Configure the third IPv4 owner group

```
[edit interfaces ge-1/0/0 unit 0 family inet]
user@host# set address 30.0.0.2/24 vrrp-group 4 virtual-address 30.0.0.2 priority 255
```

Configuring multiple IPv6 owner groups

Step-by-Step Procedure

To configure multiple IPv6 owner groups:

1. Create an IPv6 interface on the device

```
[edit]
user@host# edit interfaces ge-1/0/0 unit 0 family inet6
```

2. Configure the inet6 address for the first IPv6 owner group

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-inet6-address
2001:4818:f000:20::1
```

- 3.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-link-local-address
fe80:4818:f000:20::1
```

- 4.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 priority 255
```

- 5.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-inet6-
address 2001:1000:f000:20::1
```

- 6.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-link-local-
address fe80:1000:f000:20::1
```

7.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 priority 255
```

8.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-inet6-address 2001:2000:f000:20::2
```

9.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-link-local-address fe80:2000:f000:20::2
```

10.

```
[edit interfaces ge-1/0/0 unit 0 family inet6]
user@host# set address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 priority 250
```

Configuring multiple IPv4 and IPv6 owner groups

Step-by-Step Procedure

To configure multiple IPv4 and IPv6 owner groups:

1. Create an interface on the device

```
[edit]
user@host# edit interfaces ge-1/0/0 unit 0
```

2. Configure the family inet address and virtual address for the IPv4 owner group

```
[edit interfaces ge-1/0/0 unit 0]
user@host# set family inet address 10.0.0.1/24 vrrp-group 5 virtual-address 10.0.0.1
```

3. Set the priority of the IPv4 owner group to 255

```
[edit interfaces ge-1/0/0 unit 0]  
set family inet address 10.0.0.1/24 vrrp-group 5 priority 255
```

4. Configure the inet6 address for the first IPv6 owner group

```
[edit interfaces ge-1/0/0 unit 0]  
set family inet6 address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-inet6-address  
2001:4818:f000:20::1
```

5. Set the virtual link local address for the first IPv6 owner group

```
[edit interfaces ge-1/0/0 unit 0]  
set family inet6 address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 virtual-link-local-address  
fe80:4818:f000:20::1
```

6. Set the first IPv6 owner group's priority to 255

```
[edit interfaces ge-1/0/0 unit 0]  
set family inet6 address 2001:4818:f000:20::1/64 vrrp-inet6-group 1 priority 255
```

7. Configure the inet6 address for the second IPv6 owner group

```
[edit interfaces ge-1/0/0 unit 0]  
set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-inet6-address  
2001:1000:f000:20::1
```

8. Set the virtual link local address for the second IPv6 owner group

```
[edit interfaces ge-1/0/0 unit 0]  
set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 virtual-link-local-address  
fe80:1000:f000:20::1
```

9. Set the second IPv6 owner group's priority to 255

```
[edit interfaces ge-1/0/0 unit 0]
set family inet6 address 2001:1000:f000:20::1/64 vrrp-inet6-group 2 priority 255
```

10. Configure the inet6 address for the third IPv6 owner group

```
[edit interfaces ge-1/0/0 unit 0]
set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-inet6-address
2001:2000:f000:20::2
```

11. Set the virtual link local address for the third IPv6 owner group

```
[edit interfaces ge-1/0/0 unit 0]
set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 virtual-link-local-address
fe80:2000:f000:20::2
```

12. Set the third IPv6 owner group's priority to 250

```
[edit interfaces ge-1/0/0 unit 0]
set family inet6 address 2001:2000:f000:20::1/64 vrrp-inet6-group 3 priority 250
```

Results

Multiple IPv4 owner groups

```
[edit interfaces]
ge-1/0/0
  unit 0 {
    family inet {
      address 10.0.0.2/24 {
        vrrp-group 2 {
          virtual-address 10.0.0.4;
          accept-data;
        }
      }
      address 20.0.0.2/24 {
```



```

        vrrp-group 3 {
            virtual-address 20.0.0.2;
            priority 255;
        }
    }
    address 30.0.0.2/24 {
        vrrp-group 4 {
            virtual-address 30.0.0.2;
            priority 255;
        }
    }
}

```

Multiple IPv6 owner groups

```

[edit interfaces]
ge-1/0/0
  unit 0 {
    family inet6 {
      address 2001:4818:f000:20::1/64 {
        vrrp-inet6-group 1 {
          virtual-inet6-address 2001:4818:f000:20::1;
          virtual-link-local-address fe80:4818:f000:20::1;
          priority 255;
        }
      }
      address fe80:4818:f000:13::2/64;
      address 2001:1000:f000:20::1/64 {
        vrrp-inet6-group 2 {
          virtual-inet6-address 2001:1000:f000:20::1;
          virtual-link-local-address fe80:1000:f000:20::1;
          priority 255;
        }
      }
      address 2001:2000:f000:20::1/64 {
        vrrp-inet6-group 3 {
          virtual-inet6-address 2001:2000:f000:20::2;
          virtual-link-local-address fe80:2000:f000:20::2;
          priority 250;
        }
      }
    }
  }

```

```

    }
}

```

Multiple IPv4 and IPv6 owner groups

```

[edit interfaces]
ge-1/0/0
  unit 0 {
    family inet {
      address 10.0.0.1/24 {
        vrrp-group 5 {
          virtual-address 10.0.0.1;
          priority 255;
        }
      }
    }
    family inet6 {
      address 2001:4818:f000:20::1/64 {
        vrrp-inet6-group 1 {
          virtual-inet6-address 2001:4818:f000:20::1;
          virtual-link-local-address fe80:4818:f000:20::1;
          priority 255;
        }
      }
      address 2001:1000:f000:20::1/64 {
        vrrp-inet6-group 2 {
          virtual-inet6-address 2001:1000:f000:20::1;
          virtual-link-local-address fe80:1000:f000:20::1;
          priority 255;
        }
      }
      address 2001:2000:f000:20::1/64 {
        vrrp-inet6-group 3 {
          virtual-inet6-address 2001:2000:f000:20::2;
          virtual-link-local-address fe80:2000:f000:20::2;
          priority 250;
        }
      }
    }
  }
}

```

Verification

To verify the configuration, run the **show interfaces ge-1/0/0** command, or use whichever name you assigned to the interface.

RELATED DOCUMENTATION

[Tracing VRRP Operations | 483](#)

[Configuring Inheritance for a VRRP Group | 474](#)

Configuring Inheritance for a VRRP Group

Junos OS enables you to configure VRRP groups on the various subnets of a VLAN to inherit the state and configuration of one of the groups, which is known as the *active VRRP group*. When the **vrrp-inherit-from** configuration statement is included in the configuration, only the active VRRP group, from which the other VRRP groups are inheriting the state, sends out frequent VRRP advertisements, and processes incoming VRRP advertisements. The groups that are inheriting the state do not process any incoming VRRP advertisement because the state is always inherited from the active VRRP group. However, the groups that are inheriting the state do send out VRRP advertisements once every 2 to 3 minutes to facilitate MAC address learning on the switches placed between the VRRP routers.

If the **vrrp-inherit-from** statement is not configured, each of the VRRP primary groups in the various subnets on the VLAN sends out separate VRRP advertisements and adds to the traffic on the VLAN.

To configure inheritance for a VRRP group, include the **vrrp-inherit-from** statement at the **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]** hierarchy level.

```
[edit interfaces interface-name unit logical-unit-number family inet address
address vrrp-group group-id]
vrrp-inherit-from vrrp-group;
```

When you configure a group to inherit a state from another group, the inheriting groups and the active group must be on the same physical interface and logical system. However, the groups do not need to necessarily be on the same routing instance (as was in Junos OS releases earlier than 9.6), VLAN, or logical interface.

When you include the **vrrp-inherit-from** statement for a VRRP group, the VRRP group inherits the following parameters from the active group:

- `advertise-interval`
- `authentication-key`
- `authentication-type`
- `fast-interval`
- `preempt | no-preempt`
- `priority`
- `track interfaces`
- `track route`

However, you can configure the **`accept-data | no-accept-data`** statement for the group to specify whether the interface should accept packets destined for the virtual IP address.

RELATED DOCUMENTATION

| [Understanding VRRP | 405](#)

Configuring an Interface to Accept All Packets Destined for the Virtual IP Address of a VRRP Group

In VRRP implementations where the router acting as the primary router is not the IP address owner—the IP address owner is the router that has the interface whose actual IP address is used as the virtual router's IP address (virtual IP address)—the primary router accepts only the ARP packets from the packets that are sent to the virtual IP address. Junos OS enables you to override this limitation with the help of the **`accept-data`** configuration. When the **`accept-data`** statement is included in the configuration, the primary router accepts all packets sent to the virtual IP address even when the primary router is not the IP address owner.

NOTE: If the primary router is the IP address owner or has its priority set to 255, the primary router, by default, accepts all packets addressed to the virtual IP address. In such cases, the **`accept-data`** configuration is not required.

To configure an interface to accept all packets sent to the virtual IP address, include the **accept-data** statement:

```
accept-data;
```

You can include this statement at the following hierarchy levels:

- [edit interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id*]
- [edit logical-systems *logical-system-name* interfaces *interface-name* unit *logical-unit-number* family (inet | inet6) address *address* (vrrp-group | vrrp-inet6-group) *group-id*]

To prevent a primary router that is the IP address owner or has its priority set to 255 from accepting packets other than the ARP packets addressed to the virtual IP address, include the **no-accept-data** statement:

```
no-accept-data;
```

NOTE:

- If you want to restrict the incoming IP packets to ICMP packets only, you must configure firewall filters to accept only ICMP packets.
- If you include the **accept-data** statement, your routing platform configuration does not comply with RFC 3768 (see section 6.4.3 of RFC 3768, *Virtual Router Redundancy Protocol (VRRP)*).

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring VRRP | 431](#)

Configuring the Silent Period to Avoid Alarms Due to Delay in Receiving VRRP Advertisement Packets

The silent period starts when the interface state is changed from down to up. During this period, the Primary Down Event is ignored. Configure the silent period interval to avoid alarms caused by the delay or interruption of the incoming VRRP advertisement packets during the interface startup phase.

To configure the silent period interval that the Primary Down Event timer ignores, include the **startup-silent-period** statement at the **[edit protocols vrrp]** hierarchy level:

```
[edit protocols vrrp]
startup-silent-period seconds;
```

NOTE: During the silent startup period, the **show vrrp detail** command output shows a value of 0 for **Master priority** and your IP address for **Master router**. These values indicate that the Primary selection is not completed yet, and these values can be ignored.

When you have configured **startup-silent-period**, the Primary Down Event is ignored until the **startup-silent-period** expires.

For example, configure a VRRP group, *vrrp-group1*, with an advertise interval of 1 second, startup silent period of 10 seconds, and an interface *interface1* with a priority less than 255.

When *interface1* transitions from down to up:

- The *vrrp-group1* group moves to the backup state, and starts the Primary Down Event timer (3 seconds; three times the value of the advertise interval, which is 1 second in this case).
- If no VRRP PDU is received during the 3-second period, the **startup-silent-period** (10 seconds in this case) is checked, and if the startup silent period has not expired, the Primary Down Event timer is restarted. This is repeated until the **startup-silent-period** expires. In this example, the Primary Down Event timer runs four times (12 seconds) by the time the 10-second startup silent period expires.
- If no VRRP PDU is received by the end of the fourth 3-second cycle, *vrrp-group1* takes over the primary role.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[startup-silent-period | 882](#)

Enabling the Distributed Periodic Packet Management Process for VRRP

Typically, VRRP advertisements are sent by the VRRP process (vrrpd) on the primary VRRP router at regular intervals to let other members of the group know that the VRRP primary router is operational.

When the vrrpd process is busy and does not send VRRP advertisements, the backup VRRP routers might assume that the primary router is down and take over as the primary router, causing unnecessary flaps. This takeover might occur even though the original primary router is still active and available and might resume sending advertisements after the traffic has decreased. To address this problem and to reduce the load on the vrrpd process, Junos OS uses the periodic packet management process (ppmd) to send VRRP advertisements on behalf of the vrrpd process. However, you can further delegate the job of sending VRRP advertisements to the distributed ppm process that resides on the Packet Forwarding Engine.

The ability to delegate the sending of VRRP advertisements to the distributed ppm process ensures that the VRRP advertisements are sent even when the ppm process—which is now responsible for sending VRRP advertisements—is busy. Such delegation prevents the possibility of false alarms when the ppm process is busy. The ability to delegate the sending of VRRP advertisements to distributed ppm also adds to scalability because the load is shared across multiple ppm instances and is not concentrated on any single unit.

NOTE: CPU-intensive VRRP advertisements, such as advertisements with MD5 authentication, continue to be processed by the VRRP process on the Routing Engine even when distributed ppm is enabled.

NOTE: VRRP is supported by graceful Routing Engine switchover only in the case that PPM delegation is enabled (the default).

NOTE: Aggregated Ethernet and integrated routing and bridging (IRB) delegation is supported only for MPC line cards. Routing devices with inbuilt MPCs such as the MX104 and below do not support this feature.

To configure the distributed ppm process to send VRRP advertisements, include the **delegate-processing** statement at the **[edit protocols vrrp]** hierarchy level:

```
[edit protocols vrrp]
  delegate-processing;
```

To configure the distributed ppm process to send VRRP advertisements over aggregated Ethernet and IRB interfaces, include the **delegate-processing ae-irb** statement at the **[edit protocols vrrp]** hierarchy level:

```
[edit protocols vrrp]
delegate-processing ae-irb;
```

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[delegate-processing \(VRRP\) | 852](#)

Improving the Convergence Time for VRRP

You can enable faster convergence time for the configured Virtual Router Redundancy Protocol (VRRP), thereby reducing the traffic restoration time to less than 1 second. To improve the convergence time for the VRRP, perform the following tasks:

- **Configure the distributed periodic packet management process**—When the VRRP process is busy and does not send VRRP advertisements, the backup VRRP routers might assume that the primary router is down and take over as the primary router, causing unnecessary flaps. To address this problem and to reduce the load on the VRRP process, Junos OS uses the distributed periodic packet management (PPM) process to send VRRP advertisements on behalf of the VRRP process.

To configure the distributed PPM process, include the **delegate-processing** statement at the **[edit protocols vrrp]** hierarchy level.

- **Disable the skew timer**—The skew timer in VRRP is used to ensure that two backup routers do not switch to the primary state at the same time in case of a failover situation. When there is only one primary router and one backup router in the network deployment, you can disable the skew timer, thereby reducing the time required to transition to the primary state.

To disable the skew timer, include the **skew-timer-disable** statement at the **[edit protocols vrrp]** hierarchy level.

- **Configure the number of fast advertisements that can be missed by a backup router before it starts transitioning to the master state**—The backup router waits until a certain number of advertisement packets are lost after which it transitions to the primary state. This waiting time can be fatal in scenarios such as router failure or link failure. To avoid such a situation and to enable faster convergence time, in Junos OS Release 12.2 and later, you can configure a fast advertisement

interval value that specifies the number of fast advertisements that can be missed by a backup router before it starts transitioning to the primary state.

To configure the fast advertisement interval, include the **global-advertisements-threshold** statement at the **[edit protocols vrrp]** hierarchy level.

- **Configure inheritance of VRRP groups**—Junos OS enables you to configure VRRP groups on the various subnets of a virtual LAN (VLAN) to inherit the state and configuration of one of the groups, which is known as the active VRRP group. When the **vrrp-inherit-from** statement is included in the configuration, only the active VRRP group, from which the other VRRP groups inherit the state, sends out frequent VRRP advertisements and processes incoming VRRP advertisements. Use inherit groups for scaled configurations. For example, if you have 1000 VRRP groups with an advertisement interval of 100 ms, then use inherit groups.

To configure inheritance for a VRRP group, include the **vrrp-inherit-from** statement at the **[edit interfaces *interface-name* unit *logical-unit-number* family inet address *address* vrrp-group *group-id*]** hierarchy level.

- **Disable duplicate address detection for IPv6 interfaces**—Starting with Junos OS Release 15.1, duplicate address detection is a feature of the Neighbor Discovery Protocol for IPv6. Duplicate address detection is enabled by default and determines whether an address is already in use by another node. When detection address detection is enabled, convergence time is high after an IPv6 interface that has been configured for VRRP tracking comes up. To disable duplicate address detection, include the **ipv6-duplicate-addr-transmits 0** statement at the **[edit system internet-options]** hierarchy level. To disable duplicate address detection only for a specific interface, include the **dad-disable** statement at the **[edit interfaces *interface-name* unit *logical-unit-number* family inet6]** hierarchy level.

NOTE:

- Inheritance of VRRP groups is supported with all types of interfaces. Other measures to reduce convergence time, such as VRRP distribution, disabling skew timer, and reducing advertisement threshold.
- Compared to other routers, the convergence time and the traffic restoration time are less for MX Series routers with MPCs.
- Reduction in convergence time is applicable for all types of configurations at the physical interface but the convergence time might not be less than 1 second for all the configurations. The convergence time depends on the number of groups that are transitioning from the backup to the primary state and the interval at which these groups are transitioning.

RELATED DOCUMENTATION

[Configuring Inheritance for a VRRP Group | 474](#)

[Configuring VRRP to Improve Convergence Time | 481](#)

[delegate-processing \(VRRP\) | 852](#)

[global-advertisements-threshold | 858](#)

[skew-timer-disable | 880](#)

Configuring VRRP to Improve Convergence Time

You can enable faster convergence time for the configured Virtual Router Redundancy Protocol (VRRP), thereby reducing the traffic restoration time to less than 1 second. To improve the convergence time for VRRP, perform the following tasks.

Before you begin, configure VRRP. See ["Configuring VRRP" on page 431](#).

1. Configure the distributed periodic packet management (PPM) process to send VRRP advertisements when the VRRP process is busy.

```
[edit]
user@host# set protocols vrrp delegate-processing
```

2. Disable the skew timer to reduce the time required to transition to the primary state.

```
[edit]
user@host# set protocols vrrp skew-timer-disable
```

NOTE: When there is only one primary router and one backup router in the network deployment, you can disable the skew timer, thereby reducing the time required to transition to the primary state.

3. Configure the number of fast advertisements that can be missed by a backup router before it starts transitioning to the primary state.

```
[edit]
user@host# set protocols vrrp global-advertisement-threshold advertisement-value
```

4. Configure VRRP groups on the various subnets of a VLAN to inherit the state and to configure one of the groups.

```
[edit]
user@host# set interfaces interface-name unit logical-unit-number family inet address address vrrp-
group group-id
```

5. Verify the configuration.

```
[edit]
user@host# show protocols vrrp
```

NOTE:

- Inheritance of VRRP groups is supported with all types of interfaces. Other measures to reduce convergence time, such as VRRP distribution, disabling skew timer, and reducing advertisement threshold, are not applicable when VRRP is configured over integrated routing and bridging (IRB) interfaces, aggregated Ethernet interfaces, and multichassis link aggregation group (MC-LAG) interfaces.
- Compared to other routers, the convergence time and the traffic restoration time are less for MX Series routers with MPCs.
- Reduction in convergence time is applicable for all types of configurations at the physical interface, but the convergence time might not be less than 1 second for all the configurations. The convergence time depends on the number of groups that are transitioning from the backup to the primary state and the interval at which these groups are transitioning.

RELATED DOCUMENTATION

[Improving the Convergence Time for VRRP | 479](#)

[Configuring Inheritance for a VRRP Group | 474](#)

[delegate-processing \(VRRP\) | 852](#)

[global-advertisements-threshold | 858](#)

[skew-timer-disable | 880](#)

Tracing VRRP Operations

To trace VRRP operations, include the **traceoptions** statement at the **[edit protocols vrrp]** hierarchy level.

By default, VRRP logs the error, data carrier detect (DCD) configuration, and routing socket events in a file in the **/var/log** directory. By default, this file is named **/var/log/vrrpd**. The default file size is 1 megabyte (MB), and three files are created before the first one gets overwritten.

To change the configuration of the logging file, include the **traceoptions** statement at the **[edit protocols vrrp]** hierarchy level:

```
[edit protocols vrrp]
traceoptions {
    file filename <files number> <match regular-expression> <microsecond-stamp>
    <size size> <world-readable | no-world-readable>;
    flag flag;
    no-remote-trace;
}
flag flag;
```

You can specify the following VRRP tracing flags:

- **all**—Trace all VRRP operations.
- **database**—Trace all database changes.
- **general**—Trace all general events.
- **interfaces**—Trace all interface changes.
- **normal**—Trace all normal events.
- **packets**—Trace all packets sent and received.
- **state**—Trace all state transitions.
- **timer**—Trace all timer events.

RELATED DOCUMENTATION

| [Understanding VRRP | 405](#)

Example: Configuring VRRP for Load Sharing

IN THIS SECTION

- [Requirements | 484](#)
- [Overview and Topology | 484](#)
- [Configuring VRRP on Both Switches | 486](#)
- [Verification | 490](#)

If you do not want to dedicate a switch to be a VRRP backup (and therefore leave it idle unless the primary fails), you can create a load-sharing configuration in which each participating switch simultaneously acts as a primary and a backup.

One reason to use a load-sharing (active-active) configuration is that you are more likely to actively monitor and maintain both switches and notice if a problem occurs on either of them. If you use a configuration in which one switch is only a backup (an active-backup configuration), you might be less likely to pay attention to the backup switch while it is idle. In the worst case, this could lead to the backup switch developing an undetected problem and not being able to perform adequately when a failover occurs.

Requirements

This example uses the following hardware and software components:

- Two switches
- Junos OS Release 11.3 or later
- Static routing or a dynamic routing protocol enabled on both switches.


Overview and Topology

IN THIS SECTION

- [Topology | 486](#)

This example uses two VRRP groups, each of which has its own virtual IP address. Devices on the LAN use one of these virtual IP addresses as their default gateway. If one of the switches fails, the other switch takes over for it. In the topology shown in [Figure 28 on page 485](#), for example, Switch A is the primary for VRRP group 100. If Switch A fails, Switch B takes over and forwards traffic that the end devices send to the default gateway address 10.1.1.1.

Figure 28: VRRP Load-Sharing Configuration

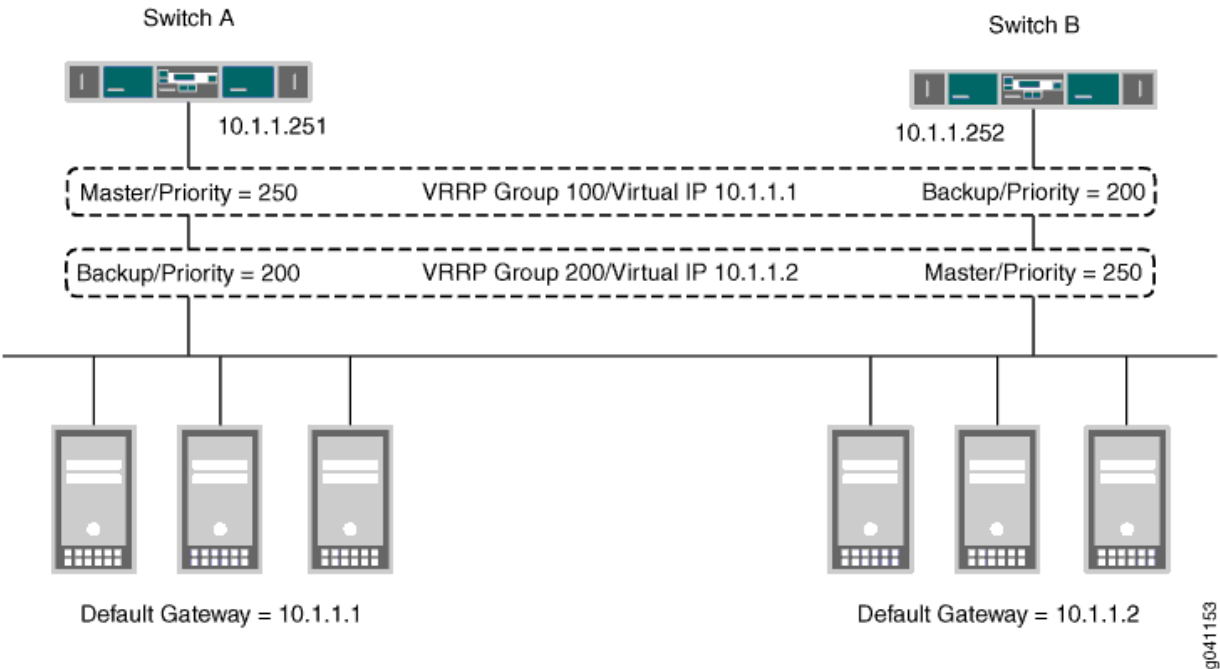

This example shows a simple configuration to illustrate the basic steps for configuring two switches running VRRP to back each other up. [Table 17 on page 486](#) lists VRRP settings for each switch.

Topology

Table 17: Settings for VRRP Load-Sharing Example

Switch A	Switch B
VRRP Group 100: • Interface address: 10.1.1.251 • VIP: 10.1.1.1 • Priority: 250	VRRP Group 100: • Interface address: 10.1.1.252 • VIP: 10.1.1.1 • Priority: 200
VRRP Group 200: • Interface address: 10.1.1.251 • VIP: 10.1.1.2 • Priority: 200	VRRP Group 200: • Interface address: 10.1.1.252 • VIP: 10.1.1.2 • Priority: 250

In addition to configuring the two switches as shown, you must configure your end devices so that some of them use one of the virtual IP addresses as their default gateway and the remaining end devices use the other virtual IP address as their default gateway.

Note that if a failover occurs, the remaining switch might be unable to handle all of the traffic, depending on the demand.

Configuring VRRP on Both Switches

IN THIS SECTION

- [Procedure | 487](#)

Procedure

CLI Quick Configuration

Enter the following on Switch A:

```
[edit]
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 virtual-address 10.1.1.1
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 priority 250
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 200 virtual-address 10.1.1.2
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 200 priority 200
```

Enter the following on Switch B:

```
[edit]
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 virtual-address 10.1.1.1
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 priority 200
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 200 virtual-address 10.1.1.2
set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 200 priority 250
```

Step-by-Step Procedure

Configure the VRRP groups and priorities on Switch A:

1. Create VRRP group 100 on Switch A and configure the virtual IP address for the group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 virtual-
address 10.1.1.1
```

2. Assign the VRRP priority for this interface in this group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 priority
250
```


3. Create VRRP group 200 on Switch A and configure the virtual IP address for the group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 200 virtual-
address 10.1.1.2
```

4. Assign the VRRP priority for this interface in this group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 priority
200
```

Step-by-Step Procedure

Configure the VRRP groups and priorities on Switch B:

1. Create VRRP group 100 on Switch B and configure the virtual IP address for the group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 virtual-
address 10.1.1.1
```

2. Assign the VRRP priority for this interface in this group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 100 priority
200
```

Switch A remains the primary for group 100 because it has the highest priority for this group.

3. Create VRRP group 200 on Switch A and configure the virtual IP address for the group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.252/24 vrrp-group 200 virtual-
address 10.1.1.2
```

4. Assign the VRRP priority for this interface in this group:

```
[edit]
user@switch# set interfaces xe-0/0/0 unit 0 family inet address 10.1.1.251/24 vrrp-group 100 priority
250
```

Switch B becomes the primary for group 200 because it has the highest priority for this group.

Results

Display the results of the configuration on Switch A:

```
user@switch> show configuration
interfaces {
  xe-0/0/0 {
    unit 0 {
      family inet {
        address 10.1.1.251 {
          vrrp-group 100 {
            virtual address 10.1.1.1
            priority 250
          }
          vrrp-group 200 {
            virtual address 10.1.1.2
            priority 200
          }
        }
      }
    }
  }
}
```

Display the results of the configuration on Switch B:

```
user@switch> show configuration
interfaces {
  xe-0/0/0 {
    unit 0 {
      family inet {
        address 10.1.1.252 {
```

```

        vrrp-group 100 {
            virtual address 10.1.1.1
            priority 200
        }
        vrrp-group 200 {
            virtual address 10.1.1.2
            priority 250
        }
    }
}
}
}
}
```

Verification

IN THIS SECTION

[Verifying that VRRP Is Working on Switch A | 490](#)

[Verifying that VRRP Is Working on Switch B | 491](#)

Verifying that VRRP Is Working on Switch A

Purpose

Verify that VRRP is active on Switch A and that the primary and backup roles are correct.

Action

Use the following command to verify that VRRP is active on Switch A and that the switch is primary for group 100 and backup for group 200.

```
user@switch> show vrrp
```

Interface	State	Group	VR state
Timer	Type	Address	
xe-0/0/0.0	up	100	master A .0327
lcl	10.1.1.251		

```

10.1.1.1
xe-0/0/0.0      up      200      backup      A .0327
lcl      10.1.1.251
vip
10.1.1.2
vip
```

Meaning

The **show vrrp** command displays fundamental information about the VRRP configuration. This output shows that both VRRP groups are active and that this switch has assumed the correct primary and backup roles. The **lcl** address is the physical address of the interface and the **vip** address is the virtual address shared by both switches. The **Timer** value (**A .0327**) indicates the remaining time (in seconds) in which this switch expects to receive a VRRP advertisement from the other switch. If an advertisement for group 200 does not arrive before the timer expires, Switch A asserts itself as the primary for this group.

Verifying that VRRP Is Working on Switch B

Purpose

Verify that VRRP is active on Switch B and that the primary and backup roles are correct.

Action

Use the following command to verify that VRRP is active on Switch B and that the switch is backup for group 100 and primary for group 200.

```

user@switch> show vrrp
Interface      State      Group      VR state
Timer          Type      Address
xe-0/0/0.0     up      100      backup      A .0327
lcl      10.1.1.252
vip
10.1.1.1
xe-0/0/0.0     up      200      master      A .0327
lcl      10.1.1.252
vip
10.1.1.2
```

Meaning

The **show vrrp** command displays fundamental information about the VRRP configuration. This output shows that both VRRP groups are active and that this switch has assumed the correct primary and backup roles. The **lcl** address is the physical address of the interface and the **vip** address is the virtual address shared by both switches. The **Timer** value (**A .0327**) indicates the remaining time (in seconds) in which this switch expects to receive a VRRP advertisement from the other switch. If an advertisement for group 100 does not arrive before the timer expires, Switch B asserts itself as the primary for this group.

RELATED DOCUMENTATION

[Understanding VRRP | 405](#)

[Configuring Basic VRRP Support for QFX](#)

Troubleshooting VRRP

IN THIS SECTION

● [Problem | 492](#)

● [Solution | 493](#)

Problem

Description

If you configure multiple VRRP groups on an interface (using multiple VLANs), traffic for some of the groups might be briefly dropped if a failover occurs. This can happen because the new primary must send gratuitous ARP replies for each VRRP group to update the ARP tables in the connected devices, and there is a short delay between each gratuitous ARP reply. Traffic sent by devices that have not yet received the gratuitous ARP reply is dropped (until the device receives the reply and learns the MAC address of the new primary).

Solution

Configure a failover delay so that the new primary delays sending gratuitous ARP replies for the period that you set. This allows the new primary to send the ARP replies for all of the VRRP groups simultaneously.

RELATED DOCUMENTATION

| [failover-delay](#)

13

PART

Performing Unified In-Service Software Upgrade (ISSU)

Getting Started with Unified ISSU and Understanding How Unified ISSU Works |
495

Unified ISSU System Requirements | 507

Performing a Unified ISSU | 536

Performing an ISSR | 593

Getting Started with Unified ISSU and Understanding How Unified ISSU Works

IN THIS CHAPTER

- [Getting Started with Unified In-Service Software Upgrade | 495](#)
- [Understanding the Unified ISSU Process | 496](#)
- [Understanding In-Service Software Upgrade \(ISSU\) | 504](#)
- [Understanding In-Service Software Upgrade \(ISSU\) in ACX5000 Series Routers | 505](#)

Getting Started with Unified In-Service Software Upgrade

The unified in-service software upgrade (ISSU) feature enables you to upgrade between two different Junos OS releases with no disruption on the control plane and with minimal disruption of traffic.

To quickly access the information you need, click on the link in [Table 18 on page 495](#).

Table 18: Locating the Information You Need to Work With ISSU

Task You Need to Perform	Where The Information Is Located
Verify unified ISSU support for your device	"Unified ISSU System Requirements" on page 507
Perform a unified ISSU	"Example: Performing a Unified ISSU" on page 537
Verify that the unified ISSU is successful	"Verifying a Unified ISSU" on page 590
Understand how the unified ISSU process works	"Understanding the Unified ISSU Process" on page 496

Unified ISSU takes advantage of the redundancy provided by dual Routing Engines and works in conjunction with the graceful Routing Engine switchover feature and the nonstop active routing feature.

Unified ISSU provides the following benefits:

- Eliminates network downtime during software image upgrades
- Reduces operating costs, while delivering higher service levels
- Allows fast implementation of new features

RELATED DOCUMENTATION

[Understanding High Availability Features on Juniper Networks Routers | 2](#)

Understanding the Unified ISSU Process

IN THIS SECTION

- [Understanding the Unified ISSU Process on a Router | 496](#)
- [Understanding the Unified ISSU Process on the TX Matrix Router | 501](#)

This topic explains the unified ISSU processes that take place on a router, on a TX Matrix router, on a TX Matrix Plus router and its connected line-card chassis (LCCs), as well as on a TX Matrix Plus router with 3D SIBs and its connected LCCs.

Understanding the Unified ISSU Process on a Router

IN THIS SECTION

- [Unified ISSU Process on a Router | 497](#)

This topic describes the processes that take place on a router with dual Routing Engines when you initiate a unified in-service software upgrade (ISSU).

Unified ISSU Process on a Router

After you use the `"request system software in-service-upgrade"` on page 1024 command, the following process occurs.

In Figure 29 on page 498 through Figure 34 on page 501 that follow:

- A solid line indicates the high-speed internal link between a Routing Engine and a Packet Forwarding Engine.
- A dotted line indicates the messages exchanged between the Packet Forwarding Engine and the chassis process (chassisd) on the Routing Engine.
- RE0m and RE1b indicate primary and backup Routing Engines, respectively.
- The check mark indicates that the device is running the new version of software.

NOTE: Unified ISSU can only upgrade up to three major releases ahead of the current release on a device. To upgrade to a release more than three releases ahead of the current release on a device, use the unified ISSU process to upgrade the device to one or more intermediate releases until the device is within three major releases of the target release.

NOTE: The following process pertains to all supported routing platforms except the TX Matrix router and TX Matrix Plus router. On most routers, the Packet Forwarding Engine resides on a Flexible PIC Concentrator (FPC). However, on an M120 router, the Forwarding Engine Board (FEB) replaces the functions of a Packet Forwarding Engine. In the illustrations and steps, when considering an M120 router, you can regard the Packet Forwarding Engine as an FPC. As an additional step on an M120 router, after the FPCs and PICs have been upgraded, the FEBs are upgraded.


1. The primary Routing Engine validates the router configuration to ensure that it can be committed when you use the new software version.

Checks are made for the following:

- Disk space is available for the `/var` file system on both Routing Engines.
- The configuration is supported by a unified ISSU.
- The PICs are supported by a unified ISSU.
- Graceful Routing Engine switchover is enabled.
- Nonstop active routing is enabled.


These checks are the same as the checks made when you enter the **request system software validate in-service-upgrade** command. If there is insufficient disk space available on either of the Routing Engines, the unified ISSU process fails and returns an error message. However, unsupported PICs do not prevent a unified ISSU. If there are unsupported PICs, the system issues a warning to indicate that these PICs will restart during the upgrade. Similarly, if there is an unsupported protocol configured, the system issues a warning that packet loss might occur for the unsupported protocol during the upgrade.

Figure 29: Device Status Before Starting a Unified ISSU

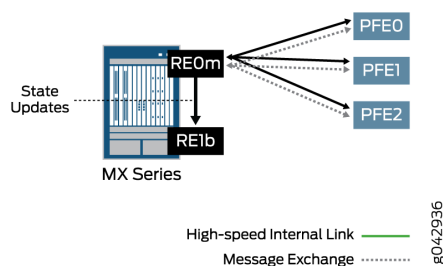

2. After the validation succeeds, the management process installs (copies) the new software image to the backup Routing Engine.
3. The backup Routing Engine is rebooted.
4. After the backup Routing Engine is rebooted and is running the new software, the kernel state synchronization process (ksyncd) synchronizes (copies) the configuration file and the kernel state from the primary Routing Engine.

Figure 30: Device Status After the Backup Routing Engine Is Upgraded

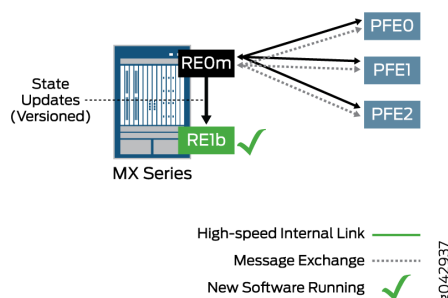


5. After the configuration file and the kernel state are synchronized to the backup Routing Engine, the chassis process (chassisd) on the primary Routing Engine prepares other software processes for the

unified ISSU. The chassis process informs the various software processes (such as rpd, apsd, bfdd, and so on) about the unified ISSU and waits for responses from them. When all the processes are ready, the chassis process sends an ISSU_PREPARE message to the FPCs installed in the router. You can display the unified ISSU process messages by using the **show log messages** command.

6. The Packet Forwarding Engine on each FPC saves its state and downloads the new software image from the backup Routing Engine. Next, each Packet Forwarding Engine sends an ISSU_READY message to the chassis process.

Figure 31: Device Status After One Packet Forwarding Engine Downloads the New Software

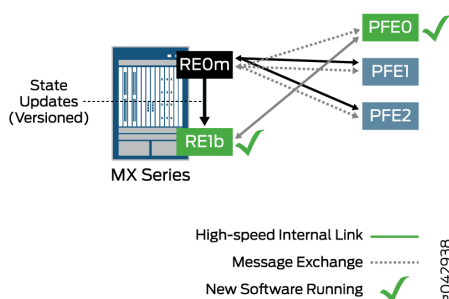


7. After receiving an ISSU_READY message from a Packet Forwarding Engine, the chassis process sends an ISSU_REBOOT message to the FPC on which the Packet Forwarding Engine resides. The FPC reboots with the new software image. After the FPC is rebooted, the Packet Forwarding Engine restores the FPC state, and a high-speed internal link is established with the backup Routing Engine running the new software. The chassis process link is also reestablished with the primary Routing Engine.

NOTE: The Packet Forwarding Engine reboots that occur during an unified ISSU are designed to have a very short window of down time.

8. After all Packet Forwarding Engines have sent a READY message using the chassis process on the primary Routing Engine, other software processes are prepared for a Routing Engine switchover. The system is ready for a switchover at this point.


Figure 32: Device Status Before the Routing Engine Switchover

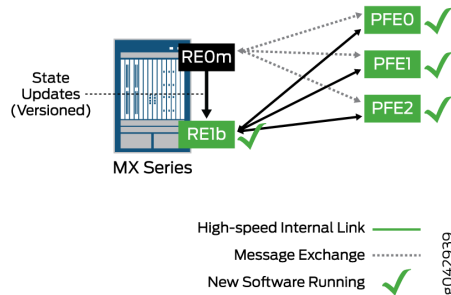

NOTE: For M120 routers, the FEBs are upgraded at this point. When all FEBs have been upgraded, the system is ready for a switchover.


9. The Routing Engine switchover occurs, and the Routing Engine (re1) that was the backup now becomes the primary Routing Engine.

Figure 33: Device Status After the Routing Engine Switchover

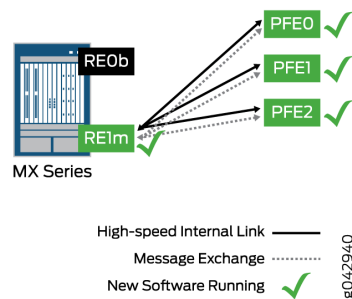

10. The new backup Routing Engine is now upgraded to the new software image. (This step is skipped if you have specified the **no-old-master-upgrade** option in the **request system software in-service-upgrade** command.)

Figure 34: Device Status After the Unified ISSU Is Complete

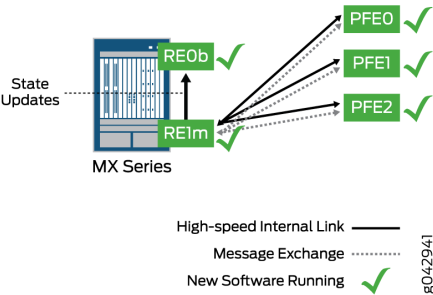

11. When the backup Routing Engine has been successfully upgraded, the unified ISSU is complete.

Understanding the Unified ISSU Process on the TX Matrix Router

IN THIS SECTION

- [Unified ISSU Process on the TX Matrix Router | 501](#)

This topic describes the processes that take place on a TX Matrix router when you initiate a unified in-service software upgrade (ISSU).

Unified ISSU Process on the TX Matrix Router

This section describes the processes that take place on a TX Matrix router and the routers acting as connected line-card chassis (LCCs).

NOTE: A routing matrix is a multichassis architecture that consists of a TX Matrix router and from one to four T640 routers. From the perspective of the user interface, the routing matrix appears as a single router. The TX Matrix router controls all the T640 routers in the routing matrix.

Each router has dual Routing Engines.

After you use the "[request system software in-service-upgrade](#)" on page 1024 command on a TX Matrix router, the following process occurs:

1. The management process (mgd) on the primary Routing Engine of the TX Matrix router (global primary) checks the current configuration.

Checks are made for the following:

- Disk space is available for the `/var` file system on all Routing Engines.
 - The configuration is supported by a unified ISSU.
 - The PICs are supported by a unified ISSU.
 - Graceful Routing Engine switchover is enabled.
 - Nonstop active routing is enabled.
2. After successful validation of the configuration, the management process copies the new image to the backup Routing Engines on the TX Matrix router and the T640 routers.
 3. The kernel synchronization process (ksyncd) on the backup Routing Engines synchronizes the kernels on the backup Routing Engines with the kernels on the primary Routing Engines.
 4. The global backup Routing Engine is upgraded with the new software. Next the global backup Routing Engine is rebooted. Then the global backup Routing Engine synchronizes the configuration and kernel state from the global primary Routing Engine.
 5. The LCC backup Routing Engines are upgraded and rebooted. Then the LCC backup Routing Engines connect with the upgraded global backup Routing Engine and synchronize the configuration and kernel state.
 6. The unified ISSU control moves from the management process to the chassis process (chassisd). The chassis process informs the various software processes (such as rpd, apsd, bfdd, and so on) about the unified ISSU and waits for responses from them.
 7. After receiving messages from the software processes indicating that the processes are ready for unified ISSU, the chassis process on the global primary Routing Engine sends messages to the chassis process on the routing nodes to start the unified ISSU.
 8. The chassis process on the routing nodes sends ISSU_PREPARE messages to the field-replaceable units (FRUs), such as FPCs and intelligent PICs.
 9. After receiving an ISSU_PREPARE message, the Packet Forwarding Engines save the current state information and download the new software image from the backup Routing Engines. Next, each Packet Forwarding Engine sends ISSU_READY messages to the chassis process. You can display the unified ISSU process messages by using the **show log messages** command.

10. After receiving an ISSU_READY message from the Packet Forwarding Engines, the chassis process sends an ISSU_REBOOT message to the FRUs. While the upgrade is in progress, the FRUs keep sending ISSU_IN_PROGRESS messages to the chassis process on the routing nodes. The chassis process on each routing node, in turn, sends an ISSU_IN_PROGRESS message to the chassis process on the global primary Routing Engine.

NOTE: The Packet Forwarding Engine reboots that occur during a unified ISSU are designed to have a very short window of down time.

11. After the unified ISSU reboot, the Packet Forwarding Engines restore the saved state information and connect back to the routing nodes. The chassis process on each routing node sends an ISSU_READY message to the chassis process on the global primary Routing Engine. The CM_MSG_READY message from the chassis process on the routing nodes indicate that the unified ISSU is complete on the FRUs.
12. The unified ISSU control moves back to the management process on the global primary Routing Engine.
13. The management process initiates Routing Engine switchover on the primary Routing Engines.
14. Routing Engine switchover occurs on the TX Matrix router and the T640 routers.
15. After the switchover, the FRUs connect to the new primary Routing Engines. Then the chassis manager and Packet Forwarding Engine manager on the T640 router FRUs connect to the new primary Routing Engines on the T640 routers.
16. The management process on the global primary Routing Engine initiates the upgrade process on the old primary Routing Engines on the T640 routers. (This step is skipped if you have specified the **no-old-master-upgrade** option in the **request system software in-service-upgrade** command.)
17. After the Routing Engines that were previously the primaries on the T640 routers are upgraded, the management process initiates the upgrade of the Routing Engine that was previously the global primary on the TX Matrix router.
18. After a successful unified ISSU, the TX Matrix router and the T640 routers are rebooted if you specified the **reboot** option in the **request system software in-service-upgrade** command.

RELATED DOCUMENTATION

[Getting Started with Unified In-Service Software Upgrade | 495](#)

[Best Practices for Performing a Unified ISSU | 536](#)

[Unified ISSU System Requirements | 507](#)

[Example: Performing a Unified ISSU | 537](#)

[request system software validate in-service-upgrade | 1082](#)

Understanding In-Service Software Upgrade (ISSU)

IN THIS SECTION

- [In-Service Software Upgrade Process | 504](#)

An in-service software upgrade (ISSU) enables you to upgrade between two different Junos OS releases with minimal disruption on the control plane and with minimal disruption of traffic. During an ISSU, the Junos OS runs in two separate virtual machines (VMs)—one VM is in the primary role acting as the primary Routing Engine, and the other VM is in the backup role acting as the backup Routing Engine. The Junos OS is upgraded on the backup VM. After a successful software upgrade, the backup VM then becomes the primary VM, and the original primary VM is no longer needed and is shut down.



Video: [How Does ISSU Work on the QFX5100?](#)

ISSU provides the following benefits:

- Eliminates network downtime during software image upgrades
- Reduces operating costs, while delivering higher service levels
- Allows fast implementation of new features

In-Service Software Upgrade Process

When you request an ISSU on a standalone device:

1. The management process (mgd) verifies that non-stop routing (NSR), graceful Routing Engine switchover (GRES), and non-stop bridging (NSB) are enabled.
2. The switch downloads and validates the software package.
3. The ISSU state machine spawns the backup Routing Engine (RE) with the newer software.
4. The ISSU state machine checks to see if the backup RE has synchronized all of the data with the primary RE.

5. The ISSU state machine moves the devices (for example, forwarding ASIC, FPGA, management port and serial console) from the primary RE to the backup RE.
6. The primary role is switched between the REs, so the backup RE becomes the primary RE.
7. The old primary RE is shut down.

RELATED DOCUMENTATION

[In-Service Software Upgrade \(ISSU\) System Requirements](#)

[Performing an In-Service Software Upgrade \(ISSU\) with Non-Stop Routing | 575](#)

Understanding In-Service Software Upgrade (ISSU) in ACX5000 Series Routers

IN THIS SECTION

- [In-Service Software Upgrade Process | 506](#)

An in-service software upgrade (ISSU) enables you to upgrade between two different Junos OS releases with minimal disruption on the control plane and with minimal disruption of traffic. During an ISSU, the Junos OS runs in two separate virtual machines (VMs)—one VM is in the primary role acting as the primary Routing Engine, and the other VM is in the backup role acting as the backup Routing Engine. The Junos OS is upgraded on the backup VM. After a successful software upgrade, the backup VM then becomes the primary VM, and the original primary VM is no longer needed and is shut down.

NOTE: ISSU is supported in Junos OS Release 15.1X54-D60 or later for ACX5000 Series routers.

ISSU provides the following benefits:

- Eliminates network downtime during software image upgrades
- Reduces operating costs, while delivering higher service levels
- Allows fast implementation of new features

In-Service Software Upgrade Process

When you request an ISSU on a standalone device:

1. The management process (mgd) verifies that non-stop routing (NSR), graceful Routing Engine switchover (GRES), and non-stop bridging (NSB) are enabled.
2. The router downloads and validates the software package.
3. The ISSU state machine spawns the backup Routing Engine (RE) with the newer software.
4. The ISSU state machine checks to see if the backup RE has synchronized all of the data with the primary RE.
5. The ISSU state machine moves the devices (for example, forwarding ASIC, FPGA, management port and serial console) from the primary RE to the backup RE.
6. The primary role is switched between the REs, so the backup RE becomes the primary RE.
7. The old primary RE is shut down.

Unified ISSU System Requirements

IN THIS CHAPTER

- Unified ISSU System Requirements | 507

Unified ISSU System Requirements

IN THIS SECTION

- General Unified ISSU Considerations for All Platforms | 508
- Unified ISSU Considerations for MX Series Routers | 509
- Unified ISSU Considerations for PTX Series Routers | 510
- Unified ISSU Considerations for T Series Routers | 510
- Unified ISSU Considerations for EX Series Switches | 511
- Unified ISSU Platform Support | 511
- Unified ISSU Protocol Support for M Series, MX Series, and T Series Routers and EX9200 Switches | 513
- Unified ISSU Feature Support | 514
- Unified ISSU PIC Support Considerations | 514

The unified in-service software upgrade (ISSU) feature enables you to upgrade your device between two different Junos OS releases with no disruption on the control plane and with minimal disruption of traffic. Unified ISSU is supported only on dual Routing Engine platforms. In addition, the graceful Routing Engine switchover (GRES) and nonstop active routing (NSR) features must be enabled.

To access an interactive tool for verifying hardware support for unified ISSU, see the [Juniper Networks Feature Explorer](#).

This section contains the following topics:

General Unified ISSU Considerations for All Platforms

Unified ISSU has the following caveats:

- We recommend that you not use unified ISSU to upgrade from an earlier Junos OS release to Junos OS Release 14.2.R1 or 15.1.R1. ISSU is not supported in Junos OS Release 14.2. For more information about Junos OS Release 14.2, see the [Release Notes for Junos OS Release 14.2](#). For more information about Junos OS Release 15.1, see the [Release Notes for Junos OS Release 15.1](#).
- Using unified ISSU to upgrade from an earlier Junos OS release to Junos OS Release 17.1R1 or later does not work if VPLS dynamic profiles are configured and enhanced subscriber management is not configured.
- The primary Routing Engine and backup Routing Engine must be running the same software version before you can perform a unified ISSU.
- The unified ISSU process is terminated and a message is displayed if the Junos OS version specified for installation is a version earlier than the one currently running on the device.
- The unified ISSU process is terminated if the specified upgrade has conflicts with the current configuration, components supported, and so forth.
- You cannot take PICs offline or bring them online during a unified ISSU.
- User-initiated GRES is blocked when the device is undergoing a unified ISSU.
- Unified ISSU does not support extension application packages developed with the Junos SDK.
- To downgrade from a unified ISSU-capable release to a previous software release (unified ISSU-capable or not), use the **request system software add *package-name*** command. Unlike an upgrade using the unified ISSU process, a downgrade using the **request system software add *package-name*** command can cause network disruptions and loss of data. For more information about the use of the **request system software add *package-name*** command, see the [Junos OS Software Installation and Upgrade Guide](#).
- Unicast reverse-path-forwarding (RPF)-related statistics are not saved across a unified ISSU, and the unicast RPF counters are reset to zero during a unified ISSU.
- BGP session uptime and downtime statistics are not synchronized between the primary and backup Routing Engines during a unified ISSU. The backup Routing Engine maintains its own session uptime based on the time when the backup first becomes aware of the established sessions. For example, if the backup Routing Engine is rebooted (or if you run **restart routing** on the backup Routing Engine), the backup Routing Engine uptime is a short duration, because the backup has just learned about the established sessions. If the backup is operating when the BGP sessions first come up on the primary, the uptime on the primary and the uptime on the backup are almost the same duration. After a

Routing Engine switchover, the new primary continues from the time left on the backup Routing Engine.

- If proxy ARP is enabled on your device, you must delete the **unconditional-src-learn** statement from the [edit interfaces *interface-name* unit 0 family inet] hierarchy level before the unified ISSU process begins and include it after the unified ISSU process is complete. Note that the **unconditional-src-learn** statement is not included by default.

Unified ISSU Considerations for MX Series Routers

Unified ISSU has the following caveats for MX Series routers:

- On MX Series 3D Universal Edge Routers (with Modular Port Concentrator/Modular Interface Card (MPC/MIC) interfaces), unified ISSU is supported starting with Junos OS Release 11.2.
- On MX Series 3D Universal Edge Routers with MPC3E and MPC4E interfaces, unified ISSU is supported starting with Junos OS Release 13.3.
- Unified ISSU is supported with Junos OS Release 17.4R1 for MX Series routers with MPC-3D-16XGE-SFPP, MPC-3D-NG, MPC-3D-16XGE-SFPP-R-B, MPC-SEPTUM-S, MPC2E-3D-NG, MPC2E-3D-NG-IR-B, MPC2E-3D-NG-Q, MPC2E-3D-NG-Q-IR-B, MPC2E-3D-NG-Q-R-B, MPC2E-3D-NG-R-B, MPC3E-3D-NG, MPC3E-3D-NG-IR-B, MPC3E-3D-NG-Q, MPC3E-3D-NG-Q-IR-B, MPC3E-3D-NG-Q-R-B, MPC3E-3D-NG-R-B, MPC4E-3D-2CGE-8XGE, MPC4E-3D-2CGE8XGE-IR-B, MPC4E-3D-2CGE8XGE-R-B, MPC4E-3D-32XGE-IR-B, MPC4E-3D-32XGE-R-B, MPC4E-3D-32XGE-SFPP, MPC5E-100G10G, MPC5E-100G10G-IRB, MPC5E-100G10G-RB, MPC5E-40G10G, MPC5E-40G10G-IRB, MPC5E-40G10G-RB, MPC5EQ-100G10G, MPC5EQ-100G10G-IRB, MPC5EQ-100G10G-RB, MPC5EQ-40G10G, MPC5EQ-40G10G-IRB, MPC5EQ-40G10G-RB, MPC7E-10G, MPC7E-10G-IRB, MPC7E-10G-RB, MPC7E-MRATE, MPC7E-MRATE-IRB, MPC7E, MRATE-RB, MPC7EQ-10G-B, MPC7EQ-10G-IRB, MPC7EQ-10G-RB, MPC7EQ-MRATE-B, MPC7EQ-MRATE-IRB, MPC7EQ-MRATE-RB Flexible Port Concentrators (FPCs). If you perform a unified ISSU on a MX Series router with these FPCs installed, the FPCs need to be rebooted in order to complete the unified ISSU process.
- Unified ISSU for MX Series routers does not support the IEEE 802.1ag OAM and IEEE 802.3ah protocols.
- Unified ISSU is not supported when clock synchronization is configured for Synchronous Ethernet, Precision Time Protocol (PTP), and hybrid mode on the MICs and MPCEs on MX240, MX480, and MX960 routers. If clock synchronization is configured, the unified ISSU process terminates.
- On MX Series routers with MPC/MIC interfaces, the policers for transit traffic and statistics are disabled temporarily during the unified ISSU process.
- On MX Series MPCs, interface-specific and firewall filter statistics are preserved across a unified ISSU. During the unified ISSU, counter and policer operations are disabled.

- To preserve statistics across a unified ISSU on MX Series routers with MPC/MIC interfaces, the router stores the statistics data as binary large objects. The router collects the statistics before the unified ISSU is initialized, and restores the statistics after the unified ISSU completes. No statistics are collected during the unified ISSU process.
- After a unified ISSU operation is completed, an MPC reboot is required for MACsec to work. If you upgrade a router from an earlier Junos OS release to Release 14.2R2 or Release 15.1R1 using unified ISSU and MACsec is configured on that router, you must reboot the MPC for MACsec to function properly.
- When there is a large number of subscribers configured, the Layer 2 scheduler can become oversubscribed. The unified ISSU process might terminate when the system runs out of schedulers. The system generates log messages with ISSU failures and CRC errors on the control plane. If you encounter this issue, please contact JTAC for assistance in eliminating the Layer 2 scheduler oversubscription in your configuration.
- MX Series routers support Link Aggregation Control Protocol (LACP) with fast hellos during unified ISSU. This support is disabled by default. You must enable the fast-hello-issu option on the main router and on the peer routers before starting unified ISSU. Note that the peer router must also be an MX Series router for this functionality to work.

Unified ISSU Considerations for PTX Series Routers

Unified ISSU has the following caveats for PTX Series routers:

- Starting with Junos OS Release 13.2, unified ISSU is supported on the PTX5000 and PTX3000 with the FPC-PTX-P1-A FPC. However, you can perform unified ISSU only from Junos OS Release 13.2 to 13.3 and from Junos OS Release 14.1 to a later release. You must *not* perform unified ISSU from Junos OS Release 13.2 or 13.3 to 14.1 and later releases.
- Link Aggregation Control Protocol (LACP) is not supported during unified ISSU on PTX Series routers. You must disable the **lACP** statement at the **[edit interfaces *interface-name* aggregated-ether-options]** hierarchy level before the unified ISSU process begins and enable it after the unified ISSU process is complete.

Unified ISSU Considerations for T Series Routers

Unified ISSU has the following caveats for T Series devices:

- During the unified ISSU process on a routing matrix with TX Matrix Plus routers with 3D SIBs, only 75 percent of the traffic remains uninterrupted.
- The scale supported on T640-FPC2-E, T640-FPC2-E2, T640-FPC3-E, and T640-FPC3-E2 Flexible Port Concentrators (FPCs) is less than that supported on T640-FPC1-ES, T640-FPC2-ES, T640-FPC3-ES, T1600-FPC4-ES, and T640-FPC4-1P-ES FPCs because of differences in hardware

configuration. Therefore, when a unified ISSU is performed, if the configured scale on any of the FPCs is more than what is supported on that FPC, field-replaceable unit (FRU) upgrade of that FPC fails. To check the current hardware configuration of an FPC, use the **show chassis fpc** operational command.

- The PD-4XGE-XFP PIC goes offline during a unified ISSU if the PIC is installed in a T-1600-FPC4-ES with part number 710-013037 revision 12 or earlier.
- In the FPCs on T4000 routers, interface-specific and firewall filter statistics are preserved across a unified ISSU. During the unified ISSU, counter and policer operations are disabled.
- To preserve statistics across a unified ISSU on T4000 routers with FPC/PIC interfaces, the router stores the statistics data as binary large objects. The router collects the statistics before the unified ISSU is initialized, and restores the statistics after the unified ISSU completes. No statistics are collected during the unified ISSU process.
- To verify that statistics are preserved across the unified ISSU, you can issue CLI operational commands such as **show interfaces statistics** after the unified ISSU completes.
- When you configure the unified ISSU feature on the T4000 Core Router, you can also configure LACP. However, LACP periodic fast mode is not supported. If you configure LACP periodic transmission, set it to slow mode at both sides before initiating a unified ISSU. If fast mode is configured, the configuration can be committed without any commit or system log error messages, but you might notice that a larger than expected amount of traffic drops because of the LACP links going down during a unified ISSU.

Unified ISSU Considerations for EX Series Switches

Unified ISSU has the following caveats for EX Series devices:

- EX9204, EX9208, EX9214, and EX9251, and EX9253 switches do not support LACP fast timer configuration starting with Junos OS Release 17.4. If the LACP fast timer is configured, there will be LAG interface flaps traffic loss during ISSU. We recommend moving to LACP slow before beginning ISSU on these devices.

Unified ISSU Platform Support

Table 19 on page 512 lists the platforms that support unified ISSU when dual Routing Engines are installed and the first Junos OS release that supports unified ISSU on those platforms. In addition to verifying that your platform supports unified ISSU, you need to verify that the field-replaceable unit, such as PICs, that are installed also support unified ISSU.

To access an interactive tool for verifying hardware support for unified ISSU, see the Juniper Networks Feature Explorer (<https://pathfinder.juniper.net/feature-explorer/>).

Table 19: Unified ISSU Support for Dual Routing Engine Platforms

Platform	Junos OS Release
EX9200 switch	• 12.3R3 or later • 14.2R1 or later on EX9200-32XS, EX9200-4QS, and EX9200-2C-8XS • 17.1R1 or later on EX9200-6QS
M10i router	9.5R1
M120 router	9.2R1
M320 router	9.0R1
MX240 router	9.3R1
MX480 router	9.3R1
MX960 router	9.3R1
MX2010 router	13.2R1
MX2020 router	13.2R1
MX104 router	14.1R1
MX Series Virtual Chassis	14.1R1
MX10003 router	18.2R1
PTX5000 router	13.2R1

Table 19: Unified ISSU Support for Dual Routing Engine Platforms (Continued)

Platform	Junos OS Release
PTX3000 router	13.2R1
T320 router	9.0R1
T640 router	9.0R1
T1600 router	9.1R1
T4000 router	12.3R1
TX Matrix router	9.3R1
TX Matrix Plus router	12.3R2
TX Matrix Plus routers with 3D SIBs	14.1R1

Unified ISSU Protocol Support for M Series, MX Series, and T Series Routers and EX9200 Switches

To find out which releases support ISSU, please use the [ISSU Feature Explorer](#) tool on the Juniper Networks website. The ISSU Feature Explorer tool contains information about the Juniper Networks devices that support ISSU, the releases that support ISSU for each device, and the SKUs that support ISSU for each release.

NOTE: To gain access to the ISSU Feature Explorer tool, you need to log in with a customer or partner account on the Juniper Networks website. For more information on setting up a Juniper Networks account, please see the [Juniper Networks Guide to Creating a User Account](#).

Unified ISSU Feature Support

Unified ISSU supports most Junos OS features starting in Junos OS Release 9.0. However, the following constraints apply:

- Link Aggregation Control Protocol (LACP)—Link changes are not processed until after the unified ISSU is complete.
- Automatic Protection Switching (APS)—Network changes are not processed until after the unified ISSU is complete.
- Ethernet Operation, Administration, and Management (OAM) as defined by IEEE 802.3ah and by IEEE 802.1ag—When a Routing Engine switchover occurs, the OAM hello message times out, triggering protocol convergence.
- Ethernet circuit cross-connect (CCC) encapsulation—Circuit changes are not processed until after the unified ISSU is complete.
- Logical systems—On devices that have logical systems configured on them, only the primary logical system supports unified ISSU.

NOTE: Starting with Junos OS Release 16.1R1, while performing a unified ISSU from a FreeBSD 6.1-based Junos OS to an upgraded FreeBSD 10.x-based Junos OS, the configuration must be validated on a remote host or on a Routing Engine. The remote host or the Routing Engine must be running a Junos OS with an upgraded FreeBSD. In addition, only a few selected directories and files are preserved while upgrading from FreeBSD 6.1-based Junos OS to FreeBSD 10.x-based Junos OS. See [Upgrading Junos OS with Upgraded FreeBSD](#).

Unified ISSU PIC Support Considerations

The following sections list the PICs that are supported by unified ISSU.

NOTE: For information about ISSU support on individual PICs based on device and release, use the [ISSU Feature Explorer](#) tool.

NOTE: For information about Flexible PIC Concentrator (FPC) types, FPC/PIC compatibility, and the initial Junos OS release in which a particular PIC is supported on an FPC, see the PIC guide for your platform.

PIC Considerations

Take the following PIC restrictions into consideration before performing a unified ISSU:

- **Unsupported PICs**—If a PIC is not supported by unified ISSU, at the beginning of the upgrade, the software issues a warning that the PIC will be taken offline. After the PIC is brought offline and the unified ISSU is complete, the PIC is brought back online with the new firmware.
- **PIC combinations**—For some PICs, newer Junos OS services can require significant Internet Processor ASIC memory, and some configuration rules might limit certain combinations of PICs on particular platforms. With a unified ISSU:
 - If a PIC combination is not supported by the software version that the device is being upgraded from, the validation check displays a message and terminates the upgrade.
 - If a PIC combination is not supported by the software version to which the device is being upgraded, the validation check displays a message and terminates the upgrade, even if the PIC combination is supported by the software version from which the device is being upgraded.
- **Interface statistics**—Interface statistics might be incorrect because:
 - During bootup of the new microkernel on the Packet Forwarding Engine, host-bound traffic is not handled and might be dropped, causing packet loss.
 - During the hardware update of the Packet Forwarding Engine and its interfaces, traffic is halted and discarded. (The duration of the hardware update depends on the number and type of interfaces and on the device configuration.)
 - During a unified ISSU, periodic statistics collection is halted. If hardware counters saturate or wrap around, the software does not display accurate interface statistics.
- **CIR oversubscription**—If oversubscription of the committed information rate (CIR) is configured on logical interfaces:
 - And the sum of the CIR exceeds the physical interface's bandwidth, after a unified ISSU is performed, each logical interface might not be given its original CIR.
 - And the sum of the delay buffer rate configured on logical interfaces exceeds the physical interface's bandwidth, after a unified ISSU is performed, each logical interface might not receive its original delay-buffer-rate calculation.

SONET/SDH PICs

Table 20 on page 516 lists the SONET/SDH PICs that are supported during a unified ISSU.

Table 20: Unified ISSU PIC Support: SONET/SDH

PIC Type	Number of Ports	Model Number	Device
OC3c/STM1	4	PB-4OC3-SON-MM—(EOL) PB-4OC3-SON-SMIR—(EOL)	M120 M320, T320, T640, T1600
		PE-4OC3-SON-MM—(EOL) PE-4OC3-SON-SMIR—(EOL)	M10i
	2	PE-2OC3-SON-MM—(EOL) PE-2OC3-SON-SMIR—(EOL)	
OC3c/STM1 with SFP	2	PE-2OC3-SON-SFP	M10i
OC3c/STM1, SFP (Multi-Rate)	4 OC3 ports, 4 OC12 ports	PB-4OC3-4OC12-SON-SFP	M120 M320, MX Series, T320, T640, T1600, T4000, TX Matrix Plus, TX Matrix Plus with 3D SIBs
	4 OC3 ports, 1 OC12 port	PB-4OC3-1OC12-SON-SFP PB-4OC3-1OC12-SON2-SFP	
		PE-4OC3-1OC12-SON-SFP	M10i
OC12c/STM4	1	PE-1OC12-SON-SFP	M10i
		PE-1OC12-SON-MM—(EOL)	
		PE-1OC12-SON-SMIR—(EOL)	

Table 20: Unified ISSU PIC Support: SONET/SDH (Continued)

PIC Type	Number of Ports	Model Number	Device
		PB-1OC12-SON-MM—(EOL) PB-1OC12-SON-SMIR—(EOL)	M120, M320, T320, T640, T1600, T4000, TX Matrix, TX Matrix Plus with 3D SIBs
	4	PB-4OC12-SON-MM PB-4OC12-SON-SMIR	
OC12c/STM4, SFP	1	PB-1OC12-SON-SFP	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus
OC48c/STM16, SFP	1	PB-1OC48-SON-SFP PB-1OC48-SON-B-SFP	M120, M320, MX Series, T320, T640, T1600, TX Matrix, T4000, TX Matrix Plus, TX Matrix Plus with 3D SIBs
	4	PC-4OC48-SON-SFP	
OC192/STM64	1	PC-1OC192-SON-VSR	MX Series routers
OC192/STM64, XFP	1	PC-1OC192-SON-LR PC-1OC192-SON-SR2 PC-1OC192-VSR	M320, T320, T640, T1600, T4000, TX Matrix Plus with 3D SIBs
OC192/STM64, XFP	4	PD-4OC192-SON-XFP	M120, T640, T1600, T4000, TX Matrix Plus with 3D SIBs
	1	PC-1OC192-SON-XFP	T4000, MX Series routers, TX Matrix Plus with 3D SIBs

Table 20: Unified ISSU PIC Support: SONET/SDH *(Continued)*

PIC Type	Number of Ports	Model Number	Device
OC768/STM256	1	PD-1OC768-SON-SR	T640, T1600, T4000, TX Matrix Plus, TX Matrix Plus with 3D SIBs

Fast Ethernet and Gigabit Ethernet PICs

Table 21 on page 518 lists the Fast Ethernet and Gigabit Ethernet PICs that are supported during a unified ISSU.

NOTE: Starting with Junos OS Release 9.2, new Ethernet IQ2 PIC features might cause the software to reboot the PIC when a unified ISSU is performed. For information about applicable new Ethernet IQ2 PIC features, refer to the release notes for the specific Junos OS release.

Table 21: Unified ISSU PIC Support: Fast Ethernet and Gigabit Ethernet

PIC Type	Number of Ports	Model Number	Device
Fast Ethernet	4	PB-4FE-TX	M120, M320, T320, T640, T1600, TX Matrix
		PE-4FE-TX	M10i
	8	PB-8FE-FX	M120, M320
		PE-8FE-FX	M10i

Table 21: Unified ISSU PIC Support: Fast Ethernet and Gigabit Ethernet *(Continued)*

PIC Type	Number of Ports	Model Number	Device
	12	PB-12FE-TX-MDI PB-12FE-TX-MDIX	M120, M320, T320
		PE-12FE-TX-MDI PE-12FE-TX-MDIX	M10i
	48	PB-48FE-TX-MDI PB-48FE-TX-MDIX	M120, M320, T320
Gigabit Ethernet, RJ-45	40	EX9200-40T	EX9200
Gigabit Ethernet, SFP	1	PE-1GE-SFP	M10i
		PB-1GE-SFP	M120, M320, T320, T640, T1600, T4000, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
	2	PB-2GE-SFP	
	4	PB-4GE-SFP	
	10	PC-10GE-SFP	
	40	EX9200-40F	EX9200
Gigabit Ethernet IQ, SFP	1	PE-1GE-SFP-QPP	M10i
		PB-1GE-SFP-QPP	M120, M320, T320, T640, T1600, T4000, TX Matrix, TX

Table 21: Unified ISSU PIC Support: Fast Ethernet and Gigabit Ethernet *(Continued)*

PIC Type	Number of Ports	Model Number	Device
	2	PB-2GE-SFP-QPP	Matrix Plus, TX Matrix Plus with 3D SIBs
Gigabit Ethernet IQ2, SFP	4	PB-4GE-TYPE1-SFP-IQ2	M120, M320, T320, T640, T1600, T4000, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
	8	PB-8GE-TYPE2-SFP-IQ2 PC-8GE-TYPE3-SFP-IQ2	
Gigabit Ethernet IQ2, XFP	1	PC-1XGE-TYPE3-XFP-IQ2	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
10-Gigabit Ethernet XFP	4	PD-4XGE-XFP NOTE: This PIC goes offline during a unified ISSU if the PIC is inserted on T-1600-FPC4-ES with part number 710-013037 revision 12 or below.	T640, T1600, T4000, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
10-Gigabit Ethernet SFP+	10	PD-5-10XGE-SFPP	T640, T1600, T4000, TX Matrix Plus, TX Matrix Plus with 3D SIBs
	24	P1-PTX-24-10GE-SFPP EX9200-6QS	PTX5000 EX9200
	32	EX9200-32XS	EX9200

Table 21: Unified ISSU PIC Support: Fast Ethernet and Gigabit Ethernet *(Continued)*

PIC Type	Number of Ports	Model Number	Device
10-Gigabit Ethernet, DWDM	1	PC-1XGE-DWDM-CBAND	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
10-Gigabit Ethernet, DWDM OTN	1	PC-1XGE-DWDM-OTN	T4000, TX Matrix Plus with 3D SIBs
10-Gigabit Ethernet LAN/WAN PIC with SFP+	12	PF-12XGE-SFPP	T4000, TX Matrix Plus with 3D SIBs
	24	PF-24XGE-SFPP	T4000, TX Matrix Plus with 3D SIBs
10-Gigabit Ethernet, SFP+	32	14.2R1 or later EX9200-32XS	EX9200
10-Gigabit Ethernet, XENPAK	1	PC-1XGE-XENPAK	M120, M320, T320, T640, T1600, T4000, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
40-Gigabit Ethernet, CFP	2	P1-PTX-2-40GE-CFP	PTX5000
10-Gigabit Ethernet, 40-Gigabit Ethernet, QFSP+	16/4	14.2R1 or later EX9200-4QS	EX9200
	24/6	17.1R1 or later EX9200-6QS	
	48/12	P2-10G-40G-QSFPP	PTX5000

Table 21: Unified ISSU PIC Support: Fast Ethernet and Gigabit Ethernet (Continued)

PIC Type	Number of Ports	Model Number	Device
100-Gigabit Ethernet, CFP	1	PF-1CGE-CFP	T4000, TX Matrix Plus with 3D SIBs
	2	P1-PTX-2-100GE-CFP	PTX5000
	4	P2-100GE-CFP2	PTX5000
100-Gigabit Ethernet CFP/10-Gigabit Ethernet SFP+	2/8	EX9200-2C-8XS	EX9200
100-Gbps DWDM OTN	2	P1-PTX-2-100G-WDM	PTX5000
100-Gbps OTN, CFP2	4	P2-100GE-OTN	PTX5000

Channelized PICs

[Table 22 on page 522](#) lists the channelized PICs that are supported during a unified ISSU.

Table 22: Unified ISSU PIC Support: Channelized

PIC Type	Number of Ports	Model Number	Platform
Channelized E1 IQ	10	PB-10CHE1-RJ48-QPP	M120, M320, T320, T640, T1600, TX Matrix
		PB-10CHE1-RJ48-QPP-N	M120

Table 22: Unified ISSU PIC Support: Channelized *(Continued)*

PIC Type	Number of Ports	Model Number	Platform
		PE-10CHE1-RJ48-QPP PE-10CHE1-RJ48-QPP-N	M10i
Channelized T1 IQ	10	PB-10CHT1-RJ48-QPP	M320, T320, T640, T1600
		PE-10CHT1-RJ48-QPP	M10i
Channelized OC IQ	1	PB-1CHOC12SMIR-QPP PB-1CHSTM1-SMIR-QPP PB-1CHOC3-SMIR-QPP	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus
		PE-1CHOC12SMIR-QPP PE-1CHOC3-SMIR-QPP	M10i
Channelized DS3 to DS0 IQ	4	PB-4CHDS3-QPP	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus
		PE-4CHDS3-QPP	M10i
Channelized STM 1	1	PE-1CHSTM1-SMIR-QPP	M10i

Tunnel Services PICs

Table 23 on page 524 lists the Tunnel Services PICs that are supported during a unified ISSU.

Table 23: Unified ISSU PIC Support: Tunnel Services

PIC Type	Model Number	Platform
1-Gbps Tunnel	PE-TUNNEL	M10i
	PB-TUNNEL-1	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus
4-Gbps Tunnel	PB-TUNNEL	
10-Gbps Tunnel	PC-TUNNEL	

ATM PICs

Table 24 on page 524 lists the ATM PICs that are supported during a unified ISSU. The table includes support on Enhanced III FPCs.

Table 24: Unified ISSU PIC Support: ATM

PIC Type	Number of Ports	Model Number	Platform
DS3	4	PB-4DS3-ATM2	M120, M320, T320, T640, T1600, TX Matrix
		PE-4DS3-ATM2	M10i
E3	4	PB-4E3-ATM2	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus
	2	PE-2E3-ATM2	M10i

Table 24: Unified ISSU PIC Support: ATM (*Continued*)

PIC Type	Number of Ports	Model Number	Platform
OC3/STM1	2	PB-2OC3-ATM2-MM PB-2OC3-ATM2-SMIR	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus
		PE-2OC3-ATM2-MM PE-2OC3-ATM2-SMIR	M10i
OC12/STM4	1	PB-1OC12-ATM2-MM PB-1OC12-ATM2-SMIR	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus
	2	PB-2OC12-ATM2-MM PB-2OC12-ATM2-SMIR	M120, M320, T320, T640, T1600, T4000, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
	1	PE-1OC12-ATM2-MM PE-1OC12-ATM2-SMIR	M10i
OC48/STM16	1	PB-1OC48-ATM2-SFP	M120, M320, T320, T640, T1600, TX Matrix, TX Matrix Plus

Serial PICs

Unified ISSU supports the following 2-port EIA-530 serial PICs:

- PB-2EIA530 on M320 routers with Enhanced III FPCs, and on M120 routers
- PE-2EIA530 on M10i routers

DS3, E1, E3, and T1 PICs

Unified ISSU supports the following PICs on M120, M320, and T320 routers; T640 and T1600 routers; and the TX Matrix router:

- 4-Port DS3 PIC (PB-4DS3)
- 4-Port E1 Coaxial PIC (PB-4E1-COAX)
- 4-Port E1 RJ48 PIC (PB-4E1-RJ48)
- 4-Port E3 IQ PIC (PB-4E3-QPP)
- 4-Port T1 PIC (PB-4T1-RJ48)

NOTE: Unified ISSU is also supported on the 4-Port DS3 PIC (PB-4DS3) and the 4-Port E3 IQ PIC (PB-4E3-QPP) on the TX Matrix Plus router.

Unified ISSU supports the following PICs on M10i routers:

- 2-Port DS3 PIC (PE-2DS3)
- 4-Port DS3 PIC (PE-4DS3)
- 4-Port E1 PICs (PE-4E1-COAX and PE-4E1-RJ48)
- 2-Port E3 PIC (PE-2E3)
- 4-Port T1 PIC (PE-4T1-RJ48)
- 4-Port E3 IQ PIC (PE-4E3-QPP)

Enhanced IQ PICs

Unified ISSU supports the following PICs on M120 router, M320 router, and on T320 routers; T640 routers, T1600 routers, TX Matrix router, and the TX Matrix Plus router:

- 1-Port Channelized OC12/STM4 Enhanced IQ PIC (PB-1CHOC12-STM4-IQE-SFP)
- 1-Port nonchannelized OC12/STM4 Enhanced IQ PIC (PB-1OC12-STM4-IQE-SFP)
- 4-Port Channelized DS3/E3 Enhanced IQ PIC (PB-4CHDS3-E3-IQE-BNC)
- 4-Port nonchannelized DS3/E3 Enhanced IQ PIC (PB-4DS3-E3-IQE-BNC)
- 4-Port nonchannelized SONET/SDH OC48/STM16 Enhanced IQ (IQE) PIC with SFP (PC-4OC48-STM16-IQE-SFP)

Unified ISSU supports 1-port Channelized OC48/STM16 Enhanced IQ (IQE) PIC with SFP (PB-1CHOC48-STM16-IQE-SFP) on MX Series routers.

Enhanced IQ2 Ethernet Services Engine (ESE) PIC

Unified ISSU supports the enhanced IQ2 ESE PICs listed in [Table 25 on page 527](#).

Table 25: Unified ISSU Support: Enhanced IQ2 Ethernet Services Engine (ESE) PIC

Model Number	Number of Ports	Platform
PC-8GE-TYPE3-SFP-IQ2E	8	M120, M320, T320, T640, T4000 TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
PB-8GE-TYPE2-SFP-IQ2E	8	M120, M320, T320, T640, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
PB-4GE-TYPE1-SFP-IQ2E	4	M120, M320, T320, T640
PC-1XGE-TYPE3-XFP-IQ2E	1	M120, M320, T320, T640, T4000, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
PB-1CHOC48-STM16-IQE	1	M120, M320, T320, T640, T4000, TX Matrix, TX Matrix Plus, TX Matrix Plus with 3D SIBs
PE-4GE-TYPE1-SFP-IQ2E	4	M10i
PE-4GE-TYPE1-SFP-IQ2	4	M10i

Unified ISSU FPC Support on T4000 Routers

In the FPCs on T4000 routers, interface-specific and firewall filter statistics are preserved across a unified ISSU. During the unified ISSU, counter and policer operations are disabled.

To preserve statistics across a unified ISSU on T4000 routers with FPC/PIC interfaces, the router stores the statistics data as binary large objects. The router collects the statistics before the unified ISSU is initialized, and restores the statistics after the unified ISSU completes. No statistics are collected during the unified ISSU process.

To verify that statistics are preserved across the unified ISSU, you can issue CLI operational commands such as **show interfaces statistics** after the unified ISSU completes.

Unified ISSU is supported on the following FPCs:

- T4000 FPC5 (model numbers—T4000-FPC5-3D and T4000-FPC5-LSR)
- Enhanced Scaling FPC4-1P (model number—T640-FPC4-1P-ES)
- Enhanced Scaling FPC4 (T1600-FPC4-ES)
- Enhanced Scaling FPC3 (T640-FPC3-ES)
- Enhanced Scaling FPC2 (T640-FPC2-ES)

NOTE: The aforementioned FPCs are also supported on TX Matrix Plus routers with 3D SIBs.

Unified ISSU Support on MX Series 3D Universal Edge Routers

The following sections list the Dense Port Concentrators (DPCs), Flexible PIC Concentrators (FPCs), Modular Port Concentrators (MPCs), and Modular Interface Cards (MICs) that are supported during a unified ISSU on MX Series routers.

Unified ISSU DPC and FPC Support on MX Series Routers

Unified ISSU supports all DPCs except the Multiservices DPC on MX Series routers. Unified ISSU also supports Type 2 FPC (**MX-FPC2**) and Type 3 FPC (**MX-FPC3**) on MX Series routers. For more information about DPCs and FPCs on MX Series routers, go to https://www.juniper.net/documentation/en_US/release-independent/junos/information-products/pathway-pages/mx-series/.

Unified ISSU MIC and MPC Support on MX Series Routers

Unified ISSU supports all the Modular Port Concentrators (MPCs) and Modular Interface Cards (MICs) listed in [Table 26 on page 529](#) and [Table 27 on page 531](#). Unified ISSU is not supported on MX80 routers.

In the MPCs on MX Series routers, interface-specific and firewall filter statistics are preserved across a unified ISSU. During the unified ISSU, counter and policer operations are disabled.

To preserve statistics across a unified ISSU on MX Series routers with MPC/MIC interfaces, the router stores the statistics data as binary large objects. The router collects the statistics before the unified ISSU is initialized, and restores the statistics after the unified ISSU completes. No statistics are collected during the unified ISSU process.

To verify that statistics are preserved across the unified ISSU, you can issue CLI operational commands such as **show interfaces statistics** after the unified ISSU completes.

Table 26: Unified ISSU Support: MX Series Router MPCs

MPC Type	Number of Ports	Model Number	Platform
MPC1	—	MX-MPC1-3D	MX Series routers
MPC1E	—	MX-MPC1E-3D	MX Series routers
MPC1 Q	—	MX-MPC1-3D-Q	MX Series routers
MPC1E Q	—	MX-MPC1E-3D-Q	MX Series routers
MPC2	—	MX-MPC2-3D	MX Series routers
MPC2E	—	MX-MPC2E-3D	MX Series routers
MPC2 Q	—	MX-MPC2-3D-Q	MX Series routers
MPC2E Q	—	MX-MPC2E-3D-Q	MX Series routers
MPC2 EQ	—	MX-MPC2-3D-EQ	MX Series routers

Table 26: Unified ISSU Support: MX Series Router MPCs *(Continued)*

MPC Type	Number of Ports	Model Number	Platform
MPC2E EQ	—	MX-MPC2E-3D-EQ	MX Series routers
16x10GE MPC	16	MPC-3D-16XGE-SFPP	MX Series routers
MPC3E	—	MX-MPC3E-3D	MX Series routers
32x10GE MPC4E	32	MPC4E-3D-32XGE-SFPP	MX Series routers
2x100GE + 8x10GE MPC4E	10	MPC4E-3D-2CGE-8XGE	MX Series routers
6x40GE + 24x10GE MPC5E	30	MPC5E-40G10G	MX Series routers
6x40GE + 24x10GE MPC5EQ	30	MPC5EQ-40G10G	MX Series routers
2x100GE + 4x10GE MPC5E	6	MPC5E-100G10G	MX Series routers
2x100GE + 4x10GE MPC5EQ	6	MPC5EQ-100G10G	MX Series routers
MPC6E	2	MX2K-MPC6E	MX Series routers
MPC7E (multi-rate)	12	MPC7E-MRATE	MX Series routers
MPC7E 10G	40	MPC7E-10G	MX Series routers
MPC8E	—	MX2K-MPC8E	MX Series routers
MPC9E	—	MX2K-MPC9E	MX Series routers

Table 27: Unified ISSU Support: MX Series Router MICs

MIC Type	Number of Ports	Model Number	Platform
ATM MIC with SFP	8	MIC-3D-8OC3-2OC12-ATM	MX Series routers
Channelized SONET/SDH OC192/STM64 MIC with XFP	4	MIC-3D-1OC192-XFP	MX Series routers
Channelized OC3/STM1 (Multi-Rate) Circuit Emulation MIC with SFP	4	MIC-3D-4COC3-1COC12-CE	MX Series routers
Channelized E1/T1 Circuit Emulation MIC	16	MIC-3D-16CHE1-T1-CE	MX Series routers
Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP	4	MIC-3D-4CHOC3-2CHOC12	MX Series routers
Channelized SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP	8	MIC-3D-4CHOC3-2CHOC12	MX Series routers
Channelized DS3/E3 MIC	8	MIC-3D-8CHDS3-E3-B	MX Series routers
DS3/E3	8	MIC-3D-8DS3-E3	MX Series routers
See MIC MRATE for MIC Type	12	MIC MRATE	MX Series routers
40-Gigabit Ethernet MIC with QSFP	2	MIC3-3D-2X40GE-QSFPP	MX Series routers

Table 27: Unified ISSU Support: MX Series Router MICs (Continued)

MIC Type	Number of Ports	Model Number	Platform
10-Gigabit Ethernet MIC with SFPP	10	MIC3-3D-10XGE-SFPP	MX Series routers
100-Gigabit Ethernet MIC with CXP	1	MIC3-3D-1X100GE-CXP	MX Series routers
100-Gigabit Ethernet MIC with CFP	1	MIC3-3D-1X100GE-CFP	MX Series routers
Gigabit Ethernet MIC with SFP	20	MIC-3D-20GE-SFP	MX Series routers
10-Gigabit Ethernet MIC with SFP+ (24 Ports)	24	MIC6-10G	MX Series routers
10-Gigabit Ethernet DWDM OTN MIC (non-OTN mode only)	24	MIC6-10G-OTN	MX Series routers
100-Gigabit Ethernet MIC with CFP2 (non-OTN mode only)	2	MIC6-100G-CFP2	MX Series routers
100-Gigabit Ethernet MIC with CXP (4 Ports)	4	MIC6-100G-CXP	MX Series routers
10-Gigabit Ethernet MICs with XFP	2	MIC-3D-2XGE-XFP	MX Series routers
10-Gigabit Ethernet MICs with XFP	4	MIC-3D-4XGE-XFP	MX Series routers

Table 27: Unified ISSU Support: MX Series Router MICs *(Continued)*

MIC Type	Number of Ports	Model Number	Platform
SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP	4	MIC-3D-4OC3OC12-1OC48	MX Series routers
SONET/SDH OC3/STM1 (Multi-Rate) MICs with SFP	8	MIC-3D-8OC3OC12-4OC48	MX Series routers
Tri-Rate Copper Ethernet MIC	40	MIC-3D-40GE-TX	MX Series routers
100-Gigabit DWDM OTn MIC with CFP2-ACO	1	MIC3-100G-DWDM	MX960 routers

NOTE: Note that unified ISSU is supported only by the MICs listed in [Table 27 on page 531](#).

NOTE: Consider the following guidelines before performing a unified ISSU on an MX Series router with ATM interfaces at scale:

- The PPP keepalive interval must be 10 seconds or greater. PPP requires three keepalives to fail before it brings down the session. Thirty seconds (ten seconds multiplied by three) provides a safe margin to maintain PPP sessions across the unified ISSU in case of any traffic loss during the operation. Configure the interval with the **keepalives** statement at the **[edit interfaces at-*interface-name*]** or **[edit interfaces at-*interface-name* unit *logical-unit-number*]** hierarchy level.
- The OAM F5 loopback cell period must be 20 seconds or greater to maintain ATM connectivity across the unified ISSU. Configure the interval with the **oam-period** statement at the **[edit interfaces at-*interface-name* unit *logical-unit-number*]** hierarchy level.

Unified ISSU Limitations on MX Series Routers

Unified ISSU is currently not supported when clock synchronization is configured for Synchronous Ethernet, Precision Time Protocol (PTP), and hybrid mode on MX80 routers and on the MICs and MPCEs on MX240, MX480, and MX960 routers.

NOTE: Before enabling ISSU on MX routers, when upgrading from a Junos OS Release 14.1 or earlier to Junos OS Release 14.2 or later, you must disable IGMP snooping, and PIM snooping, in all protocol hierarchies. This includes the bridge-domain and routing-instances hierarchies.

NOTE: On MX Series routers with MPC/MIC interfaces, the policers for transit traffic and statistics are disabled temporarily during the unified ISSU process.

Release History Table

Release	Description
17.4	Unified ISSU is supported with Junos OS Release 17.4R1 for MX Series routers
17.4	EX9204, EX9208, EX9214, and EX9251, and EX9253 switches do not support LACP fast timer configuration starting with Junos OS Release 17.4.
16.1R1	Starting with Junos OS Release 16.1R1, while performing a unified ISSU from a FreeBSD 6.1-based Junos OS to an upgraded FreeBSD 10.x-based Junos OS, the configuration must be validated on a remote host or on a Routing Engine.
13.3	On MX Series 3D Universal Edge Routers with MPC3E and MPC4E interfaces, unified ISSU is supported starting with Junos OS Release 13.3.
13.2	Starting with Junos OS Release 13.2, unified ISSU is supported on the PTX5000 and PTX3000 with the FPC-PTX-P1-A FPC.
11.2	On MX Series 3D Universal Edge Routers (with Modular Port Concentrator/Modular Interface Card (MPC/MIC) interfaces), unified ISSU is supported starting with Junos OS Release 11.2.

RELATED DOCUMENTATION

[Getting Started with Unified In-Service Software Upgrade](#) | 495

[Best Practices for Performing a Unified ISSU | 536](#)

[Understanding the Unified ISSU Process | 496](#)

[Example: Performing a Unified ISSU | 537](#)

[Configuring LACP for Aggregated Ethernet Interfaces](#)

request system software validate on (Junos OS with Upgraded FreeBSD)

Performing a Unified ISSU

IN THIS CHAPTER

- [Best Practices for Performing a Unified ISSU | 536](#)
- [Example: Performing a Unified ISSU | 537](#)
- [Performing an In-Service Software Upgrade \(ISSU\) with Non-Stop Routing | 575](#)
- [Performing an In-Service Software Upgrade \(ISSU\) in ACX5000 Series Routers | 581](#)
- [How to Use Unified ISSU with Enhanced Mode | 586](#)
- [Verifying a Unified ISSU | 590](#)
- [Troubleshooting Unified ISSU Problems | 591](#)
- [Managing and Tracing BFD Sessions During Unified ISSU Procedures | 591](#)

Best Practices for Performing a Unified ISSU

When you are planning to perform a unified in-service software upgrade (ISSU), choose a time when your network is as stable as possible. As with a normal upgrade, Telnet sessions, SNMP, and CLI access are briefly interrupted. In addition, the following restrictions apply:

- The primary Routing Engine and backup Routing Engine must be running the same software version before you can perform a unified ISSU.
- Verify that your platform supports the unified ISSU feature.
- Read the “Unified ISSU Considerations” topic in the chapter ["Unified ISSU System Requirements" on page 507](#) to anticipate any special circumstances that might affect your upgrade.

RELATED DOCUMENTATION

[Example: Performing a Unified ISSU | 537](#)

[Verifying a Unified ISSU | 590](#)

[Troubleshooting Unified ISSU Problems | 591](#)

Example: Performing a Unified ISSU

IN THIS SECTION

- [Requirements | 537](#)
- [Overview | 538](#)
- [Configuration | 539](#)
- [Verifying Dual Routing Engines and Enabling GRES and NSR | 540](#)
- [Verifying the Software Versions and Backing Up the Device Software | 542](#)
- [Adjusting Timers and Changing Feature-Specific Configuration | 544](#)
- [Upgrading and Rebooting Both Routing Engines Automatically | 546](#)
- [Restoring Feature-Specific Configuration | 553](#)
- [Upgrading Both Routing Engines and Rebooting the New Backup Routing Engine Manually | 555](#)
- [Upgrading and Rebooting Only One Routing Engine | 565](#)

This example shows how to perform a unified in-service software upgrade (ISSU).

Requirements

This example uses the following hardware and software components:

- MX480 router with dual Routing Engines
- Junos OS Release 13.3R6 as the starting release
- Junos OS Release 14.1R4 as the ending release

Before You Begin

Before you perform a unified ISSU, be sure you:

- Perform a compatibility check to ensure that the software and hardware components and the configuration on the device support unified ISSU by using the ["request system software validate in-service-upgrade" on page 1082](#) command
- Read the chapter ["Unified ISSU System Requirements" on page 507](#) to anticipate any special circumstances that might affect your upgrade.
 - Verify that your platform supports the unified ISSU feature.

- Verify that the field-replaceable units (FRUs) installed in your platform support the unified ISSU feature or that you can accept the results of performing the upgrade with some FRUs that do not support unified ISSU.
- Verify that the protocols and features configured on your platform support the unified ISSU feature or that you can accept the results of performing the upgrade with some protocols and features that do not support unified ISSU.
- Download the software package from the Juniper Networks Support website at <https://www.juniper.net/support/> and place the package on your local server.

BEST PRACTICE: When you access the Download Software web page for your device, record the md5 checksum. After downloading the software package to your device, confirm that it is not modified in any way by using the `file checksum md5` command. For more information about verifying the md5 checksum, see <https://kb.juniper.net/InfoCenter/index?page=content&id=KB17665>.

NOTE: Starting with Junos OS Release 16.1R1, while performing a unified ISSU from a FreeBSD 6.1 based Junos OS to an upgraded FreeBSD 10.x based Junos OS, the configuration must be validated on a remote host or on a routing engine. The remote host or the routing engine must be running a Junos OS with an upgraded FreeBSD. In addition, only a few selected directories and files will be preserved while upgrading from FreeBSD 6.1 based Junos OS to FreeBSD 10.x based Junos OS. See [Upgrading Junos OS with Upgraded FreeBSD](#) and [request system software validate on \(Junos OS with Upgraded FreeBSD\)](#)

Overview

IN THIS SECTION

- [Topology](#) | 539


This procedure can be used to upgrade M Series, T Series, MX Series, EX Series, and PTX Series devices that have dual Routing Engines installed and support unified ISSU.

In the example, the hostnames, filenames, and FRUs are representational. When you perform the procedure on your device, the hostnames, filenames, and FRUs are different. The command output is truncated to only show the text of interest in this procedure.

Topology

Figure 35 on page 539 shows the topology used in this example.

Figure 35: Unified ISSU Example Topology

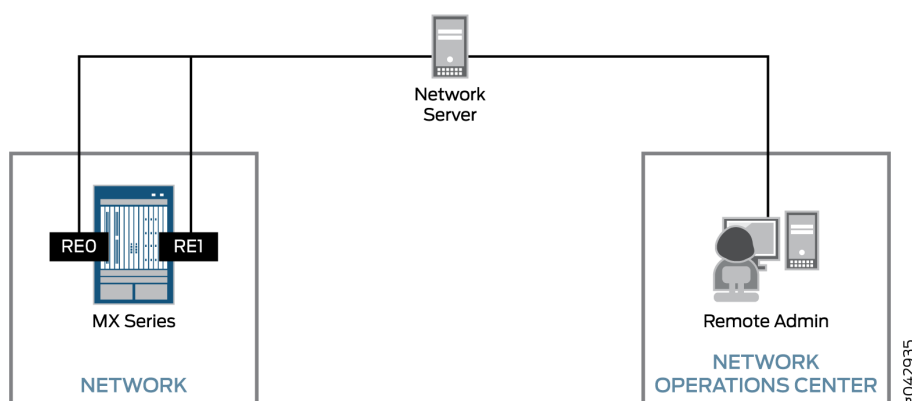

Configuration

There are variations of the procedure depending on if you want to install the new software on one or both Routing Engines and if you want to automatically reboot both Routing Engines or manually reboot one of the Routing Engines.

In all cases, you must verify that dual Routing Engines are installed and that graceful Routing Engine switchover (GRES) and nonstop active routing (NSR) are enabled. We recommend that you back up the device software before the upgrade.

To perform a unified ISSU, select the appropriate tasks from the following list:

- ["Verifying Dual Routing Engines and Enabling GRES and NSR" on page 540](#)
- ["Verifying the Software Versions and Backing Up the Device Software" on page 542](#)
- ["Adjusting Timers and Changing Feature-Specific Configuration" on page 544](#)
- ["Upgrading and Rebooting Both Routing Engines Automatically" on page 546](#)
- ["Restoring Feature-Specific Configuration" on page 553](#)
- ["Upgrading Both Routing Engines and Rebooting the New Backup Routing Engine Manually" on page 555](#)
- ["Upgrading and Rebooting Only One Routing Engine" on page 565](#)

Verifying Dual Routing Engines and Enabling GRES and NSR

IN THIS SECTION

- [Procedure | 540](#)

Procedure

Step-by-Step Procedure

Enabling GRES and NSR is required regardless of which variation of the unified ISSU procedure you use.

To verify that your device has dual Routing Engines and to enable GRES and NSR:

1. Log in to your device.
2. Verify that dual Routing Engines are installed in your device by using the **show chassis hardware** command.

```
user@host> show chassis hardware
Routing Engine 0 REV 01   740-051822   9013086837   RE-S-1800x4
Routing Engine 1 REV 01   740-051822   9013086740   RE-S-1800x4
```

The command output contains lines listing Routing Engine 0 and Routing Engine 1.

3. By default, GRES is disabled; if you have not already done so, enable GRES by including the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level on the primary Routing Engine.

```
[edit ]
user@host# set chassis redundancy graceful-switchover
```

4. By default, NSR is disabled; if you have not already done so, enable NSR by including the **nonstop-routing** statement at the **[edit routing-options]** hierarchy level.

```
[edit]
user@host# set routing-options nonstop-routing
```

5. When you configure NSR, you must also include the **commit synchronize** statement at the **[edit system]** hierarchy level so that configuration changes are synchronized on both Routing Engines.

```
[edit]
user@host# set system commit synchronize
```

6. After you have verified your configuration and are satisfied with it, commit the changes by using the **commit** command.

```
[edit]
user@host# commit
commit complete
```

When you enable GRES and commit the configuration, the CLI prompt changes to indicate which Routing Engine you are using. For example:

```
{master} [edit]
user@host#
```

7. Exit configuration mode by using the **exit** command.

```
{master} [edit]
user@host# exit
Exiting configuration mode
```

8. Verify that NSR is configured on the primary Routing Engine (**re0**) by using the **show task replication** command.

```
{master}
user@host> show task replication
    Stateful Replication: Enabled
    RE mode: Master

Protocol                Synchronization Status
-----
OSPF                     Complete
IS-IS                    Complete
```

In the output, verify that the **Synchronization Status** field displays **Complete**.

9. Verify that GRES is enabled on the backup Routing Engine (**re1**) by using the **show system switchover** command.

```
user@host> request routing-engine login re1
{backup}
user@host> show system switchover
Graceful switchover: On
Configuration database: Ready
Kernel database: Ready
Peer state: Steady State
```

In the output, verify that the **Graceful switchover** field state displays **On**. For more information about the **show system switchover** command, see ["show system switchover" on page 1266](#).

Verifying the Software Versions and Backing Up the Device Software

IN THIS SECTION

- [Procedure | 542](#)

Procedure

Step-by-Step Procedure

Unified ISSU requires that both Routing Engines are running the same version of Junos OS before the upgrade. As a preventive measure in case any problems occur during an upgrade, it is a best practice to back up the system software to the device hard disk.

To verify the software versions and back up the device software:

1. Verify that the same version of Junos OS is installed and running on both Routing Engines by using the **show version** command.

```
{backup}
user@host> show version invoke-on all-routing-engines
re0:
-----
Hostname: host
Model: mx480
```

```

Junos: 13.3R6.5
JUNOS Base OS boot [13.3R6.5]
JUNOS Base OS Software Suite [13.3R6.5]
JUNOS 64-bit Kernel Software Suite [13.3R6.5]
JUNOS Crypto Software Suite [13.3R6.5]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [13.3R6.5]
JUNOS Packet Forwarding Engine Support (MX Common) [13.3R6.5]
JUNOS Online Documentation [13.3R6.5]

```

```
rel:
```

```

-----
Hostname: host
Model: mx480
Junos: 13.3R6.5
JUNOS Base OS boot [13.3R6.5]
JUNOS Base OS Software Suite [13.3R6.5]
JUNOS 64-bit Kernel Software Suite [13.3R6.5]
JUNOS Crypto Software Suite [13.3R6.5]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [13.3R6.5]
JUNOS Packet Forwarding Engine Support (MX Common) [13.3R6.5]
JUNOS Online Documentation [13.3R6.5]

```

2. Back up the system software to the device hard disk by using the **request system snapshot** command on *each* Routing Engine.

NOTE: The root file system is backed up to **/altroot**, and **/config** is backed up to **/altconfig**. After you issue the **request system snapshot** command, the device flash and hard disks are identical. You can return to the previous version of the software only by booting the device from removable media.

```

{backup}
user@host> request system snapshot
user@host> request routing-engine login re0
{master}
user@host> request system snapshot

```


Adjusting Timers and Changing Feature-Specific Configuration

IN THIS SECTION

- Procedure | 544

Procedure

Step-by-Step Procedure

If you have any of the following feature-specific configuration on your device, perform the appropriate steps.

To adjust timers and change feature-specific configuration:

1. Bidirectional Forwarding Detection (BFD) sessions temporarily increase their detection and transmission timers during unified ISSU procedures. After the upgrade, these timers revert to the values in use before the unified ISSU started.

If BFD is enabled on your device and you want to disable the BFD timer negotiation during the unified ISSU, include the **no-issu-timer-negotiation** statement at the **[edit protocols bfd]** hierarchy level.

```
{master} [edit]
user@host# set protocols bfd no-issu-timer-negotiation
```

NOTE: If you include this statement, the BFD timers maintain their original values during the unified ISSU, and the BFD sessions might flap during the unified ISSU or Routing Engine switchover, depending on the detection intervals.

2. If proxy ARP is enabled on your M Series, MX Series, or EX 9200 Series device, remove the **unconditional-src-learn** statement from the **[edit interfaces *interface-name* unit 0 family inet]** hierarchy level.

By default the statement is not included. This example shows the ge-0/0/1 interface only.

```
{master} [edit]
user@host# delete interfaces ge-0/0/1 unit 0 family inet unconditional-src-learn
```

3. If LACP is enabled on your PTX Series device, remove the **lacp** statement from the **[edit interfaces *interface-name* aggregated-ether-options]** hierarchy level.

```
{master} [edit]
user@host# delete interfaces aex aggregated-ether-options lacp
```

4. If ATM Point-to-Point Protocol (PPP) is enabled on your M Series or T Series device, set the keepalive interval to 10 seconds or greater.

PPP requires three keepalives to fail before it brings down the session. Thirty seconds (10 seconds x three) provides a safe margin to maintain PPP sessions in case of any traffic loss during the unified ISSU operation.

This example shows the at-0/0/1 interface only.

```
{master} [edit]
user@host# set interfaces at-0/0/1 unit 0 keepalives interval 10
```

5. If ATM OAM is enabled on your M Series or T Series device, set the OAM F5 loopback cell period to 20 seconds or greater to maintain ATM connectivity across the unified ISSU.

Include the **oam-period** statement at the **[edit interfaces *interface-name* unit *logical-unit-number*]** hierarchy level and specify 20 seconds. This example shows the at-0/0/1 interface only.

```
{master} [edit]
user@host# set interfaces at-0/0/1 unit 0 oam-period 20
```

6. After you have verified your configuration and are satisfied with it, commit the changes by using the **commit** command.

```
{master} [edit]
user@host# commit
commit complete
```

7. Exit configuration mode by using the **exit** command.

```
{master} [edit]
user@host# exit
{master}
user@host>
```

Upgrading and Rebooting Both Routing Engines Automatically

IN THIS SECTION

Procedure | 546

Procedure

Step-by-Step Procedure

In this procedure, both Routing Engines automatically reboot. Rebooting both Routing Engines automatically is the most common scenario. Variations to this procedure are described in other sections.

Table 28 on page 546 shows the Routing Engine status prior to starting the unified ISSU.

Table 28: Routing Engine Status Before Upgrading

RE0	RE1
Primary	Backup
Old software version installed	Old software version installed
Old software version running	Old software version running

To upgrade and reboot both Routing Engines automatically:

1. Copy the Junos OS software package to the device by using the **file copy ftp://*username@hostname.net/ filename /var/tmp/ filename*** command.

We recommend that you copy the package to the `/var/tmp` directory, which is a large file system on the hard disk.

```
{master}
user@host> file copy ftp://myid@myhost.mydomain.net/jinstall64-14.1R4.10-domestic-signed.tgz
/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
```

BEST PRACTICE: When you access the Download Software web page for your device, record the md5 checksum. After downloading the software package to your device, confirm that it is not modified in any way by using the `file checksum md5` command. For more information about verifying the md5 checksum, see <https://kb.juniper.net/InfoCenter/index?page=content&id=KB17665>.

2. On the primary Routing Engine, start the upgrade by using the **request system software in-service-upgrade *package-name* reboot** command.

NOTE: Do not try running any additional commands until after the **Connection closed** message is displayed and your session is disconnected.

```
{master}
user@host> request system software in-service-upgrade
/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz reboot
Chassis ISSU Check Done
ISSU: Validating Image
FPC 0 will be offlined (In-Service-Upgrade not supported)
PIC 0/0 will be offlined (In-Service-Upgrade not supported)
PIC 0/1 will be offlined (In-Service-Upgrade not supported)
Do you want to continue with these actions being taken ? [yes,no] (no) yes

Checking compatibility with configuration
Initializing...
Using jbase-13.3R6.5
Verified manifest signed by PackageProductionEc_2015
Using /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Using jinstall64-14.1R4.10-domestic.tgz
Using jbundle64-14.1R4.10-domestic.tgz
```

```

Checking jbundle requirements on /
Using jbase-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jbase-14.1R4.10 signed by PackageProductionEc_2015
Using /var/v/c/tmp/jbundle/jboot-14.1R4.10.tgz
Using jcrypto64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jcrypto64-14.1R4.10 signed by PackageProductionEc_2015
Using jdocs-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jdocs-14.1R4.10 signed by PackageProductionEc_2015
Using jkernel64-14.1R4.10.tgz
Using jpfe-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M10-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M120-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M160-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M320-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M40-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M7i-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-T-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X2000-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X960-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-common-14.1R4.10.tgz
Using jplatform-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jplatform-14.1R4.10 signed by PackageProductionEc_2015
Using jroute-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jroute-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime64-14.1R4.10 signed by PackageProductionEc_2015
Using jservices-14.1R4.10.tgz
Using jservices-crypto-14.1R4.10.tgz
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
ISSU: Preparing Backup RE
Pushing /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz to rel:/var/tmp/

```

```
jinstall64-14.1R4.10-domestic-signed.tgz
Installing package '/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz' ...
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionRSA_2015
Adding jinstall64...
Verified manifest signed by PackageProductionEc_2015
```

```
WARNING:      This package will load JUNOS 14.1R4.10 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.
```

```
Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/
juniper.conf.pre-install
Installing the bootstrap installer ...
```

```
WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.
```

```
Saving state for rollback ...
Backup upgrade done
Rebooting Backup RE
```

```
Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
```

Item	Status	Reason

```

FPC 0           Offline           Offlined by cli command
Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
ISSU: Upgrading Old Master RE
Installing package '/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz' ...
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionRSA_2015
Adding jinstall64...
Verified manifest signed by PackageProductionEc_2015

WARNING:      This package will load JUNOS 14.1R4.10 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/
juniper.conf.pre-install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall64-14.1R4.10-domestic-
signed.tgz ...
Saving state for rollback ...
ISSU: Old Master Upgrade Done
ISSU: IDLE
Shutdown NOW!
[pid 10149]

{backup}
user@host>

{backup}
user@host>

```

```
*** FINAL System shutdown message from user@host ***

System going down IMMEDIATELY

Connection closed by foreign host.
```

When the Routing Engine that was previously the primary is rebooted, you are logged out of the device.

- 3. Wait a few minutes and then log in to the device again.

[Table 29 on page 551](#) shows the Routing Engine status after the unified ISSU.

Table 29: Routing Engine Status After Upgrading and Rebooting Both Routing Engines

RE0	RE1
Backup	Primary
New software version installed	New software version installed
New software version running	New software version running

You are logged in to the new backup Routing Engine (**re0**).

- 4. Verify that both Routing Engines have been upgraded by using the **show version** command.

```
{backup}
user@host> show version invoke-on all-routing-engines
re0:
-----
Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
```



```
JUNOS Online Documentation [14.1R4.10]

rel:
-----

Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
JUNOS Online Documentation [14.1R4.10]
```

5. If you want to, you can optionally display the unified ISSU log messages by using the **show log messages** command.
6. If you want to, you can optionally make **re0** the primary Routing Engine by using the **request chassis routing-engine master acquire** command.

```
{backup}
user@host> request chassis routing-engine master
acquire
Attempt to become the master routing engine ? [yes,no] (no) yes

Resolving mastership...
Complete. The local routing engine becomes the master.

{master}
user@host>
```

Table 30 on page 552 shows the Routing Engine status after Step 5 is completed.

Table 30: Routing Engine Status After Upgrading, Rebooting, and Switching Primary Role

RE0	RE1
Primary	Backup

Table 30: Routing Engine Status After Upgrading, Rebooting, and Switching Primary Role
(Continued)

RE0	RE1
New software version installed	New software version installed
New software version running	New software version running

7. Perform the applicable steps in ["Restoring Feature-Specific Configuration" on page 553](#).
8. If you are satisfied with the results of your testing, you can optionally back up the system software to the device's hard disk by using the **request system snapshot** command on *each* Routing Engine.

NOTE: The root file system is backed up to **/altroot**, and **/config** is backed up to **/altconfig**. After you issue the **request system snapshot** command, you cannot easily return to the previous version of the software, because the device flash and hard disks are identical. To return to the previous version of the software, you must boot the device from removable media.

```
{master}
user@host> request system snapshot
user@host> request routing-engine login re1
{backup}
user@host> request system snapshot
```

Restoring Feature-Specific Configuration

IN THIS SECTION

- [Procedure | 554](#)

Procedure

Step-by-Step Procedure

If you have any of the following feature-specific configuration on your device, perform the appropriate steps.

To restore feature-specific configuration:

1. If BFD is enabled on your device and you previously disabled the BFD timer negotiation, delete the **no-issu-timer-negotiation** statement at the **[edit protocols bfd]** hierarchy level.

```
{master} [edit]
user@host# delete protocols bfd no-issu-timer-negotiation
```

2. If proxy ARP is enabled on your M Series, MX Series, or EX9200 device and you previously removed the **unconditional-src-learn** statement, include the statement again.

This example shows the ge-0/0/1 interface only.

```
{master} [edit]
user@host# set interfaces ge-0/0/1 unit 0 family inet unconditional-src-learn
```

3. If LACP is enabled on your PTX Series device and you previously removed the **lACP** statement, include the statement again.

```
{master} [edit]
user@host# set interfaces aex aggregated-ether-options lacp
```

4. If ATM PPP is enabled on your M Series or T Series device and you previously set the keepalive interval to 10 seconds or greater, restore the original value.

This example shows the at-0/0/1 interface only and shows the interval being set to the default 3 seconds.

```
{master} [edit]
user@host# set interfaces at-0/0/1 unit 0 keepalives interval 3
```

5. If ATM OAM is enabled on your M Series or T Series device and you previously set the OAM F5 loopback cell period to 20 seconds or greater, change the configuration back to the original value.

This example shows the at-0/0/1 interface only and shows the period being set to 10 seconds.

```
{master} [edit]
user@host# set interfaces at-0/0/1 unit 0 oam-period 10
```

6. After you have verified your configuration and are satisfied with it, commit the changes by using the **commit** command.

```
{master} [edit]
user@host# commit
commit complete
```

7. Exit configuration mode by using the **exit** command.

```
{master} [edit]
user@host# exit
{master}
user@host>
```

Upgrading Both Routing Engines and Rebooting the New Backup Routing Engine Manually

IN THIS SECTION

- [Procedure | 555](#)

Procedure

Step-by-Step Procedure

In certain circumstances, you might want to install the new software on only one Routing Engine and reboot only the primary until after you can test the new software. A Routing Engine does not start running the new software until after it is rebooted.

The advantage is if the results of your testing requires you to downgrade the software, you can switch Routing Engines to run the old software on one Routing Engine and then install the old software on the other Routing Engine. This is not the typical scenario.

To upgrade both Routing Engines and to reboot the new backup Routing Engine manually:

1. Perform the steps in "Verifying Dual Routing Engines and Enabling GRES and NSR" on page 540.
2. Perform the steps in "Verifying the Software Versions and Backing Up the Device Software" on page 542.
3. Perform the steps in "Adjusting Timers and Changing Feature-Specific Configuration" on page 544.
4. Copy the Junos OS software package to the device using the **file copy ftp://username@hostname.net/ filename /var/tmp/ filename** command.

We recommend that you copy the package to the **/var/tmp** directory, which is a large file system on the hard disk.

```
{master}
user@host> file copy ftp://myid@myhost.mydomain.net/jinstall64-14.1R4.10-domestic-signed.tgz
/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
```

BEST PRACTICE: When you access the Download Software web page for your device, record the md5 checksum. After downloading the software package to your device, confirm that it is not modified in any way by using the `file checksum md5` command. For more information about verifying the md5 checksum, see <https://kb.juniper.net/InfoCenter/index?page=content&id=KB17665>.

Table 31 on page 556 shows the Routing Engine status prior to starting the unified ISSU.

Table 31: Routing Engine Status Before Upgrading and Manually Rebooting the Backup Routing Engine

RE0	RE1
Primary	Backup
Old software version installed	Old software version installed

Table 31: Routing Engine Status Before Upgrading and Manually Rebooting the Backup Routing Engine (Continued)

RE0	RE1
Old software version running	Old software version running

5. On the primary Routing Engine, start the upgrade by using the **request system software in-service-upgrade *package-name*** command without the reboot option.

```
{master}
user@host> request system software in-service-upgrade
/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
Chassis ISSU Check Done
ISSU: Validating Image
FPC 0 will be offlined (In-Service-Upgrade not supported)
PIC 0/0 will be offlined (In-Service-Upgrade not supported)
PIC 0/1 will be offlined (In-Service-Upgrade not supported)
Do you want to continue with these actions being taken ? [yes,no] (no) yes

Checking compatibility with configuration
Initializing...
Using jbase-13.3R6.5
Verified manifest signed by PackageProductionEc_2015
Using /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Using jinstall64-14.1R4.10-domestic.tgz
Using jbundle64-14.1R4.10-domestic.tgz
Checking jbundle requirements on /
Using jbase-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jbase-14.1R4.10 signed by PackageProductionEc_2015
Using /var/v/c/tmp/jbundle/jboot-14.1R4.10.tgz
Using jcrypto64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jcrypto64-14.1R4.10 signed by PackageProductionEc_2015
Using jdocs-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jdocs-14.1R4.10 signed by PackageProductionEc_2015
Using jkernel64-14.1R4.10.tgz
```

```

Using jpfe-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M10-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M120-14.1R4.10.tgz

Verified SHA1 checksum of jpfe-M160-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M320-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M40-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M7i-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-T-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X2000-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X960-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-common-14.1R4.10.tgz
Using jplatform-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jplatform-14.1R4.10 signed by PackageProductionEc_2015
Using jroute-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jroute-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime64-14.1R4.10 signed by PackageProductionEc_2015
Using jservices-14.1R4.10.tgz
Using jservices-crypto-14.1R4.10.tgz
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
ISSU: Preparing Backup RE
Pushing /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz to rel:/var/tmp/
jinstall64-14.1R4.10-domestic-signed.tgz
Installing package '/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz' ...
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Verified jinstall64-14.1R4.10-domestic.tgz signed by
PackageProductionRSA_2015
Adding jinstall64...
Verified manifest signed by PackageProductionEc_2015

WARNING:      This package will load JUNOS 14.1R4.10 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information

```

```

WARNING:      stored on this machine.  It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

```

```
Saving the config files ...
```

```

NOTICE: uncommitted changes have been saved in /var/db/config/
juniper.conf.pre-install

```

```
Installing the bootstrap installer ...
```

```

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

```

```
Saving state for rollback ...
```

```
Backup upgrade done
```

```
Rebooting Backup RE
```

```
Rebooting rel
```

```
ISSU: Backup RE Prepare Done
```

```
Waiting for Backup RE reboot
```

```
GRES operational
```

```
Initiating Chassis In-Service-Upgrade
```

```
Chassis ISSU Started
```

```
ISSU: Preparing Daemons
```

```
ISSU: Daemons Ready for ISSU
```

```
ISSU: Starting Upgrade for FRUs
```

```
ISSU: Preparing for Switchover
```

```
ISSU: Ready for Switchover
```

```
Checking In-Service-Upgrade status
```

Item	Status	Reason
FPC 0	Offline	Offlined by cli command

```
Resolving mastership...
```

```
Complete. The other routing engine becomes the master.
```

```
ISSU: RE switchover Done
```

```
ISSU: Upgrading Old Master RE
```

```
Installing package '/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz' ...
```

```
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
```

```
Verified jinstall64-14.1R4.10-domestic.tgz signed by
```

```
PackageProductionRSA_2015
```

```
Adding jinstall64...
```



```
Verified manifest signed by PackageProductionEc_2015

WARNING:      This package will load JUNOS 14.1R4.10 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine.  It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/
juniper.conf.pre-install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall64-14.1R4.10-domestic-
signed.tgz ...
Saving state for rollback ...
ISSU: Old Master Upgrade Done
ISSU: IDLE
```

Table 32 on page 560 shows the Routing Engine status after the unified ISSU and before manually rebooting the backup Routing Engine.

Table 32: Routing Engine Status After Upgrading and Before Manually Rebooting the Backup Routing Engine

RE0	RE1
Backup	Primary
New software version installed	New software version installed

Table 32: Routing Engine Status After Upgrading and Before Manually Rebooting the Backup Routing Engine *(Continued)*

RE0	RE1
Old software version running	New software version running

6. Verify that the new backup, (old primary) Routing Engine (**re0**), is still running the previous software image and that the new primary Routing Engine (**re1**) is running the new software image, by using the **show version** command.

```
{backup}
user@host> show version invoke-on all-routing-engines
re0:
-----
Hostname: host
Model: mx480
Junos: 13.3R6.5
JUNOS Base OS boot [13.3R6.5]
JUNOS Base OS Software Suite [13.3R6.5]
JUNOS 64-bit Kernel Software Suite [13.3R6.5]
JUNOS Crypto Software Suite [13.3R6.5]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [13.3R6.5]
JUNOS Packet Forwarding Engine Support (MX Common) [13.3R6.5]
JUNOS Online Documentation [13.3R6.5]

re1:
-----
Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
JUNOS Online Documentation [14.1R4.10]
```

- At this point, if you do not want to install the newer software version on the new backup Routing Engine (re0), issue the **request system software delete *package-name*** command on it.

Otherwise, to complete the upgrade, go to the next step.

- Reboot the new backup Routing Engine (re0) by issuing the **request system reboot** command.

```
{backup}
user@host> request system reboot
Reboot the system ? [yes,no] (no) yes

*** FINAL System shutdown message from remote@host ***

System going down IMMEDIATELY

Shutdown NOW!
[pid 38432]

{backup}
user@home> Connection closed by foreign host.
```

If you are not on the console port, you are disconnected from the device session.

[Table 33 on page 562](#) shows the Routing Engine status after the unified ISSU, after rebooting the backup Routing Engine, but before switching primary role.

Table 33: Routing Engine Status After Upgrading, Manually Rebooting, and Before Switching Primary Role

RE0	RE1
Backup	Primary
New software version installed	New software version installed
New software version running	New software version running

- Wait a few minutes, then log in to the device again.

You are logged in to the new backup Routing Engine (**re0**).

10. Verify that both Routing Engines have been upgraded by using the **show version** command.

```
{backup}
user@host> show version invoke-on all-routing-engines
re0:
-----
Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
JUNOS Online Documentation [14.1R4.10]

rel:
-----
Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
JUNOS Online Documentation [14.1R4.10]
```

11. If you want to, you can optionally display the unified ISSU log messages by using the **show log messages** command.
12. If you want to, you can optionally make **re0** the primary Routing Engine by using the **request chassis routing-engine master acquire** command:

```
{backup}
user@host> request chassis routing-engine master
acquire
Attempt to become the master routing engine ? [yes,no] (no) yes
```

```
Resolving mastership...
Complete. The local routing engine becomes the master.

{master}
user@host>
```

Table 34 on page 564 shows the Routing Engine status after the unified ISSU, after rebooting the backup Routing Engine, and after switching primary role.

Table 34: Routing Engine Status After Upgrading, Manually Rebooting, and Switching Primary Role

RE0	RE1
Primary	Backup
New software version installed	New software version installed
New software version running	New software version running

- 13. Perform the applicable steps in ["Restoring Feature-Specific Configuration" on page 553](#).
- 14. If you are satisfied with the results of your testing, you can optionally back up the system software to the device's hard disk by using the **request system snapshot** command on *each* Routing Engine.

NOTE: The root file system is backed up to **/altroot**, and **/config** is backed up to **/altconfig**. After you issue the **request system snapshot** command, you cannot easily return to the previous version of the software, because the device flash and hard disks are identical. To return to the previous version of the software, you must boot the device from removable media.

```
{master}
user@host> request system snapshot
user@host> request routing-engine login re1
{backup}
user@host> request system snapshot
```

Upgrading and Rebooting Only One Routing Engine

IN THIS SECTION

- Procedure | 565

Procedure

Step-by-Step Procedure

In certain circumstances you might want to install the new software on only one Routing Engine.

The advantage is if the results of your testing requires you to downgrade the software, you can switch Routing Engines to run the old software on one Routing Engine and then install the old software on the other Routing Engine. This is not the typical scenario.

Table 35 on page 565 shows the Routing Engine status prior to starting the unified ISSU.

Table 35: Routing Engine Status Before Upgrading and Rebooting One Routing Engine

RE0	RE1
Primary	Backup
Old software version installed	Old software version installed
Old software version running	Old software version running

To upgrade and rebooting only one Routing Engine:

1. Perform the steps in "Verifying Dual Routing Engines and Enabling GRES and NSR" on page 540.
2. Perform the steps in "Verifying the Software Versions and Backing Up the Device Software" on page 542.
3. Perform the applicable steps in "Adjusting Timers and Changing Feature-Specific Configuration" on page 544.

4. Copy the Junos OS software package to the device by using the **file copy ftp://username@hostname.net/ filename /var/tmp/ filename** command.

We recommend that you copy the package to the **/var/tmp** directory, which is a large file system on the hard disk.

```
{master}
user@host> file copy ftp://myid@myhost.mydomain.net/jinstall64-14.1R4.10-domestic-signed.tgz
/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
```

BEST PRACTICE: When you access the Download Software web page for your device, record the md5 checksum. After downloading the software package to your device, confirm that it is not modified in any way by using the `file checksum md5` command. For more information about verifying the md5 checksum, see <https://kb.juniper.net/InfoCenter/index?page=content&id=KB17665>.

5. On the primary Routing Engine, start the upgrade by using the **request system software in-service-upgrade package-name no-old-master-upgrade** command.

```
{master}
user@host> request system software in-service-upgrade
/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz no-old-master-upgrade
Chassis ISSU Check Done
ISSU: Validating Image
FPC 0 will be offlined (In-Service-Upgrade not supported)
PIC 0/0 will be offlined (In-Service-Upgrade not supported)
PIC 0/1 will be offlined (In-Service-Upgrade not supported)
Do you want to continue with these actions being taken ? [yes,no] (no) yes

Checking compatibility with configuration
Initializing...
Using jbase-13.3R6.5
Verified manifest signed by PackageProductionEc_2015
Using /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Using jinstall64-14.1R4.10-domestic.tgz
Using jbundle64-14.1R4.10-domestic.tgz
Checking jbundle requirements on /
Using jbase-14.1R4.10.tgz
```

```

Verified manifest signed by PackageProductionEc_2015
Verified jbase-14.1R4.10 signed by PackageProductionEc_2015
Using /var/v/c/tmp/jbundle/jboot-14.1R4.10.tgz
Using jcrypto64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jcrypto64-14.1R4.10 signed by PackageProductionEc_2015
Using jdocs-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jdocs-14.1R4.10 signed by PackageProductionEc_2015
Using jkernel64-14.1R4.10.tgz
Using jpfe-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M10-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M120-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M160-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M320-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M40-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M7i-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-T-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X2000-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X960-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-common-14.1R4.10.tgz
Using jplatform-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jplatform-14.1R4.10 signed by PackageProductionEc_2015
Using jroute-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jroute-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime64-14.1R4.10 signed by PackageProductionEc_2015
Using jservices-14.1R4.10.tgz
Using jservices-crypto-14.1R4.10.tgz
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
ISSU: Preparing Backup RE
Pushing /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz to rel:/var/tmp/
jinstall64-14.1R4.10-domestic-signed.tgz
Installing package '/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz' ...

```



```

Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Verified jinstall64-14.1R4.10-domestic.tgz signed by
PackageProductionRSA_2015
Adding jinstall64...
Verified manifest signed by PackageProductionEc_2015

```

```

WARNING:      This package will load JUNOS 14.1R4.10 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

```

```

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/
juniper.conf.pre-install
Installing the bootstrap installer ...

```

```

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

```

```

Saving state for rollback ...
Backup upgrade done
Rebooting Backup RE

```

```

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

Item	Status	Reason
FPC 0	Offline	Offlined by cli command

```
Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
Skipping Old Master Upgrade
ISSU: IDLE
```

Table 36 on page 569 shows the Routing Engine status after the unified ISSU upgrades the primary Routing Engine but before the backup Routing Engine is upgraded.

Table 36: Routing Engine Status After Upgrading One Routing Engine and Before Upgrading the Other Routing Engine

RE0	RE1
Backup	Primary
Old software version installed	New software version installed
Old software version running	New software version running

6. Verify that the new backup, (old primary) Routing Engine (**re0**), is still running the previous software image and that the new primary Routing Engine (**re1**) is running the new software image, by using the **show version** command.

```
{backup}
user@host> show version invoke-on all-routing-engines
re0:
-----
Hostname: host
Model: mx480
Junos: 13.3R6.5
JUNOS Base OS boot [13.3R6.5]
JUNOS Base OS Software Suite [13.3R6.5]
JUNOS 64-bit Kernel Software Suite [13.3R6.5]
JUNOS Crypto Software Suite [13.3R6.5]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [13.3R6.5]
JUNOS Packet Forwarding Engine Support (MX Common) [13.3R6.5]
JUNOS Online Documentation [13.3R6.5]
```

```

rel:
-----
Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
JUNOS Online Documentation [14.1R4.10]

```

7. If your testing is complete and you want to install the new software on the backup Routing Engine, you must first disable GRES and NSR on both Routing Engines and commit the configuration.

```

{backup} [edit ]
user@host# delete chassis redundancy graceful-switchover
user@host# delete routing-options nonstop-routing
user@host# commit
warning: Graceful-switchover is enabled, commit on backup is not recommended
Continue commit on backup RE? [yes,no] (no) yes
re0:
configuration check succeeds
rel:
commit complete
re0:
commit complete
[edit ]
user@host#

```

8. Install the new software on the backup Routing Engine (re0) by using the **request system software add /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz** command.

```

user@host> request system software add /var/tmp/jinstall64-14.1R4.10-
domestic-signed.tgz
NOTICE: Validating configuration against jinstall64-14.1R4.10-domestic-
signed.tgz.
NOTICE: Use the 'no-validate' option to skip this if desired.
Checking compatibility with configuration
Initializing...

```

```
Using jbase-13.3R6.5
Verified manifest signed by PackageProductionEc_2015
Using /var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Using jinstall64-14.1R4.10-domestic.tgz
Using jbundle64-14.1R4.10-domestic.tgz
Checking jbundle requirements on /
Using jbase-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jbase-14.1R4.10 signed by PackageProductionEc_2015
Using /var/v/c/tmp/jbundle/jboot-14.1R4.10.tgz
Using jcrypto64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jcrypto64-14.1R4.10 signed by PackageProductionEc_2015
Using jdocs-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jdocs-14.1R4.10 signed by PackageProductionEc_2015
Using jkernel64-14.1R4.10.tgz
Using jpfe-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M10-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M120-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M160-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M320-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M40-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-M7i-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-T-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X2000-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-X960-14.1R4.10.tgz
Verified SHA1 checksum of jpfe-common-14.1R4.10.tgz
Using jplatform-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jplatform-14.1R4.10 signed by PackageProductionEc_2015
Using jroute-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jroute-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime-14.1R4.10 signed by PackageProductionEc_2015
Using jruntime64-14.1R4.10.tgz
Verified manifest signed by PackageProductionEc_2015
Verified jruntime64-14.1R4.10 signed by PackageProductionEc_2015
Using jservices-14.1R4.10.tgz
Using jservices-crypto-14.1R4.10.tgz
```

```

Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
Installing package '/var/tmp/jinstall64-14.1R4.10-domestic-signed.tgz' ...
Verified jinstall64-14.1R4.10-domestic.tgz signed by PackageProductionEc_2015
Verified jinstall64-14.1R4.10-domestic.tgz signed by
PackageProductionRSA_2015
Adding jinstall64...
Verified manifest signed by PackageProductionEc_2015

WARNING:      This package will load JUNOS 14.1R4.10 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/
juniper.conf.pre-install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall64-14.1R4.10-domestic-
signed.tgz ...
Saving state for rollback ...

```

9. Reboot re0 by using the **request system reboot** command.

```

user@host> request system reboot
Reboot the system ? [yes,no] (no) yes

*** FINAL System shutdown message from user@host ***

```

```
System going down IMMEDIATELY
```

```
Shutdown NOW!
```

```
[pid 22857]
```

```
user@host> Connection closed by foreign host.
```

If you are not on the console port, you are disconnected from the router session.

10. After waiting a few minutes, log in to the device again.

You are logged in to the backup Routing Engine (**re0**).

11. Verify that both Routing Engines are running the new software image by using the **show version** command.

```
{backup}
user@host> show version invoke-on all-routing-engines
Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
JUNOS Online Documentation [14.1R4.10]

rel:
-----

Hostname: host
Model: mx480
Junos: 14.1R4.10
JUNOS Base OS boot [14.1R4.10]
JUNOS Base OS Software Suite [14.1R4.10]
JUNOS Packet Forwarding Engine Support (M/T/EX Common) [14.1R4.10]
JUNOS Packet Forwarding Engine Support (MX Common) [14.1R4.10]
JUNOS platform Software Suite [14.1R4.10]
JUNOS Runtime Software Suite [14.1R4.10]
JUNOS Online Documentation [14.1R4.10]
```

12. If you want to, you can optionally display the unified ISSU log messages by using the **show log messages** command.
13. If you want to, make **re0** the primary Routing Engine by using the **request chassis routing-engine master acquire** command.

```
{backup}
user@host> request chassis routing-engine master
acquire
Attempt to become the master routing engine ? [yes,no] (no) yes

Resolving mastership...
Complete. The local routing engine becomes the master.

user@host>
```

[Table 37 on page 574](#) shows the Routing Engine status after the unified ISSU, after rebooting the backup Routing Engine, and after switching primary role.

Table 37: Routing Engine Status After Upgrading, Manually Rebooting, and Switching Primary Role

RE0	RE1
Primary	Backup
New software version installed	New software version installed
New software version running	New software version running

14. Enable GRES and NSR again by performing the steps in ["Verifying Dual Routing Engines and Enabling GRES and NSR" on page 540](#).
15. Perform the applicable steps in ["Restoring Feature-Specific Configuration" on page 553](#).
16. If you are satisfied with the results of your testing, you can optionally back up the system software to the device's hard disk by using the **request system snapshot** command on *each* Routing Engine.

NOTE: The root file system is backed up to `/altroot`, and `/config` is backed up to `/altconfig`. After you issue the **request system snapshot** command, you cannot easily return to the previous version of the software, because the device flash and hard disks are identical. To return to the previous version of the software, you must boot the device from removable media.

```
{master}
user@host> request system snapshot
user@host> request routing-engine login re1
{backup}
user@host> request system snapshot
```

RELATED DOCUMENTATION

- [Getting Started with Unified In-Service Software Upgrade | 495](#)
- [Understanding the Unified ISSU Process | 496](#)
- [Unified ISSU System Requirements | 507](#)
- [Best Practices for Performing a Unified ISSU | 536](#)
- [Verifying a Unified ISSU | 590](#)
- [Troubleshooting Unified ISSU Problems | 591](#)
- [Managing and Tracing BFD Sessions During Unified ISSU Procedures | 591](#)

Performing an In-Service Software Upgrade (ISSU) with Non-Stop Routing

IN THIS SECTION

- [Preparing the Switch for Software Installation | 576](#)
- [Upgrading the Software Using ISSU | 576](#)

You can use an in-service software upgrade with non-stop routing to upgrade the software running on the switch with minimal traffic disruption during the upgrade.

NOTE: Starting with Junos OS Release 18.2R1 on the QFX5200 switch, we recommend that you wait at least five minutes between in-service software upgrades.

NOTE: Starting with Junos OS Release 17.1R1, on QFX5100 and EX4600 switches, you cannot perform an ISSU from a Junos OS Release earlier than 17.1R1 to Junos OS Release 17.1R1.

This topic covers:

Preparing the Switch for Software Installation

Before you begin software installation using ISSU:

NOTE: Before you perform an in-service software upgrade, if applicable, remove the **set system internet-options no-tcp-reset drop-all-tcp** command from the configuration, otherwise the upgrade will fail and an error message will be displayed.

NSB and non-stop routing enable NSB-supported Layer 2 protocols to synchronize protocol information between the primary and backup Routing Engines.

- Enable non-stop routing. See ["Configuring Nonstop Active Routing on Switches" on page 293](#) for information on how to enable it.
- Enable nonstop bridging (NSB). See ["Configuring Nonstop Bridging on Switches \(CLI Procedure\)" on page 264](#) for information on how to enable it.
- Configure the Bidirectional Forwarding Detection Protocol (BFD) timeout to be more than one second, otherwise you will receive an error.

Upgrading the Software Using ISSU

This procedure describes how to upgrade the software running on a standalone switch:

NOTE: If the Host OS software needs to be updated, you cannot perform an ISSU. Instead, perform a standard software upgrade.

To upgrade the switch using ISSU:

1. Download the software package by following the procedure in the Downloading Software Files with a Browser section in *Installing Software Packages on QFX Series Devices*.
2. Copy the software package or packages to the switch. We recommend that you copy the file to the `/var/tmp` directory.
3. Log in to the console connection. Using a console connection allows you to monitor the progress of the upgrade.
4. Start the ISSU:
 - On the switch, enter:

```
user@switch> request system software in-service-upgrade /var/tmp/package-name.tgz
```

where *package-name.tgz* is, for example, *jinstall-host-qfx-5e-18.1R1-secured-signed.tgz*.

NOTE: During the upgrade, you will not be able to access the Junos OS CLI.

The switch displays status messages similar to the following messages as the upgrade executes:

```
ISSU: Validating Image
```

```
PRE ISSU CHECK:
```

```
-----
```

```
PFE Status                : Online
Member Id zero             : Valid
VC not in mixed or fabric mode : Valid
Member is single node vc   : Valid
BFD minimum-interval check done : Valid
GRES enabled               : Valid
GR enabled                 : Valid
drop-all-tcp not configured : Valid
Ready for ISSU             : Valid
```

```
warning: Do NOT use /user during ISSU. Changes to /user during ISSU may get
lost!
```

```
Pushing Junos image package to the host...
```

```
Installing /var/tmp/install-media-qfx-5e-junos-2018-secure.tgz
```

```

Extracting the package ...
total 1110328
-rw-r--r-- 1 18735 758 237044439 Oct 26 05:11 jinstall-qfx-5e-junos-2018-secure-linux.tgz
-rw-r--r-- 1 18735 758 899918118 Oct 26 05:11 jinstall-qfx-5e-junos-2018-secure-app.tgz

=====
Current Host kernel version : 3.14.52-rt50-WR7.0.0.9_ovp
Package Host kernel version : 3.14.52-rt50-WR7.0.0.9_ovp
Current Host version       : 3.0.7
Package Host version       : 3.0.7
Min host version required for applications: 3.0.7
Min host version required for in-service-upgrade: 3.0.7
=====

Setting up Junos host applications for in-service-upgrade ...
-----
Running Junos application installer for in-service-upgrade
-----

-----
Installing /var/sw/applications/qfx-5e-flex-2018.tgz
-----
pkg_install_rpms: qfx-5e-base-1.0-0-2018.x86_64.rpm
Installing qfx-5e-control-plane-flex-1.0-0-2018.x86_64.rpm ...
=====
Loading cache...
Updating cache... #####
[100%]

Committing transaction...
Preparing... #####
[ 0%]
  1:Installing qfx-5e-contro.. #####
[100%]

Output from qfx-5e-control-plane-flex-1.0-0@x86_64:
-----
Installing JUNOS image: jinstall-jcp-i386-flex-18.12018.img.gz
-----
Extracting jinstall-jcp-i386-flex-18.12018.img.gz to /recovery/junos/jinstall-jcp-i386-flex-18.12018-2018.img

```

```

Prepare host for virtfs...
Integrity check passed for hash-control-plane.md5.

Installing packages (1):
  qfx-5e-control-plane-flex-1.0-0@x86_64

812.9MB of package files are needed. 821.5MB will be used.

Saving cache...

=====
Application installed.
Waiting to sync newly setup VM disk
VM ready after 200 seconds
[Oct 26 05:19:22]:ISSU: Preparing Backup RE
Prepare for ISSU
[Oct 26 05:19:27]:ISSU: Backup RE Prepare Done
Spawning the backup RE
Spawn backup RE, index 0 successful
Starting secondary dataplane
Second dataplane container started
GRES in progress
Waiting for backup RE switchover ready
GRES operational
Copying home directories
Copying home directories successful
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
[Oct 26 05:28:33]:ISSU: Preparing Daemons
[Oct 26 05:28:39]:ISSU: Daemons Ready for ISSU
[Oct 26 05:28:43]:ISSU: Starting Upgrade for FRUs
[Oct 26 05:28:54]:ISSU: FPC Warm Booting
[Oct 26 05:29:59]:ISSU: FPC Warm Booted
[Oct 26 05:30:10]:ISSU: Preparing for Switchover
[Oct 26 05:30:14]:ISSU: Ready for Switchover
Checking In-Service-Upgrade status
  Item                Status                Reason
  FPC 0                Online (ISSU)
Send ISSU done to chassisd on backup RE
Chassis ISSU Completed
Removing dcpfel eth1 128.0.0.16 IP

```

```
Bringing down bme01
Post Chassis ISSU processing done
[Oct 26 05:30:17]:ISSU: IDLE
Stopping primary dataplane
Clearing ISSU states
Console and management sessions will be disconnected. Please login again.
```

NOTE: If the ISSU process stops, you can look at the CLI output when you issue the **request system software in-service-upgrade** command to diagnose the problem. You can also look at syslog files for more information.

- 5. Log in after the reboot of the switch completes. To verify that the software has been upgraded, enter the following command:

```
user@switch> show version
```

Release History Table

Release	Description
18.1R1	Starting with Junos OS Release 18.2R1 on the QFX5200 switch, we recommend that you wait at least five minutes between in-service software upgrades.
17.1R1	Starting with Junos OS Release 17.1R1, on QFX5100 and EX4600 switches, you cannot perform an ISSU from a Junos OS Release earlier than 17.1R1 to Junos OS Release 17.1R1.

RELATED DOCUMENTATION

Understanding In-Service Software Upgrade (ISSU) 504
request system software in-service-upgrade 1024

Performing an In-Service Software Upgrade (ISSU) in ACX5000 Series Routers

IN THIS SECTION

- [Preparing the Router for Software Installation | 581](#)
- [Upgrading the Software Using ISSU | 583](#)
- [Verifying a Unified ISSU | 585](#)

You can use an in-service software upgrade to upgrade the software running on the router with minimal traffic disruption during the upgrade.

NOTE: ISSU is supported in Junos OS Release 15.1X54-D60 and later on ACX5000 Series routers.

This topic covers:

Preparing the Router for Software Installation

Before you begin software installation using ISSU:

NOTE: Before you perform an in-service software upgrade, if applicable, remove the **set system internet-options no-tcp-reset drop-all-tcp** command from the configuration, otherwise the upgrade will fail and an error message will be displayed.

- Ensure that nonstop active routing (NSR) and nonstop bridging (NSB) are enabled. If enabled, disable graceful restart (GR), because NSR and GR cannot be enabled simultaneously. NSB and GR enable NSB-supported Layer 2 protocols to synchronize protocol information between the primary and backup Routing Engines.
- If NSR is not enabled (**Stateful Replication is Disabled**), then enable NSR. NSR requires you to configure graceful Routing Engine switchover (GRES). By default, NSR is disabled.
 - To enable graceful Routing Engine switchover, include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level as **user@host#set chassis redundancy graceful-switchover**.

- To enable NSR, include the **nonstop-routing** statement at the **[edit routing-options]** hierarchy level as `user@host#set routing-options nonstop-routing`.
- Enable nonstop bridging (NSB). Nonstop bridging requires you to configure graceful Routing Engine switchover (GRES). By default, NSB is disabled.
 - To enable graceful Routing Engine switchover, include the **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level as `user@host#set chassis redundancy graceful-switchover`.
 - To enable NSB, include the **nonstop-bridging** statement at the **[edit protocols layer2-control]** hierarchy level as `user@host#set protocols layer2-control nonstop-bridging`.
- (Optional) Back up the system software—Junos OS, the active configuration, and log files—on the router to an external storage device with the `request system snapshot` command.

On ACX5000 line of routers, you need to consider the following feature before performing ISSU:

- ISSU supports link fault management (LFM) timeout sessions of 1 second interval. During ISSU, you may notice LFM flaps for sessions having timeout interval of less than 1 second.
- Bidirectional Forwarding Detection (BFD) sessions having timeout interval of less than 1 second need to be reconfigured to 1 second before starting the ISSU process. You can restore the timeout interval to its original value after completing the ISSU process.
- ISSU supports interval slow (every 30 seconds) for periodic transmission of Link Aggregation Control Protocol (LACP) packets.
- ISSU supports Virtual Router Redundancy Protocol (VRRP) version 3.

ISSU do not support the following ACX5000 features:

- Downgrade to an earlier version of Junos OS software. If you want to install an earlier version of Junos OS software, use the **request system software add** CLI command.
- Upgrade of Host OS software.
- Connectivity fault management (CFM).
- TWAMP, RPF, RFC2544, and clocksyncd daemon (timing functionality).
- Mirroring and pseudowire cross connect.
- IPv6 firewall, IPv6 COS (classification and rewrite), IPv6 VPN, and VPLS mesh group.
- Virtual Router Redundancy Protocol (VRRP) version 1 and 2.
- Interval fast (every second) for periodic transmission of Link Aggregation Control Protocol (LACP) packets. If the periodic interval fast is configured, then you may notice traffic drops because of LACP

links going down during ISSU. ACX5000 line of routers can support LACP with fast hello by configuring the **fast-hello-issu** option (**user@host# set protocols lacp fast-hello-issu**) on the main router and peer routers before starting ISSU.

NOTE: The peer router must have Junos OS software to support this functionality.

Upgrading the Software Using ISSU

This procedure describes how to upgrade the software running on a standalone router:

NOTE: If the Host OS software needs to be updated, you cannot perform an ISSU. Instead, perform a standard software upgrade.

It is recommended to cleanup any unwanted data from the **/var** directory (**/var/log**, **/var/tmp**) before initiating the ISSU process.

To upgrade the router using ISSU:

1. Download the software package from the Juniper Networks Support website <https://www.juniper.net/support/downloads/junos.html>.

NOTE: To access the download site, you must have a service contract with Juniper Networks and an access account. If you need help obtaining an account, complete the registration form at the Juniper Networks website

<https://www.juniper.net/registration/Register.jsp>.

2. Go to ACX Series section and select the ACX5000 Series platform software you want to download.
3. Copy the software package or packages to the router. We recommend that you copy the file to the **/var/tmp** directory.
4. Log in to the console connection. Using a console connection allows you to monitor the progress of the upgrade.
5. Start the ISSU:
 - On the router, enter:

```
user@host> request system software in-service-upgrade /var/tmp/package-name.tgz
```


where *package-name.tgz* is, for example, *jinstall-acx5k-15.1X54-D60.9-domestic-signed.tgz*.

NOTE: During the upgrade, you will not be able to access the Junos OS CLI.

The router displays status messages similar to the following messages as the upgrade executes:

```
PRE ISSU CHECK:
-----
PFE Status                               : Online
BFD minimum-interval check done          : Valid
GRES enabled                             : Valid
NSR enabled                              : Valid
drop-all-tcp not configured              : Valid
OVSDDB not configured                     : Valid

warning: Do NOT use /user during ISSU. Changes to /user during ISSU may get
lost!
[Oct 24 00:25:37]:ISSU: Validating Image
[Oct 24 00:25:44]:ISSU: Preparing Backup RE
Prepare for ISSU
[Oct 24 00:25:49]:ISSU: Backup RE Prepare Done
Extracting jinstall-acx5k-15.1X54-D60.3-domestic ...
Install jinstall-acx5k-15.1X54-D60.3-domestic completed
Spawning the backup RE
Spawn backup RE, index 0 successful
GRES in progress
GRES done in 0 seconds
Waiting for backup RE switchover ready
GRES operational
Copying home directories
Copying home directories successful
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
[Oct 24 00:31:56]:ISSU: Preparing Daemons
[Oct 24 00:32:57]:ISSU: Daemons Ready for ISSU
[Oct 24 00:33:02]:ISSU: Starting Upgrade for FRUs
[Oct 24 00:33:23]:ISSU: FPC Warm Booting
[Oct 24 00:34:41]:ISSU: FPC Warm Booted
[Oct 24 00:34:51]:ISSU: Preparing for Switchover
[Oct 24 00:34:57]:ISSU: Ready for Switchover
```

Checking In-Service-Upgrade status

Item	Status	Reason
FPC 0	Online (ISSU)	

Send ISSU done to chassisd on backup RE
 Chassis ISSU Completed
 [Oct 24 00:35:18]:ISSU: IDLE
 Console and management sessions will be disconnected. Please login again.

NOTE: An ISSU might stop instead of terminate if the FPC is at the warm boot stage. Also, any links that go down and up will not be detected during a warm boot of the Packet Forwarding Engine (PFE).

NOTE: If the ISSU process stops, you can look at the log files to diagnose the problem. The log files are located at `/var/log/vjunos-log.tgz`.

6. Log in after the router reboots. To verify that the software has been upgraded, enter the following command:

```
user@host> show version
```

7. Disable or delete the configuration done to enable the ISSU. This includes disabling nonstop active routing (NSR), nonstop bridging (NBR) and graceful Routing Engine (GRES).

Verifying a Unified ISSU

Verify the status of FPCs and their corresponding PICs after the most recent unified ISSU.

Issue the **show chassis in-service-upgrade** command on the primary Routing Engine.

```
user@host> show chassis in-service-upgrade
```

Item	Status	Reason
FPC 0	Online	

Display the unified ISSU process messages by using the **show log messages** command.

How to Use Unified ISSU with Enhanced Mode

IN THIS SECTION

- [Unified ISSU with Enhanced Mode Overview | 586](#)
- [Benefits of Unified ISSU with Enhanced Mode | 586](#)
- [Prerequisites for Performing Unified ISSU with Enhanced Mode | 586](#)
- [Performing Unified ISSU with Enhanced Mode | 587](#)

Unified ISSU with Enhanced Mode Overview

Enhanced mode is an in-service software upgrade (ISSU) option available on MPC8E, and MPC9E line cards that eliminates packet loss during the unified ISSU process. This is achieved by taking advantage of new line card architecture improvements that make it possible to have a second copy of the Junos OS software running on the line card in standby mode ready to take over while software moves from an old image to a new one during unified ISSU. You can enable enhanced mode by adding the **enhanced-mode** option to the **request system software in-service-upgrade** CLI command.

Use this document to learn about unified ISSU with enhanced mode and how to use it.

Benefits of Unified ISSU with Enhanced Mode

Unified ISSU with enhanced mode provides the following benefits:

- Upgrades to a new software version with no loss of transit or host bound traffic
- Reduces packet loss to zero or several milliseconds depending on configuration and network conditions
- Allows software upgrades to be performed without the need for maintenance windows
- Uses the existing unified ISSU process and doesn't require any special configuration

Prerequisites for Performing Unified ISSU with Enhanced Mode

Before you begin a unified ISSU with enhanced mode, there are several prerequisites to keep in mind:

- The device running unified ISSU with enhanced mode must use an MPC8E, or MPC9E line card.

NOTE: If you are performing unified ISSU with enhanced mode on a device that has a mix of supported and unsupported line cards, there will be sub-second traffic loss for traffic passing through the unsupported line cards.

NOTE: If you are performing unified ISSU with enhanced mode on guest network functions (GNFs), then all GNFs should be using MPC8E, or MPC9E line cards to avoid traffic loss.

- The Linux version running on your Flexible PIC Concentrator (FPC) and the line card Linux version in the target release need to be compatible.
- Enhanced mode won't work if the target release carries changes that require the ASIC blocks to be reset.
- Forwarding memory usage should be below 75 percent to ensure no packet loss during the unified ISSU process

NOTE: Unified ISSU with enhanced mode will still work if forwarding memory usage is above 75 percent, but it might introduce several milliseconds of packet loss.

- All prerequisites for unified ISSU also apply to enhanced mode. See [Unified ISSU System Requirements](#) for more information.

You can check to see if your device can use unified ISSU with enhanced mode to upgrade to a specific release by using the **request system software validate in-service-upgrade *package-name.tgz* enhanced-mode** command. If your device and the target release are not compatible with enhanced mode, you can still use regular unified ISSU to upgrade with minimal disruption of traffic.

Performing Unified ISSU with Enhanced Mode

To perform a unified ISSU with enhanced mode, follow these steps:

1. Download the software package by following the procedure in [Downloading Software](#).
2. Copy the software package or packages to the device. We recommend that you copy the file to the **/var/tmp** directory.
3. Log in to the console connection. Using a console connection allows you to monitor the progress of the upgrade.
4. Verify that you can use unified ISSU with enhanced mode for your desired release.

- a. On the device, enter:

```
user@host> request system software validate in-service-upgrade /var/tmp/  
package-name.tgz enhanced-mode
```

where *package-name.tgz* is the name of the software package you downloaded in Step 1.

5. Start the unified ISSU with enhanced mode:

- a. On the device, enter:

```
user@host> request system software in-service-upgrade /var/tmp/package-name.tgz  
enhanced-mode reboot
```

where *package-name.tgz* is the name of the software package you downloaded in Step 1.

NOTE: During the upgrade, you will not be able to access the Junos OS CLI.

The device displays status messages similar to the following messages as the upgrade executes:

```
Chassis ISSU enhanced-mode  
ISSU: set chassis enhanced-mode  
Chassis ISSU Check Done  
ISSU: Validating Image  
..  
mgd: commit complete  
Validation succeeded  
Validating Image Done  
Preparing Backup RE  
Pushing /var/tmp/junos-install-mx-x86-32-20.1.tgz to rel:/var/tmp/junos-  
install-mx-x86-32-20.1.tgz  
Pushing package /var/tmp/junos-install-mx-x86-32-20.1.tgz to rel done  
Installing package /var/tmp/junos-install-mx-x86-32-20.1.tgz on rel  
...  
Verified sflow-mx signed by PackageDevelopmentEc_2019 method ECDSA256+SHA256  
NOTICE: 'pending' set will be activated at next reboot...  
ISSU: Installing package /var/tmp/junos-install-mx-x86-32-20.1.tgz on rel done  
ISSU: Rebooting Backup RE  
  
Rebooting rel
```

```

Backup RE Prepare Done
Waiting for Backup RE reboot
Backup RE reboot done. Backup RE is up
Waiting for Backup RE state synchronization
Backup RE state synchronization done
GRES operational
"Initiating Chassis In-Service-Upgrade"
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Offline Incompatible FRUs
ISSU: Starting Upgrade for FRUs
...

ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
  Item           Status           Reason
  FPC 1          Online (ISSU)
  FPC 2          Offline           Configured power off
Resolving mastership...
Complete. The other routing engine becomes the master.

```

NOTE: If the unified ISSU process stops, you can look at the CLI output by using the **request system software in-service-upgrade** command to diagnose the problem. You can also look at syslog files for more information.

6. Log in after the reboot of the device is completed. To verify that the software has been upgraded, enter the following command:

```
user@host> show version
```

NOTE: When using unified ISSU with enhanced mode, the base Linux OS on your FPC cannot be upgraded as part of the ISSU process. Linux can be updated with an upgrade done through regular unified ISSU or a reboot of the FPC.

Verifying a Unified ISSU

IN THIS SECTION

- Purpose | 590
- Action | 590
- Meaning | 590

Purpose

Verify the status of FPCs and their corresponding PICs after the most recent unified ISSU.

Action

Issue the **show chassis in-service-upgrade** command on the primary Routing Engine.

```
user@host> show chassis in-service-upgrade
```

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online	
PIC 0	Online	
PIC 1	Online	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online	
PIC 1	Online	
FPC 5	Online	
PIC 0	Online	
FPC 6	Online	
PIC 3	Online	
FPC 7	Online	

Display the unified ISSU process messages by using the **show log messages** command.

Meaning

See "[show chassis in-service-upgrade](#)" on [page 989](#) for more information.

RELATED DOCUMENTATION

[Example: Performing a Unified ISSU | 537](#)

[Troubleshooting Unified ISSU Problems | 591](#)

[Understanding the Unified ISSU Process | 496](#)

[Unified ISSU System Requirements | 507](#)

[Managing and Tracing BFD Sessions During Unified ISSU Procedures | 591](#)

Troubleshooting Unified ISSU Problems

If the unified ISSU procedure stops progressing:

1. Open a new session on the primary Routing Engine and issue the **request system software abort in-service-upgrade** command.
2. Check the existing router session to verify that the upgrade has been terminated.

An “ISSU: terminated!” message is provided. Additional system messages provide you with information about where the upgrade stopped and recommendations for the next step to take.

See *request chassis cluster in-service-upgrade abort (ISSU)* for more information.

RELATED DOCUMENTATION

[Understanding the Unified ISSU Process | 496](#)

[Unified ISSU System Requirements | 507](#)

[Best Practices for Performing a Unified ISSU | 536](#)

[Example: Performing a Unified ISSU | 537](#)

[Verifying a Unified ISSU | 590](#)

[Managing and Tracing BFD Sessions During Unified ISSU Procedures | 591](#)

Managing and Tracing BFD Sessions During Unified ISSU Procedures

Bidirectional Forwarding Detection (BFD) sessions temporarily increase their detection and transmission timers during unified ISSU procedures. After the upgrade, these timers revert to the values in use before the unified ISSU started. The BFD process replicates the unified ISSU state and timer values to the backup Routing Engine for each session.

No additional configuration is necessary to enable unified ISSU for BFD. However, you can disable the BFD timer negotiation during the unified ISSU by including the **no-issu-timer-negotiation** statement at the **[edit protocols bfd]** hierarchy level.

```
[edit protocols bfd]
no-issu-timer-negotiation;
```

If you include this statement, the BFD timers maintain their original values during unified ISSU.



CAUTION: The BFD sessions might flap during unified ISSU or Routing Engine switchover, depending on the detection intervals.

For more information about BFD, see the [Junos OS Routing Protocols Library](#).

To configure unified ISSU trace options for BFD sessions, include the **issu** statement at the **[edit protocols bfd traceoptions flag]** hierarchy level.

```
[edit protocols]
bfd {
    traceoptions {
        flag issu;
    }
}
```

RELATED DOCUMENTATION

[Getting Started with Unified In-Service Software Upgrade | 495](#)

[Understanding the Unified ISSU Process | 496](#)

[Unified ISSU System Requirements | 507](#)

[Best Practices for Performing a Unified ISSU | 536](#)

[Example: Performing a Unified ISSU | 537](#)

[Verifying a Unified ISSU | 590](#)

[Troubleshooting Unified ISSU Problems | 591](#)

Performing an ISSR

IN THIS CHAPTER

- [Performing an In-Service Software Reboot | 593](#)

Performing an In-Service Software Reboot

NOTE: We recommend that you wait at least five minutes between in-service software reboots.

When you request an in-service software reboot (ISSR) on a standalone device:

1. The management process (MGD) verifies that graceful restart (GR) or non-stop routing and graceful Routing Engine switchover (GRES) are enabled.
2. The ISSU state machine spawns the backup Routing Engine (RE) with the existing software version.
3. The ISSU state machine checks to see if the backup RE has synchronized all of the data with the primary RE.
4. The ISSU state machine requests the routing protocol process (RPD) to notify its readiness for switchover.
5. RPD initiates the GR or non-stop routing procedures by notifying all of the registered protocols.
6. RPD notifies the ISSU state machine that its ready for switchover.
7. The primary role is switched between the REs, so the backup RE becomes the primary RE.
8. The old primary RE is shut down.
9. RPD is spawned on the new primary and continues the GR or non-stop routing procedure and exits either GR or non-stop routing after the protocol state synchronizes.

To perform an ISSR:

Issue the **request system reboot in-service** command.

For example:

```

user@switch> request system reboot in-service
Reboot the system ? [yes,no]
[Feb 22 02:37:04]:ISSU: Validating Image

PRE ISSR CHECK:
-----
PFE Status                        : Online
Member Id zero                    : Valid
VC not in mixed or fabric mode    : Valid
Member is single node vc          : Valid
BFD minimum-interval check done   : Valid
GRES enabled                      : Valid
NSR enabled                       : Valid
drop-all-tcp not configured      : Valid
Ready for ISSR                   : Valid

warning: Do NOT use /user during ISSR. Changes to /user during ISSR may get lost!
Current image is jinstall-jcp-i386-flex-18.1.img
[Feb 22 02:37:14]:ISSU: Preparing Backup RE
Prepare for ISSR
[Feb 22 02:37:19]:ISSU: Backup RE Prepare Done
Spawning the backup RE
Spawn backup RE, index 1 successful
Starting secondary dataplane
Second dataplane container started
GRES in progress
Waiting for backup RE switchover ready
GRES operational
Copying home directories
Copying home directories successful
Initiating Chassis In-Service-Upgrade for ISSR
Chassis ISSU Started
[Feb 22 02:42:55]:ISSU: Preparing Daemons
[Feb 22 02:43:00]:ISSU: Daemons Ready for ISSU
[Feb 22 02:43:05]:ISSU: Starting Upgrade for FRUs
[Feb 22 02:43:15]:ISSU: FPC Warm Booting
[Feb 22 02:44:16]:ISSU: FPC Warm Booted
[Feb 22 02:44:27]:ISSU: Preparing for Switchover
[Feb 22 02:44:31]:ISSU: Ready for Switchover

```

```

Checking In-Service-Upgrade status
  Item          Status          Reason
  FPC 0         Online (ISSU)
Send ISSR done to chassisd on backup RE
Chassis ISSU Completed
Removing dcpfe0 eth1 128.168.0.16 IP
Bringing down bme00
Post Chassis ISSU processing done
[Feb 22 02:44:33]:ISSU: IDLE
Stopping primary dataplane
Clearing ISSU states
Console and management sessions will be disconnected. Please login again.
device_handoff successful ret: 0
Shutdown NOW!
[pid 14305]

*** FINAL System shutdown message from root@sw-duckhorn-01 ***

System going down IMMEDIATELY

```

RELATED DOCUMENTATION

| *request system reboot*

14

PART

Performing Nonstop Software Upgrade (NSSU)

[Getting Started with NSSU and Understanding How NSSU Works | 597](#)

[Performing a NSSU | 607](#)

Getting Started with NSSU and Understanding How NSSU Works

IN THIS CHAPTER

- [Understanding Nonstop Software Upgrade on EX Series Switches | 597](#)

Understanding Nonstop Software Upgrade on EX Series Switches

IN THIS SECTION

- [Requirements for Performing an NSSU | 599](#)
- [How an NSSU Works | 600](#)
- [NSSU Limitations | 603](#)
- [NSSU and Junos OS Release Support | 604](#)
- [Overview of NSSU Configuration and Operation | 605](#)

Nonstop software upgrade (NSSU) enables you to upgrade the software running on Juniper Networks EX Series Ethernet Switches with redundant Routing Engines and all member switches in EX Series Virtual Chassis using a single command. During the upgrade there might be minimal network traffic disruption during primary-role switchover, and the extent of disruption could be dependent on the network topology, configuration, network traffic, and other environment factors .

NOTE: When an EX Series switch in a mixed Virtual Chassis is upgraded to Junos OS Release 15.1 or later from a release earlier than Release 15.1, there might be a drop in traffic for up to 60 seconds.

The following EX Series Virtual Chassis support NSSU:

- EX3300 Virtual Chassis
- EX3400 Virtual Chassis
- EX4200 Virtual Chassis
- EX4300 Virtual Chassis
- EX4500 Virtual Chassis
- EX4550 Virtual Chassis
- All mixed Virtual Chassis composed of EX4200, EX4500, and EX4550 switches
- EX4600 Virtual Chassis
- EX4650 Virtual Chassis

NOTE: An EX4650 Virtual Chassis operates the same as a QFX5120 Virtual Chassis, so for details on upgrading an EX4650 Virtual Chassis using NSSU, see *Understanding Nonstop Software Upgrade on a Virtual Chassis and Mixed Virtual Chassis* and *Upgrading Software on a Virtual Chassis and Mixed Virtual Chassis Using Nonstop Software Upgrade* instead of this topic.

- EX6200 switches
- EX8200 switches
- EX8200 Virtual Chassis

Performing an NSSU provides these benefits:

- No disruption to the control plane—An NSSU takes advantage of *graceful Routing Engine switchover* (GRES) and *nonstop active routing* (NSR) to ensure no disruption to the control plane. During the upgrade process, interface, kernel, and routing protocol information is preserved.
- Minimal disruption to network traffic—An NSSU minimizes network traffic disruption by:
 - Upgrading line cards one at a time in an EX6200 switch, EX8200 switch, or EX8200 Virtual Chassis while permitting traffic to continue to flow through the line cards that are not being upgraded.
 - Upgrading member switches one at a time in other EX Series Virtual Chassis while permitting traffic to continue to flow through the members that are not being upgraded.

To achieve minimal disruption to traffic, you must configure link aggregation groups (LAGs) such that the member links of each LAG reside on different line cards or Virtual Chassis members. When one

member link of a LAG is down, the remaining links are up, and traffic continues to flow through the LAG.

NOTE: Because NSSU upgrades the software on each line card or on each Virtual Chassis member one at a time, an upgrade using NSSU can take longer than an upgrade using the **request system software add** command.

In releases prior to Junos OS Release 16.1, for EX6200 switches, EX8200 switches, and EX8200 Virtual Chassis, you can reduce the amount of time an upgrade takes by configuring line-card upgrade groups. The line cards in an upgrade group are upgraded simultaneously, reducing the amount of time it takes to complete an upgrade. See ["Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade"](#) You can configure line-card upgrade groups for nonstop software upgrade (NSSU) operations on supporting platforms. Line-card upgrade groups can reduce the total time required to complete an NSSU operation and enable you to control the upgrade sequence among the switches being upgraded." on page 607.

Requirements for Performing an NSSU

The following requirements apply to all switches and Virtual Chassis:

- All Virtual Chassis members and all Routing Engines must be running the same Junos OS release.
- Graceful Routing Engine switchover (GRES) must be enabled.
- Nonstop active routing (NSR) must be enabled.

NOTE: Although nonstop bridging (NSB) does not have to be enabled to perform an NSSU, we recommend enabling NSB before performing an NSSU. Enabling NSB ensures that all NSB-supported Layer 2 protocols operate seamlessly during the Routing Engine switchover that is part of the NSSU. In releases prior to Junos OS Release 16.1, see [Configuring Nonstop Bridging on Switches \(CLI Procedure\)](#).

- For minimal traffic disruption, you must define link aggregation groups (LAGs) such that the member links reside on different Virtual Chassis members or on different line cards.

NOTE: During an NSSU operation, if you try to view LAG interface status on the primary Routing Engine member using the **show interfaces ae-*ae-interface-number*** CLI command, you might see incorrect or zero traffic counts. To work around this problem, run the command on the backup Routing Engine member instead if that member is already loaded and running.

The following are requirements for performing NSSU on an EX Series Virtual Chassis (excluding EX6200 or EX8200 Virtual Chassis):

- The Virtual Chassis members must be connected in a ring topology so that no member is isolated as a result of another member being rebooted. This topology prevents the Virtual Chassis from splitting during an NSSU.
- The Virtual Chassis primary and backup must be adjacent to each other in the ring topology. Adjacency permits the primary and backup to always be in sync, even when the switches in linecard roles are rebooting.
- The Virtual Chassis must be preprovisioned so that the linecard role has been explicitly assigned to member switches acting in a linecard role. During an NSSU, the Virtual Chassis members must maintain their roles—the primary and backup must maintain their primary and backup roles (although primary role will change), and the remaining switches must maintain their linecard roles.
- A two-member Virtual Chassis must have **no-split-detection** configured so that the Virtual Chassis does not split when an NSSU upgrades a member.

NOTE: For the EX4300 Virtual Chassis, you should enable the **vcp-no-hold-time** statement at the **[edit virtual-chassis]** hierarchy level before performing a software upgrade using NSSU. If you do not enable the **vcp-no-hold-time** statement, the Virtual Chassis might split during the upgrade. A split Virtual Chassis can cause disruptions to your network, and you might have to manually reconfigure your Virtual Chassis after the NSSU if the split and merge feature was disabled. For more information about a split Virtual Chassis, see *Understanding Split and Merge in a Virtual Chassis*

How an NSSU Works

This section describes what happens when you request an NSSU on EX Series switches and Virtual Chassis.

NOTE: An EX4650 Virtual Chassis operates the same as a QFX5120 Virtual Chassis, so for details on upgrading an EX4650 Virtual Chassis using NSSU, see *Understanding Nonstop Software Upgrade on a Virtual Chassis and Mixed Virtual Chassis* and *Upgrading Software on a Virtual Chassis and Mixed Virtual Chassis Using Nonstop Software Upgrade* instead of this topic.

EX3300, EX3400, EX4200, EX4300, EX4500, EX4600, and Mixed Virtual Chassis

When you request an NSSU on an EX3300, EX3400, EX4200, EX4300, EX4500, or mixed Virtual Chassis:

1. The Virtual Chassis primary verifies that:
 - The backup is online and running the same software version.
 - Graceful Routing Engine switchover (GRES) and nonstop active routing (NSR) are enabled.
 - The Virtual Chassis has a preprovisioned configuration.
2. The primary installs the new software image on the backup and reboots it.
3. The primary resynchronizes the backup.
4. The primary installs the new software image on member switches that are in the linecard role and reboots them, one at a time. The primary waits for each member to become online and active before starting the software upgrade on the next member.
5. When all members that are in the linecard role have been upgraded, the primary performs a graceful Routing Engine switchover, and the upgraded backup becomes the primary.
6. The software on the original primary is upgraded and the original primary is automatically rebooted. After the original primary has rejoined the Virtual Chassis, you can optionally return control to it by requesting a graceful Routing Engine switchover.

EX6200 and EX8200 Switches

When you request an NSSU on a standalone switch with redundant Routing Engines:

1. The switch verifies that:
 - Both Routing Engines are online and running the same software version.
 - Both Routing Engines have sufficient storage space for the new software image.
 - Graceful Routing Engine switchover and nonstop active routing are enabled.
2. The switch installs the new software image on the backup Routing Engine and reboots it.
3. The switch resynchronizes the backup Routing Engine to the primary Routing Engine.
4. The line cards in the first upgrade group (or the line card in slot 0, if no upgrade groups are defined) download the new image and then restart. Traffic continues to flow through the line cards in the other upgrade groups during this process.

5. When line cards restarted in Step 4 are online again, the line cards in the next upgrade group download the new image and restart. This process continues until all online line cards have restarted with the new software.

NOTE: If you have taken a line card offline with the CLI before you start the NSSU, the line card is not restarted and remains offline.

6. The switch performs a graceful Routing Engine switchover, so that the upgraded backup Routing Engine becomes the primary.
7. The switch installs the new software on the original primary Routing Engine.

To complete the upgrade process, the original primary Routing Engine must be rebooted. You can do so manually or have the switch perform an automatic reboot by including the **reboot** option when you request the NSSU. After the original primary has been rebooted, you can optionally return control to it by requesting a graceful Routing Engine switchover.

8. (EX6200 switch only) The original primary Routing Engine reboots to complete the software upgrade.

NOTE: To complete the upgrade process on an EX8200 switch, you must intervene to reboot the original primary Routing Engine. You can reboot the original primary Routing Engine manually or have the switch perform an automatic reboot by including the **reboot** option when you request the NSSU.

9. (Optional) After the original primary has been rebooted, you can return control to it by requesting a graceful Routing Engine switchover.

The switch can maintain normal operations with either Routing Engine acting as the primary Routing Engine after the software upgrade, so you only have to perform this switchover if you want to return Routing Engine control to the original primary Routing Engine.

EX8200 Virtual Chassis

When you request an NSSU on an EX8200 Virtual Chassis:

1. The primary external Routing Engine verifies that:
 - It has a backup external Routing Engine that is online.
 - All Virtual Chassis members have redundant Routing Engines and the Routing Engines are online.
 - All Routing Engines are running the same software version.

- All Routing Engines have sufficient storage space for the new software image.
 - Graceful Routing Engine switchover and nonstop active routing (NSR) are enabled.
2. The primary external Routing Engine installs the new software image on the backup external Routing Engine and reboots it.
 3. The backup external Routing Engine resynchronizes with the primary external Routing Engine.
 4. The primary external Routing Engine installs the new software on the backup Routing Engines in the member switches and reboots the backup Routing Engines.
 5. When the reboot of the backup Routing Engines complete, the line cards in the first upgrade group download the new image and then restart. (If no upgrade groups are defined, the line card in slot 0 of member 0 downloads the new image and restarts.) Traffic continues to flow through the line cards in the other upgrade groups during this process.
 6. When line cards restarted in Step 5 are online again, the line cards in the next upgrade group (or the next sequential line card) download the new image and restart. This process continues until all online line cards have restarted with the new software.

NOTE: If you have taken a line card offline with the CLI before you start the NSSU, the line card is not restarted and remains offline.

7. The new software image is installed on the primary Routing Engines, both external and internal.
8. The member switches perform a graceful Routing Engine switchover, so that the upgraded backup Routing Engines become primaries.
9. The primary external Routing Engine performs a graceful Routing Engine switchover so that the backup external Routing Engine is now the primary.

To complete the upgrade process, the original primary Routing Engines, both external and internal, must be rebooted. You can do so manually by establishing a console connection to each Routing Engine or have the reboot performed automatically by including the **reboot** option when you request the NSSU. After the original primary external Routing Engine has been rebooted, you can optionally return control to it by requesting a graceful Routing Engine switchover.

NSSU Limitations

You cannot use an NSSU to downgrade the software—that is, to install an earlier version of the software than is currently running on the switch. To install an earlier software version, use the **request system software add** command.

You cannot roll back to the previous software version after you perform an upgrade using NSSU. If you need to roll back to the previous software version, you can do so by rebooting from the alternate root partition if you have not already copied the new software version into the alternate root partition.

NSSU and Junos OS Release Support

A Virtual Chassis must be running a Junos OS release that supports NSSU before you can perform an NSSU. If a Virtual Chassis is running a software version that does not support NSSU, use the `request system software add` command.

[Table 38 on page 604](#) lists the EX Series switches and Virtual Chassis that support NSSU and the Junos OS release at which they began supporting it.

Table 38: Platform and Release Support for NSSU

Platform	Junos OS Release
EX3300 Virtual Chassis	12.2 or later
EX3400 Virtual Chassis	15.1X53-D55
EX4200 Virtual Chassis	12.1 or later
EX4300 Virtual Chassis	13.2X51-D20 or later
EX4500 Virtual Chassis	12.1 or later
EX4550 Virtual Chassis	12.2 or later
Mixed EX4200 and EX4500 Virtual Chassis	12.1 or later
Mixed EX4200 and EX4550 Virtual Chassis	12.2 or later
Mixed EX4200, EX4500, and EX4550 Virtual Chassis	12.2 or later
Mixed EX4500 and EX4550 Virtual Chassis	12.2 or later

Table 38: Platform and Release Support for NSSU *(Continued)*

Platform	Junos OS Release
EX6200 switch	12.2 or later
EX8200 switch	10.4 or later
EX8200 Virtual Chassis	11.1 or later

Overview of NSSU Configuration and Operation

You must ensure that the configuration of the switch or Virtual Chassis meets the requirements described in ["Requirements for Performing an NSSU" on page 599](#). NSSU requires no additional configuration.

In releases prior to Junos OS Release 16.1, for EX6200 switches, EX8200 switches, and EX8200 Virtual Chassis, you can optionally configure line-card upgrade groups using the CLI. See ["Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches" on page 597](#).

You perform an NSSU by executing the `request system software nonstop-upgrade` command. For detailed instructions on how to perform an NSSU, see the topics in Related Documentation.

Release History Table

Release	Description
16.1	In releases prior to Junos OS Release 16.1, for EX6200 switches, EX8200 switches, and EX8200 Virtual Chassis, you can reduce the amount of time an upgrade takes by configuring line-card upgrade groups.

RELATED DOCUMENTATION

[Upgrading Software Using Nonstop Software Upgrade on EX Series Virtual Chassis and Mixed Virtual Chassis \(CLI Procedure\) | 924](#)

[Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade \(CLI Procedure\)](#)

[Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade \(CLI Procedure\) | 918](#)

[Configuring Nonstop Active Routing on Switches](#)

Configuring Graceful Routing Engine Switchover in a Virtual Chassis | **211**

Understanding Nonstop Software Upgrade on EX Series Switches | **597**

Performing a NSSU

IN THIS CHAPTER

- [Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade | 607](#)
- [Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade \(CLI Procedure\) | 612](#)
- [Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches | 623](#)

Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade

SUMMARY

You can configure line-card upgrade groups for nonstop software upgrade (NSSU) operations on supporting platforms. Line-card upgrade groups can reduce the total time required to complete an NSSU operation and enable you to control the upgrade sequence among the switches being upgraded.

IN THIS SECTION

- [How Line-card Upgrade Groups Work with Nonstop Software Upgrade | 607](#)
- [Line-card Upgrade Groups Support | 608](#)
- [Configure Line-Card Upgrade Groups on an EX4650 Virtual Chassis, a QFX Series Virtual Chassis or a QFX5100 VCF | 608](#)
- [Configure Line-Card Upgrade Groups on Standalone EX6200 or EX8200 Switches | 609](#)
- [Configure Line-Card Upgrade Groups on an EX8200 Virtual Chassis | 610](#)

How Line-card Upgrade Groups Work with Nonstop Software Upgrade

With NSSU, you can upgrade software on supporting switches with redundant Routing Engines, a Virtual Chassis, or a Virtual Chassis Fabric (VCF) using a single command with minimal disruption to network traffic.

In its default configuration, NSSU upgrades each line card in a switch or linecard role member in a Virtual Chassis or VCF one at a time. Traffic continues to flow through the other line cards or members while each one is being restarted as part of the upgrade. This behavior minimizes traffic disruption if you configure link aggregation groups (LAGs) such that the member links of each LAG reside on different line cards or members. As a result, when one member link of a LAG is down, the remaining links are up, and traffic continues to flow through the LAG.

When you configure line-card upgrade groups for NSSU, NSSU upgrades all of the devices in each upgrade group at the same time instead of sequentially, reducing the total time needed to complete the upgrade on all line cards or members.

To achieve minimal traffic disruption during an NSSU operation, you must define the line-card upgrade groups such that the member links of the LAGs reside on line cards or members that are in different upgrade groups. For information on how to configure LAGs, see [Configuring Aggregated Ethernet Links \(CLI Procedure\)](#).

NSSU upgrades the groups in the order that they appear in the configuration (in other words, in the order you configure them). As a result, you can also define upgrade groups to control the upgrade sequence during an NSSU operation.

To configure upgrade groups, use the **upgrade-group** configuration statement in the **[edit chassis nssu]** hierarchy.

Line-card Upgrade Groups Support

The following platforms support NSSU line-card upgrade groups:

- EX4650 Virtual Chassis with more than three member switches
- QFX3500, QFX3600, and QFX5100 Virtual Chassis
- QFX5100 Virtual Chassis Fabric (VCF)
- EX6200 or EX8200 switches with redundant Routing Engines
- EX8200 Virtual Chassis

Configure Line-Card Upgrade Groups on an EX4650 Virtual Chassis, a QFX Series Virtual Chassis or a QFX5100 VCF

When you configure line-card upgrade groups on an EX4650 Virtual Chassis, a QFX Series Virtual Chassis, or a QFX5100 VCF, whose switches do not have separate line cards, you use only the **fpcs** option to specify the Virtual Chassis or VCF member IDs that you want to include in an upgrade group. You don't need to use the **member** option.

- To create an upgrade group and add a Virtual Chassis or VCF member switch to the upgrade group, configure the upgrade group name and specify the member number using the **fpcs** option:

```
[edit chassis]
user@switch# set nssu upgrade-group group-name fpcs member-number
```

For example, to create an upgrade group called **vcf** and add linecard role member 2 to that group:

```
[edit chassis]
user@switch# set nssu upgrade-group vcf fpcs 2
```

If **vcf** already exists, this command adds member 2 to **vcf**.

- To create an upgrade group that contains multiple members in a Virtual Chassis or VCF, specify multiple member numbers enclosed in square brackets after the **fpcs** option:

```
[edit chassis]
user@switch# set nssu upgrade-group group-name fpcs [list-of-member-numbers]
```

For example, to create an upgrade group called **vc1** that contains members 1 and 2:

```
[edit chassis]
user@switch# set nssu upgrade-group vc1 fpcs [1 2]
```

Make sure you commit the configuration before starting an NSSU operation.

Configure Line-Card Upgrade Groups on Standalone EX6200 or EX8200 Switches

To configure line-card upgrade groups on a standalone EX6200 or EX8200 switch:

- To create an upgrade group and add a line card to it:

```
[edit chassis]
user@switch# set nssu upgrade-group group-name fpcs slot-number
```

For example, to create an upgrade group called **group3** and add the line card in slot 5 to it:

```
[edit chassis]
user@switch# set nssu upgrade-group group3 fpcs 5
```

If **group3** already exists, this command adds line card 5 to **group3**.

- To create an upgrade group and add multiple line cards to it:

```
[edit chassis]
user@switch# set nssu upgrade-group group-name fpcs [list-of-slot-numbers]
```

For example, to create an upgrade group called **primary** and add line cards in slots 1, 4, and 7 to it:

```
[edit chassis]
user@switch# set nssu upgrade-group primary fpcs [1 4 7]
```

If **primary** already exists, this command adds line cards in slots 1, 4, and 7 to **primary**.

SEE ALSO

[Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade \(CLI Procedure\)](#)

Configure Line-Card Upgrade Groups on an EX8200 Virtual Chassis

To configure line-card upgrade groups on an EX8200 Virtual Chassis:

- To create an upgrade group and add a line card on a Virtual Chassis member to it:

```
[edit chassis]
user@switch# set nssu upgrade-group group-name member member-id fpcs slot-number
```

For example, to create an upgrade group called **primary-ny** and add the line card on member 1 in slot 5 to it:

```
[edit chassis]
user@switch# set nssu upgrade-group primary-ny member 1 fpcs 5
```

If **primary-ny** already exists, this command adds line card 5 on member 1 to **primary-ny**.

- To create an upgrade group that contains multiple line cards on a Virtual Chassis member:

```
[edit chassis]
user@switch# set nssu upgrade-group group-name member member-id fpcs [list-of-slot-numbers]
```

For example, to create an upgrade group called **primary-ny** that contains the line cards in slots 1 and 2 on member 0 and in slots 3 and 4 on member 1:

```
[edit chassis]
user@switch# set nssu upgrade-group primary-ny member 0 fpcs [1 2]

[edit chassis]
user@switch# set nssu upgrade-group primary-ny member 1 fpcs [3 4]
```

SEE ALSO

[Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade \(CLI Procedure\)](#)

RELATED DOCUMENTATION

[Understanding Nonstop Software Upgrade on a Virtual Chassis and Mixed Virtual Chassis](#)

[Upgrading Software on a Virtual Chassis and Mixed Virtual Chassis Using Nonstop Software Upgrade](#)

Understanding Nonstop Software Upgrade on a Virtual Chassis Fabric

Upgrading Software on a Virtual Chassis Fabric Using Nonstop Software Upgrade

[Understanding Nonstop Software Upgrade on EX Series Switches](#)

[Upgrading Software Using Nonstop Software Upgrade on EX Series Virtual Chassis and Mixed Virtual Chassis \(CLI Procedure\)](#)

[Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches](#)

Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade (CLI Procedure)

IN THIS SECTION

- [Preparing the Switch for Software Installation | 612](#)
- [Upgrading Both Routing Engines Using NSSU | 614](#)
- [Upgrading One Routing Engine Using NSSU \(EX8200 Switch Only\) | 618](#)
- [Upgrading the Original Primary Routing Engine \(EX8200 Switch Only\) | 621](#)

You can use nonstop software upgrade (NSSU) to upgrade the software on standalone EX6200 or EX8200 switches with redundant Routing Engines. NSSU upgrades the software running on the Routing Engines and line cards with minimal traffic disruption during the upgrade. NSSU is supported on EX8200 switches running Junos OS Release 10.4 or later and on EX6200 switches running Junos OS Release 12.2 or later.

This topic covers:

Preparing the Switch for Software Installation

Before you begin software installation using NSSU:

- (Optional) Configure line-card upgrade groups as described in ["Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade"](#) on page 607. You can configure line-card upgrade groups for nonstop software upgrade (NSSU) operations on supporting platforms. Line-card upgrade groups can reduce the total time required to complete an NSSU operation and enable you to control the upgrade sequence among the switches being upgraded." By default, an NSSU upgrades line cards one at a time to allow aggregated Ethernet links that have members on different line cards to remain up through the upgrade process. Configuring line-card upgrade groups reduces the time an upgrade takes because the line cards in each upgrade group are upgraded at the same time rather than sequentially.
- Verify that the Routing Engines are running the same version of the software. Enter the following command:

```
{master}  
user@switch> show version invoke-on all-routing-engines
```

Ensure that nonstop active routing (NSR) and graceful Routing Engine switchover (GRES) are enabled. To verify that they are enabled, you need to check only the state of nonstop active routing—if nonstop active routing is enabled, then graceful Routing Engine switchover is enabled.

```
{master}
user@switch> show task replication
    Stateful Replication: Enabled
    RE mode: Master
```

Protocol	Synchronization Status

OSPF	Complete
RIP	Complete
PIM	Complete
RSVP	Complete

If nonstop active routing is not enabled (**Stateful Replication is Disabled**), see ["Configuring Nonstop Active Routing on Switches" on page 293](#) for information on how to enable it.

- (Optional) Enable nonstop bridging (NSB). Enabling NSB ensures that all NSB-supported Layer 2 protocols operate seamlessly during the Routing Engine switchover that is part of the NSSU.
- (Optional) Back up the system software on each Routing Engine to an external storage device with the `request system snapshot` command.

Upgrading Both Routing Engines Using NSSU

This procedure describes how to upgrade both Routing Engines using NSSU. When the upgrade completes, both Routing Engines are running the new version of the software, and the backup Routing Engine is the new primary Routing Engine.

To upgrade both Routing Engines using NSSU:

1. Download the software package.
2. Copy the software package to the switch. We recommend that you use FTP to copy the file to the `/var/tmp` directory.
3. Log in to the primary Routing Engine using the console connection. You can perform an NSSU from the management interface, but a console connection allows you to monitor the progress of the primary Routing Engine reboot.
4. Install the new software package:

```
{master}
user@switch> request system software nonstop-upgrade reboot
/var/tmp/package-name-m.nZx-distribution.tgz
```

where *package-name-m.nZx-distribution.tgz* is, for example, *jinstall-ex-8200-10.4R1.5-domestic-signed.tgz*.

The switch displays the following status messages as the upgrade executes:

```
Chassis ISSU Check Done
ISSU: Validating Image
```

```

ISSU: Preparing Backup RE
Pushing bundle to rel
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Backup upgrade done
Rebooting Backup RE

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online (ISSU)	
FPC 5	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

```

Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
ISSU: Upgrading Old Master RE
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
ISSU: Old Master Upgrade Done
ISSU: IDLE

*** FINAL System shutdown message from user@switch ***
System going down IMMEDIATELY

```



```
Shutdown NOW!
[pid 2635]
```

NOTE: If you omit the **reboot** option in this step when using an EX8200 switch, you must manually reboot the original primary Routing Engine with the `request system reboot` command for the upgrade to complete.

The original primary Routing Engine reboots automatically after updating the new primary Routing Engine when an NSSU is used to upgrade an EX6200 switch with dual Routing Engines.

5. Log in after the reboot completes. To verify that both Routing Engines have been upgraded, enter the following command:

```
{backup}
user@switch> show version invoke-on all-routing-engines
re0:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [12.1-20111229.0]
JUNOS Base OS Software Suite [12.1-20111229.0]
JUNOS Kernel Software Suite [12.1-20111229.0]
JUNOS Crypto Software Suite [12.1-20111229.0]
JUNOS Online Documentation [12.1-20111229.0]
JUNOS Enterprise Software Suite [12.1-20111229.0]
LC JUNOS Installation Software [12.1-20111229.0]
JUNOS Routing Software Suite [12.1-20111229.0]
JUNOS Web Management [12.1-20111229.0]

rel:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [12.1-20111229.0]
JUNOS Base OS Software Suite [12.1-20111229.0]
JUNOS Kernel Software Suite [12.1-20111229.0]
JUNOS Crypto Software Suite [12.1-20111229.0]
JUNOS Online Documentation [12.1-20111229.0]
JUNOS Enterprise Software Suite [12.1-20111229.0]
LC JUNOS Installation Software [12.1-20111229.0]
```

```
JUNOS Routing Software Suite [12.1-20111229.0]
JUNOS Web Management [12.1-20111229.0]
```

6. To verify that the line cards that were online before the upgrade are online after the upgrade, log in to the primary Routing Engine and enter the `show chassis nonstop-upgrade` command:

```
{backup}
user@switch> request routing-engine login master

{master}
user@switch> show chassis nonstop-upgrade
```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online (ISSU)	
FPC 5	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

7. If you want to make **re0** the primary Routing Engine again, enter the following command:

```
{master}
user@switch> request chassis routing-engine master switch
Toggle mastership between routing engines ? [yes,no] (no) yes
```

You can verify that **re0** is the primary Routing Engine by executing the `show chassis routing-engine` command.

8. To ensure that the resilient dual-root partitions feature operates correctly, execute the following command to copy the new Junos OS image into the alternate root partition on each Routing Engine:

```
user@switch> request system snapshot slice alternate routing-engine both
```

Resilient dual-root partitions allow the switch to boot transparently from the alternate root partition if the system fails to boot from the primary root partition.

Upgrading One Routing Engine Using NSSU (EX8200 Switch Only)

This procedure describes how to upgrade one of the Routing Engines using NSSU on an EX8200 switch. When the upgrade completes, the backup Routing Engine is running the new software version and is the new primary. The original primary Routing Engine, now the backup Routing Engine, continues to run the previous software version.

NOTE: NSSU always upgrades the software on both Routing Engines on an EX6200 switch. Therefore, you cannot upgrade software on one Routing Engine using NSSU on an EX6200 switch.

To upgrade one Routing Engine using NSSU:

1. Download the software package.
2. Copy the software package to the switch. We recommend that you use FTP to copy the file to the `/var/tmp` directory.
3. Log in to the primary Routing Engine.
4. Request an NSSU. On an EX8200 switch, specify the **no-old-master-upgrade** option when requesting the NSSU:

```
{master}
user@switch> request system software nonstop-upgrade
no-old-master-upgrade /var/tmp/package-name-m.nZx-distribution.tgz
```

where *package-name-m.nZx-distribution.tgz* is, for example, **jinstall-ex-8200-10.4R2.5-domestic-signed.tgz**.

The switch displays the following status messages as the upgrade executes:

```
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing Backup RE
Pushing bundle to rel
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Backup upgrade done
Rebooting Backup RE

Rebooting rel
```

```

ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online (ISSU)	
FPC 5	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

```

Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
Skipping Old Master Upgrade
ISSU: IDLE

```

When the upgrade is complete, the original primary Routing Engine (**re0**) becomes the backup Routing Engine.

5. To verify that the original backup Routing Engine (**re1**) has been upgraded, enter the following command:

```

{backup}
user@switch> show version invoke-on all-routing-engines
re0:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [11.3-20110429.1]
JUNOS Base OS Software Suite [11.3-20110429.1]
JUNOS Kernel Software Suite [11.3-20110429.1]
JUNOS Crypto Software Suite [11.3-20110429.1]

```

```

JUNOS Online Documentation [11.3-20110429.1]
JUNOS Enterprise Software Suite [11.3-20110429.1]
LC JUNOS Installation Software [11.3-20110429.1]
JUNOS Routing Software Suite [11.3-20110429.1]
JUNOS Web Management [11.3-20110429.1]

rel:
-----

Hostname: switch
Model: ex8208
JUNOS Base OS boot [12.1-20111229.0]
JUNOS Base OS Software Suite [12.1-20111229.0]
JUNOS Kernel Software Suite [12.1-20111229.0]
JUNOS Crypto Software Suite [12.1-20111229.0]
JUNOS Online Documentation [12.1-20111229.0]
JUNOS Enterprise Software Suite [12.1-20111229.0]
LC JUNOS Installation Software [12.1-20111229.0]
JUNOS Routing Software Suite [12.1-20111229.0]
JUNOS Web Management [12.1-20111229.0]

```

6. To verify that the line cards that were online before the upgrade are online after the upgrade, log in to the new primary Routing Engine and enter the **show chassis nonstop-upgrade** command:

```

{backup}
user@switch> request routing-engine login master

--- JUNOS 12.1-20111229.0 built 2011-12-29 04:12:22 UTC
{master}
user@switch> show chassis nonstop-upgrade

```

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online	
FPC 5	Online	
FPC 6	Online	
FPC 7	Online	

7. To ensure that the resilient dual-root partitions feature operates correctly, copy the new Junos OS image into the alternate root partition of the Routing Engine:

```
user@switch> request system snapshot slice alternate
```

Resilient dual-root partitions allow the switch to boot transparently from the alternate root partition if the system fails to boot from the primary root partition.

Upgrading the Original Primary Routing Engine (EX8200 Switch Only)

This procedure describes how to upgrade the original primary Routing Engine after you have upgraded the original backup Routing Engine as described in ["Upgrading One Routing Engine Using NSSU \(EX8200 Switch Only\)" on page 618](#) for an EX8200 switch.

1. Log in to the current primary Routing Engine (**re1**).
2. Enter configuration mode and disable nonstop active routing:

```
{master}[edit]
user@switch# delete routing-options nonstop-routing
```

3. Deactivate graceful Routing Engine switchover and commit the configuration:

```
{master}[edit]
user@switch# deactivate chassis redundancy graceful-switchover

{master}[edit]
user@switch# commit
```

4. Log in to the current backup Routing Engine (**re0**) using a console connection.
5. Request a software installation:

```
user@switch> request system software add reboot /var/tmp/package-name-m.nZx-
distribution.tgz
```

NOTE: When you use NSSU to upgrade only one Routing Engine, the installation package is not automatically deleted from **/var/tmp**, leaving the package available to be used to upgrade the original primary Routing Engine.

6. After the upgrade completes, log in to the current primary Routing Engine (**re1**) and enter CLI configuration mode.
7. Re-enable nonstop active routing and graceful Routing Engine switchover:

```
[edit]
user@switch# activate chassis redundancy graceful-switchover

[edit]
user@switch# set routing-options nonstop-routing

[edit]
user@switch# commit
```

8. To ensure that the resilient dual-root partitions feature operates correctly, exit the CLI configuration mode and copy the new Junos OS image into the alternate root partition of the Routing Engine:

```
user@switch> request system snapshot slice alternate
```

Resilient dual-root partitions allow the switch to boot transparently from the alternate root partition if the system fails to boot from the primary root partition.

9. (Optional) To return control to the original primary Routing Engine (**re0**), enter the following command:

```
{master}
user@switch> request chassis routing-engine master switch
Toggle mastership between routing engines ? [yes,no] (no) yes
```

You can verify that **re0** is the primary Routing Engine by executing the `show chassis routing-engine` command.

RELATED DOCUMENTATION

[Understanding Nonstop Software Upgrade on EX Series Switches | 597](#)

Configuring Dual-Root Partitions

Troubleshooting Software Installation on EX Series Switches

Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches

IN THIS SECTION

- [Requirements | 623](#)
- [Overview and Topology | 623](#)
- [Configuration | 625](#)

Nonstop software upgrade (NSSU) enables you to upgrade the software running on an EX Series switch with redundant Routing Engines or on most EX Series Virtual Chassis by using a single command and with minimal disruption to network traffic. By default, NSSU upgrades the software running on line cards one line card at a time.

To reduce the time an NSSU takes, you can configure line-card upgrade groups on an EX6200 or EX8200 switch with redundant Routing Engines or on an EX8200 Virtual Chassis.

This example shows how to configure NSSU to use line-card upgrade groups:

Requirements

This example uses the following hardware and software components:

- An EX8200 switch with redundant Routing Engines
- Junos OS Release 10.4 or later for EX Series switches

Before you begin to configure line-card upgrade groups, ensure that you have configured the link aggregation groups (LAGs) as described in [Configuring Aggregated Ethernet Links \(CLI Procedure\)](#). See ["Overview and Topology" on page 623](#) for details about the LAG configurations for this example.

Overview and Topology

IN THIS SECTION

- [Topology | 624](#)

In its default configuration, NSSU upgrades each line card in a switch or Virtual Chassis one at a time. Traffic continues to flow through the other line cards while a line card is being restarted as part of the upgrade. This behavior allows you minimize disruption to traffic by configuring link aggregation groups (LAGs) such that the member links of each LAG reside on different line cards. When one member link of a LAG is down, the remaining links are up, and traffic continues to flow through the LAG.

Because the default configuration upgrades each line card one at a time, the upgrade can take some time to complete. You can reduce the time it takes to perform an NSSU by configuring line-card upgrade groups. Instead of being upgraded sequentially, the line cards in an upgrade group are upgraded simultaneously. To achieve minimal traffic disruption, you must define the line-card upgrade groups such that the member links of the LAGs reside on line cards that are in different upgrade groups.

NOTE: NSSU upgrades the groups in the order that they appear in the configuration (in other words, in the order you configure them).

Topology

This example uses an EX8200 switch that has five line cards installed in slots 0 through 4. Two LAGs have been configured:

- **ae0**—Has two member links, one on the line card in slot 0 and one on the line card in slot 1.
- **ae1**—Has two member links, one on the line card in slot 2 and one on the line card in slot 3.

The interfaces on the line card in slot 4 are not part of either LAG.


To minimize the time an upgrade takes and to ensure that the member links of each LAG are in different upgrade groups, this example configures the following two line-card upgrade groups:

- **group1**—Contains the line cards in slots 0, 2, and 4.
- **group2**—Contains the line cards in slots 1 and 3.

The line card in slot 4 could be put in either group. It could also be left out of an upgrade group entirely, and it would be upgraded separately after the line cards in the upgrade groups have been upgraded. However, it is more efficient to include it in an upgrade group.

Figure 36 on page 625 illustrates the topology.

Figure 36: Example Line-Card Upgrade Group Topology

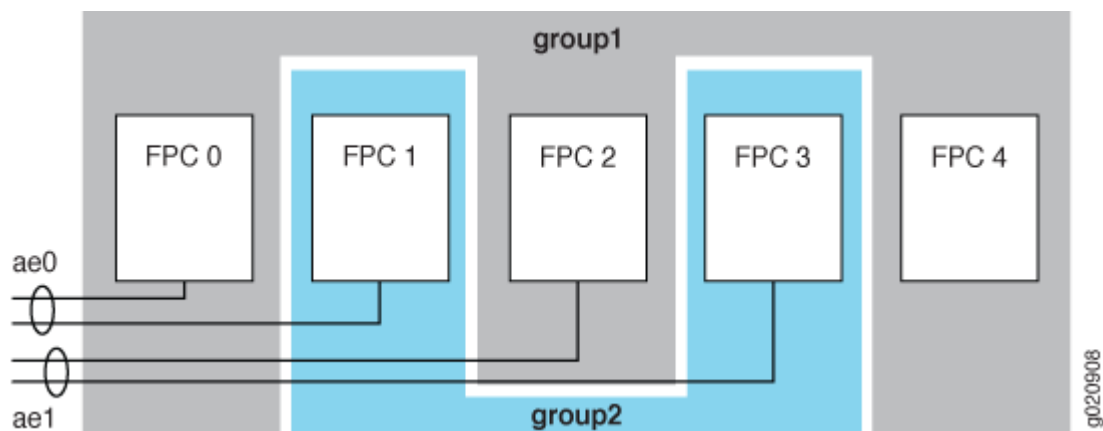

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 625](#)
- [Procedure | 626](#)

To create line-card upgrade groups, perform these tasks:

CLI Quick Configuration

To quickly create the line-card upgrade groups, copy the following commands and paste them into the switch terminal window:

```
[edit]
set chassis nssu upgrade-group group1 fpcs [0 2 4]
set chassis nssu upgrade-group group2 fpcs [1 3]
```

Procedure

Step-by-Step Procedure

To create the line-card upgrade groups for an NSSU:

1. Create the first line-card upgrade group:

```
[edit chassis]
user@switch# set nssu upgrade-group group1 fpcs [0 2 4]
```

2. Create the second line-card upgrade group:

```
[edit chassis]
user@switch# set nssu upgrade-group group2 fpcs (NSSU Upgrade Groups) [1 3]
```

Results

Display the results of the configuration:

```
[edit chassis]
user@switch# show
nssu {
    upgrade-group group1 {
        fpcs [ 0 2 4 ];
    }
    upgrade-group group2 {
        fpcs [ 1 3 ];
    }
}
```

RELATED DOCUMENTATION

[Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade | 607](#)

[Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade \(CLI Procedure\)](#)

Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade (CLI Procedure) | **918**

15

PART

Multinode High Availability

Multinode High Availability | 629

CHAPTER 33

Multinode High Availability

IN THIS CHAPTER

- [Multinode High Availability | 629](#)

Multinode High Availability

IN THIS SECTION

- [Multinode High Availability | 629](#)
- [Support for VPN on HA Nodes in Multinode High Availability Solution | 636](#)
- [Configure Tunnel Link Encryption for Multinode High Availability Nodes | 638](#)

Multinode High Availability

IN THIS SECTION

- [Overview | 630](#)
- [Benefits | 631](#)
- [Multinode High Availability Modes | 631](#)
- [Active/Active Data Plane | 631](#)
- [Active/Backup Control and Data Plane | 632](#)
- [Services Redundancy/Failover Group | 634](#)
- [Monitoring failures | 635](#)


Multinode High Availability solution introduces a model suitable for certain L3 based deployments with the goal of simplicity and reliability.

Overview

Multinode High Availability provides inter-chassis redundancy on SRX devices in a L3 network. It supports two SRX devices presenting themselves as independent nodes to the rest of the network. In this mode, the nodes can either be co-located or separated across the geography. These nodes are connected with an interchassis link (ICL) to synchronize configuration, control plane, and data plane states across the SRX nodes to handle device failover scenarios. This mode provides redundancy at the service level, which minimizes the control plane state that needs to be synchronized across the nodes. Control plane state is required only for services like IPsec which has an active control plane protocol state.

Figure 37 on page 630 shows a simplified view of a deployment where two SRX Series devices are reachable over an ICL.

Figure 37: Deployment of SRX Nodes with Interchassis Link

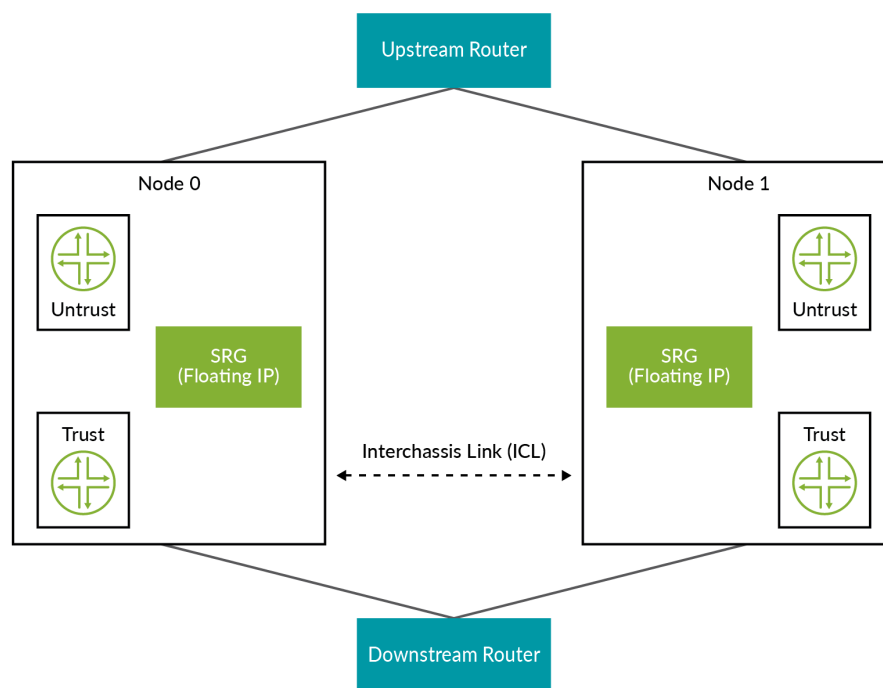

In this deployment, both nodes are connected to each other over an interchassis link and are also connected to adjacent routers on **trust** and on **untrust** network. The nodes in High Availability (HA) pair act in standalone mode since the Routing Engines (REs) on each node will only be connected to their

local PFEs. The REs on each of the nodes will run their own routing protocols (Static, OSPF, BGP, IS-IS, ANYCAST, VRRP) and state machines. The nodes agree on the primary and backup roles by talking to each other using an interchassis link or the IP link.

The interchassis link is based on a couple of IP addresses reachable to each other through an IP network. The link is generally configured in a different routing instance to separate from regular traffic.

The traffic between the HA nodes is protected using the trusted IPsec protocols. Traffic is steered towards the node where the service is active by upstream and downstream routers.

Following commands are added to the Multinode High Availability configuration for interchassis link encryption:

```
set chassis high-availability peer-id peer-id vpn-profile profile name
set chassis high-availability local-id local-id local-ip local-ip
set chassis high-availability peer-id peer-id peer-ip peer-ip
```

Benefits

- Reduced cost of deployments
- Improved geo-redundancy deployability

Multinode High Availability Modes

Interchassis link related changes are applicable to both active/active and active/backup modes.

- Active/backup- In this mode, one node is active in forwarding traffic and the second node is ready to start processing traffic instantly.
- Active/active- In this mode, each node can forward traffic for services not terminated on a node in a SRG.

Active/Active Data Plane

This mode works for stateless services which does not have control plane state. For example, Firewall, ALG, NAT.


In this mode, there is only active and warm states in the data plane. The activeness is maintained at per session level and the transition from warm to active is packet driven. When a packet is received in warm state, the session transitions its state from warm to active. The node that is receiving traffic marks flow session active and the node that is not receiving traffic marks the session as warm.

After failover the node which now gets the traffic notifies the remote node about the session movement. The remote node then transitions the session from active to warm.

Active/Backup Control and Data Plane

In the Active/backup mode, services require both controls and data plane states to be synchronized across the nodes. Whenever an active SRX node fails for a service function, both control and data plane needs to failover to the backup node at the same time.

Figure 38: Deployment of Multinode High Availability in Active/Backup Mode

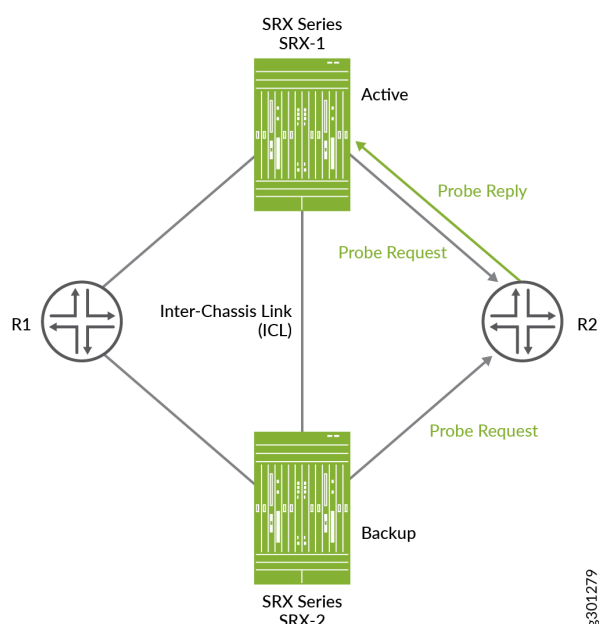

The active/backup state in HA mode involves:

Activeness Determination

In this mode, the SRX devices are configured with a floating IP address on the loopback interface "lo0". Administrator needs to configure "lo0" interfaces and the "floating IPs" as required.

Both the SRX devices initially advertise the route for the floating IP address to the routers R1 and R2 with equal preferences. But the routers can have their own preferences on one of the paths based on the IP address. If a certain node is preferred to take over the activeness at boot up, you can configure higher default route preference on the routing policy towards the probe router on that node instead of the equal preference.

After reboot, both the SRX devices start from hold state and continuously probe a configured HA activeness determination probe IP on R1 or R2 which is used as the destination IP address and the floating IP as the source. The router hosting the probe destination IP address replies only to the SRX node which lies on its preferred routing path. The node that gets the probe reply promotes itself to the active role and communicate to the other node. The other node stops probing and takes over the backup role.

Activeness Enforcement

After the activeness is determined, the active node starts advertising active (higher) preference path for all the remote and local routes (including the floating IP address) to both routers to ensure all the traffic is drawn towards the active node. The backup node will advertise the default (lower) priority ensuring no packet is forwarded to the backup node either by R1 and R2.

Activeness is notified to peer node through ICL. The active node advertises the high preference path to adjacent neighbors. The service processes (IKED, AUTHD, PKID) take an active role on the node with Active state and backup on other node.

When the failover happens and the old backup node transitions to Active role, the route preference is swapped to drive all the traffic to the new active node.

The switch in the route preference advertisement is driven by route policies configured on SRX1 and SRX2 with the **if-route-exists** condition. You can configure the required route **active-signal-route-ip** to be used with this condition and HA module will add this route to the routing table on moving to active role which will activate the policy to start advertising higher preference.

You can configure the **backup-signal-route-ip** for the backup node to advertise a medium priority. When the HA link is down, the active node removes the **active-signal-route**. The old backup node can detect this through its probes with which the default routing preference towards the old active node is overwritten with the medium priority.

If a certain node is preferred to take over the activeness at boot up, you need to configure the routing policy based on the sample routing policy as below:

```
user@host# set policy-options policy-statement ipsec_pol term 1 from protocol static
user@host# set policy-options policy-statement ipsec_pol term 1 from protocol direct
user@host# set policy-options policy-statement ipsec_pol term 1 from condition active_route_exists
user@host# set policy-options policy-statement ipsec_pol term 1 then metric 10
user@host# set policy-options policy-statement ipsec_pol term 1 then accept
user@host# set policy-options policy-statement ipsec_pol term 2 from protocol static
user@host# set policy-options policy-statement ipsec_pol term 2 from protocol direct
user@host# set policy-options policy-statement ipsec_pol term 2 from condition backup_route_exists
user@host# set policy-options policy-statement ipsec_pol term 2 then metric 20
user@host# set policy-options policy-statement ipsec_pol term 2 then accept
```

```

user@host# set policy-options policy-statement ipsec_pol term 3 from protocol static
user@host# set policy-options policy-statement ipsec_pol term 3 from protocol direct
user@host# set policy-options policy-statement ipsec_pol term 3 then metric 30
user@host# set policy-options policy-statement ipsec_pol term 3 then accept
user@host# set policy-options policy-statement ipsec_pol term default then reject
user@host# set policy-options condition active_route_exists if-route-exists address-family inet <ip
address>
user@host# set policy-options condition active_route_exists if-route-exists address-family inet table inet.0
user@host# set policy-options condition backup_route_exists if-route-exists address-family inet <ip
address>
user@host# set policy-options condition backup_route_exists if-route-exists address-family inet table
inet.0

```

In the configuration, the routing policies must have three priorities: low, medium and high. Low is default, medium is backup and high is active.

Failure Scenarios

In case of external path failure, link failure, and BFD down to adjacent routers, routes are re-advertised to swap the preference and the packets start taking the path to peer node, which is active.

In case of node failure where the peer node is active, the processes (flowd, IKED, IKEMD, PKID, AUTHD, RE kernel) are restarted.

- Flowd restart process impacts the session on the respective SPU and will also bring down the ICL.
- Infrastructure (REPD) restart process impacts new sessions or some tunnels in rekey window.
- The packets are dropped if the node is in ineligible mode. Node state transitions to ineligible when external or internal path fails or any node failure occurs.

Services Redundancy/Failover Group

A services redundancy group (SRG) allows user to define the following two types of services based on which different HA modes are supported:

- SRG0- This mode is applicable to all services which does not have control plane state. For example (Firewall, NAT, and ALG).
- SRG1-This mode is applicable to the services that have control plane state. For example, IPsec.

You can configure **services-redundancy-group** to define the control plane HA stateless services and IPsec VPN service.

To enable the active/backup mode:

1. Enable the default HA mode.

```
user@host# set chassis high-availability services-redundancy-group 0
```

2. Enable the VPN service in active/backup mode.

```
user@host# set chassis high-availability services-redundancy-group 1
```

3. Specify the designated floating IP address for the SRG. The IP address is used as the source IP address to determine the activeness.

```
user@host# set high-availability services-redundancy-group 1 floating-ip IP address
```

Monitoring failures

In case of any failures, the local node takes action and the remote node is notified about the action, if the interchassis link is up.

If the interchassis link is down, the remote node knows the state change by the activeness probing that it would already be doing because of the ICL down event earlier.

Following actions are listed:

- SRG0- If the failure is related to SRG0, SRG0 goes to isolated state and shuts down the user configured **shut-on-failure** interfaces.
- SRG1- The nodes goes to ineligible state and removes the active/backup signal route.

On failure recovery:

- SRG0- Waits for the subsequent cold sync to complete and transitions to online state and brings up the interfaces which it shuts down earlier.
- SRG1-Transition out of Ineligible state and the new state is determined based on remote nodes HA state and ICL link status at that time.

When the active node goes down abruptly for any reason, the interchassis link is detected down on the remote SRX node and the activeness determination probing is restarted to prevent split brain scenario. In this case, since the old active is down and hence the router hosting the probe destination IP address has lost its higher preference path, the probe result is a success and the remote SRX node transitions to active state.

In spite of the split brain prevention mechanism, theoretically the nodes can still get in to a ACTIVE-ACTIVE state when the interchassis link is down and there are network issues on the probe router at the same time because of which it replies to probe requests from both the SRX nodes. In this case once the situation improves and the interchassis link is up, the node with lower local id backs off and takes the backup role. This behavior can be overridden by the optional activeness-priority configuration.

SEE ALSO

[request chassis high-availability failover services-redundancy-group | 1008](#)

[show chassis high-availability information | 1087](#)

[show chassis high-availability services-redundancy-group | 1096](#)

[show chassis high-availability data-plane statistics | 1100](#)

[High-Availability \(Chassis\) | 759](#)

[clear chassis high-availability data-plane statistics | 1002](#)

Support for VPN on HA Nodes in Multinode High Availability Solution

VPN service is automatically enabled when you enable the active/backup mode using **set chassis high-availability services-redundancy-group 1** command. The multinode high availability solution allows you to synchronize IKE negotiations from active to the backup. The inter chassis link (ICL) connects the active and backup nodes for exchange of the synchronization data.

IPsec feature is supported on multinode HA. IPsec runs actively on one node (or active node). It can failover to the secondary node (or backup node). IKE negotiations occurs from active node and the states are synchronized with the backup node. After synchronization, the backup node will be ready for mastership role and continues without bringing down the tunnels after switchover. You can run the show command(s) on both active and backup nodes to display the status of IKE and IPsec security associations. You can delete the IKE and IPsec security associations only on the active node.

When you enable multinode high availability feature, the dynamic CA profiles are loaded only on the node during the IKE negotiation. If a failover occurs, the new active node undergoes a new IKE negotiation and loads the dynamic CA certificates as part of that negotiation. When PKID restarts, dynamic CA certificates are deleted only from the node where PKID was restarted.


Now let's discuss the scenario how to enable VPN in active/backup mode in Multinode High Availability solution. First, you must configure SRG1 to enable active/backup mode in Multinode High Availability.

Ensure that the tunnels are anchored in lo0 interface. For this, you need to configure IKE tunnel end point IP address on local lo0.x interface (where 'x' represents the interface subunit) on both the active and backup devices and this IP is called floating IP. This lo0.x is now configured as the external interface for IKE gateway and the floating IP is configured as local address. Route on the adjacent routers for this

floating IP address will be pointing to the active device. This ensures that at any given point, the IKE negotiation will initiate from the active device.

Figure 39 on page 637 shows both active and backup SRX Series devices with floating IP address.

Figure 39: Active/backup Nodes With Floating IP Address

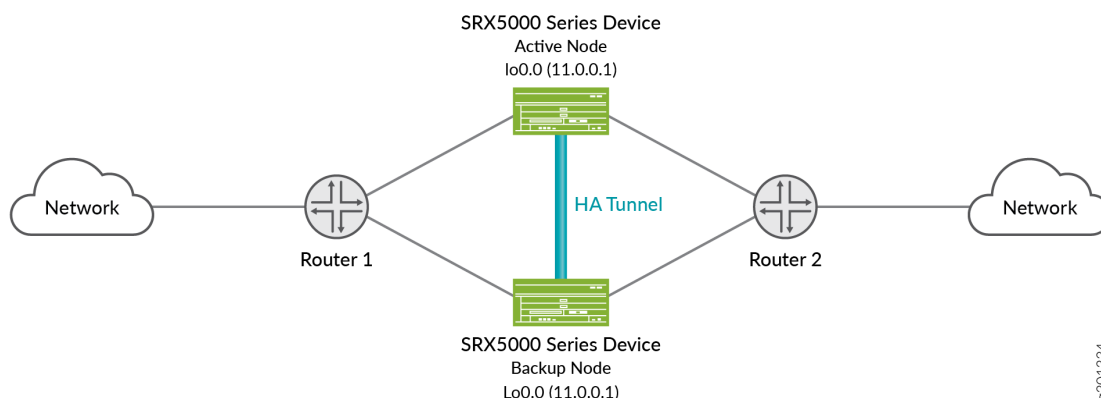

Following are the steps to configure VPN and assign the same floating IP address to the active and backup node. Note that in this example, loopback interface (lo0.0) is used as external interface and loopback address (11.0.0.1) is assigned to the local address.

```
set interfaces lo0 unit 0 family inet address 11.0.0.1/32
set security ipsec vpn HUB_VPN bind-interface st0.1
set security ipsec vpn HUB_VPN ike gateway HUB_GW
set security ipsec vpn HUB_VPN ike ipsec-policy IPSEC_POL
set security ipsec vpn HUB_VPN traffic-selector TS local-ip 0.0.0.0/0
set security ipsec vpn HUB_VPN traffic-selector TS remote-ip 0.0.0.0/0
set security ike gateway HUB_GW ike-policy IKE_POL
set security ike gateway HUB_GW dynamic distinguished-name wildcard C=us,DC=juniper
set security ike gateway HUB_GW dynamic ike-user-type group-ike-id
set security ike gateway HUB_GW dead-peer-detection always-send
set security ike gateway HUB_GW dead-peer-detection interval 10
set security ike gateway HUB_GW dead-peer-detection threshold 3
set security ike gateway HUB_GW local-identity distinguished-name
set security ike gateway HUB_GW external-interface lo0.0
set security ike gateway HUB_GW local-address 11.0.0.1
set security ike gateway HUB_GW version v2-only
```

SEE ALSO

ipsec (High Availability)
ike (High Availability)
High-Availability (Chassis)
services-redundancy-group
local-id
peer-id
traceoptions
show security ike security-associations
show security ike active-peer
show security ipsec security-associations
show security ipsec statistics
clear security ike security-associations
clear security ipsec security-associations

Configure Tunnel Link Encryption for Multinode High Availability Nodes

IN THIS SECTION

● Requirements | 638

● Overview | 639

● Configuration | 640

● Verification | 650

This example shows how to encrypt or protect the High Availability (HA) traffic that traverse between the SRX5000 Series devices (HA nodes) when the Multinode High Availability feature is enabled.

Requirements

This example uses the following hardware and software components:

- Two SRX5000 line of devices
- MX or vSRX devices as adjacent routers
- Junos OS Release 20.4R1 or later

Overview

IN THIS SECTION

- [Topology](#) | 639

In Multinode High Availability mode, nodes deployed at different locations are connected by Public IPs to synchronize all the HA related information between them. Since HA traffic traverse over the internet and it can be a security issue, these packets need to be encrypted.

To protect the HA traffic between active and backup nodes, IPsec VPN tunnel is established between the nodes as soon as they come up. It is assumed that without HA link encryption, these devices can communicate with their local IP addresses as if they are on the same subnet. When HA link encryption is enabled, all the local IP based HA traffic are tunneled through IPsec. For better protection, IPsec SAs are negotiated by IKE between the nodes instead of manual VPN. In Multinode HA mode, the tunnel is installed to PFE and encrypt both the control and Real Time Objects (RTO) between the nodes.

Perform the following configuration to protect the HA traffic between the HA nodes:

- Configure a VPN profile for the HA traffic using the **vpn-profile profile-name** option at the **[edit chassis high-availability peer-id peer-id]** hierarchy level.
- Encrypt the HA traffic for the specific VPN profile using the **ha-link-encryption** option at the **[edit security ipsec vpn vpn-name]** hierarchy level.

This configuration creates an ICL tunnel where only IKEv2 is supported for secure HA traffic flow. ICL tunnels support only site-to-site IPsec VPN tunnels.

View HA tunnel related information using the [show security ike security-associations](#), [show security ike active-peer](#), [show security ipsec security-associations](#), and [show security ipsec statistics](#) commands.


Clear HA tunnel related information using the [clear security ike security-associations](#) and [clear security ipsec security-associations](#) commands.

Topology

In this example, two SRX5000 Series devices that are at different geographical locations act as a high availability node. As the control and data traffic passes through the internet, the traffic needs to be secured. To secure the HA traffic, the HA tunnel is encrypted using IPsec protocols.

Figure 40 on page 640 shows the topology in which SRX5000 Series devices supports encrypting the traffic that transverse through the HA tunnel between the layer 3 high availability nodes.

Figure 40: High Availability Tunnel Link Encryption

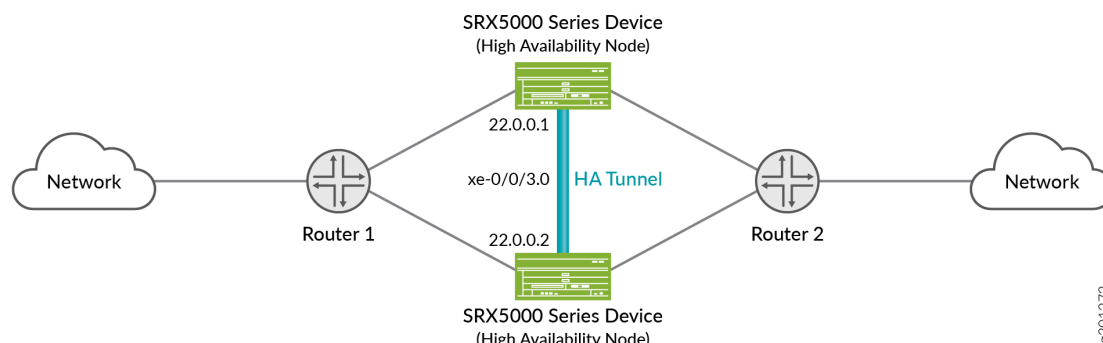

Configuration

IN THIS SECTION

- [CLI Quick Configuration | 640](#)
- [Configuring Link Encryption on High Availability Nodes | 642](#)
- [Results | 646](#)

CLI Quick Configuration

To quickly configure this example, copy the following commands, paste them into a text file, remove any line breaks, change any details necessary to match your network configuration, copy and paste the commands into the CLI at the **[edit]** hierarchy level, and then enter **commit** from configuration mode.

To configure HA tunnel to protect the traffic between the two HA nodes (22.0.0.1 and 22.0.0.2) using the IPsec protocols, configure the following:

```
set chassis high-availability local-id 1
set chassis high-availability local-id local-ip 22.0.0.1
set chassis high-availability peer-id 2 peer-ip 22.0.0.2
set chassis high-availability peer-id 2 interface xe-0/0/3.0
```

```

set chassis high-availability peer-id 2 liveness-detection minimum-interval 200
set chassis high-availability peer-id 2 liveness-detection multiplier 5
set chassis high-availability services-redundancy-group 0 peer-id 2
set chassis high-availability services-redundancy-group 1 peer-id 2
set chassis high-availability services-redundancy-group 1 floating-ip 11.0.0.1
set chassis high-availability services-redundancy-group 1 activeness-probe dest-ip 111.0.0.1
set chassis high-availability services-redundancy-group 1 monitor bfd-liveliness 2.0.0.1 src-ip 2.0.0.2
set chassis high-availability services-redundancy-group 1 monitor bfd-liveliness 2.0.0.1 session-type
singlehop
set chassis high-availability services-redundancy-group 1 monitor bfd-liveliness 2.0.0.1 interface xe-0/0/1.0
set chassis high-availability services-redundancy-group 1 active-signal-route 39.0.0.1
set chassis high-availability services-redundancy-group 1 backup-signal-route 39.0.0.2
set chassis high-availability services-redundancy-group 1 activeness-priority 200
set security ike respond-bad-spi 5
set security ike proposal L3HA_IKE_PROP description l3ha_link_encr_tunnel
set security ike proposal L3HA_IKE_PROP authentication-method pre-shared-keys
set security ike proposal L3HA_IKE_PROP dh-group group14
set security ike proposal L3HA_IKE_PROP authentication-algorithm sha-256
set security ike proposal L3HA_IKE_PROP encryption-algorithm aes-256-cbc
set security ike proposal L3HA_IKE_PROP lifetime-seconds 28800
set security ike policy L3HA_IKE_POL description l3ha_link_encr_tunnel
set security ike policy L3HA_IKE_POL proposals L3HA_IKE_PROP
set security ike policy L3HA_IKE_POL pre-shared-key ascii-text "$9$m5z6p0lreW9AeWLxwsP5Qz/
tO1hreW"
set security ike gateway L3HA_IKE_GW ike-policy L3HA_IKE_POL
set security ike gateway L3HA_IKE_GW version v2-only
set security ipsec proposal L3HA_IPSEC_PROP description l3ha_link_encr_tunnel
set security ipsec proposal L3HA_IPSEC_PROP protocol esp
set security ipsec proposal L3HA_IPSEC_PROP encryption-algorithm aes-256-gcm
set security ipsec proposal L3HA_IPSEC_PROP lifetime-seconds 3600
set security ipsec policy L3HA_IPSEC_POL description l3ha_link_encr_tunnel
set security ipsec policy L3HA_IPSEC_POL proposals L3HA_IPSEC_PROP
set security ipsec vpn L3HA_IPSEC_VPN ha-link-encryption
set security ipsec vpn L3HA_IPSEC_VPN ike gateway L3HA_IKE_GW
set security ipsec vpn L3HA_IPSEC_VPN ike ipsec-policy L3HA_IPSEC_POL
set chassis high-availability peer-id 2 vpn-profile L3HA_IPSEC_VPN
set security zones security-zone halink host-inbound-traffic system-services ike
set security zones security-zone halink host-inbound-traffic system-services ping
set security zones security-zone halink host-inbound-traffic system-services high-availability
set security zones security-zone halink host-inbound-traffic system-services ssh
set security zones security-zone halink host-inbound-traffic protocols bfd

```

```

set security zones security-zone halink interfaces xe-0/0/3.0

set policy-options policy-statement ipsec_pol term 1 from protocol static
set policy-options policy-statement ipsec_pol term 1 from protocol direct
set policy-options policy-statement ipsec_pol term 1 from condition active_route_exists
set policy-options policy-statement ipsec_pol term 1 then metric 10
set policy-options policy-statement ipsec_pol term 1 then accept
set policy-options policy-statement ipsec_pol term 2 from protocol static
set policy-options policy-statement ipsec_pol term 2 from protocol direct
set policy-options policy-statement ipsec_pol term 2 from condition backup_route_exists
set policy-options policy-statement ipsec_pol term 2 then metric 20
set policy-options policy-statement ipsec_pol term 2 then accept
set policy-options policy-statement ipsec_pol term 3 from protocol static
set policy-options policy-statement ipsec_pol term 3 from protocol direct
set policy-options policy-statement ipsec_pol term 3 then metric 30
set policy-options policy-statement ipsec_pol term 3 then accept
set policy-options policy-statement ipsec_pol term default then reject
set policy-options condition active_route_exists if-route-exists address-family inet 39.0.0.1/32
set policy-options condition active_route_exists if-route-exists address-family inet table inet.0
set policy-options condition backup_route_exists if-route-exists address-family inet 39.0.0.2/32
set policy-options condition backup_route_exists if-route-exists address-family inet table inet.0

```

Configuring Link Encryption on High Availability Nodes

Step-by-Step Procedure

The following example requires you to navigate various levels in the configuration hierarchy. For instructions on how to do that, see [Using the CLI Editor in Configuration Mode](#) in the [CLI User Guide](#).

1. Configure both local and peer information for high availability.

```

[edit]
user@host# set chassis high-availability local-id 1
user@host# set chassis high-availability local-id local-ip 22.0.0.1
user@host# set chassis high-availability peer-id 2 peer-ip 22.0.0.2
user@host# set chassis high-availability peer-id 2 interface xe-0/0/3.0
user@host# set chassis high-availability peer-id 2 liveness-detection minimum-interval 200
user@host# set chassis high-availability peer-id 2 liveness-detection multiplier 5

```

2. Configure multinode High Availability mode and associate the peer node id 2 to the Service Redundancy Group (SRG).

```
[edit]
user@host# set chassis high-availability services-redundancy-group 0 peer-id 2
```

3. Configure services redundancy group 1.

```
[edit]
set chassis high-availability services-redundancy-group 1 peer-id 2
set chassis high-availability services-redundancy-group 1 floating-ip 11.0.0.1
set chassis high-availability services-redundancy-group 1 activeness-probe dest-ip 111.0.0.1
set chassis high-availability services-redundancy-group 1 monitor bfd-liveliness 2.0.0.1 src-ip 2.0.0.2
set chassis high-availability services-redundancy-group 1 monitor bfd-liveliness 2.0.0.1 session-type
singlehop
set chassis high-availability services-redundancy-group 1 monitor bfd-liveliness 2.0.0.1 interface
xe-0/0/1.0
set chassis high-availability services-redundancy-group 1 active-signal-route 39.0.0.1
set chassis high-availability services-redundancy-group 1 backup-signal-route 39.0.0.2
set chassis high-availability services-redundancy-group 1 activeness-priority 200
```

4. Define an IKE proposal and the IKE proposal authentication method. Also define the Diffie-Hellman group, authentication algorithm, an encryption algorithm for the IKE proposal.

```
[edit]
user@host# set security ike proposal L3HA_IKE_PROP description l3ha_link_encr_tunnel
user@host# set security ike proposal L3HA_IKE_PROP authentication-method pre-shared-keys
user@host# set security ike proposal L3HA_IKE_PROP dh-group group14
user@host# set security ike proposal L3HA_IKE_PROP authentication-algorithm sha-256
user@host# set security ike proposal L3HA_IKE_PROP encryption-algorithm aes-256-cbc
user@host# set security ike proposal L3HA_IKE_PROP lifetime-seconds 28800
```

5. Configure an IKE policy and associate the policy with the IKE proposal. Also define the authentication method.

```
[edit]
user@host# set security ike policy L3HA_IKE_POL description l3ha_link_encr_tunnel
user@host# set security ike policy L3HA_IKE_POL proposals L3HA_IKE_PROP
```

```
user@host# set security ike policy L3HA_IKE_POL pre-shared-key ascii-text
"$9$m5z6p0lreW9AeWLxwsP5Qz/tO1hreW"
```

6. Define the gateway policy reference and gateway version. For High availability feature, you must configure the IKE version as **v2-only**.

```
[edit]
user@host# set security ike gateway L3HA_IKE_GW ike-policy L3HA_IKE_POL
user@host# set security ike gateway L3HA_IKE_GW version v2-only
```

7. Specify the IPsec proposal protocol and encryption algorithm.

```
[edit]
user@host# set security ipsec proposal L3HA_IPSEC_PROP description l3ha_link_encr_tunnel
user@host# set security ipsec proposal L3HA_IPSEC_PROP protocol esp
user@host# set security ipsec proposal L3HA_IPSEC_PROP encryption-algorithm aes-256-gcm
user@host# set security ipsec proposal L3HA_IPSEC_PROP lifetime-seconds 3600
```

8. Create the multinode high availability IPsec policy.

```
[edit]
user@host# set security ipsec policy L3HA_IPSEC_POL description l3ha_link_encr_tunnel
user@host# set security ipsec policy L3HA_IPSEC_POL proposals L3HA_IPSEC_PROP
```

9. Enable multinode high availability feature for the IPsec VPN.

```
[edit]
user@host# set security ipsec vpn L3HA_IPSEC_VPN ha-link-encryption
```

The same VPN name L3HA_IPSEC_VPN must be mentioned for *vpn_profile* in chassis high availability configuration. .

10. Specify the IKE gateway.

```
[edit]
user@host# set security ipsec vpn L3HA_IPSEC_VPN ike gateway L3HA_IKE_GW
```

11. Specify the L3HA IPsec policies.

```
[edit]
user@host# set security ipsec vpn L3HA_IPSEC_VPN ike ipsec-policy L3HA_IPSEC_POL
```

12. The IPsec VPN profile L3HA_IPSEC_VPN is attached to chassis high availability configuration to establish a secure interchassis link or tunnel between the HA nodes 22.0.0.1 and 22.0.0.2.

```
[edit]
user@host# set chassis high-availability peer-id 2 vpn-profile L3HA_IPSEC_VPN
```

13. Specify allowed system services for the halink security zone.

```
[edit]
user@host# set security zones security-zone halink host-inbound-traffic system-services ike
user@host# set security zones security-zone halink host-inbound-traffic system-services ping
user@host# set security zones security-zone halink host-inbound-traffic system-services high-availability
user@host# set security zones security-zone halink host-inbound-traffic system-services ssh
user@host# set security zones security-zone halink host-inbound-traffic protocols bfd
```

14. Assign an interface to the halink security zone.

```
[edit]
user@host# set security zones security-zone halink interfaces xe-0/0/3.0
```

15. Configure policy options.

```
user@host# set policy-options policy-statement ipsec_pol term 1 from protocol static
user@host# set policy-options policy-statement ipsec_pol term 1 from protocol direct
user@host# set policy-options policy-statement ipsec_pol term 1 from condition active_route_exists
user@host# set policy-options policy-statement ipsec_pol term 1 then metric 10
user@host# set policy-options policy-statement ipsec_pol term 1 then accept
user@host# set policy-options policy-statement ipsec_pol term 2 from protocol static
user@host# set policy-options policy-statement ipsec_pol term 2 from protocol direct
user@host# set policy-options policy-statement ipsec_pol term 2 from condition backup_route_exists
user@host# set policy-options policy-statement ipsec_pol term 2 then metric 20
```

```

user@host# set policy-options policy-statement ipsec_pol term 2 then accept
user@host# set policy-options policy-statement ipsec_pol term 3 from protocol static
user@host# set policy-options policy-statement ipsec_pol term 3 from protocol direct
user@host# set policy-options policy-statement ipsec_pol term 3 then metric 30
user@host# set policy-options policy-statement ipsec_pol term 3 then accept
user@host# set policy-options policy-statement ipsec_pol term default then reject
user@host# set policy-options condition active_route_exists if-route-exists address-family inet
39.0.0.1/32
user@host# set policy-options condition active_route_exists if-route-exists address-family inet table
inet.0
user@host# set policy-options condition backup_route_exists if-route-exists address-family inet
39.0.0.2/32
user@host# set policy-options condition backup_route_exists if-route-exists address-family inet
table inet.0

```

Results

From configuration mode, confirm your configuration by entering the **show security ike**, **show security ipsec**, **show policy-options**, and **show chassis high-availability** commands. If the output does not display the intended configuration, repeat the configuration instructions in this example to correct it.

```

[edit]
user@host# show chassis high-availability
local-id 1 local-ip 22.0.0.1;
peer-id 2 {
    peer-ip 22.0.0.2;
    interface xe-0/0/3.0;
    inactive: vpn-profile L3HA_IPSEC_VPN;
    liveness-detection {
        minimum-interval 200;
        multiplier 5;
    }
}
services-redundancy-group 0 {
    peer-id {
        2;
    }
}
services-redundancy-group 1 {
    peer-id {

```

```

        2;
    }
    floating-ip {
        11.0.0.1;
    }
    activeness-probe {
        dest-ip {
            111.0.0.1;
        }
    }
    monitor {
        bfd-liveliness 2.0.0.1 {
            src-ip 2.0.0.2;
            session-type singlehop;
            interface xe-0/0/1.0;
        }
    }
    active-signal-route {
        39.0.0.1;
    }
    backup-signal-route {
        39.0.0.2;
    }
    activeness-priority 200;
}

```

```

[edit]
user@host# show security ike
respond-bad-spi 5;
proposal L3HA_IKE_PROP {
    description l3ha_link_encr_tunnel;
    authentication-method pre-shared-keys;
    dh-group group14;
    authentication-algorithm sha-256;
    encryption-algorithm aes-256-cbc;
    lifetime-seconds 28800;
}
policy L3HA_IKE_POL {
    description l3ha_link_encr_tunnel;
    proposals L3HA_IKE_PROP;
    pre-shared-key ascii-text "$9$m5z6p0IreW9AeWLxwsP5Qz/t0lhreW"; ## SECRET-DATA
}

```



```

}
gateway L3HA_IKE_GW {
    ike-policy L3HA_IKE_POL;
    version v2-only;
}

```

```

[edit]
user@host# show security ipsec
proposal L3HA_IPSEC_PROP {
    description l3ha_link_encr_tunnel;
    protocol esp;
    encryption-algorithm aes-256-gcm;
    lifetime-seconds 3600;
}
policy L3HA_IPSEC_POL {
    description l3ha_link_encr_tunnel;
    proposals L3HA_IPSEC_PROP;
}
vpn L3HA_IPSEC_VPN {
    ha-link-encryption;
    ike {
        gateway L3HA_IKE_GW;
        ipsec-policy L3HA_IPSEC_POL;
    }
}

```

```

[edit]
user@host# show policy-options
policy-statement ipsec_pol {
    term 1 {
        from {
            protocol [ static direct ];
            condition active_route_exists;
        }
        then {
            metric 10;
            accept;
        }
    }
    term 2 {

```

```

        from {
            protocol [ static direct ];
            condition backup_route_exists;
        }
        then {
            metric 20;
            accept;
        }
    }
    term 3 {
        from protocol [ static direct ];
        then {
            metric 30;
            accept;
        }
    }
    term default {
        then reject;
    }
}

condition active_route_exists {
    if-route-exists {
        address-family {
            inet {
                39.0.0.1/32;
                table inet.0;
            }
        }
    }
}

condition backup_route_exists {
    if-route-exists {
        address-family {
            inet {
                39.0.0.2/32;
                table inet.0;
            }
        }
    }
}

```

```

    }
}

```

```

[edit]
user@host# show security zones security-zone halink
host-inbound-traffic {
    system-services {
        ike;
        ping;
        high-availability;
        ssh;
    }
    protocols {
        bfd;
    }
}
interfaces {
    xe-0/0/3.0;
}

```

If you are done configuring the device, enter **commit** from configuration mode.

Verification

IN THIS SECTION

- [Verify Interchassis Link Active Peers | 651](#)
- [Verify Security Associations Created for Interchassis Link Tunnel | 651](#)
- [Verify the Interchassis Link Tunnel Mode | 652](#)
- [Verify Link Encryption Tunnel Statistics | 654](#)

Confirm that the configuration is working properly.

Verify Interchassis Link Active Peers

Purpose

To verify only interchassis link active peers, but not regular IKE active peers.

Action

```
user@host# show security ike active-peer ha-link-encryption
```

Remote Address	Port	Peer IKE-ID	AAA username	Assigned IP
22.0.0.2	500	22.0.0.2	ot available	0.0.0.0

Meaning

Displays only the active peer of interchassis link tunnel with details such as the peer addresses and ports the active peer is using.

Verify Security Associations Created for Interchassis Link Tunnel

Purpose

To verify the multi SAs created for the interchassis link encryption tunnel.

Action

```
user@host# show security ipsec security-associations ha-link-encryption
```

```
Total active tunnels: 1      Total IPsec sas: 39
```

ID	Algorithm	SPI	Life:sec/kb	Mon lsys	Port
Gateway					
<495002	ESP:aes-gcm-256/aes256-gcm	0x008f4f71	1208/ unlim	- root	500
22.0.0.2					
>495002	ESP:aes-gcm-256/aes256-gcm	0x008f6503	1208/ unlim	- root	500
22.0.0.2					
<495002	ESP:aes-gcm-256/aes256-gcm	0x048f4f71	1208/ unlim	- root	500
22.0.0.2					
>495002	ESP:aes-gcm-256/aes256-gcm	0x048f6503	1208/ unlim	- root	500
22.0.0.2					

```

<495002 ESP:aes-gcm-256/aes256-gcm 0x088f4f71 1208/ unlim - root 500
22.0.0.2
>495002 ESP:aes-gcm-256/aes256-gcm 0x088f6503 1208/ unlim - root 500
22.0.0.2
<495002 ESP:aes-gcm-256/aes256-gcm 0x0c8f4f71 1208/ unlim - root 500
22.0.0.2
>495002 ESP:aes-gcm-256/aes256-gcm 0x0c8f6503 1208/ unlim - root 500
22.0.0.2
<495002 ESP:aes-gcm-256/aes256-gcm 0x108f4f71 1208/ unlim - root 500
22.0.0.2
>495002 ESP:aes-gcm-256/aes256-gcm 0x108f6503 1208/ unlim - root 500
22.0.0.2
<495002 ESP:aes-gcm-256/aes256-gcm 0x148f4f71 1208/ unlim - root 500
22.0.0.2
>495002 ESP:aes-gcm-256/aes256-gcm 0x148f6503 1208/ unlim - root 500
22.0.0.2
...

```

Meaning

The output from the **show security ipsec security-associations ha-link-encryption** command lists the following information:

- The remote gateway has an IP address of 22.0.0.2.
- The SPIs, lifetime (in seconds), and usage limits (or lifeseize in KB) are shown for both directions. The 1208/ value indicates that the Phase 2 lifetime expires in 1208 seconds, and that no lifeseize has been specified, which indicates that it is unlimited. The Phase 2 lifetime can differ from the Phase 1 lifetime, because Phase 2 is not dependent on Phase 1 after the VPN is up.

Verify the Interchassis Link Tunnel Mode

Purpose

To verify the interchassis link tunnel mode.

Action

```

user@host# show security ipsec sa detail ha-link-encryption
ID: 495002 Virtual-system: root, VPN Name: IPSEC_VPN_LINK_ENC

```

```

Local Gateway: 22.0.0.1, Remote Gateway: 22.0.0.2
Traffic Selector Name: __IPSEC_VPN_LINK_ENC__multi_node
Local Identity: ipv4(180.100.1.1-180.100.1.1)
Remote Identity: ipv4(180.100.1.2-180.100.1.2)
Version: IKEv2
PFS group: N/A
DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.16000, Policy-
name: IPSEC_POL_LINK_ENC
Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
HA Link Encryption Mode: Multi-Node
Location: FPC -, PIC -, KMD-Instance -
Anchorship: Thread -
Distribution-Profile: default-profile
Direction: inbound, SPI: 0x008f4f71, AUX-SPI: 0
                , VPN Monitoring: -
    Hard lifetime: Expires in 866 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 170 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: aes256-gcm, Encryption: aes-gcm (256 bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
    Extended-Sequence-Number: Disabled
    tunnel-establishment: establish-tunnels-immediately
    Location: FPC 2, PIC 0, KMD-Instance 0
    Anchorship: Thread 15
    IKE SA Index: 4294966279
Direction: outbound, SPI: 0x008f6503, AUX-SPI: 0
                , VPN Monitoring: -
    Hard lifetime: Expires in 866 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 170 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: aes256-gcm, Encryption: aes-gcm (256 bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
    Extended-Sequence-Number: Disabled
    tunnel-establishment: establish-tunnels-immediately
    Location: FPC 2, PIC 0, KMD-Instance 0
    Anchorship: Thread 15
    IKE SA Index: 4294966279
Direction: inbound, SPI: 0x048f4f71, AUX-SPI: 0
                , VPN Monitoring: -
    Hard lifetime: Expires in 866 seconds

```

```

Lifesize Remaining:  Unlimited
Soft lifetime: Expires in 170 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: aes256-gcm, Encryption: aes-gcm (256 bits)
Anti-replay service: counter-based enabled, Replay window size: 64
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-immediately
...

```

Meaning

The above output from the **show security ipsec sa detail ha-link-encryption** command lists the following information:

- The local identity and remote identity make up the proxy ID for the SA.
- Displays the IPsec SA pair for each threads in PIC.
- Below line in the IPsec SA output indicates HA link encryption tunnel mode.

HA Link Encryption Mode: Multi-Node

- Authentication and encryption algorithms used.

Verify Link Encryption Tunnel Statistics

Purpose

To verify link encryption tunnel statistics on both active and backup nodes.

Action

```

user@host# show security ipsec statistics ha-link-encryption
ESP Statistics:
  Encrypted bytes:          10376
  Decrypted bytes:          4996
  Encrypted packets:        96
  Decrypted packets:        96
AH Statistics:
  Input bytes:              0
  Output bytes:             0

```

```

Input packets:          0
Output packets:         0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0
  Invalid SPI: 0, TS check fail: 0
  Discarded: 0

```

You can also use the **show security ipsec statistics ha-link-encryption** command to review statistics and errors for all SAs.

To clear all IPsec statistics, use the **clear security ipsec statistics ha-link-encryption** command.

Meaning

If you see packet loss issues across a VPN, you can run the **show security ipsec statistics ha-link-encryption** command several times to confirm that the encrypted and decrypted packet counters are incrementing. You should also check that the other error counters are incrementing.

SEE ALSO

[ike \(High Availability\)](#)

[ipsec \(High Availability\)](#)

[High-Availability \(Chassis\)](#)

[services-redundancy-group](#)

[local-id](#)

[peer-id](#)

[traceoptions](#)

[show security ike security-associations](#)

[show security ike active-peer](#)

[show security ipsec security-associations](#)

[show security ipsec statistics](#)

[clear security ike security-associations](#)

[clear security ipsec security-associations](#)

16

PART

Configuration Statements and Operational Commands

Configuration Statements: Adaptive Load Balancing | 658

Configuration Statements: Bidirectional Forwarding Detection | 661

Ethernet Automatic Protection Switching | 676

Configuration Statements: Ethernet Ring Protection Switching | 682

Configuration Statements: Graceful Routing Engine Switchover | 714

Configuration Statements: Graceful Restart | 719

Configuration Statements: Multiple Node High Availability | 756

Configuration Statements: Nonstop Active Routing | 768

Configuration Statements: Nonstop Bridging | 778

Configuration Statements: NSSU | 781

Configuration Statements: Power Management | 789

Configuration Statements: Redundant Power System | 795

Configuration Statements: Routing Engine and Switching Control Board
Redundancy | 800

Configuration Statements: Unified ISSU | 834

Configuration Statements: VRRP | 839

Administration | 907

Verification Tasks | 930

Operational Commands | 934

Troubleshooting | 1303

Knowledge Base | 1312

Configuration Statements: Adaptive Load Balancing

IN THIS CHAPTER

- [adaptive | 658](#)

adaptive

IN THIS SECTION

- [Syntax | 658](#)
- [Hierarchy Level | 659](#)
- [Description | 659](#)
- [Options | 659](#)
- [Required Privilege Level | 660](#)
- [Release Information | 660](#)

Syntax

```
adaptive {  
    pps;  
    scan-interval multiple;  
    tolerance tolerance-percentage;  
}
```

Hierarchy Level

```
[edit dynamic-profiles name interfaces name aggregated-ether-options load-
balance],
[edit dynamic-profiles name interfaces name logical-tunnel-options load-balance],
[edit dynamic-profiles name interfaces interface-range name aggregated-ether-
options load-balance],
[edit dynamic-profiles name interfaces interface-range name logical-tunnel-
options load-balance],
[edit dynamic-profiles name logical-systems name interfaces name aggregated-
ether-options load-balance],
[edit dynamic-profiles name logical-systems name interfaces name logical-tunnel-
options load-balance],
[edit dynamic-profiles name logical-systems name interfaces interface-range name
aggregated-ether-options load-balance],
[edit dynamic-profiles name logical-systems name interfaces interface-range name
logical-tunnel-options load-balance],
[edit interfaces name aggregated-ether-options load-balance],
[edit interfaces name logical-tunnel-options load-balance],
[edit interfaces interface-range name aggregated-ether-options load-
balance],
[edit interfaces interface-range name logical-tunnel-options load-
balance]
```

Description

Correct a genuine traffic imbalance by using a feedback mechanism to distribute the traffic across the links of an aggregated Ethernet bundle.

Options

pps	(PTX Series only) The type of traffic rate among the members of the AE bundle is measured packets per second. The default rate type is bytes per second.
scan-interval multiple	(PTX Series only) Scan interval, as a multiple of a 30-second interval. • Range: 1 through 5 • Default: 1

tolerance
tolerance-
percentage

(MX Series and PTX Series) Limit to the variance in the packet traffic flow to the aggregated Ethernet links in a percentage.

- **Range:** 1 through 100 percent
- **Default:** 20 percent

Required Privilege Level

interface - To view this statement in the configuration.

interface-control - To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.2R3.

RELATED DOCUMENTATION

[Understanding Aggregated Ethernet Load Balancing | 147](#)

[Example: Configuring Aggregated Ethernet Load Balancing | 169](#)

Configuration Statements: Bidirectional Forwarding Detection

IN THIS CHAPTER

- [dedicated-ukern-cpu \(BFD\) | 661](#)
- [realtime-ukern-thread \(BFD\) | 662](#)
- [authentication \(LAG\) | 664](#)
- [bfd-liveness-detection \(LAG\) | 666](#)
- [detection-time \(LAG\) | 669](#)
- [traceoptions \(Protocols BFD\) | 670](#)
- [transmit-interval \(LAG\) | 673](#)

dedicated-ukern-cpu (BFD)

IN THIS SECTION

- [Syntax | 661](#)
- [Hierarchy Level | 662](#)
- [Description | 662](#)
- [Required Privilege Level | 662](#)
- [Release Information | 662](#)

Syntax

```
dedicated-ukern-cpu;
```

Hierarchy Level

```
[edit chassis]
```

Description

Enable the dedicated Bidirectional Forwarding Detection (BFD) protocol. One dedicated CPU core is allocated for the flowd ukernel thread to handle the dedicated BFD. This ensures that the BFD packet processing does not compete with the Routing Engine daemons.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 15.1X49-D100.

RELATED DOCUMENTATION

[Enabling Dedicated and Real-Time BFD | 123](#)

[show chassis dedicated-ukern-cpu | 988](#)

[bfd-liveness-detection \(LAG\) | 666](#)

[authentication \(LAG\) | 664](#)

[detection-time \(LAG\) | 669](#)

[transmit-interval \(LAG\) | 673](#)

realtime-ukern-thread (BFD)

IN THIS SECTION

[Syntax | 663](#)

- [Hierarchy Level | 663](#)
- [Description | 663](#)
- [Required Privilege Level | 663](#)
- [Release Information | 663](#)

Syntax

```
realtime-ukern-thread;
```

Hierarchy Level

```
[edit chassis]
```

Description

Enable the real-time Bidirectional Forwarding Detection (BFD) protocol. After real-time BFD is enabled, the priority of the flowd ukernel thread is changed to the highest level and, therefore, the flowd ukernel thread gets more CPU cycles for processing the BFD packets.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Command introduced in Junos OS Release 15.1X49-D100.

RELATED DOCUMENTATION

[Enabling Dedicated and Real-Time BFD | 123](#)

[show chassis realtime-ukern-thread | 995](#)

[bfd-liveness-detection \(LAG\) | 666](#)

[authentication \(LAG\) | 664](#)

[detection-time \(LAG\) | 669](#)

[transmit-interval \(LAG\) | 673](#)

authentication (LAG)

IN THIS SECTION

- [Syntax | 664](#)
- [Hierarchy Level | 664](#)
- [Description | 664](#)
- [Options | 665](#)
- [Required Privilege Level | 665](#)
- [Release Information | 665](#)

Syntax

```
authentication {  
    algorithm algorithm-name;  
    key-chain key-chain-name;  
    loose-check;  
}
```

Hierarchy Level

```
[edit interfaces aex aggregated-ether-options bfd-liveness-detection]
```

Description

Configure the authentication criteria of the BFD session for aggregated Ethernet interfaces.

Options

algorithm <i>algorithm-name</i>	Specify the algorithm to be used to authenticate the BFD session. You can use one of the following algorithms for authentication: • keyed-md5 • keyed-sha-1 • meticulous-keyed-md5 • meticulous-keyed-sha-1 • simple-password
key-chain <i>key-chain-name</i>	Specify the name that is associated with the security key for the BFD session. The name you specify must match one of the keychains configured in the authentication-key-chains key-chain statement at the [edit security] hierarchy level.
loose-check	(Optional) Configure loose authentication checking on the BFD session. Use only for transitional periods when authentication might not be configured at both ends of the BFD session.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.3.

RELATED DOCUMENTATION

[bfd-liveness-detection \(LAG\) | 666](#)

[detection-time \(LAG\) | 669](#)

[transmit-interval \(LAG\) | 673](#)

[Configuring Micro BFD Sessions for LAG | 102](#)

[Example: Configuring Independent Micro BFD Sessions for LAG](#)

[Understanding Independent Micro BFD Sessions for LAG](#)

bfd-liveness-detection (LAG)

IN THIS SECTION

- [Syntax | 666](#)
- [Hierarchy Level | 667](#)
- [Description | 667](#)
- [Options | 667](#)
- [Required Privilege Level | 668](#)
- [Release Information | 668](#)

Syntax

```
bfd-liveness-detection {  
    authentication {  
        algorithm algorithm-name;  
        key-chain key-chain-name;  
        loose-check;  
    }  
    detection-time {  
        threshold milliseconds;  
    }  
    holddown-interval milliseconds;  
    local-address bfd-local-address;  
    minimum-interval milliseconds;  
    minimum-receive-interval milliseconds;  
    multiplier number;  
    neighbor bfd-neighbor-address;  
    no-adaptation;  
    transmit-interval {  
        minimum-interval milliseconds;  
        threshold milliseconds;  
    }  
    version (1 | automatic);  
}
```

Hierarchy Level

[edit interfaces aex aggregated-ether-options]

Description

Configure Bidirectional Forwarding Detection (BFD) timers and authentication for aggregated Ethernet interfaces.

For an aggregated ethernet interface, you cannot configure all three configuration options, **bfd-liveness-detection**, **minimum-links**, and **sync-reset** at the same time.

Options

holddown-interval
milliseconds

Specify a time limit, in milliseconds, indicating the time that a BFD session remains up before a state change notification is sent. If the BFD session goes down and then comes back up during the hold-down interval, the timer is restarted.

- **Range:** 0 through 255,000
- **Default:** 0

local-address
bfd-local-address

Specify the loopback address or the AE interface address of the source of the BFD session.

NOTE: Beginning with Release 16.1R2, Junos OS checks and validates the configured micro BFD **local-address** against the interface or loopback IP address before the configuration commit. Junos OS performs this check on both IPv4 and IPv6 micro BFD address configurations, and if they do not match, the commit fails.

minimum-interval
milliseconds

Specify a minimum time interval after which the local routing device transmits a BFD packet and then expects to receive a reply from the BFD neighbor. Optionally, instead of using this statement, you can configure the minimum transmit and receive intervals separately using the **transmit-interval** **minimum-interval** statement.

- **Range:** 1 through 255,000

minimum-receive-interval
milliseconds

Specify the minimum time interval after which the routing device expects to receive a reply from the BFD neighbor.

	• Range: 1 through 255,000
multiplier number	Specify the number of BFD packets that were not received by the BFD neighbor before the originating interface is declared down. • Range: 1 through 255
neighbor bfd- neighbor- address	Specify the loopback address or the AE interface address of a remote destination to send BFD packets.
no-adaptation	Disable the BFD adaptation. Include this statement if you do not want the BFD sessions to adapt to changing network conditions. We recommend that you do not disable BFD adaptation unless it is preferable not to have BFD adaptation enabled in your network.
version	Configure the BFD version to detect (BFD version 1) or autodetect (the BFD version). NOTE: The version option is not supported on the QFX Series. Starting in Junos OS Release 17.2R1, a warning will appear if you attempt to use this command. • Default: automatic

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.3.

RELATED DOCUMENTATION

[authentication](#)

[detection-time](#)

[transmit-interval](#)

Configuring Micro BFD Sessions for LAG

[Example: Configuring Independent Micro BFD Sessions for LAG](#)

[Understanding Independent Micro BFD Sessions for LAG](#)

detection-time (LAG)

IN THIS SECTION

- [Syntax | 669](#)
- [Hierarchy Level | 669](#)
- [Description | 669](#)
- [Options | 670](#)
- [Required Privilege Level | 670](#)
- [Release Information | 670](#)

Syntax

```
detection-time {  
    threshold milliseconds;  
}
```

Hierarchy Level

```
[edit interfaces aex aggregated-ether-options bfd-liveness-detection]
```

Description

Configure BFD timers for aggregated Ethernet interfaces.

Options

threshold
milliseconds Specify the maximum time interval for detecting a BFD neighbor. If the transmit interval is greater than this value, the device triggers a trap.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.3.

RELATED DOCUMENTATION

[authentication \(LAG\) | 664](#)

[bfd-liveness-detection \(LAG\) | 666](#)

[transmit-interval \(LAG\) | 673](#)

[Configuring Micro BFD Sessions for LAG | 102](#)

[Example: Configuring Independent Micro BFD Sessions for LAG](#)

[Understanding Independent Micro BFD Sessions for LAG](#)

traceoptions (Protocols BFD)

IN THIS SECTION

- [Syntax | 671](#)
- [Hierarchy Level | 671](#)
- [Description | 671](#)
- [Default | 671](#)
- [Options | 671](#)
- [Required Privilege Level | 673](#)

Syntax

```
traceoptions {  
    file name <size size> <files number> <world-readable | no-world-readable>;  
    flag flag <flag-modifier> <disable>;  
}
```

Hierarchy Level

```
[edit protocols bfd]
```

Description

Define tracing operations that track unified in-service software upgrade (ISSU) functionality in the router.

To specify more than one tracing operation, include multiple **flag** statements.

Default

If you do not include this statement, no global tracing operations are performed.

Options

disable—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as **all**.

file *name*—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. We recommend that you place global routing protocol tracing output in the file **routing-log**.

files *number*—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Range:** 2 through 1000 files
- **Default:** 2 files

If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

flag *flag*—Tracing operation to perform. The tracing options are as follows:

- **adjacency**—Trace adjacency messages.
- **all**—Trace everything.
- **error**—Trace all errors.
- **events**—Trace all events.
- **issu**—Trace ISSU packet activity.
- **nsr-packet**—Trace packet activity of NSR.
- **nsr-synchronization**—Trace NSR synchronization events.
- **packet**—Trace all packets.
- **pipe**—Trace pipe messages.
- **pipe-detail**—Trace pipe messages in detail.
- **ppm-packet**—Trace packet activity by periodic packet management.
- **state**—Trace state transitions.
- **timer**—Trace timer processing.

no-world-readable—Restrict users from reading the log file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file.0***. When the ***trace-file*** again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Syntax:** ***xk*** to specify KB, ***xm*** to specify MB, or ***xg*** to specify GB
- **Range:** 10 KB through the maximum file size supported on your system
- **Default:** 128 KB

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

world-readable—Allow users to read the log file.

Required Privilege Level

routing and trace—To view this statement in the configuration.

routing-control and trace-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

issu flag for BFD added in Junos OS Release 9.1.

RELATED DOCUMENTATION

| [Managing and Tracing BFD Sessions During Unified ISSU Procedures](#) | 591

transmit-interval (LAG)

IN THIS SECTION

- [Syntax](#) | 674
- [Hierarchy Level](#) | 674
- [Description](#) | 674
- [Options](#) | 674
- [Required Privilege Level](#) | 674
- [Release Information](#) | 674

Syntax

```
transmit-interval {
    minimum-interval milliseconds;
    threshold milliseconds;
}
```

Hierarchy Level

```
[edit interfaces aex aggregated-ether-options bfd-liveness-detection]
```

Description

Configure the minimum interval and the threshold for transmission of BFD packets for aggregated Ethernet interfaces.

Options

minimum-interval <i>milliseconds</i>	Specify the minimum time interval between two transmissions of packets. • Range: 1 through 255,000
threshold <i>milliseconds</i>	Specify the maximum interval between transmission of packets. If the transmit interval is greater than this value, the device triggers a trap.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.3.

RELATED DOCUMENTATION

authentication (LAG) 664
bfd-liveness-detection (LAG) 666
detection-time (LAG) 669
Configuring Micro BFD Sessions for LAG 102
Example: Configuring Independent Micro BFD Sessions for LAG
Understanding Independent Micro BFD Sessions for LAG

Ethernet Automatic Protection Switching

IN THIS CHAPTER

- [clear](#) | 676
- [exercise](#) | 677
- [force switch](#) | 678
- [lockout](#) | 679
- [manual switch](#) | 680

clear

IN THIS SECTION

- [Syntax](#) | 676
- [Hierarchy Level](#) | 676
- [Description](#) | 677
- [Required Privilege Level](#) | 677

Syntax

```
request protection-group ethernet-aps clear md <md> ma <ma>
```

Hierarchy Level

```
[edit protocols protection-group ethernet-aps]
```

Description

Clears the lockout, force switch, manual switch, exercise, and wait-to-restore (WTR) states.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

RELATED DOCUMENTATION

| [Ethernet Automatic Protection Switching Overview](#) | 219

exercise

IN THIS SECTION

- [Syntax](#) | 677
- [Hierarchy Level](#) | 677
- [Description](#) | 678
- [Required Privilege Level](#) | 678

Syntax

```
request protection-group ethernet-aps exercise md <md> ma <ma>
```

Hierarchy Level

```
[edit protocols protection-group ethernet-aps]
```

Description

This configuration statement is used to test if APS is operating correctly, it does not interrupt regular APS operations.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

RELATED DOCUMENTATION

| [Ethernet Automatic Protection Switching Overview](#) | 219

force switch

IN THIS SECTION

- [Syntax](#) | 678
- [Hierarchy Level](#) | 678
- [Description](#) | 679
- [Required Privilege Level](#) | 679

Syntax

```
request protection-group ethernet-aps force-switch md <md> ma <ma>
```

Hierarchy Level

```
[edit protocols protection-group ethernet-aps]
```

Description

Forces traffic to switch from the active path to the alternate path. If the working path is the active path, traffic will be switched to the protection path. If the protection path is the active path, traffic will be switched to the protection path.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

RELATED DOCUMENTATION

[Ethernet Automatic Protection Switching Overview](#) | 219

lockout

IN THIS SECTION

- [Syntax](#) | 679
- [Hierarchy Level](#) | 679
- [Description](#) | 680
- [Required Privilege Level](#) | 680

Syntax

```
request protection-group ethernet-aps lockout md <md> ma <ma>
```

Hierarchy Level

```
[edit protocols protection-group ethernet-aps]
```


Description

Configure a lockout of the protection path, forcing the use of the working path and locking out the protect path regardless of anything else.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

RELATED DOCUMENTATION

[Ethernet Automatic Protection Switching Overview](#) | 219

manual switch

IN THIS SECTION

- [Syntax](#) | 680
- [Hierarchy Level](#) | 680
- [Description](#) | 681
- [Required Privilege Level](#) | 681

Syntax

```
request protection-group ethernet-aps manual-switch md <md> ma <ma>
```

Hierarchy Level

```
[edit protocols protection-group ethernet-aps]
```

Description

Forces traffic to switch from the active path to the alternate path, even in the absence of a failure on the working path. If the working path is the active path, traffic will be switched to the protection path. If the protection path is the active path, traffic will be switched to the protection path.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

RELATED DOCUMENTATION

| [Ethernet Automatic Protection Switching Overview](#) | 219

Configuration Statements: Ethernet Ring Protection Switching

IN THIS CHAPTER

- compatibility-version | 683
- control-channel | 684
- data-channel | 686
- dot1p-priority | 687
- east-interface | 689
- ethernet-ring | 691
- guard-interval | 693
- hold-interval (Protection Group) | 694
- major-ring-name | 696
- non-revertive | 697
- non-vc-mode | 698
- node-id | 699
- propagate-tc | 700
- protection-group | 702
- restore-interval | 705
- ring-id | 706
- ring-protection-link-end | 708
- ring-protection-link-owner | 709
- wait-to-block-interval | 710
- west-interface | 712

compatibility-version

IN THIS SECTION

- [Syntax | 683](#)
- [Hierarchy Level | 683](#)
- [Description | 683](#)
- [Options | 683](#)
- [Required Privilege Level | 684](#)
- [Release Information | 684](#)

Syntax

```
compatibility-version;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Specify the compatible version mode to be used. When compatibility-version is set to value 1, the node operates in ITU-T Recommendation G.8032/Y.1344 version 1 compatible mode. In this mode all the supported external commands are blocked, ring-id is forced to be 1 and mode of operation is set to revertive mode.

Options

- 1—Use ITU-T Recommendation G.8032/Y.1344 compatible mode version 1.
- 2—Use ITU-T Recommendation G.8032/Y.1344 compatible mode version 2.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

control-channel

IN THIS SECTION

- [Syntax | 684](#)
- [Hierarchy Level | 685](#)
- [Description | 685](#)
- [Options | 685](#)
- [Required Privilege Level | 685](#)
- [Release Information | 685](#)

Syntax

```
control-channel channel-name {  
    vlan vlan-id;  
    interface name interface-name  
}
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring name (east-interface | west-interface)]
```

Description

Configure the Ethernet RPS control channel logical interface to carry the RAPS PDU. The related physical interface is the physical ring port.

Options

vlan *vlan-id*—If the control channel logical interface is a trunk port, then a dedicated **vlan *vlan-id*** defines the dedicated VLAN channel to carry the RAPS traffic. Only configure the ***vlan-id*** when the control channel logical interface is the trunk port.

interface name *interface-name*—Interface name of the control channel.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

Statement introduced in Junos OS Release 12.1 for EX Series switches.

Statement introduced in Junos OS Release 14.153-D10 for QFX Series switches.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

data-channel

IN THIS SECTION

- [Syntax | 686](#)
- [Hierarchy Level | 686](#)
- [Description | 686](#)
- [Options | 686](#)
- [Required Privilege Level | 687](#)
- [Release Information | 687](#)

Syntax

```
data-channel {  
    vlan number;  
}
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

For Ethernet ring protection, configure a data channel to define a set of VLAN IDs that belong to a ring instance.

VLANs specified in the data channel use the same topology used by the ERPS PDU in the control channel. Therefore, if a ring interface is blocked in the control channel, all traffic in the data channel is also blocked on that interface.

Options

vlan *number*—Specify (by VLAN ID) one or more VLANs that belong to a ring instance.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.2.

Statement introduced in Junos OS Release 12.1 for EX Series switches.

Statement introduced in Junos OS Release 14.153-D10 for QFX Series switches.

RELATED DOCUMENTATION

[Ethernet Ring Protection Using Ring Instances for Load Balancing](#)

[Example: Configuring Load Balancing Within Ethernet Ring Protection for MX Series Routers](#)

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

dot1p-priority

IN THIS SECTION

- [Syntax | 688](#)
- [Hierarchy Level | 688](#)
- [Description | 688](#)
- [Options | 688](#)
- [Required Privilege Level | 688](#)
- [Release Information | 688](#)

Syntax

```
dot1p-priority number;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Specify the IEEE 802.1p priority to be used in the transmitted RAPS protocol data units.

Options

number—802.1p priority number.

- **Range:** 0 through 7
- **Default:** 0

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

east-interface

IN THIS SECTION

- [Syntax | 689](#)
- [Hierarchy Level | 689](#)
- [Description | 689](#)
- [Required Privilege Level | 690](#)
- [Release Information | 690](#)

Syntax

```
east-interface {  
    node-id mac-address;  
    control-channel channel-name {  
        vlan number;  
        interface name interface-name  
    }  
    interface-name  
    ring-protection-link-end;  
}
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Define one of the two interface ports for Ethernet ring protection, the other being defined by the **west-interface** statement at the same hierarchy level. The interface must use the control channel's logical interface name. The control channel is a dedicated VLAN channel for the ring port.

EX Series switches do not use the node-id statement--the node ID is automatically configured on the switches using the MAC address.

NOTE: Always configure this port first, before configuring the **west-interface** statement.

NOTE: The Node ID is not configurable on EX Series switches. The node ID is automatically configured using the MAC address.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

Statement introduced in Junos OS Release 12.1 for EX Series switches.

Statement introduced in Junos OS Release 14.153-D10 for QFX Series switches.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Ethernet Ring Protection Using Ring Instances for Load Balancing](#)

west-interface

ethernet-ring

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

ethernet-ring

IN THIS SECTION

- [Syntax | 691](#)
- [Hierarchy Level | 692](#)
- [Description | 692](#)
- [Options | 692](#)
- [Required Privilege Level | 692](#)
- [Release Information | 692](#)

Syntax

```
ethernet-ring ring-name {  
    control-vlan (vlan-id | vlan-name);  
    data-channel {  
        vlan number  
    }  
    east-interface {  
        control-channel channel-name {  
            vlan number;  
            interface name interface-name  
        }  
    }  
    guard-interval number;  
    node-id mac-address;  
    restore-interval number;  
    ring-protection-link-owner;  
    west-interface {  
        control-channel channel-name {  
            vlan number;  
        }  
    }  
}
```

Hierarchy Level

```
[edit protocols protection-group]
```

Description

For Ethernet PICs on MX Series routers or for EX Series switches, , specify the Ethernet ring in an Ethernet ring protection switching configuration.

Options

ring-name—Name of the Ethernet protection ring.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

Statement introduced in Junos OS Release 12.1 for EX Series switches.

Statement introduced in Junos OS Release 14.153-D10 for QFX Series switches.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

guard-interval

IN THIS SECTION

- [Syntax | 693](#)
- [Hierarchy Level | 693](#)
- [Description | 693](#)
- [Options | 693](#)
- [Required Privilege Level | 694](#)
- [Release Information | 694](#)

Syntax

```
guard-interval number;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

When a link goes down, the ring protection link (RPL) activates. When the downed link comes back up, the RPL link receives notification, restores the link, and waits for the restore interval before issuing another block on the same link. This configuration is a global configuration and applies to all Ethernet rings if the Ethernet ring does not have a more specific configuration for this value. If no parameter is configured at the protection group level, the global configuration of this parameter uses the default value.

Options

number—Guard timer interval, in milliseconds.

- **Range:** 10 through 2000 ms

- **Default:** 500 ms

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

Statement introduced in Junos OS Release 12.1 for EX Series switches.

Statement introduced in Junos OS Release 14.153-D10 for QFX Series switches.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

hold-interval (Protection Group)

IN THIS SECTION

- [Syntax | 695](#)
- [Hierarchy Level | 695](#)
- [Description | 695](#)
- [Options | 695](#)
- [Required Privilege Level | 695](#)
- [Release Information | 695](#)

Syntax

```
hold-interval number;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring name]
```

Description

Specify the hold-off timer interval *for all rings* in 100 millisecond (ms) increments.

Options

number—Hold-timer interval, in milliseconds.

- **Range:** 0 through 10,000 ms
- **Default:** 100 ms

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

major-ring-name

IN THIS SECTION

- [Syntax | 696](#)
- [Hierarchy Level | 696](#)
- [Description | 696](#)
- [Required Privilege Level | 696](#)
- [Release Information | 696](#)

Syntax

```
major-ring-name name;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Specify the name of major ring to which the sub-ring node is interconnected.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

non-revertive

IN THIS SECTION

- [Syntax | 697](#)
- [Hierarchy Level | 697](#)
- [Description | 697](#)
- [Required Privilege Level | 697](#)
- [Release Information | 698](#)

Syntax

```
non-revertive;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Enable nonrevertive operation where traffic is allowed to use the RPL if it has not failed, even after a switch condition has cleared. The default mode of operation is revertive.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

non-vc-mode

IN THIS SECTION

- [Syntax | 698](#)
- [Hierarchy Level | 698](#)
- [Description | 698](#)
- [Required Privilege Level | 699](#)
- [Release Information | 699](#)

Syntax

```
non-vc-mode;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Configure a node on the sub-ring to operate in non-virtual channel mode. If this option is enabled then all the nodes in the sub-ring are configured with this option. Also, the **non-vc-mode** option should be

used with care and only for open rings. Using this option for closed rings creates loops for RAPS control messages.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

node-id

IN THIS SECTION

- [Syntax | 699](#)
- [Hierarchy Level | 700](#)
- [Description | 700](#)
- [Required Privilege Level | 700](#)
- [Release Information | 700](#)

Syntax

```
node-id mac-address;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

For EX Series switches and QFX Series switches, node-id is not configurable.

For MX Series routers, optionally specify the MAC address of a node in the protection group. If this statement is not included, the router assigns the node's MAC address.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

propagate-tc

IN THIS SECTION

- [Syntax | 701](#)
- [Hierarchy Level | 701](#)
- [Description | 701](#)

- Required Privilege Level | 701
- Release Information | 701

Syntax

```
propagate-tc;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Enable topology change propagation from a sub-ring to an interconnected major-ring. By default, topology change propagation is disabled.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

protection-group

IN THIS SECTION

- [Syntax | 702](#)
- [Hierarchy Level | 704](#)
- [Description | 704](#)
- [Required Privilege Level | 704](#)
- [Release Information | 704](#)

Syntax

```

protection-group {
    ethernet-ring ring-name {
        data-channel {
            vlan number
        }
        east-interface {
            control-channel channel-name {
                vlan number;
                interface name interface-name
            }
        }
        guard-interval number;
        node-id mac-address;
        restore-interval number;
        ring-protection-link-owner;
        non-revertive;
        wait-to-block-interval number;
        major-ring-name name;
        propagate-tc;
        compatibility-version (1|2);
        ring-id number;
        non-vc-mode;
        dot1p-priority number;
        west-interface {
            control-channel channel-name {

```

```

        vlan number;
        interface name interface-name
    }
    virtual-control-channel {
        west-interface name;
        east-interface name;
    }
}
}
control-vlan (vlan-id | vlan-name);
    east-interface {
        node-id mac-address;
        control-channel channel-name {
            vlan number;
            interface name interface-name
        }
        interface-none
        ring-protection-link-end;
    }
}
    control-channel channel-name {
        vlan number;
        interface name interface-name
    }
}
data-channel {
    vlan number
}
guard-interval number;
node-id mac-address;
restore-interval number;
ring-protection-link-owner;
    west-interface {
        node-id mac-address;
        control-channel channel-name {
            vlan number;
            interface name interface-name
        }
        interface-none
        ring-protection-link-end;
    }
    control-channel channel-name {
        vlan number;

```



```

        interface name interface-name
        }
    }
}
guard-interval number;
restore-interval number;
traceoptions {
    file filename <no-stamp> <world-readable | no-world-readable> <replace>
<size size>;
    flag flag;
}
}

```

Hierarchy Level

```
[edit protocols]
```

Description

Configure Ethernet ring protection switching.

The statements are explained separately. All statements apply to MX Series routers. EX Series switches do not assign **node-id** and use **control-vlan** instead of **control-channel**.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Ethernet Ring Protection Using Ring Instances for Load Balancing](#)

[Example: Configuring Load Balancing Within Ethernet Ring Protection for MX Series Routers](#)

Configuring Ethernet Ring Protection Switching on Switches (CLI Procedure)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

restore-interval

IN THIS SECTION

- [Syntax | 705](#)
- [Hierarchy Level | 705](#)
- [Description | 705](#)
- [Options | 706](#)
- [Required Privilege Level | 706](#)
- [Release Information | 706](#)

Syntax

```
restore-interval number;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Configures the number of minutes that the node does not process any Ethernet ring protection (ERP) protocol data units (PDUs).. This configuration is a global configuration and applies to all Ethernet rings if the Ethernet ring does not have a more specific configuration for this value. If no parameter is configured at the protection group level, the global configuration of this parameter uses the default value.

Options

number—Specify the restore interval.

- **Range:** 1 through 12 minutes

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

Statement introduced in Junos OS Release 12.1 for EX Series switches.

Statement introduced in Junos OS Release 14.153-D10 for QFX Series switches.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview](#)

[Example: Configuring Ethernet Ring Protection Switching on EX Series Switches](#)

[Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

ring-id

IN THIS SECTION

- [Syntax | 707](#)
- [Hierarchy Level | 707](#)
- [Description | 707](#)
- [Options | 707](#)

- Required Privilege Level | 707
- Release Information | 707

Syntax

```
ring-id number;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Specify the ring ID.

Options

number—Ring ID number.

- **Range:** 1 through 239
- **Default:** 1

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

ring-protection-link-end

IN THIS SECTION

- [Syntax | 708](#)
- [Hierarchy Level | 708](#)
- [Description | 708](#)
- [Required Privilege Level | 708](#)
- [Release Information | 709](#)

Syntax

```
ring-protection-link-end;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name (east-interface | west-interface)]
```

Description

Specify that the port is one side of a ring protection link (RPL) by setting the RPL end flag.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

ring-protection-link-owner

IN THIS SECTION

- [Syntax | 709](#)
- [Hierarchy Level | 709](#)
- [Description | 710](#)
- [Required Privilege Level | 710](#)
- [Release Information | 710](#)

Syntax

```
ring-protection-link-owner;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Specify the ring protection link (RPL) owner flag in the Ethernet protection ring. Include this statement only once for each ring (only one node can function as the RPL owner).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

Example: Configuring Ethernet Ring Protection Switching on EX Series Switches

Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS

wait-to-block-interval

IN THIS SECTION

- [Syntax | 711](#)
- [Hierarchy Level | 711](#)
- [Description | 711](#)
- [Options | 711](#)
- [Required Privilege Level | 711](#)
- [Release Information | 711](#)

Syntax

```
wait-to-block-interval number;
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Enable the Wait to Block (WTB) timer interval when clearing force switch and manual switch commands.

Options

number—Wait-to-block interval, in seconds.

- **Range:** 5 through 10 s
- **Default:** 5 s

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

[Ethernet Ring Protection Switching Overview | 231](#)

[Configuring Ethernet Ring Protection Switching on Switches \(CLI Procedure\)](#)

west-interface

IN THIS SECTION

- [Syntax | 712](#)
- [Hierarchy Level | 712](#)
- [Description | 713](#)
- [Required Privilege Level | 713](#)
- [Release Information | 713](#)

Syntax

```
west-interface {  
    node-id mac-address;  
    control-channel channel-name {  
        vlan number;  
        interface name interface-name  
    }  
    interface-none  
    ring-protection-link-end;  
    virtual-control-channel {  
        west-interface name;  
        east-interface name;  
    }  
}
```

Hierarchy Level

```
[edit protocols protection-group ethernet-ring ring-name]
```

Description

Define one of the two interface ports for Ethernet ring protection, the other being defined by the **east-interface** statement at the same hierarchy level. The interface must use the control channel's logical interface name. The control channel is a dedicated VLAN channel for the ring port.

NOTE: Always configure this port second, after configuring the **east-interface** statement.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.5.

RELATED DOCUMENTATION

Ethernet Ring Protection Switching Overview 231
Ethernet Ring Protection Using Ring Instances for Load Balancing
<i>east-interface</i>
<i>ethernet-ring</i>
<i>Example: Configuring Ethernet Ring Protection Switching on EX Series Switches</i>
<i>Example: Configuring Ethernet Ring Protection Switching on QFX Series and EX Series Switches Supporting ELS</i>
Configuring Ethernet Ring Protection Switching on Switches (CLI Procedure)

Configuration Statements: Graceful Routing Engine Switchover

IN THIS CHAPTER

- [graceful-switchover](#) | 714
- [graceful-switchover](#) | 715
- [redundancy \(Graceful Switchover\)](#) | 717

graceful-switchover

IN THIS SECTION

- [Syntax](#) | 714
- [Hierarchy Level](#) | 715
- [Description](#) | 715
- [Required Privilege Level](#) | 715
- [Release Information](#) | 715

Syntax

```
graceful-switchover;
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

For routing platforms with two Routing Engines, configure a primary Routing Engine to switch over gracefully to a backup Routing Engine without interruption to packet forwarding.

NOTE: The **graceful-switchover** statement at the **[edit chassis redundancy]** hierarchy level is not supported for Junos OS Evolved. Graceful switchover is enabled on the Junos OS Evolved system by default.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Configuring Graceful Routing Engine Switchover](#) | 208

graceful-switchover

IN THIS SECTION

- [Syntax](#) | 716
- [Hierarchy Level](#) | 716

- [Description | 716](#)
- [Default | 716](#)
- [Required Privilege Level | 716](#)
- [Release Information | 716](#)

Syntax

```
graceful-switchover;
```

Hierarchy Level

```
[edit chassis (EX Series) redundancy]
```

Description

For switches with more than one Routing Engine, including those in a Virtual Chassis or a Virtual Chassis Fabric, configure the primary Routing Engine to switch over gracefully to a backup Routing Engine without interruption to packet forwarding.

Default

Graceful Routing Engine switchover (GRES) is disabled.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

[Example: Configuring Nonstop Active Routing on Switches](#)

[Configuring Graceful Routing Engine Switchover](#)

[Configuring Graceful Routing Engine Switchover in a Virtual Chassis | 211](#)

[Configuring Nonstop Active Routing on Switches](#)

[Installing Software on an EX Series Switch with Redundant Routing Engines \(CLI Procedure\)](#)

redundancy (Graceful Switchover)

IN THIS SECTION

- [Syntax | 717](#)
- [Hierarchy Level | 717](#)
- [Description | 718](#)
- [Default | 718](#)
- [Required Privilege Level | 718](#)
- [Release Information | 718](#)

Syntax

```
redundancy {  
    failover {  
        on-disk-failure;  
        on-loss-of-keepalives;  
    }  
    graceful-switchover;  
}
```

Hierarchy Level

```
[edit chassis (EX Series)]
```

Description

Enable redundant Routing Engines on a Virtual Chassis with two or more member switches or on a Virtual Chassis Fabric, on a standalone EX6200 or EX8200 switch with more than one Routing Engine.

The remaining statements are explained separately. See [CLI Explorer](#).

Default

Redundancy is enabled for the Routing Engines.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

[graceful-switchover](#) | **715**

[Configuring Graceful Routing Engine Switchover in a Virtual Chassis](#) | **211**

[Configuring Graceful Routing Engine Switchover](#)

[Installing Software on an EX Series Switch with Redundant Routing Engines \(CLI Procedure\)](#)

[High Availability Features for EX Series Switches Overview](#)

Configuration Statements: Graceful Restart

IN THIS CHAPTER

- `disable` | 720
- `disable` (BGP Graceful Restart) | 721
- `dont-help-shared-fate-bfd-down` | 723
- `graceful-restart` (Enabling Globally) | 724
- `graceful-restart` (Multicast Snooping) | 726
- `graceful-restart` (Protocols BGP) | 728
- `graceful-restart` (Protocols OSPF) | 730
- `helper-disable` (Multiple Protocols) | 733
- `kernel-replication` | 734
- `maximum-helper-recovery-time` | 736
- `maximum-helper-restart-time` (RSVP) | 737
- `maximum-neighbor-reconnect-time` | 739
- `maximum-neighbor-recovery-time` | 740
- `not-on-disk-underperform` | 742
- `reconnect-time` | 743
- `recovery-time` | 744
- `restart-duration` | 746
- `restart-time` (BGP Graceful Restart) | 748
- `stale-routes-time` | 750
- `traceoptions` (Protocols) | 751
- `warm-standby` | 754

disable

IN THIS SECTION

- [Syntax | 720](#)
- [Hierarchy Level | 720](#)
- [Description | 720](#)
- [Required Privilege Level | 721](#)
- [Release Information | 721](#)

Syntax

```
disable;
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols (bgp | isis | ldp | ospf |
ospf3 | pim | rip | ripng | rsvp) graceful-restart],
[edit logical-systems logical-system-name routing-instances routing-instance-
name protocols (bgp | ldp | ospf | ospf3 | pim) graceful-restart],
[edit protocols (bgp | esis | isis | ospf | ospf3 | ldp | pim | rip | ripng |
rsvp) graceful-restart],
[edit protocols bgp group group-name graceful-restart],
[edit protocols bgp group group-name neighbor ip-address graceful-restart],
[edit routing-instances routing-instance-name protocols (bgp | ldp | ospf |
ospf3 | pim) graceful-restart],
[edit routing-instances routing-instance-name routing-options graceful-restart],
[edit routing-options graceful-restart]
```

Description

Disable graceful restart.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Enabling Graceful Restart | 319](#)

[Configuring Routing Protocols Graceful Restart | 355](#)

[Configuring Graceful Restart for MPLS-Related Protocols | 364](#)

[Configuring VPN Graceful Restart | 366](#)

[Configuring Logical System Graceful Restart | 368](#)

[Graceful Restart Configuration Statements](#)

[Configuring Graceful Restart for QFabric Systems | 370](#)

disable (BGP Graceful Restart)

IN THIS SECTION

- [Syntax | 722](#)
- [Hierarchy Level | 722](#)
- [Description | 722](#)
- [Required Privilege Level | 722](#)
- [Release Information | 722](#)

Syntax

```
disable;
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols bgp graceful-restart],
[edit logical-systems logical-system-name protocols bgp group group-name
 graceful-restart],
[edit logical-systems logical-system-name protocols bgp group group-name
 neighbor address graceful-restart],
[edit protocols bgp graceful-restart],
[edit protocols bgp group group-name graceful-restart],
[edit protocols bgp group group-name neighbor address graceful-restart]
```

Description

Disable graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition.

NOTE: When you disable graceful restart at one level in the configuration statement hierarchy, it is also disabled at lower levels in the same hierarchy. For example, if you disable graceful restart at the **[edit protocols bgp group *group-name*]** hierarchy level, it is disabled for all the peers in the group. Therefore, if you want to enable graceful restart for some peers in a group and disable it for others, enable graceful restart at the **[edit protocols bgp group *group-name*]** hierarchy level and disable graceful restart for each peer at the **[edit protocols bgp group *group-name* neighbor *address*]** hierarchy level.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for BGP | 356](#)

graceful-restart

restart-time

stale-routes-time

dont-help-shared-fate-bfd-down

IN THIS SECTION

- [Syntax | 723](#)
- [Hierarchy Level | 723](#)
- [Description | 723](#)
- [Default | 724](#)
- [Required Privilege Level | 724](#)
- [Release Information | 724](#)

Syntax

```
dont-help-shared-fate-bfd-down
```

Hierarchy Level

```
[edit protocols bgp graceful-restart]
```

Description

When BFD is control plane dependent and the device detects a BFD down event and is not already entering the graceful restart helper mode, this is treated as a regular BFD down event and the device enters the graceful restart helper mode. This behavior makes the control plane dependent BFD unusable in conjunction with graceful restart.

Include the **dont-help-shared-fate-bfd-down** statement at the **[edit protocols bgp graceful-restart]** hierarchy to ensure that the device does not enter the graceful restart helper mode and data traffic continues to be forwarded to an alternate path even if there is an interface failure (without a control plane restart on the BGP neighbor).

Default

By default, this option is not enabled.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 18.3R1.

RELATED DOCUMENTATION

[Using Control Plane Dependent BFD along with Graceful Restart Helper Mode | 357](#)

Understanding External BGP Peering Sessions

graceful-restart (Enabling Globally)

IN THIS SECTION

- [Syntax | 725](#)
- [Hierarchy Level | 725](#)
- [Description | 725](#)
- [Default | 726](#)
- [Options | 726](#)
- [Required Privilege Level | 726](#)
- [Release Information | 726](#)

Syntax

```
graceful-restart {
    disable;
    helper-disable;
    maximum-helper-recovery-time seconds;
    maximum-helper-restart-time seconds;
    notify-duration seconds;
    recovery-time seconds;
    restart-duration seconds;
    stale-routes-time seconds;
}
```

Hierarchy Level

```
[edit logical-systems logical-system-name routing-options],
[edit logical-systems logical-system-name routing-instances routing-instance-name routing-options],
[edit routing-options],
[edit routing-instances routing-instance-name routing-options]
```

Description

You configure the graceful restart routing option globally to enable the feature, but not to enable graceful restart for all routing protocols in a routing instance. To enable graceful restart globally, include the `graceful-restart` statement under the **[edit routing options]** hierarchy level. This enables graceful restart globally for all routing protocols. You can, optionally, modify the global settings at the individual protocol level.

NOTE:

- For VPNs, the **graceful-restart** statement allows a router whose VPN control plane is undergoing a restart to continue to forward traffic while recovering its state from neighboring routers.
- For BGP, if you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.

- LDP sessions flap when **graceful-restart** configurations change.

Default

Graceful restart is disabled by default.

Options

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Enabling Graceful Restart](#)[Configuring Routing Protocols Graceful Restart](#)[Configuring Graceful Restart for MPLS-Related Protocols](#)[Configuring VPN Graceful Restart](#)[Configuring Logical System Graceful Restart](#)[Configuring Graceful Restart for QFabric Systems](#)

graceful-restart (Multicast Snooping)

IN THIS SECTION

● [Syntax](#) | 727

- [Hierarchy Level | 727](#)
- [Description | 727](#)
- [Default | 727](#)
- [Required Privilege Level | 727](#)
- [Release Information | 728](#)

Syntax

```
graceful-restart {  
    disable;  
    restart-duration seconds;  
}
```

Hierarchy Level

```
[edit multicast-snooping-options]
```

Description

Establish the graceful restart duration for multicast snooping. You can set this value between 0 and 300 seconds. If you set the duration to 0, graceful restart is effectively disabled. Set this value slightly larger than the IGMP query response interval.

Default

180 seconds

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

Example: Configuring Multicast Snooping

query-response-interval (Bridge Domains)

graceful-restart (Protocols BGP)

IN THIS SECTION

- [Syntax | 728](#)
- [Hierarchy Level | 728](#)
- [Description | 729](#)
- [Required Privilege Level | 730](#)
- [Release Information | 730](#)

Syntax

```
graceful-restart {
    disable;
    restart-time seconds;
    stale-routes-time seconds;
}
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols bgp],
[edit logical-systems logical-system-name protocols bgp group group-name],
[edit logical-systems logical-system-name protocols bgp group group-name
```

```
neighbor address],
[edit protocols bgp],
[edit protocols bgp group group-name],
[edit protocols bgp group group-name neighbor address]
```

Description

Configure graceful restart for BGP. Graceful restart allows a routing device undergoing a restart to inform its adjacent neighbors and peers of its condition. Graceful restart is disabled by default. However, helper mode, the ability to assist a neighboring router attempting a graceful restart, is enabled by default.

To configure the duration of the BGP graceful restart period, include the **restart-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level. To set the length of time the router waits to receive messages from restarting neighbors before declaring them down, include the **stale-routes-time** statement at the **[edit protocols bgp graceful-restart]** hierarchy level.

NOTE: If you configure graceful restart after a BGP session has been established, the BGP session restarts and the peers negotiate graceful restart capabilities.

Enable graceful restart mode for BGP (and other protocols) by configuring graceful-restart at the routing-options level. Note that you cannot enable graceful restart for specific protocols unless graceful restart is also enabled globally.

For example, this configuration is required to enable graceful restart:

```
routing-options {
    graceful-restart
}
```

If you want to disable graceful restart for some protocols, you can do this at the protocol's graceful-restart command. The following configuration along with the configuration above will keep graceful restart for all protocols but BGP.

```
protocols{
    bgp{
        graceful-restart; {
            disable;
        }
    }
}
```

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for BGP](#)

[Configuring Graceful Restart for QFabric Systems | 370](#)

[Junos OS High Availability User Guide](#)

graceful-restart (Protocols OSPF)

IN THIS SECTION

- [Syntax | 730](#)
- [Hierarchy Level | 731](#)
- [Description | 731](#)
- [Options | 731](#)
- [Required Privilege Level | 732](#)
- [Release Information | 732](#)

Syntax

```
graceful-restart {  
    disable;
```

```

helper-disable (standard | restart-signaling | both);
no-strict-lsa-checking;
notify-duration seconds;
restart-duration seconds;
}

```

Hierarchy Level

```

[edit logical-systems logical-system-name protocols (ospf | ospf3)],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols (ospf | ospf3)],
[edit protocols (ospf | ospf3)],
[edit routing-instances routing-instance-name protocols ospf]

```

Description

Configure graceful restart for OSPF.

Graceful restart allows a routing device to restart with minimal effects to the network, and is enabled for all routing protocols at the **[edit routing-options]** hierarchy level.

Options

disable Disable graceful restart for OSPF.

helper-disable (standard | restart-signaling | both) Disable helper mode for graceful restart. When helper mode is disabled, a device cannot help a neighboring device that is attempting to restart. Beginning with Junos OS Release 11.4, you can configure restart signaling-based helper mode for OSPFv2 graceful restart configurations. The last committed statement takes precedence over the previously configured statement.

- **standard** disables helper mode for standard graceful restart (based on RFC 3623).
- **restart-signaling** disables helper mode for restart signaling-based graceful restart (based on RFC 4811, RFC 4812, and RFC 4813).
- **both** disables helper mode for both standard and restart signaling-based graceful restart.

Helper mode is enabled by default. For OSPFv2, both standard and restart-signaling based helper modes are enabled by default.

no-strict-lsa-checking Disable strict OSPF link-state advertisement (LSA) checking to prevent the termination of graceful restart by a helping router. LSA checking is enabled by default.

NOTE: The **helper-disable** statement and the **no-strict-lsa-checking** statement cannot be configured at the same time. If you attempt to configure both statements at the same time, the routing device displays a warning message when you enter the **show protocols (ospf | ospf3)** command.

notify-duration
seconds Estimated time needed to send out purged grace LSAs over all the interfaces. Range is 1 through 3600 seconds, and the default is 30 seconds.

restart-duration
seconds Estimated time needed to reacquire a full OSPF neighbor from each area. Range is 1 through 3600 seconds, and the default is 180 seconds.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

Support for the **no-strict-lsa-checking** statement introduced in Junos OS Release 8.5.

Support for the helper mode **standard**, **restart-signaling**, and **both** options introduced in Junos OS Release 11.4.

RELATED DOCUMENTATION

Example: Configuring Graceful Restart for OSPF

Example: Configuring the Helper Capability Mode for OSPFv2 Graceful Restart

Example: Configuring the Helper Capability Mode for OSPFv3 Graceful Restart

Example: Disabling Strict LSA Checking for OSPF Graceful Restart

helper-disable (Multiple Protocols)

IN THIS SECTION

- [Syntax | 733](#)
- [Hierarchy Level | 733](#)
- [Description | 733](#)
- [Default | 733](#)
- [Required Privilege Level | 734](#)
- [Release Information | 734](#)

Syntax

```
helper-disable;
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols (isis | ldp | ospf | ospf3 |  
rsvp) graceful-restart],  
[edit logical-systems logical-system-name routing-instances routing-instance-  
name protocols (ldp | ospf | ospf3) graceful-restart],  
[edit protocols (isis | ldp | ospf | ospf3 | rsvp) graceful-restart],  
[edit routing-instances routing-instance-name protocols (ldp | ospf | ospf3)  
graceful-restart]
```

Description

Disable helper mode for graceful restart. When helper mode is disabled, a router or switch cannot help a neighboring router that is attempting to restart.

Default

Helper mode is enabled by default for these supported protocols: IS-IS, LDP, OSPF/OSPFv3, and RSVP.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Routing Protocols Graceful Restart | 355](#)

[Configuring Graceful Restart for MPLS-Related Protocols | 364](#)

kernel-replication

IN THIS SECTION

- [Syntax | 734](#)
- [Hierarchy Level | 735](#)
- [Description | 735](#)
- [Options | 735](#)
- [Required Privilege Level | 735](#)
- [Release Information | 735](#)

Syntax

```
kernel-replication {
    no-multithreading;
    system-reboot recovery-failure;
}
```

Hierarchy Level

```
[edit system]
```

Description

Configure kernel replication. Use this configuration statement to debug the kernel synchronization process (ksyncd) and configure automatic recovery from ksyncd initialization errors.

Options

- no-multithreading** -(Optional) Run ksyncd in single thread mode for debugging purposes.
- system-reboot recovery-failure** -(Optional) Configure the backup RE to automatically reboot if a ksyncd initialization error is detected.

Required Privilege Level

- system—To view this statement in the configuration.
- system-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 17.2R1.

RELATED DOCUMENTATION

Understanding Graceful Routing Engine Switchover 191
show system switchover 1266

maximum-helper-recovery-time

IN THIS SECTION

- [Syntax | 736](#)
- [Hierarchy Level | 736](#)
- [Description | 736](#)
- [Options | 736](#)
- [Required Privilege Level | 737](#)
- [Release Information | 737](#)

Syntax

```
maximum-helper-recovery-time seconds;
```

Hierarchy Level

```
[edit protocols rsvp graceful-restart],  
[edit logical-systems logical-system-name protocols rsvp graceful-restart]
```

Description

Specify the length of time the router or switch retains the state of its Resource Reservation Protocol (RSVP) neighbors while they undergo a graceful restart.

Options

seconds—Length of time that the router retains the state of its Resource Reservation Protocol (RSVP) neighbors while they undergo a graceful restart.

- **Range:** 1 through 3600
- **Default:** 180

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for RSVP, CCC, and TCC | 364](#)

maximum-helper-restart-time (RSVP)

maximum-helper-restart-time (RSVP)

IN THIS SECTION

- [Syntax | 737](#)
- [Hierarchy Level | 738](#)
- [Description | 738](#)
- [Options | 738](#)
- [Required Privilege Level | 738](#)
- [Release Information | 738](#)

Syntax

```
maximum-helper-restart-time seconds;
```

Hierarchy Level

```
[edit protocols rsvp graceful-restart],  
[edit logical-systems logical-system-name protocols rsvp graceful-restart]
```

Description

Specify the length of time the router or switch waits after it discovers that a neighboring router has gone down before it declares the neighbor down. This value is applied to all RSVP neighbor routers and should be based on the time that the slowest RSVP neighbor requires for restart.

Options

seconds—The time the router or switch waits after it discovers that a neighboring router has gone down before it declares the neighbor down.

- **Range:** 1 through 1800
- **Default:** 60

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.3.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for RSVP, CCC, and TCC](#) | 364

maximum-helper-recovery-time

maximum-neighbor-reconnect-time

IN THIS SECTION

- [Syntax | 739](#)
- [Hierarchy Level | 739](#)
- [Description | 739](#)
- [Options | 739](#)
- [Required Privilege Level | 739](#)
- [Release Information | 740](#)

Syntax

```
maximum-neighbor-reconnect-time seconds;
```

Hierarchy Level

```
[edit protocols ldp graceful-restart],  
[edit logical-systems logical-system-name protocols ldp graceful-restart],  
[edit routing-instances routing-instance-name protocols ldp graceful-restart]
```

Description

Specify the maximum length of time allowed to reestablish connection from a restarting neighbor.

Options

seconds—Maximum time allowed for reconnection.

- **Range:** 30 through 300

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.1.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for LDP | 365](#)

maximum-neighbor-recovery-time

IN THIS SECTION

- [Syntax | 740](#)
- [Hierarchy Level | 740](#)
- [Description | 741](#)
- [Options | 741](#)
- [Required Privilege Level | 741](#)
- [Release Information | 741](#)

Syntax

```
maximum-neighbor-recovery-time seconds;
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols ldp graceful-restart],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols ldp graceful-restart],
```

```
[edit protocols ldp graceful-restart],
[edit routing-instances routing-instance-name protocols ldp graceful-restart]
```

Description

Specify the maximum amount of time to wait before giving up an attempt to gracefully restart.

Options

seconds—Configure the maximum recovery time, in seconds.

- **Range:** 120 through 1800 seconds
- **Default:** 140 seconds

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4. Statement changed from **maximum-recovery-time** to **maximum-neighbor-recovery-time** in Junos OS Release 9.1.

RELATED DOCUMENTATION

Configuring Recovery Time and Maximum Recovery Time

[Configuring Graceful Restart Options for LDP | 365](#)

[recovery-time | 744](#)

not-on-disk-underperform

IN THIS SECTION

- [Syntax | 742](#)
- [Hierarchy Level | 742](#)
- [Description | 742](#)
- [Required Privilege Level | 742](#)
- [Release Information | 743](#)

Syntax

```
not-on-disk-underperform;
```

Hierarchy Level

```
[edit chassis redundancy failover]
```

Description

Prevent gstatd from causing failovers in dual Routing Engines set for graceful Routing Engine switchover (GRES). The gstatd log message is still generated. This is an optional configuration.

NOTE: Configure the **disk-write-threshold** and **disk-read-threshold** statements to customize the gstatd timeout threshold.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.3R6.

RELATED DOCUMENTATION

[Preventing Graceful Routing Engine Switchover in the Case of Slow Disks | 213](#)

reconnect-time

IN THIS SECTION

- [Syntax | 743](#)
- [Hierarchy Level | 743](#)
- [Description | 744](#)
- [Options | 744](#)
- [Required Privilege Level | 744](#)
- [Release Information | 744](#)

Syntax

```
reconnect-time seconds;
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols ldp graceful-restart],  
[edit protocols ldp graceful-restart],  
[edit routing-instances routing-instance-name protocols ldp graceful-restart]
```


Description

Specify the length of time required to reestablish a Label Distribution Protocol (LDP) session after graceful restart.

Options

seconds—Time required for reconnection.

- **Range:** 30 through 300
- **Default:** 60 seconds

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.1.

RELATED DOCUMENTATION

Configuring LDP Graceful Restart

[MPLS Applications User Guide](#)

[Configuring Graceful Restart Options for LDP | 365](#)

recovery-time

IN THIS SECTION

- [Syntax | 745](#)
- [Hierarchy Level | 745](#)
- [Description | 745](#)

- [Options | 745](#)
- [Required Privilege Level | 745](#)
- [Release Information | 746](#)

Syntax

```
recovery-time seconds;
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols ldp graceful-restart],
[edit logical-systems logical-system-name routing-instances routing-instance-name protocols ldp graceful-restart],
[edit protocols ldp graceful-restart],
[edit routing-instances routing-instance-name protocols ldp graceful-restart]
```

Description

Specify the length of time a router or switch waits for Label Distribution Protocol (LDP) neighbors to assist it with a graceful restart.

Options

seconds—Time the router waits for LDP to restart gracefully.

- **Range:** 120 through 1800
- **Default:** 160

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for LDP | 365](#)

maximum-neighbor-recovery-time

restart-duration

IN THIS SECTION

- [Syntax | 746](#)
- [Hierarchy Level | 746](#)
- [Description | 747](#)
- [Options | 747](#)
- [Required Privilege Level | 748](#)
- [Release Information | 748](#)

Syntax

```
restart-duration seconds;
```

Hierarchy Level

```
[edit logical-systems logical-system-name protocols (isis | ospf | ospf3 | pim)
 graceful-restart],
[edit logical-systems logical-system-name routing-instances routing-instance-
 name protocols (ospf | ospf3 | pim) graceful-restart],
[edit protocols (esis | isis | ospf | ospf3 | pim) graceful-restart],
[edit routing-instances routing-instance-name protocols (ospf | ospf3 | pim)
```

```
graceful-restart],
[edit routing-options graceful-restart]
```

Description

Configure the grace period for graceful restart globally.

Additionally, you can individually configure the duration of the graceful restart period for the End System-to-Intermediate System (ES-IS), Intermediate System-to-Intermediate System (IS-IS), Open Shortest Path First (OSPF), and OSPFv3 protocols and for Protocol Independent Multicast (PIM) sparse mode.

Options

seconds—Time for the graceful restart period.

Range:

- The range of values varies according to whether the graceful restart period is being set globally or for a particular protocol:
 - **[edit routing-options graceful-restart]** (global setting)—120 through 900
 - ES-IS—30 through 300
 - IS-IS—30 through 300
 - OSPF/OSPFv3—1 through 3600
 - PIM—30 through 300

Default:

- The default value varies according to whether the graceful restart period is being set globally or for a particular protocol:
 - **[edit routing-options graceful-restart]** (global setting)—300
 - ES-IS—180
 - IS-IS—210
 - OSPF/OSPFv3—180
 - PIM—60

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Enabling Graceful Restart | 319](#)

[Configuring Graceful Restart for MPLS-Related Protocols | 364](#)

[Configuring VPN Graceful Restart | 366](#)

Configuring Graceful Restart for VPNs

[Configuring Logical System Graceful Restart | 368](#)

restart-time (BGP Graceful Restart)

IN THIS SECTION

- [Syntax | 748](#)
- [Hierarchy Level | 749](#)
- [Description | 749](#)
- [Options | 749](#)
- [Required Privilege Level | 749](#)
- [Release Information | 749](#)

Syntax

```
restart-time seconds;
```

Hierarchy Level

```
[edit protocols (bgp | rip | ripng) graceful-restart],
[edit logical-systems logical-system-name protocols (bgp | rip | ripng) graceful-
restart (Enabling Globally)],
[edit logical-systems logical-system-name routing-instances routing-instance-
name protocols bgp graceful-restart],
[edit routing-instances routing-instance-name protocols bgp graceful-restart]
```

Description

Configure the duration of the BGP, RIP, or next-generation RIP (RIPng) graceful restart period.

Options

seconds—Length of time for the graceful restart period.

- **Range:** 1 through 600 seconds
- **Default:** Varies by protocol:
 - BGP—120 seconds
 - RIP and RIPng—60 seconds

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.3.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for BGP | 356](#)

[Configuring Graceful Restart Options for RIP and RIPng | 361](#)

[Configuring Graceful Restart for QFabric Systems | 370](#)

| *stale-routes-time*

stale-routes-time

IN THIS SECTION

- [Syntax | 750](#)
- [Hierarchy Level | 750](#)
- [Description | 750](#)
- [Options | 751](#)
- [Required Privilege Level | 751](#)
- [Release Information | 751](#)

Syntax

```
stale-routes-time seconds;
```

Hierarchy Level

```
[edit logical-systems logical-routing-name protocols bgp graceful-restart],  
[edit logical-systems logical-routing-name routing-instances routing-instance-name protocols bgp graceful-restart],  
[edit protocols bgp graceful-restart],  
[edit routing-instances routing-instance-name protocols bgp graceful-restart]
```

Description

Specify the maximum time that stale routes are kept during a restart. The **stale-routes-time** statement allows you to set the length of time the routing device waits to receive messages from restarting neighbors before declaring them down.

Options

seconds—Time the router device waits to receive messages from restarting neighbors before declaring them down.

- **Range:** 1 through 600 seconds
- **Default:** 300 seconds

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.3.

RELATED DOCUMENTATION

[Configuring Graceful Restart Options for BGP | 356](#)

[Configuring Graceful Restart for QFabric Systems | 370](#)

restart-time (BGP Graceful Restart)

traceoptions (Protocols)

IN THIS SECTION

- [Syntax | 752](#)
- [Hierarchy Level | 752](#)
- [Description | 752](#)
- [Default | 752](#)
- [Options | 752](#)
- [Required Privilege Level | 753](#)
- [Release Information | 753](#)

Syntax

```
traceoptions {
    file name <size size> <files number> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
```

Hierarchy Level

```
[edit protocols isis],
[edit protocols (ospf | ospf3)]
```

Description

Define tracing operations that graceful restart functionality in the router or switch.

To specify more than one tracing operation, include multiple **flag** statements.

Default

If you do not include this statement, no global tracing operations are performed.

Options

disable—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as **all**.

file *name*—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. We recommend that you place global routing protocol tracing output in the file **routing-log**.

files *number*—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Range:** 2 through 1000 files
- **Default:** 2 files

If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

flag *flag*—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. The nonstop active routing tracing option is:

- **graceful-restart**—Tracing operations for nonstop active routing

no-world-readable—Restrict users from reading the log file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named ***trace-file*** reaches this size, it is renamed ***trace-file.0***. When the ***trace-file*** again reaches its maximum size, ***trace-file.0*** is renamed ***trace-file.1*** and ***trace-file*** is renamed ***trace-file.0***. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Syntax:** ***xk*** to specify KB, ***xm*** to specify MB, or ***xg*** to specify GB
- **Range:** 10 KB through the maximum file size supported on your system
- **Default:** 128 KB

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

world-readable—Allow users to read the log file.

Required Privilege Level

routing and trace—To view this statement in the configuration.

routing-control and trace-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

graceful-restart flag for IS-IS and OSPF/OSPFv3 added in Junos OS Release 8.4.

RELATED DOCUMENTATION

| [Tracking Graceful Restart Events](#) | 363

warm-standby

IN THIS SECTION

- [Syntax | 754](#)
- [Hierarchy Level | 754](#)
- [Description | 754](#)
- [Required Privilege Level | 754](#)
- [Release Information | 754](#)

Syntax

```
warm-standby;
```

Hierarchy Level

```
[edit routing-options]
```

Description

Set the routing protocols process (rpd) mode to warm standby. Warm standby mode helps the backup RE stay synchronized with the primary RE, allowing for faster RE switchover during GRES.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 17.2R1.

RELATED DOCUMENTATION

Understanding Graceful Routing Engine Switchover | 191

Configuration Statements: Multiple Node High Availability

IN THIS CHAPTER

- [services-redundancy-group | 756](#)
- [High-Availability \(Chassis\) | 759](#)
- [ike \(High Availability\) | 762](#)
- [ipsec \(High Availability\) | 764](#)

services-redundancy-group

IN THIS SECTION

- [Syntax | 756](#)
- [Hierarchy Level | 757](#)
- [Description | 757](#)
- [Options | 758](#)
- [Required Privilege Level | 759](#)
- [Release Information | 759](#)

Syntax

```
services-redundancy-group name {  
    active-signal-route {  
        ip-address;  
        routing-instance routing-instance;  
    }
```

```

    }
    activeness-priority activeness-priority;
    activeness-probe {
        dest-ip {
            ip-address;
            routing-instance routing-instance;
        }
    }
    backup-signal-route {
        ip-address;
        routing-instance routing-instance;
    }
    floating-ip ip-address;
    monitor {
        bfd-liveliness name {
            interface interface;
            routing-instance routing-instance;
            session-type (multihop | singlehop);
            src-ip src-ip;
        }
        ip name {
            routing-instance routing-instance;
        }
    }
    peer-id id;
    process-packet-on-backup;
    shutdown-on-failure name;
}

```

Hierarchy Level

```
[edit chassis high-availability]
```

Description

You can define the services level failover domain and to configure the SRX nodes to work in the high availability mode using the **services-redundancy-group** parameter.

Options

name	Services redundancy group identifier
active-signal-route	Specify a signal route required for mastership enforcement to be used along with the route exist policy. You can configure the required route (active-signal route) to be used with if-route-exists condition and HA module will add this route to the routing table on moving to active role which will activate the policy to start advertising higher preference.
activeness-priority	In spite of the split brain prevention mechanism, theoretically the nodes can still get in to a ACTIVE-ACTIVE state when the interchassis link is down and there are network issues on the probe router at the same time because of which it replies to probe requests from both the SRX nodes. In this case once the situation improves and the interchassis link is up, the node with lower local id backs off and takes the backup role. This behavior can be overridden by the optional activeness-priority configuration. • Range: 1 through 254
activeness-probe	Specify the probe destination IP address for activeness determination.
backup-signal-route	Specify the backup signal route for the backup to advertise a medium priority. When the HA link is down or the current active relinquishes mastership after any failure, the active signal route is removed and the backup will overwrite the default routing preference towards the old active node with the medium priority.
floating-ip	Specify the designated floating IP address for the services redundancy group.
monitor	Specify to configure the BFD and IP monitoring.
peer-id	Allows you to choose a specific peer when multiple HA peers are configured globally to the service redundancy group.
process-packet-on-backup	Enable packet forward engine to forward packets on backup node for the corresponding service redundancy group.
shutdown-on-failure	Configure one or multiple Interfaces which are required to be shut down to isolate the node in case of internal failures.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface

Release Information

Statement introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

[High-Availability \(Chassis\) | 759](#)

[Multinode High Availability](#)

High-Availability (Chassis)

IN THIS SECTION

- [Syntax | 759](#)
- [Hierarchy Level | 761](#)
- [Description | 761](#)
- [Options | 761](#)
- [Required Privilege Level | 761](#)
- [Release Information | 762](#)

Syntax

```
high-availability {
  local-id id local-ip local-ip;
  peer-id name {
    desc desc;
    interface interface;
    liveness-detection {
      no-adaptation;
```



```

        detection-time {
            threshold milliseconds;
        }
        minimum-interval milliseconds;
        minimum-receive-interval milliseconds;
        multiplier multiplier;
        transmit-interval {
            minimum-interval milliseconds;
            threshold milliseconds;
        }
        version (0 | 1 | automatic);
    }
    peer-ip peer-ip;
    routing-instance routing-instance;
    vpn-profile vpn-profile;
}
services-redundancy-group name {
    active-signal-route {
        ip-address;
        routing-instance routing-instance;
    }
    activeness-priority activeness-priority;
    activeness-probe {
        dest-ip {
            ip-address;
            routing-instance routing-instance;
        }
    }
    backup-signal-route {
        ip-address;
        routing-instance routing-instance;
    }
    floating-ip ip-address;
    monitor {
        bfd-liveliness name {
            interface interface;
            routing-instance routing-instance;
            session-type (multihop | singlehop);
            src-ip src-ip;
        }
        ip name {
            routing-instance routing-instance;
        }
    }
}

```

```
    }
    peer-id id;
    process-packet-on-backup;
    shutdown-on-failure name;
  }
  traceoptions {
    file <filename> <files files> <match match> <size size> <(world-readable
| no-world-readable)>;
    flag name;
    level (alert | all | critical | debug | emergency | error | info |
notice | warning);
    no-remote-trace;
  }
}
```

Hierarchy Level

```
[edit chassis]
```

Description

Configure to enable SRX devices to work in multi node high availability mode.

Options

local-id	Define local identifier.
peer-id	Define peer related information.
services-redundancy-group	Define the services level failover domain.
traceoptions	Define chassis high availability traceoptions.

Required Privilege Level

interface

Release Information

Statement introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

[Multinode High Availability](#)

[services-redundancy-group](#) | [756](#)

[local-id](#)

[peer-id](#)

[traceoptions](#)

ike (High Availability)

IN THIS SECTION

- [Syntax](#) | [762](#)
- [Hierarchy Level](#) | [763](#)
- [Description](#) | [763](#)
- [Options](#) | [763](#)
- [Required Privilege Level](#) | [764](#)
- [Release Information](#) | [764](#)

Syntax

```
ike {
  gateway name {
    ike-policy policy-name;
    version (v1-only | v2-only);
  }
  policy name {
    description description;
    pre-shared-key (ascii-text ascii-text | hexadecimal hexadecimal);
```

```

    proposals [ proposals ... ];
  }
  proposal name {
    authentication-algorithm (md5 | sha-256 | sha-384 | sha-512 | sha1);
    authentication-method (dsa-signatures | ecdsa-signatures-256 | ecdsa-
signatures-384 | ecdsa-signatures-521 | pre-shared-keys | rsa-signatures);
    description description;
    dh-group (group1 | group14 | group15 | group16 | group19 | group2 |
group20 | group21 | group24 | group5);
    encryption-algorithm (aes-256-gcm);
    lifetime-seconds seconds;
  }
}

```

Hierarchy Level

```
[edit security]
```

Description

Define Internet Key Exchange (IKE) configuration for high availability feature. IKE is a key management protocol that creates dynamic SAs; it negotiates SAs for IPsec. An IKE configuration defines the algorithms and keys used to establish a secure connection with a peer security gateway.

Options

gateway-name Name of the gateway.

ike-policy Specify the IKE policy to be used for the gateway.

version Specify the IKE version to use to initiate the connection.

- Values:
 - v2-only—The connection must be initiated using IKE version 2. For Multinode High availability feature, you must configure the IKE version as **v2-only**.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

security—To view this statement in the configuration.

security-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

ipsec (High Availability)

[High-Availability \(Chassis\)](#)

[Multinode High Availability](#)

[services-redundancy-group](#)

[local-id](#)

[peer-id](#)

[traceoptions](#)

show security ike security-associations

show security ike active-peer

show security ipsec security-associations

show security ipsec statistics

clear security ike security-associations

clear security ipsec security-associations

ipsec (High Availability)

IN THIS SECTION

- [Syntax | 765](#)
- [Hierarchy Level | 765](#)
- [Description | 765](#)

- [Options | 766](#)
- [Required Privilege Level | 767](#)
- [Release Information | 767](#)

Syntax

```
ipsec {  
    vpn vpn-name {  
        ha-link-encryption;  
        ike {  
            gateway gateway-name;  
            ipsec-policy ipsec-policy-name;  
        }  
    }  
    proposal proposal-name {  
        description description;  
        encryption-algorithm (aes-256-gcm);  
        lifetime-seconds seconds;  
        protocol (esp);  
    }  
    policy policy-name {  
        description description;  
        proposals proposal-name;  
    }  
}
```

Hierarchy Level

```
[edit security]
```

Description

Define IPsec configuration for the multinode high availability feature. A VPN connection can link two LANs (site-to-site VPN) or a remote dial-up user and a LAN. The traffic that flows between these two points passes through shared resources such as routers, switches, and other network equipment that

make up the public WAN. An IPsec tunnel is created between two participant devices to secure VPN communication.

Options

vpn-name	Configure an IPsec VPN. A VPN provides a means by which remote computers communicate securely across a public WAN such as the Internet. You must mention the same VPN name for vpn-profile in set chassis high-availability peer-id <i>peer-id</i> vpn-profile <i>profile-name</i> configuration.
ha-link-encryption	Configure a interchassis link tunnel for secure HA traffic flow between the nodes. Only site-to-site IPsec VPN tunnels are supported for interchassis link tunnels. Both PSK and PKI authentication methods are supported.
gateway-name	Name of the remote IKE gateway.
ipsec-policy-name	Specify the IPsec policy name.
proposal-name	Name of the IPsec proposal. An IPsec proposal lists protocols and algorithms (security services) to be negotiated with the remote IPsec peer.
description	Text description of IPsec proposal.
encryption-algorithm	Define encryption algorithm. The device deletes existing IPsec SAs when you update the encryption-algorithm configuration in the IPsec proposal. A commit error is thrown if any value other than aes-256-gcm is configured. - Values: aes-256-gcm—AES GCM 256-bit encryption algorithm. For an IKE proposal, AES 256-bit authenticated encryption algorithm is supported with IKEv2 only. When this option is used, aes-256-gcm should be configured at the [edit security ipsec proposal <i>proposal-name</i>] hierarchy level, and the authentication-algorithm option should not be configured at the [edit security ike proposal <i>proposal-name</i>] hierarchy level.
lifetime-seconds	Lifetime in seconds. Range: 180 through 86400 Default: 3600 seconds
protocol	Define the IPsec protocol for a manual or dynamic security association (SA).

A commit error is thrown if any value other than **esp** is configured.

- Values:
 - esp—Encapsulated Security Payload header

policy-name	Define an IPsec policy. An IPsec policy defines a combination of security parameters (IPsec proposals) used during IPsec negotiation. It defines Perfect Forward Secrecy (PFS) and the proposals needed for the connection.
description	Enter descriptive text for an IPsec policy.
proposal-name	Specify one or more proposals for an IPsec policy.

Required Privilege Level

security—To view this statement in the configuration.

security-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

ike (High Availability)

[High-Availability \(Chassis\)](#)

[Multinode High Availability](#)

[services-redundancy-group](#)

[local-id](#)

[peer-id](#)

[traceoptions](#)

show security ike security-associations

show security ike active-peer

show security ipsec security-associations

show security ipsec statistics

clear security ike security-associations

clear security ipsec security-associations

Configuration Statements: Nonstop Active Routing

IN THIS CHAPTER

- [nonstop-routing | 768](#)
- [switchover-on-routing-crash | 770](#)
- [synchronize | 771](#)
- [traceoptions | 773](#)

nonstop-routing

IN THIS SECTION

- [Syntax | 768](#)
- [Hierarchy Level | 769](#)
- [Description | 769](#)
- [Default | 769](#)
- [Required Privilege Level | 769](#)
- [Release Information | 769](#)

Syntax

```
nonstop-routing;
```

Hierarchy Level

```
[edit routing-options]
```

NOTE: Although **nonstop-routing** is also a valid keyword at the **logical-systems** hierarchy level, it is not supported.

Description

For routing platforms with two Routing Engines, configure a primary Routing Engine to switch over gracefully to a backup Routing Engine and to preserve routing protocol information.

Default

disabled

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.4.

RELATED DOCUMENTATION

| [Configuring Nonstop Active Routing](#) | 290

switchover-on-routing-crash

IN THIS SECTION

- [Syntax | 770](#)
- [Hierarchy Level | 770](#)
- [Description | 770](#)
- [Required Privilege Level | 770](#)
- [Release Information | 771](#)

Syntax

```
switchover-on-routing-crash;
```

Hierarchy Level

```
[edit system]
```

Description

Prevent loss of traffic in the case of NSR being configured. With the **switchover-on-routing-crash** configuration statement enabled, when rpd on the primary Routing Engine crashes with NSR configured, the Routing Engine will switch over immediately to the backup Routing Engine to preserve protocol state and adjacencies. Prior to having this statement, if NSR was configured and rpd on the primary Routing Engine crashed, it would cause network impact (protocol neighbor and adjacency drops and traffic loss).

Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.3.

RELATED DOCUMENTATION

| [Configuring Nonstop Active Routing](#) | 290

synchronize

IN THIS SECTION

- [Syntax](#) | 771
- [Hierarchy Level](#) | 771
- [Description](#) | 771
- [Options](#) | 773
- [Required Privilege Level](#) | 773
- [Release Information](#) | 773

Syntax

```
synchronize;
```

Hierarchy Level

```
[edit system commit]
```

Description

For devices with multiple Routing Engines only. Configure the **commit** command to automatically perform a **commit synchronize** action between dual Routing Engines within the same chassis. The

Routing Engine on which you execute the **commit** command (the requesting Routing Engine) copies and loads its candidate configuration to the other (the responding) Routing Engine. Each Routing Engine then performs a syntax check on the candidate configuration file being committed. If no errors are found, the configuration is activated and becomes the current operational configuration on both Routing Engines.

NOTE: If you configure the **commit synchronize** statement at the **[edit system]** hierarchy level and issue a **commit** in the primary Routing Engine, the primary configuration is automatically synchronized with the backup. However, if the backup Routing Engine is down when you issue the **commit**, the Junos OS displays a warning and commits the candidate configuration in the primary Routing Engine. When the backup Routing Engine comes up, its configuration will automatically be synchronized with the primary. A newly inserted backup Routing Engine automatically synchronizes its configuration with the primary Routing Engine configuration.

NOTE: When you configure nonstop active routing (NSR), you must configure the **commit synchronize** statement. Otherwise, the commit operation fails.

NOTE: Starting in Junos OS Release 20.2R1, when the **commit synchronize** statement is configured and the backup Routing Engine synchronizes its configuration with the primary Routing Engine, for example, when it is newly inserted, brought back online, or during a change in primary role, it also synchronizes the ephemeral configuration database.

On the TX Matrix router, synchronization only occurs between the Routing Engines within the same chassis. When synchronization is complete, the new configuration is then distributed to the Routing Engines on the T640 routers. That is, the primary Routing Engine on the TX Matrix router distributes the configuration to the primary Routing Engine on each T640 router. Likewise, the backup Routing Engine on the TX Matrix router distributes the configuration to the backup Routing Engine on each T640 router.

On the TX Matrix Plus router, synchronization only occurs between the Routing Engines within the switch-fabric chassis and when synchronization is complete, the new configuration is then distributed to the Routing Engines on the line-card chassis (LCC). That is, the primary Routing Engine on the TX Matrix Plus router distributes the configuration to the primary Routing Engine on each LCC. Likewise, the backup Routing Engine on the TX Matrix Plus router distributes the configuration to the backup Routing Engine on each LCC.

In EX Series Virtual Chassis configurations:

- On EX4200 switches in Virtual Chassis, synchronization occurs between the switch in the primary role and the switch in the backup role.

- On EX8200 switches in a Virtual Chassis, synchronization occurs only between the primary and backup XRE200 External Routing Engines.

Options

- and-quit** (Optional) Quit configuration mode if the commit synchronization succeeds.
- at** (Optional) Time at which to activate configuration changes.
- comment** (Optional) Write a message to the commit log.
- force** (Optional) Force a commit synchronization on the other Routing Engine (ignore warnings).
- scripts** (Optional) Push scripts to the other Routing Engine.

Required Privilege Level

system—To view this statement in the configuration.

system-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 7.4.

RELATED DOCUMENTATION

[Synchronizing the Routing Engine Configuration](#)

Configuring Multiple Routing Engines to Synchronize Committed Configurations Automatically

traceoptions

IN THIS SECTION

- [Syntax | 774](#)
- [Hierarchy Level | 774](#)

- [Description | 774](#)
- [Default | 775](#)
- [Options | 775](#)
- [Required Privilege Level | 776](#)
- [Release Information | 776](#)

Syntax

```
traceoptions {
    file filename <files number> <size size> <world-readable | no-world-
readable>;
    flag flag <disable>;
}
```

Hierarchy Level

```
[edit logical-systems logical-system-name routing-instances routing-instance-
name routing-options],
[edit logical-systems logical-system-name routing-instances routing-instance-
name routing-options multicast],
[edit logical-systems logical-system-name routing-options],
[edit logical-systems logical-system-name routing-options multicast],
[edit routing-instances routing-instance-name routing-options],
[edit routing-instances routing-instance-name routing-options multicast],
[edit routing-options],
[edit routing-options flow],
[edit routing-options multicast]
```

Description

Define tracing operations that track all routing protocol functionality in the routing device.

To specify more than one tracing operation, include multiple **flag** statements.

NOTE: On Junos OS Evolved, **traceoptions** is disabled for op, event, and commit scripts. Instead, Junos OS Evolved enables default tracking and trace messages that are logged under **/var/log/traces**.

Default

If you do not include this statement, no global tracing operations are performed.

Options

Values:

-

disable—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as **all**.

file *filename*—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. We recommend that you place global routing protocol tracing output in the file **routing-log**.

files *number*—(Optional) Maximum number of trace files. When a trace file named **trace-file** reaches its maximum size, it is renamed **trace-file.0**, then **trace-file.1**, and so on, until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

- **Range:** 2 through 1000 files
- **Default:** 10 files

flag *flag*—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. These are the global routing protocol tracing options:

- **all**—All tracing operations
- **condition-manager**—Condition-manager events
- **config-internal**—Configuration internals
- **general**—All normal operations and routing table changes (a combination of the **normal** and **route** trace operations)
- **graceful-restart**—Graceful restart operations

- **normal**—All normal operations
- **nsr-packet**—Detailed trace information for BFD nonstop active routing only
- **nsr-synchronization**—Tracing operations for nonstop active routing
- **nsr-synchronization**—Nonstop active routing synchronization
- **parse**—Configuration parsing
- **policy**—Routing policy operations and actions
- **regex-parse**—Regular-expression parsing
- **route**—Routing table changes
- **state**—State transitions
- **task**—Interface transactions and processing
- **timer**—Timer usage

no-world-readable—(Optional) Prevent any user from reading the log file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named *trace-file* reaches this size, it is renamed *trace-file.0*. When the *trace-file* again reaches its maximum size, *trace-file.0* is renamed *trace-file.1* and *trace-file* is renamed *trace-file.0*. This renaming scheme continues until the maximum number of trace files is reached. Then, the oldest trace file is overwritten. Note that if you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

- **Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB
- **Range:** 10 KB through the maximum file size supported on your system
- **Default:** 128 KB

world-readable—(Optional) Allow any user to read the log file.

Required Privilege Level

routing and trace—To view this statement in the configuration.

routing-control and trace-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

nsr-synchronization flag for BGP, IS-IS, LDP, and OSPF added in Junos OS Release 8.4.

nsr-synchronization and **nsr-packet** flags for BFD sessions added in Junos OS Release 8.5.

nsr-synchronization flag for RIP and RIPng added in Junos OS Release 9.0.

nsr-synchronization flag for Layer 2 VPNs and VPLS added in Junos OS Release 9.1.

nsr-synchronization flag for PIM added in Junos OS Release 9.3.

nsr-synchronization flag for MPLS added in Junos OS Release 10.1.

nsr-synchronization flag for MSDP added in Junos OS Release 12.1.

RELATED DOCUMENTATION

| *Example: Tracing Global Routing Protocol Operations*

Configuration Statements: Nonstop Bridging

IN THIS CHAPTER

- [nonstop-bridging](#) | 778
- [nonstop-bridging \(Ethernet Switching\)](#) | 779

nonstop-bridging

IN THIS SECTION

- [Syntax](#) | 778
- [Hierarchy Level](#) | 778
- [Description](#) | 779
- [Required Privilege Level](#) | 779
- [Release Information](#) | 779

Syntax

```
nonstop-bridging;
```

Hierarchy Level

```
[edit protocols layer2-control]
```

Description

For platforms with two Routing Engines, configure a primary Routing Engine to switch over gracefully to a backup Routing Engine and preserve Layer 2 Control Protocol (L2CP) information.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.4.

RELATED DOCUMENTATION

[Synchronizing the Routing Engine Configuration | 292](#)

[Configuring Nonstop Bridging | 262](#)

[Configuring Nonstop Bridging on EX Series Switches \(CLI Procedure\) | 266](#)

[Configuring Nonstop Bridging on Switches \(CLI Procedure\) | 264](#)

nonstop-bridging (Ethernet Switching)

IN THIS SECTION

- [Syntax | 780](#)
- [Hierarchy Level | 780](#)
- [Description | 780](#)
- [Required Privilege Level | 780](#)
- [Release Information | 780](#)

Syntax

```
nonstop-bridging;
```

Hierarchy Level

```
[edit ethernet-switching-options]
```

Description

For switches with two Routing Engines or for Virtual Chassis, configure a primary Routing Engine to switch over gracefully to a backup Routing Engine and preserve Layer 2 protocol information for the Layer 2 protocols that support nonstop bridging (NSB). For a list of the EX Series switches and Layer 2 protocols that support nonstop bridging, see [EX Series Switch Software Features Overview](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 11.3.

RELATED DOCUMENTATION

| [Configuring Nonstop Bridging on EX Series Switches \(CLI Procedure\)](#) | 266

Configuration Statements: NSSU

IN THIS CHAPTER

- [fpcs \(NSSU Upgrade Groups\) | 781](#)
- [member \(NSSU Upgrade Groups\) | 783](#)
- [nssu | 785](#)
- [upgrade-group | 787](#)

fpcs (NSSU Upgrade Groups)

IN THIS SECTION

- [Syntax | 781](#)
- [Hierarchy Level | 782](#)
- [Description | 782](#)
- [Options | 782](#)
- [Required Privilege Level | 783](#)
- [Release Information | 783](#)

Syntax

```
fpcs (slot-number | [list-of-slot-numbers]);
```

Hierarchy Level

```
[edit chassis nssu upgrade-group group-name],
[edit chassis nssu upgrade-group group-name member member-id]
```

Description

Configure switch line cards, Virtual Chassis member switches, or Virtual Chassis Fabric (VCF) member switches as part of an NSSU upgrade group.

To reduce the time an NSSU takes, you can configure line-card upgrade groups for an EX6200 or EX8200 switch with redundant Routing Engines; an EX8200 Virtual Chassis; an EX4650 Virtual Chassis with more than three member switches; QFX3500, QFX3600, and QFX5100 Virtual Chassis; or a QFX5100 Virtual Chassis Fabric (VCF). NSSU upgrades the devices in the order in which you configure the upgrade groups, so you can also use upgrade groups to control the upgrade sequence.

For switches that have separate line cards, use this statement to assign one or more line cards to an NSSU upgrade group based on their line-card slot numbers.

For Virtual Chassis or VCF member switches that do not have separate line cards, use this statement to assign one or more Virtual Chassis or VCF members to an NSSU upgrade group by specifying their member IDs.

NOTE: For a Virtual Chassis or VCF, you do not use this statement with the **member** option. When to use the **member** statement hierarchy is explained next.

To configure an upgrade group that includes line cards on switches that support multiple line cards and comprise a Virtual Chassis, use this statement with the **member** option to specify the Virtual Chassis member ID and the desired line card slot number or numbers on that member switch to include in the upgrade group. Use multiple statements to add line cards from different Virtual Chassis members to the upgrade group.

Options

list-of-slot-numbers

A list of slot numbers of multiple line cards or member IDs of Virtual Chassis or VCF members to be included in the upgrade group. Separate multiple slot numbers or member IDs with spaces and enclose the list in square brackets—for example: [3 4 7].

slot-number

The slot number of a single line card or member ID of a Virtual Chassis or VCF member to be included in the upgrade group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.4.

RELATED DOCUMENTATION

[Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches](#)

[Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade | 607](#)

member (NSSU Upgrade Groups)

IN THIS SECTION

- [Syntax | 783](#)
- [Hierarchy Level | 784](#)
- [Description | 784](#)
- [Options | 784](#)
- [Required Privilege Level | 784](#)
- [Release Information | 785](#)

Syntax

```
member member-id {
    fpcs (slot-number | [list-of-slot-numbers]);
}
```


Hierarchy Level

```
[edit chassis nssu upgrade-group group-name]
```

Description

Specify the Virtual Chassis member whose line-card slot numbers you are assigning to an NSSU upgrade group.

NOTE: This statement is not applicable to Virtual Chassis or VCF member switches that do not support separate line cards. To configure Virtual Chassis or VCF member switches that do not have separate line cards into an NSSU upgrade group, use the **fpcs** statement alone, and specify the Virtual Chassis or VCF member IDs to include in the upgrade group in place of line card slot numbers.

To reduce the time an NSSU takes, you can configure NSSU line-card upgrade groups on an EX6200 or EX8200 switch with redundant Routing Engines; EX8200 Virtual Chassis; QFX3500, QFX3600, and QFX5100 Virtual Chassis; and Virtual Chassis Fabric (VCF).

To configure an upgrade group that includes line cards on different switches that support multiple line cards and comprise a Virtual Chassis, use this statement hierarchy with the **fpcs** option to first specify the Virtual Chassis member ID and then desired line card slot number or numbers on that member switch to include in the upgrade group. Use multiple statements to add line cards from different Virtual Chassis members to the upgrade group.

Options

member-id The ID of the Virtual Chassis or VCF member switch containing one or more line cards to include in an NSSU upgrade group.

The remaining statement is explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 11.1.

RELATED DOCUMENTATION

[Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches](#)

[Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade](#) | 607

nssu

IN THIS SECTION

- [Syntax](#) | 785
- [Hierarchy Level](#) | 786
- [Description](#) | 786
- [Default](#) | 786
- [Required Privilege Level](#) | 786
- [Release Information](#) | 787

Syntax

```
nssu {  
    rcp-count number;  
    upgrade-group group-name {  
        fpcs (slot-number | [list-of-slot-numbers]);  
        member member-id {  
            fpcs (slot-number | [list-of-slot-numbers]);  
        }  
    }  
}
```

Hierarchy Level

[edit [chassis](#)]

Description

Configure parameters that affect the nonstop software upgrade (NSSU) process.

NOTE: You use the "[request system software nonstop-upgrade](#)" on [page 1068](#) command to initiate NSSU.

The **rcp-count** option (available only on QFX5100 switches) sets the number of parallel **rcp** sessions that NSSU uses to copy the new software to multiple Virtual Chassis or VCF member switches at a time.

The **upgrade-group** options define line-card upgrade groups for NSSU. When you initiate NSSU with at least one upgrade group configured, NSSU upgrades the line cards or Virtual Chassis or VCF members in each upgrade group to the new software version at the same time, in the order in which you configured them. Upgrade groups reduce the time required to complete an NSSU operation and control the order in which the line cards or members are upgraded.

Line-card upgrade groups are supported on some EX Series switches and EX Series Virtual Chassis that support NSSU and on a QFX5100 VCF.

These statements are all explained separately. You can also consult [CLI Explorer](#).

Default

If you do not configure **rcp-count**, NSSU uses a default algorithm to determine the number of parallel **rcp** sessions to use based on the number of members in the Virtual Chassis or VCF.

If you do not define any line-card upgrade groups, NSSU upgrades line cards or members of a Virtual Chassis or VCF one at a time in ascending order by slot or member number.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.4.

rcp-count statement introduced in Junos OS Release 14.1X53-D40 for QFX5100 switches only.

RELATED DOCUMENTATION

[Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade | 607](#)

[Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches](#)

upgrade-group

IN THIS SECTION

- [Syntax | 787](#)
- [Hierarchy Level | 788](#)
- [Description | 788](#)
- [Options | 788](#)
- [Required Privilege Level | 788](#)
- [Release Information | 788](#)

Syntax

```
upgrade-group group-name {
    fpcs (slot-number | [list-of-slot-numbers]);
    member member-id {
        fpcs (slot-number | [list-of-slot-numbers]);
    }
}
```

Hierarchy Level

```
[edit chassis nssu]
```

Description

Assign a name to a line-card upgrade group being created for nonstop software upgrade (NSSU).

To reduce the time an NSSU takes, you can configure line-card upgrade groups on an EX6200 or EX8200 switch with redundant Routing Engines; EX8200 Virtual Chassis; EX4650 Virtual Chassis; QFX3500, QFX3600, and QFX5100 Virtual Chassis; and QFX5100 Virtual Chassis Fabric (VCF).

NSSU upgrades the groups in the order that they appear in the configuration (in other words, in the order you configure them). If you do not define any line-card upgrade groups, NSSU upgrades line cards or members of a Virtual Chassis or VCF one at a time in ascending order by slot or member number.

Options

group-name Name of the upgrade group.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.4.

RELATED DOCUMENTATION

[Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade | 607](#)

[Example: Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade on EX Series Switches](#)

[Upgrading Software on a Virtual Chassis Fabric Using Nonstop Software Upgrade](#)

Configuration Statements: Power Management

IN THIS CHAPTER

- [power-budget-priority](#) | 789
- [n-plus-n \(Power Management\)](#) | 791
- [psu](#) | 792
- [redundancy \(Power Management\)](#) | 793

power-budget-priority

IN THIS SECTION

- [Syntax](#) | 789
- [Hierarchy Level](#) | 790
- [Description](#) | 790
- [Default](#) | 790
- [Options](#) | 790
- [Required Privilege Level](#) | 790
- [Release Information](#) | 790

Syntax

```
power-budget-priority priority;
```

Hierarchy Level

```
[edit chassis (EX Series)
```

```
    fpc slot]
```

Description

Assign a power priority to the specified line card slot on an EX6200 or EX8200 switch.

NOTE: On an EX6200 switch, you cannot change the power priority of a slot containing a Switch Fabric and Routing Engine (SRE) module. Although the CLI allows you to set a different power priority for the slot, your change does not go into effect, and the power priority remains 0. A message is sent to the system log to inform you that changing the power priority of the slot is unsupported.

Default

All line card slots are initially assigned the lowest priority, with the exception of slot 4 and slot 5 on the EX6200 switch, which always are assigned a priority of 0.

Options

priority—Assigned power priority for the slot, with 0 being the highest priority:

- 0 through 9 for an EX6200 switch
- 0 through 7 for an EX8208 switch
- 0 through 15 for an EX8216 switch

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.2.

RELATED DOCUMENTATION

[Configuring the Power Priority of Line Cards \(CLI Procedure\)](#) | 392

n-plus-n (Power Management)

IN THIS SECTION

- [Syntax](#) | 791
- [Hierarchy Level](#) | 791
- [Description](#) | 791
- [Required Privilege Level](#) | 791
- [Release Information](#) | 792

Syntax

```
n-plus-n;
```

Hierarchy Level

```
[edit chassis (EX Series) psu redundancy]
```

Description

Configure $N+N$ power supply redundancy for power management on an EX6200 or EX8200 switch.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.2.

RELATED DOCUMENTATION

[Configuring Power Supply Redundancy \(CLI Procedure\)](#) | 393

psu

IN THIS SECTION

- [Syntax](#) | 792
- [Hierarchy Level](#) | 792
- [Description](#) | 793
- [Required Privilege Level](#) | 793
- [Release Information](#) | 793

Syntax

```
psu {  
    redundancy {  
        n-plus-n (Power Management);  
    }  
}
```

Hierarchy Level

```
[edit chassis (EX Series)]
```

Description

Configure *N+N* power supply redundancy for power management on an EX6200 or EX8200 switch or SRX380 device.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.2.

RELATED DOCUMENTATION

| [Configuring Power Supply Redundancy \(CLI Procedure\)](#) | 393

redundancy (Power Management)

IN THIS SECTION

- [Syntax](#) | 794
- [Hierarchy Level](#) | 794
- [Description](#) | 794
- [Default](#) | 794
- [Required Privilege Level](#) | 794
- [Release Information](#) | 794

Syntax

```
redundancy {  
    n-plus-n (Power Management);  
}
```

Hierarchy Level

```
[edit chassis (EX Series)                psu]
```

Description

Configure $N+1$ power supply redundancy for power management on an EX6200 or EX8200 switch.

The remaining statement is explained separately. See [CLI Explorer](#).

Default

$N+1$ power supply redundancy is configured by default.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.2.

RELATED DOCUMENTATION

| [Configuring Power Supply Redundancy \(CLI Procedure\)](#) | 393

Configuration Statements: Redundant Power System

IN THIS CHAPTER

- [member \(Redundant Power System\) | 795](#)
- [priority \(Redundant Power System\) | 797](#)
- [redundant-power-system | 798](#)

member (Redundant Power System)

IN THIS SECTION

- [Syntax | 795](#)
- [Hierarchy Level | 796](#)
- [Description | 796](#)
- [Options | 796](#)
- [Required Privilege Level | 796](#)
- [Release Information | 796](#)

Syntax

```
member vc-member-number {  
    priority (0|1|2|3|4|5|6);  
}
```

Hierarchy Level

```
[edit redundant-power-system]
```

Description

Specify the Virtual Chassis member ID of a switch connected to the Redundant Power System (RPS) for backup power supply. The member ID is required only for switches that can be configured in a Virtual Chassis. If the switch has never been configured in a Virtual Chassis, the value is always 0.

Options

member-number—Member ID of a switch that has Virtual Chassis capability that is connected to the RPS.

- **Range:** 0 through maximum members in the Virtual Chassis
- **Default:** 0

The remaining statement is explained separately. See [CLI Explorer](#).

Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

| [Determining and Setting Priority for Switches Connected to an EX Series RPS](#) | 402

priority (Redundant Power System)

IN THIS SECTION

- [Syntax | 797](#)
- [Hierarchy Level | 797](#)
- [Description | 797](#)
- [Required Privilege Level | 798](#)
- [Release Information | 798](#)

Syntax

```
priority (0|1|2|3|4|5|6);
```

Hierarchy Level

```
[edit redundant-power-system member]  
[edit redundant-power-system member member-number]
```

Description

Configure the backup of any switch connected to the Redundant Power System (RPS) using the CLI on each switch. The determines the order in which the RPS supplies backup power to the switches connected to the RPS. 6 is the highest priority and 1 is lowest. Zero means off or no RPS backup.

If the switch is not reconfigured from the CLI, the default priority is 1. In this case, priority is determined by connector location with the rightmost connector having the highest priority.

For switches that can only be used as standalone switches, this hierarchy level is used for configuration:

```
[edit redundant-power-system]
```

For switches that can be used either as standalone switches or configured in a Virtual Chassis, this hierarchy level is used for configuration:

```
[edit redundant-power-system member vc-member-number]
```

If two or more connections are assigned the same , then the power of each connection is determined based on its switch connector port location, with the rightmost port receiving power first.

Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 12.1.

redundant-power-system

IN THIS SECTION

- [Syntax | 798](#)
- [Hierarchy Level | 799](#)
- [Description | 799](#)
- [Required Privilege Level | 799](#)
- [Release Information | 799](#)

Syntax

EX2200 switch:

```
redundant-power-system {
    priority (0|1|2|3|4|5|6)
```

```
    }
}
```

EX3300 switch:

```
redundant-power-system {
  member vc-member-number {
    priority (0|1|2|3|4|5|6)
  }
}
```

Hierarchy Level

```
[edit]
```

Description

Configure Redundant Power System (RPS) member to ensure higher- switches always receive power backup.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

| [Determining and Setting Priority for Switches Connected to an EX Series RPS](#) | 402

Configuration Statements: Routing Engine and Switching Control Board Redundancy

IN THIS CHAPTER

- [cfeb](#) | 801
- [description \(Chassis Redundancy\)](#) | 802
- [disk-failure-action](#) | 803
- [failover \(Chassis\)](#) | 805
- [failover \(Chassis\)](#) | 806
- [failover \(System Process\)](#) | 807
- [feb \(Creating a Redundancy Group\)](#) | 809
- [feb \(Assigning a FEB to a Redundancy Group\)](#) | 810
- [keepalive-time](#) | 812
- [keepalive-time](#) | 814
- [no-auto-failover](#) | 815
- [on-disk-failure \(Chassis Redundancy Failover\)](#) | 817
- [on-disk-failure](#) | 818
- [on-loss-of-keepalives](#) | 819
- [on-loss-of-keepalives](#) | 821
- [redundancy](#) | 822
- [redundancy-group](#) | 824
- [routing-engine \(Chassis Redundancy\)](#) | 825
- [routing-engine](#) | 827
- [sfm \(Chassis Redundancy\)](#) | 828
- [ssb](#) | 830
- [vcp-no-hold-time](#) | 831

cfeb

IN THIS SECTION

- [Syntax | 801](#)
- [Hierarchy Level | 801](#)
- [Description | 801](#)
- [Default | 801](#)
- [Options | 801](#)
- [Required Privilege Level | 802](#)
- [Release Information | 802](#)

Syntax

```
cfeb slot-number (always | preferred);
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

On M10i routers only, configure which Compact Forwarding Engine Board (CFEB) is the primary and which is the backup.

Default

By default, the CFEB in slot 0 is the primary and the CFEB in slot 1 is the backup.

Options

slot-number—Specify which slot is the primary and which is the backup.

always—Define this CFEB as the sole device.

preferred—Define this CFEB as the preferred device of at least two.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Configuring CFEB Redundancy on the M10i Router](#) | 20

description (Chassis Redundancy)

IN THIS SECTION

- [Syntax](#) | 802
- [Hierarchy Level](#) | 803
- [Description](#) | 803
- [Options](#) | 803
- [Required Privilege Level](#) | 803
- [Release Information](#) | 803

Syntax

```
description description;
```

Hierarchy Level

```
[edit chassis redundancy feb redundancy-group group-name]
```

Description

Provide a description of the FEB redundancy group.

Options

description—Provide a description for the FEB redundancy group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Configuring FEB Redundancy on the M120 Router](#) | 21

disk-failure-action

IN THIS SECTION

- [Syntax](#) | 804
- [Hierarchy Level](#) | 804
- [Description](#) | 804
- [Options](#) | 804

- [Required Privilege Level | 804](#)
- [Release Information | 804](#)

Syntax

```
disk-failure-action (halt | reboot);
```

Hierarchy Level

```
[edit chassis redundancy on-disk-failure]  
[edit chassis routing-engine on-disk-failure]
```

Description

Configure the Routing Engine to halt or reboot when the Routing Engine hard disk fails.

Options

halt—Specify the Routing Engine to halt.

reboot—Specify the Routing Engine to reboot.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

| [graceful-switchover | 715](#)

Enabling a Routing Engine to Reboot on Hard Disk Errors

Installing Software on an EX Series Switch with Redundant Routing Engines (CLI Procedure)

[High Availability Features for EX Series Switches Overview](#) | 9

failover (Chassis)

IN THIS SECTION

- [Syntax](#) | 805
- [Hierarchy Level](#) | 805
- [Description](#) | 805
- [Required Privilege Level](#) | 806
- [Release Information](#) | 806

Syntax

```
failover {  
    on-disk-failure;  
    on-loss-of-keepalives;  
    on-re-to-fpc-stale;  
}
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

Specify conditions on the primary Routing Engine that cause the backup router to take primary role.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

on-re-to-fpc-stale option introduced in Junos OS Release 15.2 on the MX240, MX480, MX960, MX2010, and MX2020.

RELATED DOCUMENTATION

| [On Detection of a Hard Disk Error on the Primary Routing Engine](#) | 136

failover (Chassis)

IN THIS SECTION

- [Syntax](#) | 806
- [Hierarchy Level](#) | 807
- [Description](#) | 807
- [Required Privilege Level](#) | 807
- [Release Information](#) | 807

Syntax

```
failover {  
    on-disk-failure;  
    on-loss-of-keepalives;  
}
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

Specify conditions on the primary Routing Engine that cause the backup router to take primary role.

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

[graceful-switchover](#) | 715

[On Detection of a Hard Disk Error on the Primary Routing Engine](#) | 136

Installing Software on an EX Series Switch with Redundant Routing Engines (CLI Procedure)

[High Availability Features for EX Series Switches Overview](#) | 9

failover (System Process)

IN THIS SECTION

- [Syntax](#) | 808
- [Hierarchy Level](#) | 808
- [Description](#) | 808

- [Options | 808](#)
- [Required Privilege Level | 808](#)
- [Release Information | 809](#)

Syntax

```
failover (alternate-media | other-routing-engine);
```

Hierarchy Level

```
[edit system processes process-name]
```

Description

Configure the router to reboot if the software process fails four times within 30 seconds, and specify the software to use during the reboot.

Options

process-name—Junos OS process name. Some of the processes that support the **failover** statement are **bootp**, **chassis-control**, **craft-control**, **ethernet-connectivity-fault-management**, **init**, **interface-control**, **neighbor-liveness**, **pfe**, **redundancy-interface-process**, **routing**, **smg-service**, and **vrp**.

alternate-media—Use the Junos OS image on alternate media during the reboot.

other-routing-engine—On routers with dual Routing Engines, use the Junos OS image on the other Routing Engine during the reboot. That Routing Engine assumes the primary role; in the usual configuration, the other Routing Engine is the designated backup Routing Engine.

Required Privilege Level

system—To view this statement in the configuration.

system-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[When a Software Process Fails
processes](#)

feb (Creating a Redundancy Group)

IN THIS SECTION

- [Syntax | 809](#)
- [Hierarchy Level | 810](#)
- [Description | 810](#)
- [Options | 810](#)
- [Required Privilege Level | 810](#)
- [Release Information | 810](#)

Syntax

```
feb {  
    redundancy-group group-name {  
        description description;  
        feb slot-number (backup | primary);  
        no-auto-failover;  
    }  
}
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

On M120 routers only, configure a Forwarding Engine Board (FEB) redundancy group.

Options

The remaining statements are described separately.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.2.

RELATED DOCUMENTATION

| [Configuring FEB Redundancy on the M120 Router](#) | 21

feb (Assigning a FEB to a Redundancy Group)

IN THIS SECTION

- [Syntax](#) | 811
- [Hierarchy Level](#) | 811
- [Description](#) | 811
- [Options](#) | 811

- Required Privilege Level | 811
- Release Information | 811

Syntax

```
feb slot-number (backup | primary);
```

Hierarchy Level

```
[edit chassis redundancy feb redundancy-group group-name]
```

Description

On M120 routers only, configure a Forwarding Engine Board (FEB) as part of a FEB redundancy group.

Options

slot-number—Slot number of the FEB. The range of values is from **0** to **5**.

backup—(Optional) For each redundancy group, you must configure exactly one backup FEB.

primary—(Optional) For each redundancy group, you can optionally configure one primary FEB.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.2.

RELATED DOCUMENTATION

[Configuring FEB Redundancy on the M120 Router](#) | 21

keepalive-time

IN THIS SECTION

- [Syntax](#) | 812
- [Hierarchy Level](#) | 812
- [Description](#) | 812
- [Default](#) | 813
- [Options](#) | 813
- [Required Privilege Level](#) | 813
- [Release Information](#) | 813

Syntax

```
keepalive-time seconds;
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

Configure the time period that must elapse before the backup router takes primary role when it detects loss of the keepalive signal.

Default

The **on-loss-of-keepalives** statement at the **[edit chassis redundancy failover]** hierarchy level must be included for failover to occur.

When the **on-loss-of-keepalives** statement is included and graceful Routing Engine switchover *is not* configured, failover occurs after 300 seconds (5 minutes).

When the **on-loss-of-keepalives** statement is included and graceful Routing Engine switchover *is* configured, the keepalive signal is automatically enabled and the failover time is set to 2 seconds (4 seconds on M20 routers). You cannot manually reset the keepalive time.

Options

seconds—Time before the backup router takes primary role when it detects loss of the keepalive signal. The range of values is 2 through 10,000.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[On Detection of a Loss of Keepalive Signal from the Primary Routing Engine | 136](#)

[failover \(Chassis\) | 805](#)

[on-loss-of-keepalives | 819](#)

keepalive-time

IN THIS SECTION

- [Syntax | 814](#)
- [Hierarchy Level | 814](#)
- [Description | 814](#)
- [Default | 814](#)
- [Options | 815](#)
- [Required Privilege Level | 815](#)
- [Release Information | 815](#)

Syntax

```
keepalive-time seconds;
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

Configure the time period that must elapse before the backup router takes primary role when it detects loss of the keepalive signal.

Default

The **on-loss-of-keepalives** statement at the **[edit chassis redundancy failover]** hierarchy level must be included for failover to occur.

When the **on-loss-of-keepalives** statement is included and graceful Routing Engine switchover *is not* configured, failover occurs after 300 seconds (5 minutes).

When the **on-loss-of-keepalives** statement is included and graceful Routing Engine switchover *is* configured, the keepalive signal is automatically enabled and the failover time is set to 2 seconds.

Options

seconds—Time before the backup router takes primary role when it detects loss of the keepalive signal. The range of values is 2 through 10,000.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

[failover \(Chassis\) | 806](#)

[graceful-switchover | 715](#)

[on-loss-of-keepalives | 821](#)

[High Availability Features for EX Series Switches Overview | 9](#)

no-auto-failover

IN THIS SECTION

- [Syntax | 816](#)
- [Hierarchy Level | 816](#)
- [Description | 816](#)
- [Default | 816](#)
- [Required Privilege Level | 816](#)
- [Release Information | 816](#)

Syntax

```
no-auto-failover;
```

Hierarchy Level

```
[edit chassis redundancy feb redundancy-group group-name]
```

Description

Disable automatic failover to a backup FEB when an active FEB in a redundancy group fails.

Default

Automatic failover is enabled by default.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Configuring FEB Redundancy on the M120 Router](#) | 21

on-disk-failure (Chassis Redundancy Failover)

IN THIS SECTION

- [Syntax | 817](#)
- [Hierarchy Level | 817](#)
- [Description | 817](#)
- [Required Privilege Level | 817](#)
- [Release Information | 817](#)

Syntax

```
on-disk-failure;
```

Hierarchy Level

```
[edit chassis redundancy failover]
```

Description

Instruct the backup router to take primary role if it detects hard disk errors on the primary Routing Engine.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [On Detection of a Hard Disk Error on the Primary Routing Engine](#) | 136

on-disk-failure

IN THIS SECTION

- [Syntax](#) | 818
- [Hierarchy Level](#) | 818
- [Description](#) | 818
- [Options](#) | 818
- [Required Privilege Level](#) | 819
- [Release Information](#) | 819

Syntax

```
on-disk-failure {  
    disk-failure-action (halt | reboot);  
}
```

Hierarchy Level

```
[edit chassis redundancy]  
[edit chassis routing-engine]
```

Description

Instruct the router to halt or reboot if it detects hard disk errors on the Routing Engine.

Options

The remaining statement is explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

[graceful-switchover | 715](#)

Enabling a Routing Engine to Reboot on Hard Disk Errors

Installing Software on an EX Series Switch with Redundant Routing Engines (CLI Procedure)

[High Availability Features for EX Series Switches Overview | 9](#)

on-loss-of-keepalives

IN THIS SECTION

- [Syntax | 819](#)
- [Hierarchy Level | 820](#)
- [Description | 820](#)
- [Default | 820](#)
- [Required Privilege Level | 820](#)
- [Release Information | 820](#)

Syntax

```
on-loss-of-keepalives;
```

Hierarchy Level

```
[edit chassis redundancy failover]
```

Description

Instruct the backup router to take primary role if it detects a loss of keepalive signal from the primary Routing Engine.

Default

The **on-loss-of-keepalives** statement must be included at the **[edit chassis redundancy failover]** hierarchy level for failover to occur.

When the **on-loss-of-keepalives** statement is included but graceful Routing Engine switchover *is not* configured, failover occurs after 300 seconds (5 minutes).

When the **on-loss-of-keepalives** statement is included and graceful Routing Engine switchover *is* configured, the keepalive signal is automatically enabled and the failover time is set to 2 seconds (4 seconds on M20 routers) . The keepalive time is not configurable.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[On Detection of a Loss of Keepalive Signal from the Primary Routing Engine | 136](#)

[keepalive-time | 812](#)

on-loss-of-keepalives

IN THIS SECTION

- [Syntax | 821](#)
- [Hierarchy Level | 821](#)
- [Description | 821](#)
- [Default | 821](#)
- [Required Privilege Level | 822](#)
- [Release Information | 822](#)

Syntax

```
on-loss-of-keepalives;
```

Hierarchy Level

```
[edit chassis redundancy failover]
```

Description

Instruct the backup router to take primary role if it detects a loss of keepalive signal from the primary Routing Engine.

Default

The **on-loss-of-keepalives** statement must be included at the **[edit chassis redundancy failover]** hierarchy level for failover to occur.

When the **on-loss-of-keepalives** statement is included but graceful Routing Engine switchover *is not* configured, failover occurs after 300 seconds (5 minutes).

When the **on-loss-of-keepalives** statement is included and graceful Routing Engine switchover *is* configured, the keepalive signal is automatically enabled and the failover time is set to 2 seconds.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

[graceful-switchover](#) | 715

[keepalive-time](#) | 814

Installing Software on an EX Series Switch with Redundant Routing Engines (CLI Procedure)

[High Availability Features for EX Series Switches Overview](#) | 9

redundancy

IN THIS SECTION

- [Syntax](#) | 822
- [Hierarchy Level](#) | 823
- [Description](#) | 823
- [Options](#) | 823
- [Required Privilege Level](#) | 823
- [Release Information](#) | 823

Syntax

```
redundancy {
  cfeb slot (always | preferred);
  failover {
```

```

    on-disk-failure;
    on-loss-of-keepalives;
    on-re-to-fpc-stale;
}
feb {
    redundancy-group group-name {
        description description;
        feb slot-number (backup | primary);
        no-auto-failover;
    }
}
graceful-switchover;
keepalive-time seconds;
routing-engine slot-number (backup | disabled | master);
sfm slot-number (always | preferred);
ssb slot-number (always | preferred);
}

```

Hierarchy Level

```
[edit chassis]
```

Description

Configure redundancy options.

Options

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

- [Configuring Routing Engine Redundancy | 134](#)
- [Configuring CFEB Redundancy on the M10i Router | 20](#)
- [Configuring FEB Redundancy on the M120 Router | 21](#)
- [Configuring SFM Redundancy on M40e and M160 Routers | 24](#)
- [Configuring SSB Redundancy on the M20 Router | 24](#)

redundancy-group

IN THIS SECTION

- [Syntax | 824](#)
- [Hierarchy Level | 824](#)
- [Description | 825](#)
- [Options | 825](#)
- [Required Privilege Level | 825](#)
- [Release Information | 825](#)

Syntax

```
redundancy-group group-name {  
    description description;  
    feb slot-number (backup | primary);  
    no-auto-failover;  
}
```

Hierarchy Level

```
[edit chassis redundancy feb]
```

Description

On M120 routers only, configure a Forwarding Engine Board (FEB) redundancy group.

Options

group-name is the unique name for the redundancy group. The maximum length is 39 alphanumeric characters.

Other statements are explained separately.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.2.

RELATED DOCUMENTATION

| [Configuring FEB Redundancy on the M120 Router](#) | 21

routing-engine (Chassis Redundancy)

IN THIS SECTION

- [Syntax](#) | 826
- [Hierarchy Level](#) | 826
- [Description](#) | 826
- [Default](#) | 826
- [Options](#) | 826
- [Required Privilege Level](#) | 826
- [Release Information](#) | 826

Syntax

```
routing-engine slot-number (backup | disabled | master);
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

Configure Routing Engine redundancy.

Default

By default, the Routing Engine in slot 0 is the primary Routing Engine and the Routing Engine in slot 1 is the backup Routing Engine.

Options

slot-number—Specify the slot number (0 or 1).

Set the function of the Routing Engine for the specified slot:

- **master**—Routing Engine in the specified slot is the primary.
- **backup**—Routing Engine in the specified slot is the backup.
- **disabled**—Routing Engine in the specified slot is disabled.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Routing Engine Redundancy | 134](#)

routing-engine

IN THIS SECTION

- [Syntax | 827](#)
- [Hierarchy Level | 827](#)
- [Description | 827](#)
- [Required Privilege Level | 828](#)
- [Release Information | 828](#)

Syntax

```
routing-engine {  
    on-disk-failure {  
        disk-failure-action (halt | reboot);  
    }  
}
```

Hierarchy Level

```
[edit chassis]
```

Description

Configure a Routing Engine to halt or reboot automatically when a hard disk error occurs. A hard disk error may cause a Routing Engine to enter a state in which it responds to local pings and interfaces remain up, but no other processes are responding. Rebooting or halting prevents this.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.2.

RELATED DOCUMENTATION

[graceful-switchover | 715](#)

Enabling a Routing Engine to Reboot on Hard Disk Errors

[High Availability Features for EX Series Switches Overview | 9](#)

sfm (Chassis Redundancy)

IN THIS SECTION

- [Syntax | 828](#)
- [Hierarchy Level | 829](#)
- [Description | 829](#)
- [Default | 829](#)
- [Options | 829](#)
- [Required Privilege Level | 829](#)
- [Release Information | 829](#)

Syntax

```
sfm slot-number (always | preferred);
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

On M40e and M160 routers, configure which Switching and Forwarding Module (SFM) is the primary and which is the backup.

Default

By default, the SFM in slot 0 is the primary and the SFM in slot 1 is the backup.

Options

slot-number—Specify which slot is the primary and which is the backup. On the M40e router, **slot-number** can be 0 or 1. On the M160 router, **slot-number** can be 0 through 3.

always—Define this SFM as the sole device.

preferred—Define this SFM as the preferred device of at least two.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Configuring SFM Redundancy on M40e and M160 Routers](#) | 24

ssb

IN THIS SECTION

- [Syntax | 830](#)
- [Hierarchy Level | 830](#)
- [Description | 830](#)
- [Default | 830](#)
- [Options | 830](#)
- [Required Privilege Level | 831](#)
- [Release Information | 831](#)

Syntax

```
ssb slot-number (always | preferred);
```

Hierarchy Level

```
[edit chassis redundancy]
```

Description

On M20 routers, configure which System and Switch Board (SSB) is the primary and which is the backup.

Default

By default, the SSB in slot 0 is the primary and the SSB in slot 1 is the backup.

Options

slot-number—Specify which slot is the primary and which is the backup.

always—Define this SSB as the sole device.

preferred—Define this SSB as the preferred device of at least two.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Configuring SSB Redundancy on the M20 Router](#) | 24

vcp-no-hold-time

IN THIS SECTION

- [Syntax](#) | 831
- [Hierarchy Level](#) | 832
- [Description](#) | 832
- [Default](#) | 833
- [Required Privilege Level](#) | 833
- [Release Information](#) | 833

Syntax

```
vcp-no-hold-time;
```


Hierarchy Level

```
[edit virtual-chassis]
```

Description

Disable the Virtual Chassis port (VCP) holddown timer for all VCPs in the Virtual Chassis or Virtual Chassis Fabric (VCF).

The VCP holddown timer is an internal mechanism that delays a Virtual Chassis reconvergence for several seconds when a VCP becomes inactive. The purpose of this delay is to provide the VCP time to return online without having to reconverge the Virtual Chassis to adjust to the inactive VCP. All traffic to the VCP is dropped while the VCP is inactive. If the VCP remains down for a time that exceeds the VCP holddown timer, a Virtual Chassis reconvergence occurs.

This statement disables the holddown timer only in an EX4300 Virtual Chassis or a mixed Virtual Chassis that contains EX4300 switches in releases in the Junos OS 13.2X50 release train. In releases after that, the **vcp-no-hold-time** option is no longer needed and has no effect because the holddown timer is replaced by a planned PFE restart for actions that affect Virtual Chassis reconvergence. Switches and releases that don't support the holddown timer might allow you to configure this statement, but the configuration posts a warning message saying the statement has no effect. The option will be deprecated in an upcoming release and will no longer appear in the CLI.

When this statement is enabled, the VCP holddown timer is disabled and the Virtual Chassis reconvergence occurs when a VCP becomes inactive. The period of time where traffic is dropped waiting for the VCP to return online is avoided.

We recommend enabling this statement after a Virtual Chassis is operational. We recommend disabling this statement when you are adding or removing member switches from your Virtual Chassis.

The VCP holddown timer cannot be viewed and is not user-configurable. You can only control whether the VCP holddown timer is enabled or disabled by configuring this statement.

NOTE: In an EX4300 Virtual Chassis running a Junos OS 13.2X50 release, you should enable the **vcp-no-hold-time** statement before performing a software upgrade using NSSU. If you do not enable the **vcp-no-hold-time** statement, the Virtual Chassis may split during the upgrade. A split Virtual Chassis can cause disruptions to your network, and you may have to manually reconfigure your Virtual Chassis after the NSSU if the split and merge feature was disabled. For more information about a split Virtual Chassis, see *Understanding Split and Merge in a Virtual Chassis*.

Default

The VCP holddown timer is enabled by default on all devices that support this statement.

Required Privilege Level

system—To view this statement in the configuration.

system-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 13.2X50-D10.

RELATED DOCUMENTATION

Understanding EX Series Virtual Chassis

Understanding QFX Series Virtual Chassis

Understanding Virtual Chassis Components

Configuration Statements: Unified ISSU

IN THIS CHAPTER

- [no-issu-timer-negotiation](#) | 834
- [traceoptions \(Protocols BFD\)](#) | 835

no-issu-timer-negotiation

IN THIS SECTION

- [Syntax](#) | 834
- [Hierarchy Level](#) | 834
- [Description](#) | 835
- [Required Privilege Level](#) | 835
- [Release Information](#) | 835

Syntax

```
no-issu-timer-negotiation;
```

Hierarchy Level

```
[edit protocols bfd],  
[edit logical-systems logical-system-name protocols bfd],  
[edit routing-instances routing-instance-name protocols bfd]
```

Description

Disable unified ISSU timer negotiation for Bidirectional Forwarding Detection (BFD) sessions.



CAUTION: The sessions might flap during unified ISSU or Routing Engine switchover, depending on the detection intervals.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.1.

RELATED DOCUMENTATION

[Managing and Tracing BFD Sessions During Unified ISSU Procedures | 591](#)

[Junos OS Routing Protocols Library for Routing Devices](#)

traceoptions (Protocols BFD)

IN THIS SECTION

- [Syntax | 836](#)
- [Hierarchy Level | 836](#)
- [Description | 836](#)
- [Default | 836](#)
- [Options | 836](#)
- [Required Privilege Level | 838](#)
- [Release Information | 838](#)

Syntax

```
traceoptions {
    file name <size size> <files number> <world-readable | no-world-readable>;
    flag flag <flag-modifier> <disable>;
}
```

Hierarchy Level

```
[edit protocols bfd]
```

Description

Define tracing operations that track unified in-service software upgrade (ISSU) functionality in the router.

To specify more than one tracing operation, include multiple **flag** statements.

Default

If you do not include this statement, no global tracing operations are performed.

Options

disable—(Optional) Disable the tracing operation. You can use this option to disable a single operation when you have defined a broad group of tracing operations, such as **all**.

file *name*—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. We recommend that you place global routing protocol tracing output in the file **routing-log**.

files *number*—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Range:** 2 through 1000 files
- **Default:** 2 files

If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

flag *flag*—Tracing operation to perform. The tracing options are as follows:

- **adjacency**—Trace adjacency messages.
- **all**—Trace everything.
- **error**—Trace all errors.
- **events**—Trace all events.
- **issu**—Trace ISSU packet activity.
- **nsr-packet**—Trace packet activity of NSR.
- **nsr-synchronization**—Trace NSR synchronization events.
- **packet**—Trace all packets.
- **pipe**—Trace pipe messages.
- **pipe-detail**—Trace pipe messages in detail.
- **ppm-packet**—Trace packet activity by periodic packet management.
- **state**—Trace state transitions.
- **timer**—Trace timer processing.

no-world-readable—Restrict users from reading the log file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes (KB), megabytes (MB), or gigabytes (GB). When a trace file named *trace-file* reaches this size, it is renamed *trace-file.0*. When the *trace-file* again reaches its maximum size, *trace-file.0* is renamed *trace-file.1* and *trace-file* is renamed *trace-file.0*. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB
- **Range:** 10 KB through the maximum file size supported on your system
- **Default:** 128 KB

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

world-readable—Allow users to read the log file.

Required Privilege Level

routing and trace—To view this statement in the configuration.

routing-control and trace-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

issu flag for BFD added in Junos OS Release 9.1.

RELATED DOCUMENTATION

| [Managing and Tracing BFD Sessions During Unified ISSU Procedures](#) | 591

Configuration Statements: VRRP

IN THIS CHAPTER

- [accept-data | 840](#)
- [advertise-interval | 842](#)
- [asymmetric-hold-time | 844](#)
- [asymmetric-hold-time | 845](#)
- [authentication-key | 846](#)
- [authentication-type | 848](#)
- [bandwidth-threshold | 850](#)
- [delegate-processing \(VRRP\) | 852](#)
- [failover-delay | 853](#)
- [failover-delay | 855](#)
- [fast-interval | 856](#)
- [global-advertisements-threshold | 858](#)
- [hold-time \(VRRP\) | 860](#)
- [hold-time | 861](#)
- [inherit-advertisement-interval | 863](#)
- [inet6-advertise-interval | 864](#)
- [inet6-advertise-interval | 866](#)
- [interface | 867](#)
- [preempt \(VRRP\) | 869](#)
- [preempt | 870](#)
- [priority \(Protocols VRRP\) | 872](#)
- [priority | 874](#)
- [priority-cost \(VRRP\) | 875](#)
- [priority-hold-time | 877](#)
- [route \(Interfaces\) | 879](#)
- [skew-timer-disable | 880](#)

- [startup-silent-period | 882](#)
- [traceoptions \(Protocols VRRP\) | 883](#)
- [traceoptions | 886](#)
- [track \(VRRP\) | 889](#)
- [version-3 | 890](#)
- [virtual-address | 892](#)
- [virtual-inet6-address | 893](#)
- [virtual-inet6-address | 895](#)
- [virtual-link-local-address | 896](#)
- [virtual-link-local-address | 898](#)
- [vrrp-group | 899](#)
- [vrrp-inet6-group | 901](#)
- [vrrp-inet6-group | 904](#)
- [vrrp-inherit-from | 905](#)

accept-data

IN THIS SECTION

- [Syntax | 840](#)
- [Hierarchy Level | 841](#)
- [Description | 841](#)
- [Default | 841](#)
- [Required Privilege Level | 841](#)
- [Release Information | 842](#)

Syntax

```
(accept-data | no-accept-data);
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

In a Virtual Router Redundancy Protocol (VRRP) configuration, determine whether or not a router that is acting as the primary router accepts all packets destined for the virtual IP address.

- **accept-data**—Enable the primary router to accept all packets destined for the virtual IP address.
- **no-accept-data**—Prevent the primary router from accepting packets other than the ARP packets destined for the virtual IP address.

Default

If the router acting as the primary router is the IP address owner or has its priority set to 255, the primary router, by default, responds to all packets sent to the virtual IP address. However, if the router acting as the primary router does not own the IP address or has its priority set to a value less than 255, the primary router responds only to ARP requests.

NOTE:

- If you want to restrict the incoming IP packets to ICMP packets only, you must configure firewall filters to accept only ICMP packets.
- If you include the **accept-data** statement, your routing platform configuration does not comply with RFC 3768 (see section 6.4.3 of RFC 3768, *Virtual Router Redundancy Protocol (VRRP)*).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring an Interface to Accept All Packets Destined for the Virtual IP Address of a VRRP Group | 475](#)

advertise-interval

IN THIS SECTION

- [Syntax | 842](#)
- [Hierarchy Level | 842](#)
- [Description | 843](#)
- [Options | 843](#)
- [Required Privilege Level | 843](#)
- [Release Information | 843](#)

Syntax

```
advertise-interval seconds;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id]
```

Description

Configure the interval between Virtual Router Redundancy Protocol (VRRP) IPv4 advertisement packets.

All routers in the VRRP group must use the same advertisement interval.

NOTE: When VRRPv3 is enabled, the **advertise-interval** statement cannot be used to configure advertisement intervals. Instead, use the **fast-interval** statement to configure advertisement intervals.

Options

seconds—Interval between advertisement packets.

- **Range:** 1 through 255 seconds
- **Default:** 1 second

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)

[fast-interval | 856](#)

[inet6-advertise-interval | 864](#)

[version-3 | 890](#)

asymmetric-hold-time

IN THIS SECTION

- [Syntax | 844](#)
- [Hierarchy Level | 844](#)
- [Description | 844](#)
- [Default | 844](#)
- [Required Privilege Level | 844](#)
- [Release Information | 845](#)

Syntax

```
asymmetric-hold-time;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Enable the VRRP primary router to switch over to the backup router immediately, without waiting for the priority hold time to expire, when a tracked route or interface goes down. When the route or interface comes back online, the original primary router that is now acting as the backup router waits for the priority hold time to expire before it reasserts primary role.

Default

asymmetric-hold-time is disabled.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.5.

RELATED DOCUMENTATION

| [Configuring the Asymmetric Hold Time for VRRP Routers](#) | 456

asymmetric-hold-time

IN THIS SECTION

- [Syntax](#) | 845
- [Hierarchy Level](#) | 845
- [Description](#) | 846
- [Default](#) | 846
- [Required Privilege Level](#) | 846
- [Release Information](#) | 846

Syntax

```
asymmetric-hold-time;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Configure a VRRP primary to fail over to a backup immediately—without waiting for the priority hold time to expire—when a tracked route goes down. Otherwise, the primary waits for the hold time to expire before it initiates a failover when a tracked interface or route goes down.

When the tracked interface or route comes up again, the new backup (original primary) router waits for the priority hold time to expire before it reasserts primary role.

Default

asymmetric-hold-time is disabled.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS 11.3.

RELATED DOCUMENTATION

| [Configuring VRRP Preemption and Hold Time](#) | 448

authentication-key

IN THIS SECTION

- [Syntax](#) | 847
- [Hierarchy Level](#) | 847
- [Description](#) | 847
- [Options](#) | 847
- [Required Privilege Level](#) | 847

Syntax

```
authentication-key key;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet  
address address vrrp-group group-id],  
[edit logical-systems logical-system-name interfaces interface-name unit logical-  
unit-number family inet address address vrrp-group group-id]
```

Description

Configure a Virtual Router Redundancy Protocol (VRRP) IPv4 authentication key. You also must specify a VRRP authentication scheme by including the **authentication-type** statement.

All devices in the VRRP group must use the same authentication scheme and password.

NOTE: When VRRPv3 is enabled, the **authentication-type** and **authentication-key** statements cannot be configured for any VRRP groups.

Options

key—Authentication password. For simple authentication, it can be 1 through 8 characters long. For Message Digest 5 (MD5) authentication, it can be 1 through 16 characters long. If you include spaces, enclose all characters in quotation marks (" ").

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring VRRP Authentication \(IPv4 Only\)](#)

[authentication-type](#) | [848](#)

[version-3](#)

Understanding VRRP on SRX Series Devices

Example: Configuring VRRP/VRRPv3 on Chassis Cluster Redundant Ethernet Interfaces

authentication-type

IN THIS SECTION

- [Syntax](#) | [848](#)
- [Hierarchy Level](#) | [848](#)
- [Description](#) | [849](#)
- [Options](#) | [849](#)
- [Required Privilege Level](#) | [849](#)
- [Release Information](#) | [849](#)

Syntax

```
authentication-type (md5 | simple);
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet  
address address vrrp-group group-id],
```

```
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id]
```

Description

Enable Virtual Router Redundancy Protocol (VRRP) IPv4 authentication and specify the authentication scheme for the VRRP group. If you enable authentication, you must specify a password by including the **authentication-key** statement. The specific type of authentication used by OSPF is encoded in this field.

All devices in the VRRP group must use the same authentication scheme and password.

NOTE: When VRRPv3 is enabled, the **authentication-type** and **authentication-key** statements cannot be configured for any VRRP groups.

Options

authentication

Authentication scheme:

- **simple** Use a simple password. The password is included in the transmitted packet, so this method of authentication is relatively insecure.
- **md5** Use the MD5 algorithm to create an encoded checksum of the packet. The encoded checksum is included in the transmitted packet. The receiving routing platform uses the authentication key to verify the packet, discarding it if the digest does not match. This algorithm provides a more secure authentication scheme.
- **Default:** none (no authentication is performed).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring VRRP Authentication \(IPv4 Only\)](#)

[authentication-key](#) | [846](#)

[version-3](#)

Understanding VRRP on SRX Series Devices

Example: Configuring VRRP/VRRPv3 on Chassis Cluster Redundant Ethernet Interfaces

bandwidth-threshold

IN THIS SECTION

- [Syntax](#) | [850](#)
- [Hierarchy Level](#) | [850](#)
- [Description](#) | [851](#)
- [Options](#) | [851](#)
- [Required Privilege Level](#) | [851](#)
- [Release Information](#) | [851](#)

Syntax

```
bandwidth-threshold bits-per-second priority-cost priority;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id track interface interface-name],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id track interface interface-name],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id track
interface interface-name],
[edit logical-systems logical-system-name interfaces interface-name
```

```
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id
track interface interface-name]
```

Description

Specify the bandwidth threshold for Virtual Router Redundancy Protocol (VRRP) logical interface tracking.

Options

bits-per-second—Bandwidth threshold for the tracked interface. When the bandwidth of the tracked interface drops below the specified value, the VRRP group uses the bandwidth threshold priority cost value. You can include up to five bandwidth threshold statements for each interface you track.

- **Range:** 1 through 10000000000000 bits per second

priority-cost ***priority***—The value subtracted from the configured VRRP priority when the tracked interface or route is down to force a new primary router election. The sum of all the costs for all interfaces or routes that are tracked must be less than or equal to the configured priority of the VRRP group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.1.

RELATED DOCUMENTATION

| [Configuring a Logical Interface to Be Tracked for a VRRP Group](#) | 459

delegate-processing (VRRP)

IN THIS SECTION

- [Syntax | 852](#)
- [Hierarchy Level | 852](#)
- [Description | 852](#)
- [Options | 853](#)
- [Required Privilege Level | 853](#)
- [Release Information | 853](#)

Syntax

```
delegate-processing {  
    ae-irb;  
}
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Configure the distributed periodic packet management process (ppmd) to send Virtual Router Redundancy Protocol (VRRP) advertisements .

Using a hash logic based on iflIndex, the vrrp group ID, and the IP version, select one of the Flexible OIC Concentrators (FPCs) for distribution. The selected FPC is called the *anchor FPC*. All transmit instances and receive instances are from and to the anchor FPC. The anchor FPC is static, and VRRP is not guaranteed to get distributed to all available FPCs uniformly for all VRRP sessions.

Options

ae-irb Enable distributed pppd for VRRP over aggregated Ethernet and integrated routing and bridging (IRB) interfaces.

Using the **ae-irb** option is only for MPC line cards. **ae-irb** is not supported on small MX Series routing devices with built-in MPCs such as the MX104 and below. Using the **ae-irb** option requires use of the **enhanced-ip** mode.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.6.

ae-irb option introduced in Junos OS Release 15.1.

RELATED DOCUMENTATION

[Enabling the Distributed Periodic Packet Management Process for VRRP | 478](#)

failover-delay

IN THIS SECTION

- [Syntax | 854](#)
- [Hierarchy Level | 854](#)
- [Description | 854](#)
- [Options | 854](#)
- [Required Privilege Level | 854](#)
- [Release Information | 854](#)

Syntax

```
failover-delay milliseconds;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

If you configure multiple VRRP groups on an interface (using multiple VLANs), traffic for some of the groups might be briefly dropped if a failover occurs. This can happen because the new primary must send gratuitous ARP replies for each VRRP group to update the ARP tables in the connected devices, and there is a short delay between each gratuitous ARP reply. Traffic sent by devices that have not yet received the gratuitous ARP reply is dropped (until the device receives the reply and learns the MAC address of the new primary).

If you configure a failover delay, the new primary delays sending gratuitous ARP replies for the period that you set. This allows the new primary to send the ARP replies for all of the VRRP groups simultaneously.

Options

milliseconds—Specify the failover delay time, in milliseconds.

- **Range:** 50 through 2000

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 11.3.

RELATED DOCUMENTATION

[Troubleshooting VRRP | 492](#)

[show vrrp](#)

failover-delay

IN THIS SECTION

- [Syntax | 855](#)
- [Hierarchy Level | 855](#)
- [Description | 855](#)
- [Options | 855](#)
- [Required Privilege Level | 856](#)
- [Release Information | 856](#)

Syntax

```
failover-delay milliseconds;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Configure the failover delay for VRRP and VRRP for IPv6 operations.

Options

milliseconds—Specify the failover delay time, in milliseconds.

- **Range:** 50 through 2000

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.4.

RELATED DOCUMENTATION

[Configuring VRRP and VRRP for IPv6 | 434](#)

fast-interval

IN THIS SECTION

- [Syntax | 856](#)
- [Hierarchy Level | 857](#)
- [Description | 857](#)
- [Options | 857](#)
- [Required Privilege Level | 857](#)
- [Release Information | 857](#)

Syntax

```
fast-interval milliseconds;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

Configure the interval, in milliseconds, between Virtual Router Redundancy Protocol (VRRP) advertisement packets.

All routers in the VRRP group must use the same advertisement interval.

Options

milliseconds—Interval between advertisement packets.

- **Range:** 10 through 40,950 milliseconds (range extended from 100–999 to 10–40,950 in Junos OS Release 12.2).

NOTE: When configuring VRRP for IPv4, if you have chosen not to enable VRRPv3, you cannot set a value less than 100 for **fast-interval**. Commit check fails if a value less than 100 is configured.

- **Default:** 1 second

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)

[advertise-interval | 842](#)

[advertise-interval | 842](#)

[inet6-advertise-interval | 864](#)

[version-3 | 890](#)

global-advertisements-threshold

IN THIS SECTION

- [Syntax | 858](#)
- [Hierarchy Level | 858](#)
- [Description | 858](#)
- [Options | 859](#)
- [Required Privilege Level | 859](#)
- [Release Information | 859](#)

Syntax

```
global-advertisements-threshold advertisement-value;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Configure the number of fast advertisements that can be missed by a backup router before the primary router is declared as down.

NOTE:

- The advertisement value configured using the **global-advertisements-threshold** statement is applicable to all the Virtual Router Redundancy Protocol (VRRP) groups in the system.
- Setting the advertisement value of the **global-advertisements-threshold** configuration to **1** is not recommended for a scaled configuration with an aggressive advertisement interval. For example, if you have 1000 VRRP groups with an advertisement interval of 100 ms, then do not set the **global-advertisements-threshold** value to 1.
- Changing the advertisement value of the **global-advertisements-threshold** configuration during runtime can result in unpredictable behavior by the VRRP state machine. For example, momentary ownership change from the primary router to the backup router and vice versa. Therefore, avoid changing the advertisement value of the **global-advertisements-threshold** statement during runtime.

Options

advertisement-value—Number of VRRP advertisements missed before the primary router is declared as down.

- **Range:** 1 through 15
- **Default:** 3

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 12.2.

RELATED DOCUMENTATION

[Improving the Convergence Time for VRRP | 479](#)

[Configuring VRRP to Improve Convergence Time | 481](#)

hold-time (VRRP)

IN THIS SECTION

- [Syntax | 860](#)
- [Hierarchy Level | 860](#)
- [Description | 860](#)
- [Default | 861](#)
- [Options | 861](#)
- [Required Privilege Level | 861](#)
- [Release Information | 861](#)

Syntax

```
hold-time seconds;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id preempt],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id preempt],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id preempt],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id
preempt]
```

Description

In a Virtual Router Redundancy Protocol (VRRP) configuration, set the hold time before a higher-priority backup router preempts the primary router.

Default

VRRP preemption is not timed.

Options

seconds—Hold-time period.

- **Range:** 0 through 3600 seconds
- **Default:** 0 seconds (VRRP preemption is not timed.)

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring a Backup Router to Preempt the VRRP Primary Router | 453](#)

[Configuring VRRP Preemption and Hold Time | 448](#)

hold-time

IN THIS SECTION

- [Syntax | 862](#)
- [Hierarchy Level | 862](#)
- [Description | 862](#)
- [Options | 862](#)
- [Required Privilege Level | 862](#)

Syntax

```
hold-time seconds;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6 address  
address vrrp-inet6-group group-id preempt]
```

Description

Configure the time in seconds after which a backup router with the highest priority preempts the primary router.

Options

seconds—Hold-time period.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.0.

RELATED DOCUMENTATION

| [Configuring VRRP for IPv6 \(CLI Procedure\)](#) | 436

inherit-advertisement-interval

IN THIS SECTION

- [Syntax | 863](#)
- [Hierarchy Level | 863](#)
- [Description | 863](#)
- [Options | 863](#)
- [Required Privilege Level | 864](#)
- [Release Information | 864](#)

Syntax

```
inherit-advertisement-interval seconds;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Set the time interval for advertisement for inherit sessions.

Options

inherit-advertisement-interval *seconds*

Time interval for inherit sessions advertisements in seconds. The default value is the recommended value.

- **Default:** 120
- **Range:** 5 to 120

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 14.2R3.

inet6-advertise-interval

IN THIS SECTION

- [Syntax | 864](#)
- [Hierarchy Level | 864](#)
- [Description | 865](#)
- [Options | 865](#)
- [Required Privilege Level | 865](#)
- [Release Information | 865](#)

Syntax

```
inet6-advertise-interval milliseconds;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

Configure the interval between Virtual Router Redundancy Protocol (VRRP) IPv6 advertisement packets.

All routers in the VRRP group must use the same advertisement interval.

NOTE: When VRRPv3 is enabled, the **inet6-advertise-interval** statement cannot be used to configure advertisement intervals. Instead, use the **fast-interval** statement to configure advertisement intervals.

Options

milliseconds—Interval, in milliseconds, between advertisement packets.

- **Range:** 100 to 40,000 milliseconds (ms)
- **Default:** 1 second

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.4R2.

RELATED DOCUMENTATION

[Configuring the Advertisement Interval for the VRRP Primary Router | 449](#)

[advertise-interval | 842](#)

[fast-interval | 856](#)

[version-3 | 890](#)

inet6-advertise-interval

IN THIS SECTION

- [Syntax | 866](#)
- [Hierarchy Level | 866](#)
- [Description | 866](#)
- [Options | 866](#)
- [Required Privilege Level | 867](#)
- [Release Information | 867](#)

Syntax

```
inet6-advertise-interval milliseconds;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6 address  
address vrrp-inet6-group group-id]
```

Description

Configure the interval between Virtual Router Redundancy Protocol (VRRP) IPv6 advertisement packets.

Options

milliseconds—Interval, in milliseconds, between advertisement packets.

- **Range:** 100 to 40,000 ms
- **Default:** 1 second

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.0.

RELATED DOCUMENTATION

| [Configuring VRRP for IPv6 \(CLI Procedure\)](#) | 436

interface

IN THIS SECTION

- [Syntax](#) | 867
- [Hierarchy Level](#) | 868
- [Description](#) | 868
- [Options](#) | 868
- [Required Privilege Level](#) | 868
- [Release Information](#) | 868

Syntax

```
interface interface-name {  
    bandwidth-threshold bits-per-second priority-cost priority;  
    priority-cost priority;  
}
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id track],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id track],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id track],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id
track]
```

Description

Enable logical interface tracking for a Virtual Router Redundancy Protocol (VRRP) group.

Options

interface-name—Interface to be tracked for this VRRP group.

- **Range:** 1 through 10 interfaces

The remaining statements are described separately.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

bandwidth-threshold statement added in Junos OS Release 8.1.

RELATED DOCUMENTATION

[Configuring a Logical Interface to Be Tracked for a VRRP Group | 459](#)

[Junos OS Services Interfaces Library for Routing Devices](#)

preempt (VRRP)

IN THIS SECTION

- [Syntax | 869](#)
- [Hierarchy Level | 869](#)
- [Description | 869](#)
- [Default | 870](#)
- [Required Privilege Level | 870](#)
- [Release Information | 870](#)

Syntax

```
(preempt | no-preempt) {
    hold-time seconds;
}
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

In a Virtual Router Redundancy Protocol (VRRP) configuration, determine whether or not a backup router can preempt a primary router:

- **preempt**—Allow the primary router to be preempted.

NOTE: By default, a higher-priority backup router can preempt a lower-priority primary router.

- **no-preempt**—Prohibit the preemption of the primary router. When **no-preempt** is configured, the backup router cannot preempt the primary router even if the backup router has a higher priority.

The remaining statement is explained separately. See [CLI Explorer](#).

Default

By default the **preempt** statement is enabled, and a higher-priority backup router preempts a lower-priority primary router even if the **preempt** statement is not explicitly configured.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring a Backup Router to Preempt the VRRP Primary Router | 453](#)

[Configuring VRRP Preemption and Hold Time | 448](#)

preempt

IN THIS SECTION

- [Syntax | 871](#)
- [Hierarchy Level | 871](#)
- [Description | 871](#)

- Required Privilege Level | 871
- Release Information | 871

Syntax

```
(preempt | no-preempt) {  
    hold-time seconds;  
}
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6 address  
address vrrp-inet6-group group-id]
```

Description

Configure whether a backup router can preempt a primary router:

- **preempt**—Allow the primary router to be preempted.
- **no-preempt**—Prohibit the preemption of the primary router.

The remaining statement is explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.0.

RELATED DOCUMENTATION

[Configuring VRRP for IPv6 \(CLI Procedure\)](#) | 436

priority (Protocols VRRP)

IN THIS SECTION

- [Syntax](#) | 872
- [Hierarchy Level](#) | 872
- [Description](#) | 873
- [Options](#) | 873
- [Required Privilege Level](#) | 873
- [Release Information](#) | 873

Syntax

```
priority priority;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet  
address address vrrp-group group-id],  
[edit interfaces interface-name unit logical-unit-number family inet6  
address address vrrp-inet6-group group-id],  
[edit logical-systems logical-system-name interfaces interface-name unit logical-  
unit-number family inet address address vrrp-group group-id],  
[edit logical-systems logical-system-name interfaces interface-name  
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

Configure a Virtual Router Redundancy Protocol (VRRP) device's priority for becoming the primary default device. The device with the highest priority within the group becomes the primary. VRRP is designed to eliminate the single point of failure inherent in the static default routed environment. VRRP specifies an election protocol that dynamically assigns responsibility for a virtual router to one of the VRRP routers on a LAN. The VRRP router controlling the IP address(es) associated with a virtual router is called the Primary, and forwards packets sent to these IP addresses. The election process provides dynamic fail-over in the forwarding responsibility when the Primary become unavailable. Any of the virtual router's IP addresses on a LAN can then be used as the default first hop router by end-hosts. The advantage gained from using VRRP is a higher availability default path without requiring configuration of dynamic routing or router discovery protocols on every end-host.

Options

priority Device's priority for being elected to be the primary device in the VRRP group. A larger value indicates a higher priority for being elected.

- **Range:** 0 through 255
- **Default:** 100. If two or more devices have the highest priority in the VRRP group, the device with the VRRP interface that has the highest IP address becomes the primary, and the others serve as backups.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Basic VRRP Support](#)

Understanding VRRP on SRX Series Devices

Example: Configuring VRRP/VRRPv3 on Chassis Cluster Redundant Ethernet Interfaces

priority

IN THIS SECTION

- [Syntax | 874](#)
- [Hierarchy Level | 874](#)
- [Description | 874](#)
- [Options | 874](#)
- [Required Privilege Level | 875](#)
- [Release Information | 875](#)

Syntax

```
priority number;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet address  
address vrp-group group-id],  
[edit interfaces interface-name unit logical-unit-number family inet6 address  
address vrp-inet6-group group-id]
```

Description

Configure a switch's priority for becoming the primary default routing platform. The routing platform with the highest priority within the group becomes the primary.

Options

number—Routing platform's priority for being elected to be the primary router in the VRRP group. A larger value indicates a higher priority for being elected.

- **Range:** 1 through 255

- **Default:** 100 (for backup routers)

NOTE: Priority 255 cannot be assigned to routed VLAN interfaces (RVIs).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.0.

RELATED DOCUMENTATION

| [Configuring VRRP for IPv6 \(CLI Procedure\)](#) | 436

priority-cost (VRRP)

IN THIS SECTION

- [Syntax](#) | 876
- [Hierarchy Level](#) | 876
- [Description](#) | 876
- [Options](#) | 876
- [Required Privilege Level](#) | 876
- [Release Information](#) | 876

Syntax

```
priority-cost priority;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id track interface interface-name],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id track interface interface-name],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id track
interface interface-name],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id
track interface interface-name]
```

Description

Configure a Virtual Router Redundancy Protocol (VRRP) router's priority cost for becoming the primary default router. The router with the highest priority within the group becomes the primary.

Options

priority—The value subtracted from the configured VRRP priority when the tracked interface or route is down to force a new primary router election. The sum of all the costs for all interfaces or routes that are tracked must be less than or equal to the configured priority of the VRRP group.

- **Range:** 1 through 254

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

Statement introduced in Junos OS Release 12.2 for ACX2000 Universal Metro Routers.

RELATED DOCUMENTATION

[Configuring a Logical Interface to Be Tracked for a VRRP Group](#) | 459

priority-hold-time

IN THIS SECTION

- [Syntax](#) | 877
- [Hierarchy Level](#) | 877
- [Description](#) | 878
- [Options](#) | 878
- [Required Privilege Level](#) | 878
- [Release Information](#) | 878

Syntax

```
priority-hold-time seconds;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id track],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id track],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id track],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id
track]
```

Description

Configure a Virtual Router Redundancy Protocol (VRRP) router's priority hold time to define the minimum length of time that must elapse between dynamic priority changes. If the dynamic priority changes because of a tracking event, the priority hold timer begins running. If another tracking event or manual configuration change occurs while the timer is running, the new dynamic priority update is postponed until the timer expires.

NOTE: When the track feature is configured, and if VRRP should pre-empt due to the tracking interface or route transition, any configured pre-empt hold time will be ignored. VRRP primary will pre-empt according to the configuration of the priority-hold time.

Options

seconds—Minimum length of time that must elapse between dynamic priority changes.

- **Range:** 0 through 3600 seconds

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.1.

RELATED DOCUMENTATION

| [Configuring a Logical Interface to Be Tracked for a VRRP Group](#) | 459

route (Interfaces)

IN THIS SECTION

- [Syntax | 879](#)
- [Hierarchy Level | 879](#)
- [Description | 879](#)
- [Options | 879](#)
- [Required Privilege Level | 880](#)
- [Release Information | 880](#)

Syntax

```
route prefix routing-instance instance-name priority-cost priority;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id track],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id track],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id track],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id
track]
```

Description

Enable route tracking for a Virtual Router Redundancy Protocol (VRRP) group.

Options

prefix—Route to be tracked for this VRRP group.

priority-cost *priority*—The value subtracted from the configured VRRP priority when the tracked interface or route is down, forcing a new primary router election. The sum of all the costs for all interfaces or routes that are tracked must be less than or equal to the configured priority of the VRRP group.

routing-instance *instance-name*—Routing instance in which the route is to be tracked. If the route is in the default, or global, routing instance, the value for *instance-name* must be **default**.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 9.0.

RELATED DOCUMENTATION

| [Configuring a Route to Be Tracked for a VRRP Group](#) | 462

skew-timer-disable

IN THIS SECTION

- [Syntax](#) | 881
- [Hierarchy Level](#) | 881
- [Description](#) | 881
- [Default](#) | 881
- [Required Privilege Level](#) | 881
- [Release Information](#) | 881

Syntax

```
skew-timer-disable;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Disable the skew timer, thereby reducing the time required to transition from the backup state to the primary state.

NOTE: The **skew-timer-disable** statement is used when there is only one primary router and one backup router in the network.

Default

By default, the skew timer is enabled for all the VRRP groups.

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 12.2.

RELATED DOCUMENTATION

[Improving the Convergence Time for VRRP | 479](#)

[Configuring VRRP to Improve Convergence Time | 481](#)

startup-silent-period

IN THIS SECTION

- [Syntax | 882](#)
- [Hierarchy Level | 882](#)
- [Description | 882](#)
- [Options | 882](#)
- [Required Privilege Level | 883](#)
- [Release Information | 883](#)

Syntax

```
startup-silent-period seconds;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Instruct the system to ignore the Primary Down Event when an interface transitions from the down state to the up state. This statement is used to avoid incorrect error alarms caused by the delay or interruption of incoming Virtual Router Redundancy Protocol (VRRP) advertisement packets during the interface startup phase.

Options

seconds—Number of seconds for the startup period.

- **Default:** 4 seconds
- **Range:** 1 through 2000 seconds

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring the Startup Period for VRRP Operations | 452](#)

traceoptions (Protocols VRRP)

IN THIS SECTION

- [Syntax | 883](#)
- [Hierarchy Level | 884](#)
- [Description | 884](#)
- [Default | 884](#)
- [Options | 884](#)
- [Required Privilege Level | 885](#)
- [Release Information | 885](#)

Syntax

```
traceoptions {  
    file filename <files number> <match regular-expression> <microsecond-stamp>  
    <size size> <world-readable | no-world-readable>;  
    flag flag;
```

```
no-remote-trace;
}
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Define tracing operations for the Virtual Router Redundancy Protocol (VRRP) process.

To specify more than one tracing operation, include multiple **flag** statements.

By default, VRRP logs the error, dcd configuration, and routing socket events in a file in the directory **/var/log**.

Default

If you do not include this statement, no VRRP-specific tracing operations are performed.

Options

file *filename*—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. By default, VRRP tracing output is placed in the file **vrrpd**.

files *number*—(Optional) Maximum number of trace files. When a trace file named ***trace-file*** reaches its maximum size, it is renamed ***trace-file.0***, then ***trace-file.1***, and so on, until the maximum number of trace files is reached. When the maximum number is reached, the oldest trace file is overwritten.

- **Range:** 0 through 4,294,967,296 files
- **Default:** 3 files

If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

flag *flag*—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. These are the VRRP-specific tracing options:

- **all**—All VRRP tracing operations
- **database**—Database changes

- **general**—General events
- **interfaces**—Interface changes
- **normal**—Normal events
- **packets**—Packets sent and received
- **state**—State transitions
- **timer**—Timer events

match *regular-expression*—(Optional) Refine the output to include only those lines that match the given regular expression.

microsecond-stamp—(Optional) Provide a timestamp with microsecond granularity.

no-world-readable—(Optional) Restrict users from reading the log file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes, megabytes, or gigabytes. When a trace file named *trace-file* reaches this size, it is renamed *trace-file.0*. When the *trace-file* again reaches its maximum size, *trace-file.0* is renamed *trace-file.1* and *trace-file* is renamed *trace-file.0*. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB
- **Range:** 10 KB through the maximum file size supported on your routing platform
- **Default:** 1 MB

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

world-readable—(Optional) Allow users to read the log file.

Required Privilege Level

trace—To view this statement in the configuration.

trace-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Tracing VRRP Operations](#) | 483

traceoptions

IN THIS SECTION

- [Syntax](#) | 886
- [Hierarchy Level](#) | 886
- [Description](#) | 886
- [Default](#) | 887
- [Options](#) | 887
- [Required Privilege Level](#) | 888
- [Release Information](#) | 888

Syntax

```
traceoptions {  
    file <filename> <files number> <match regular-expression> <microsecond-  
stamp> <size size> <world-readable | no-world-readable>;  
    flag flag;  
    no-remote-trace;  
}
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Define tracing operations for the Virtual Router Redundancy Protocol (VRRP) process.

To specify more than one tracing operation, include multiple **flag** statements.

By default, VRRP logs the error, dcd configuration, and routing socket events in a file in the directory **/var/log**.

NOTE: The **traceoptions** statement is not supported on a QFabric system.

Default

If you do not include this statement, no VRRP-specific tracing operations are performed.

Options

filename *filename*—Name of the file to receive the output of the tracing operation. Enclose the name within quotation marks. All files are placed in the directory **/var/log**. By default, VRRP tracing output is placed in the file **vrrpd**.

files *number*—(Optional) Maximum number of trace files. When a trace file named *trace-file* reaches its maximum size, it is renamed *trace-file.0*, then *trace-file.1*, and so on, until the maximum number of trace files is reached. When the maximum number is reached, the oldest trace file is overwritten.

- **Range:** 0 through 4,294,967,296 files
- **Default:** 3 files

If you specify a maximum number of files, you also must specify a maximum file size with the **size** option.

flag *flag*—Tracing operation to perform. To specify more than one tracing operation, include multiple **flag** statements. These are the VRRP-specific tracing options:

- **all**—All VRRP tracing operations
- **database**—Database changes
- **general**—General events
- **interfaces**—Interface changes
- **normal**—Normal events
- **packets**—Packets sent and received
- **state**—State transitions

- **timer**—Timer events

match *regex*—(Optional) Refine the output to include only those lines that match the given regular expression.

microsecond-stamp—(Optional) Provide a timestamp with microsecond granularity.

no-world-readable—Restrict users from reading the log file.

size *size*—(Optional) Maximum size of each trace file, in kilobytes, megabytes, or gigabytes. When a trace file named *trace-file* reaches this size, it is renamed *trace-file.0*. When the *trace-file* again reaches its maximum size, *trace-file.0* is renamed *trace-file.1* and *trace-file* is renamed *trace-file.0*. This renaming scheme continues until the maximum number of trace files is reached. Then the oldest trace file is overwritten.

- **Syntax:** *xk* to specify KB, *xm* to specify MB, or *xg* to specify GB
- **Range:** 10 KB through the maximum file size supported on your routing platform
- **Default:** 1 MB

If you specify a maximum file size, you also must specify a maximum number of trace files with the **files** option.

world-readable—Allow users to read the log file.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 11.3.

RELATED DOCUMENTATION

| [Tracing VRRP Operations](#) | 483

track (VRRP)

IN THIS SECTION

- [Syntax | 889](#)
- [Hierarchy Level | 889](#)
- [Description | 890](#)
- [Options | 890](#)
- [Required Privilege Level | 890](#)
- [Release Information | 890](#)

Syntax

```
track {
    interface interface-name {
        bandwidth-threshold bits-per-second priority-cost priority;
        priority-cost priority;
    }
    priority-hold-time seconds;
    route prefix/prefix-length routing-instance instance-name priority-cost
priority;
}
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet
address address vrrp-group group-id],
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address vrrp-group group-id],
[edit logical-systems logical-system-name interfaces interface-name
unit logical-unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

Enable logical interface tracking, route tracking, or both, for a Virtual Router Redundancy Protocol (VRRP) group.

Options

The remaining statements are described separately.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

priority-hold-time statement added in Junos OS Release 8.1.

route statement added in Junos OS Release 9.0.

RELATED DOCUMENTATION

[Configuring a Logical Interface to Be Tracked for a VRRP Group | 459](#)

[Configuring a Route to Be Tracked for a VRRP Group | 462](#)

version-3

IN THIS SECTION

- [Syntax | 891](#)
- [Hierarchy Level | 891](#)
- [Description | 891](#)
- [Default | 891](#)

- Required Privilege Level | 891
- Release Information | 892

Syntax

```
version-3;
```

Hierarchy Level

```
[edit protocols vrrp]
```

Description

Enable Virtual Router Redundancy Protocol version 3 (VRRPv3).

NOTE:

- Even though the **version-3** statement can be configured only at the **[edit protocols vrrp]** hierarchy level, VRRPv3 is enabled on all the configured logical systems as well.
- When enabling VRRPv3, you must ensure that VRRPv3 is enabled on all the VRRP routers in the network. This is because VRRPv3 does not interoperate with the previous versions of VRRP.

Default

Required Privilege Level

routing—To view this statement in the configuration.

routing-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 12.2.

RELATED DOCUMENTATION

| [Junos OS Support for VRRPv3](#) | [414](#)

virtual-address

IN THIS SECTION

- [Syntax](#) | [892](#)
- [Hierarchy Level](#) | [892](#)
- [Description](#) | [893](#)
- [Options](#) | [893](#)
- [Required Privilege Level](#) | [893](#)
- [Release Information](#) | [893](#)

Syntax

```
virtual-address [ addresses ];
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet  
address address vrrp-group group-id],  
[edit logical-systems logical-system-name interfaces interface-name unit logical-  
unit-number family inet address address vrrp-group group-id]
```

Description

Configure the addresses of the devices in a Virtual Router Redundancy Protocol (VRRP) IPv4 or IPv6 group. You can configure up to eight addresses.

Options

addresses Addresses of one or more devices. Do not include a prefix length. If the address is the same as the interface's physical address, the interface becomes the primary device for the group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Basic VRRP Support](#)

Understanding VRRP on SRX Series Devices

Example: Configuring VRRP/VRRPv3 on Chassis Cluster Redundant Ethernet Interfaces

virtual-inet6-address

IN THIS SECTION

- [Syntax | 894](#)
- [Hierarchy Level | 894](#)
- [Description | 894](#)
- [Options | 894](#)

- Required Privilege Level | 894
- Release Information | 894

Syntax

```
virtual-inet6-address [ addresses ];
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

Configure the addresses of the virtual routers in a Virtual Router Redundancy Protocol (VRRP) IPv6 group. You can configure up to eight addresses.

Options

addresses—Addresses of one or more virtual routers. Do not include a prefix length. If the address is the same as the interface's physical address, the interface becomes the primary virtual router for the group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Basic VRRP Support | 425](#)

virtual-inet6-address

IN THIS SECTION

- [Syntax | 895](#)
- [Hierarchy Level | 895](#)
- [Description | 895](#)
- [Options | 896](#)
- [Required Privilege Level | 896](#)
- [Release Information | 896](#)

Syntax

```
virtual-inet6-address [addresses];
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6 address  
address vrrp-inet6-group group-id]
```

Description

Configure the addresses of the virtual routers in a Virtual Router Redundancy Protocol (VRRP) IPv6 group. You can configure up to eight addresses.

NOTE: The address of an aggregated Ethernet interface (a LAG) or a routed VLAN interface (RVI) cannot be assigned as the virtual router address in a VRRP IPv6 group.

Options

addresses—Addresses of one or more virtual routers. Do not include a prefix length. If the address is the same as the interface's physical address, the interface becomes the primary virtual router for the group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.0.

RELATED DOCUMENTATION

| [Configuring VRRP for IPv6 \(CLI Procedure\)](#) | 436

virtual-link-local-address

IN THIS SECTION

- [Syntax](#) | 896
- [Hierarchy Level](#) | 897
- [Description](#) | 897
- [Options](#) | 897
- [Required Privilege Level](#) | 897
- [Release Information](#) | 897

Syntax

```
virtual-link-local-address ipv6-address;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6
address address vrrp-inet6-group group-id],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet6 address address vrrp-inet6-group group-id]
```

Description

Configure a virtual link-local address for a Virtual Router Redundancy Protocol (VRRP) IPv6 group. You must explicitly define a virtual link-local address for each VRRP for IPv6 group. The virtual link-local address must be in the same subnet as the physical interface address.

NOTE: You do *not* need to configure link-local addresses and virtual link-local addresses when configuring VRRP for IPv6. Junos OS automatically generates link-local addresses and virtual link-local addresses. However, if link local addresses and virtual link-local addresses are configured, Junos OS considers the configured addresses.

Options

ipv6-address—virtual link-local IPv6 address for VRRP for an IPv6 group.

- **Range:** 0 through 255

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 8.4.

RELATED DOCUMENTATION

[Configuring Basic VRRP Support | 425](#)

[Junos OS Support for VRRPv3 | 414](#)

virtual-link-local-address

IN THIS SECTION

- [Syntax | 898](#)
- [Hierarchy Level | 898](#)
- [Description | 898](#)
- [Options | 898](#)
- [Required Privilege Level | 899](#)
- [Release Information | 899](#)

Syntax

```
virtual-link-local-address ipv6-address;
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet address
address vrrp-inet6-group group-id]
[edit interfaces interface-name unit logical-unit-number family inet6 address
address vrrp-inet6-group group-id]
```

Description

Configure a virtual link local address for a Virtual Router Redundancy Protocol (VRRP) IPv6 group. You must explicitly define a virtual link local address for each VRRP IPv6 group. The virtual link local address must be in the same subnet as the physical interface address.

Options

ipv6-address—Virtual link local IPv6 address for VRRP for an IPv6 group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.0.

RELATED DOCUMENTATION

[Configuring VRRP for IPv6 \(CLI Procedure\)](#) | 436

vrrp-group

IN THIS SECTION

- [Syntax](#) | 899
- [Hierarchy Level](#) | 900
- [Description](#) | 900
- [Options](#) | 900
- [Required Privilege Level](#) | 901
- [Release Information](#) | 901

Syntax

```
vrrp-group group-id {  
    (accept-data | no-accept-data);  
    advertise-interval seconds;  
    global-advertisements-threshold number;  
    authentication-key key;  
    authentication-type authentication;  
    fast-interval milliseconds;
```

```

(preempt | no-preempt) {
    hold-time seconds;
}
priority number;
track {
    interface interface-name {
        bandwidth-threshold bits-per-second priority-cost priority;
        priority-cost priority;
    }
    priority-hold-time seconds;
    route prefix/prefix-length routing-instance instance-name priority-cost
priority;
}
virtual-address [ addresses ];
vrrp-inherit-from vrrp-group;
}

```

Hierarchy Level

```

[edit interfaces interface-name unit logical-unit-number family inet
address address],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet address address]

```

Description

Configure a Virtual Router Redundancy Protocol (VRRP) IPv4 group. As of Junos OS Release 13.2, VRRP nonstop active routing (NSR) is enabled only when you configure the **nonstop-routing** statement at the [edit routing-options] or [edit logical system *logical-system-name* routing-options hierarchy level.

Options

group-id—VRRP group identifier. If you enable MAC source address filtering on the interface, you must include the virtual MAC address in the list of source MAC addresses that you specify in the **source-address-filter** statement. MAC addresses ranging from 00:00:5e:00:53:01 through 00:00:5e:00:53:ff are reserved for VRRP, as defined in RFC 2338. The VRRP group number must be the decimal equivalent of the last hexadecimal byte of the virtual MAC address.

- **Range:** 0 through 255

NOTE: Under certain circumstances, the group identifier that you enter must be different from any other group identifiers that you configured for logical units of this same physical interface. See ["Configuring Basic VRRP Support" on page 425](#) for more information.

The remaining statements are explained separately. Click a linked statement in the Syntax section for more information about that statement.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

[Configuring Basic VRRP Support | 425](#)

[Configuring VRRP | 431](#)

[Example: Configuring VRRP for Load Sharing | 484](#)

[vrrp-inet6-group | 901](#)

[nonstop-routing | 768](#)

vrrp-inet6-group

IN THIS SECTION

- [Syntax | 902](#)
- [Hierarchy Level | 902](#)
- [Description | 903](#)

- Options | 903
- Required Privilege Level | 903
- Release Information | 903

Syntax

```
vrrp-inet6-group group-id {
    (accept-data | no-accept-data);
    advertisements-threshold number;
    fast-interval milliseconds;
    inet6-advertise-interval seconds;
    (preempt | no-preempt) {
        hold-time seconds;
    }
    priority number;
    track {
        interface interface-name {
            bandwidth-threshold bits-per-second priority-cost priority;
            priority-cost priority;
        }
        priority-hold-time seconds;
        route prefix/prefix-length routing-instance instance-name priority-cost
priority;
    }
    virtual-inet6-address [ addresses ];
    virtual-link-local-address ipv6-address;
    vrrp-inherit-from vrrp-group;
}
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6
address address],
[edit logical-systems logical-system-name interfaces interface-name unit logical-
unit-number family inet6 address address]
```

Description

Configure a Virtual Router Redundancy Protocol (VRRP) IPv6 group.

NOTE: The group identifier that you enter must be different from any other group identifiers that you configured for logical units of this same physical interface.

Options

group-id—VRRP group identifier. If you enable MAC source address filtering on the interface, you must include the virtual MAC address in the list of source MAC addresses that you specify in the **source-address-filter** statement. MAC addresses ranging from **00:00:5e:00:01:00** through **00:00:5e:00:01:ff** are reserved for VRRP, as defined in RFC 2338. The VRRP group number must be the decimal equivalent of the last hexadecimal byte of the virtual MAC address.

- **Range:** 0 through 255

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Configuring Basic VRRP Support](#) | 425

vrrp-inet6-group

IN THIS SECTION

- [Syntax | 904](#)
- [Hierarchy Level | 904](#)
- [Description | 904](#)
- [Options | 905](#)
- [Required Privilege Level | 905](#)
- [Release Information | 905](#)

Syntax

```
vrrp-inet6-group group-id {  
    inet6-advertise-interval milliseconds;  
    preempt {  
        hold-time seconds;  
    }  
    priority number;  
    virtual-inet6-address;  
    virtual-link-local-address  
}
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6 address  
address]
```

Description

Configure a Virtual Router Redundancy Protocol (VRRP) IPv6 group.

Options

group-id—VRRP group identifier. If you enable MAC source address filtering on the interface, you must include the virtual MAC address in the list of source MAC addresses that you specify in the **source-address-filter** statement. The MAC address **00-00-5E-00-02-{VRID}** is reserved for VRRP, as defined in RFC 5798. The VRRP group number must be the decimal equivalent of the last hexadecimal byte of the virtual MAC address.

- **Range:** 0 through 255

The remaining statements are explained separately. See [CLI Explorer](#).

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced in Junos OS Release 10.0.

RELATED DOCUMENTATION

| [Configuring VRRP for IPv6 \(CLI Procedure\)](#) | 436

vrrp-inherit-from

IN THIS SECTION

- [Syntax](#) | 906
- [Hierarchy Level](#) | 906
- [Description](#) | 906
- [Options](#) | 906
- [Required Privilege Level](#) | 906
- [Release Information](#) | 906

Syntax

```
vrrp-inherit-from {
    active-group group-index;
    active-interface active-interface-name;
}
```

Hierarchy Level

```
[edit interfaces interface-name unit logical-unit-number family inet6 vrrp-
inet6-group group-id]
[edit interfaces interface-name unit logical-unit-number family inet vrrp-group
group-id]
```

Description

VRRP group to follow for the vrrp-group or vrrp-inet6-group.

Options

group-index—Identifier for VRRP active group.

- **Range:** 0 through 255

active-interface-name—Interface name of VRRP active group.

Required Privilege Level

interface—To view this statement in the configuration.

interface-control—To add this statement to the configuration.

Release Information

Statement introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [Understanding VRRP | 405](#)

Administration

IN THIS CHAPTER

- Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade (CLI Procedure) | 907
- Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade (CLI Procedure) | 918
- Upgrading Software Using Nonstop Software Upgrade on EX Series Virtual Chassis and Mixed Virtual Chassis (CLI Procedure) | 924

Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade (CLI Procedure)

IN THIS SECTION

- Preparing the Switch for Software Installation | 908
- Upgrading Both Routing Engines Using NSSU | 909
- Upgrading One Routing Engine Using NSSU (EX8200 Switch Only) | 913
- Upgrading the Original Primary Routing Engine (EX8200 Switch Only) | 916

You can use nonstop software upgrade (NSSU) to upgrade the software on standalone EX6200 or EX8200 switches with redundant Routing Engines. NSSU upgrades the software running on the Routing Engines and line cards with minimal traffic disruption during the upgrade. NSSU is supported on EX8200 switches running Junos OS Release 10.4 or later and on EX6200 switches running Junos OS Release 12.2 or later.

This topic covers:

Preparing the Switch for Software Installation

Before you begin software installation using NSSU:

- (Optional) Configure line-card upgrade groups as described in ["Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade"](#) on page 607. You can configure line-card upgrade groups for nonstop software upgrade (NSSU) operations on supporting platforms. Line-card upgrade groups can reduce the total time required to complete an NSSU operation and enable you to control the upgrade sequence among the switches being upgraded. By default, an NSSU upgrades line cards one at a time to allow aggregated Ethernet links that have members on different line cards to remain up through the upgrade process. Configuring line-card upgrade groups reduces the time an upgrade takes because the line cards in each upgrade group are upgraded at the same time rather than sequentially.
- Verify that the Routing Engines are running the same version of the software. Enter the following command:

```
{master}
user@switch> show version invoke-on all-routing-engines
re0:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [11.3-20110429.1]
JUNOS Base OS Software Suite [11.3-20110429.1]
JUNOS Kernel Software Suite [11.3-20110429.1]
JUNOS Crypto Software Suite [11.3-20110429.1]
JUNOS Online Documentation [11.3-20110429.1]
JUNOS Enterprise Software Suite [11.3-20110429.1]
LC JUNOS Installation Software [11.3-20110429.1]
JUNOS Routing Software Suite [11.3-20110429.1]
JUNOS Web Management [11.3-20110429.1]

re1:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [11.3-20110429.1]
JUNOS Base OS Software Suite [11.3-20110429.1]
JUNOS Kernel Software Suite [11.3-20110429.1]
JUNOS Crypto Software Suite [11.3-20110429.1]
JUNOS Online Documentation [11.3-20110429.1]
```

```
JUNOS Enterprise Software Suite [11.3-20110429.1]
LC JUNOS Installation Software [11.3-20110429.1]
JUNOS Routing Software Suite [11.3-20110429.1]
JUNOS Web Management [11.3-20110429.1]
```

If the Routing Engines are not running the same version of the software, use the `request system software add` command to upgrade the Routing Engine that is running the earlier software version.

- Ensure that nonstop active routing (NSR) and graceful Routing Engine switchover (GRES) are enabled. To verify that they are enabled, you need to check only the state of nonstop active routing—if nonstop active routing is enabled, then graceful Routing Engine switchover is enabled.

To verify that nonstop active routing is enabled, execute the following command:

```
{master}
user@switch> show task replication
    Stateful Replication: Enabled
    RE mode: Master

Protocol                Synchronization Status
-----                -
OSPF                    Complete
RIP                     Complete
PIM                     Complete
RSVP                    Complete
```

If nonstop active routing is not enabled (**Stateful Replication is Disabled**), see ["Configuring Nonstop Active Routing on Switches" on page 293](#) for information on how to enable it.

- (Optional) Enable nonstop bridging (NSB). Enabling NSB ensures that all NSB-supported Layer 2 protocols operate seamlessly during the Routing Engine switchover that is part of the NSSU.
- (Optional) Back up the system software on each Routing Engine to an external storage device with the `request system snapshot` command.

Upgrading Both Routing Engines Using NSSU

This procedure describes how to upgrade both Routing Engines using NSSU. When the upgrade completes, both Routing Engines are running the new version of the software, and the backup Routing Engine is the new primary Routing Engine.

To upgrade both Routing Engines using NSSU:

1. Download the software package.

2. Copy the software package to the switch. We recommend that you use FTP to copy the file to the `/var/tmp` directory.
3. Log in to the primary Routing Engine using the console connection. You can perform an NSSU from the management interface, but a console connection allows you to monitor the progress of the primary Routing Engine reboot.
4. Install the new software package:

```
{master}
user@switch> request system software nonstop-upgrade reboot
/var/tmp/package-name-m.nZx-distribution.tgz
```

where *package-name-m.nZx-distribution.tgz* is, for example, *jinstall-ex-8200-10.4R1.5-domestic-signed.tgz*.

The switch displays the following status messages as the upgrade executes:

```
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing Backup RE
Pushing bundle to rel
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Backup upgrade done
Rebooting Backup RE

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	

```

FPC 2      Online (ISSU)
FPC 3      Offline           Offlined by CLI command
FPC 4      Online (ISSU)
FPC 5      Online (ISSU)
FPC 6      Online (ISSU)
FPC 7      Online (ISSU)

Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
ISSU: Upgrading Old Master RE
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
ISSU: Old Master Upgrade Done
ISSU: IDLE

*** FINAL System shutdown message from user@switch ***
System going down IMMEDIATELY

Shutdown NOW!
[pid 2635]

```

NOTE: If you omit the **reboot** option in this step when using an EX8200 switch, you must manually reboot the original primary Routing Engine with the `request system reboot` command for the upgrade to complete.

The original primary Routing Engine reboots automatically after updating the new primary Routing Engine when an NSSU is used to upgrade an EX6200 switch with dual Routing Engines.

5. Log in after the reboot completes. To verify that both Routing Engines have been upgraded, enter the following command:

```

{backup}
user@switch> show version invoke-on all-routing-engines
re0:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [12.1-20111229.0]
JUNOS Base OS Software Suite [12.1-20111229.0]

```



```

JUNOS Kernel Software Suite [12.1-20111229.0]
JUNOS Crypto Software Suite [12.1-20111229.0]
JUNOS Online Documentation [12.1-20111229.0]
JUNOS Enterprise Software Suite [12.1-20111229.0]
LC JUNOS Installation Software [12.1-20111229.0]
JUNOS Routing Software Suite [12.1-20111229.0]
JUNOS Web Management [12.1-20111229.0]

rel:
-----

Hostname: switch
Model: ex8208
JUNOS Base OS boot [12.1-20111229.0]
JUNOS Base OS Software Suite [12.1-20111229.0]
JUNOS Kernel Software Suite [12.1-20111229.0]
JUNOS Crypto Software Suite [12.1-20111229.0]
JUNOS Online Documentation [12.1-20111229.0]
JUNOS Enterprise Software Suite [12.1-20111229.0]
LC JUNOS Installation Software [12.1-20111229.0]
JUNOS Routing Software Suite [12.1-20111229.0]
JUNOS Web Management [12.1-20111229.0]

```

6. To verify that the line cards that were online before the upgrade are online after the upgrade, log in to the primary Routing Engine and enter the `show chassis nonstop-upgrade` command:

```

{backup}
user@switch> request routing-engine login master

{master}
user@switch> show chassis nonstop-upgrade

```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online (ISSU)	
FPC 5	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

7. If you want to make **re0** the primary Routing Engine again, enter the following command:

```
{master}
user@switch> request chassis routing-engine master switch
Toggle mastership between routing engines ? [yes,no] (no) yes
```

You can verify that **re0** is the primary Routing Engine by executing the `show chassis routing-engine` command.

8. To ensure that the resilient dual-root partitions feature operates correctly, execute the following command to copy the new Junos OS image into the alternate root partition on each Routing Engine:

```
user@switch> request system snapshot slice alternate routing-engine both
```

Resilient dual-root partitions allow the switch to boot transparently from the alternate root partition if the system fails to boot from the primary root partition.

Upgrading One Routing Engine Using NSSU (EX8200 Switch Only)

This procedure describes how to upgrade one of the Routing Engines using NSSU on an EX8200 switch. When the upgrade completes, the backup Routing Engine is running the new software version and is the new primary. The original primary Routing Engine, now the backup Routing Engine, continues to run the previous software version.

NOTE: NSSU always upgrades the software on both Routing Engines on an EX6200 switch. Therefore, you cannot upgrade software on one Routing Engine using NSSU on an EX6200 switch.

To upgrade one Routing Engine using NSSU:

1. Download the software package.
2. Copy the software package to the switch. We recommend that you use FTP to copy the file to the `/var/tmp` directory.
3. Log in to the primary Routing Engine.

4. Request an NSSU. On an EX8200 switch, specify the **no-old-master-upgrade** option when requesting the NSSU:

```
{master}
user@switch> request system software nonstop-upgrade
no-old-master-upgrade /var/tmp/package-name-m.nZx-distribution.tgz
```

where *package-name-m.nZx-distribution.tgz* is, for example, *jinstall-ex-8200-10.4R2.5-domestic-signed.tgz*.

The switch displays the following status messages as the upgrade executes:

```
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing Backup RE
Pushing bundle to rel
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Backup upgrade done
Rebooting Backup RE

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online (ISSU)	
FPC 5	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

```

Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
Skipping Old Master Upgrade
ISSU: IDLE

```

When the upgrade is complete, the original primary Routing Engine (**re0**) becomes the backup Routing Engine.

5. To verify that the original backup Routing Engine (**re1**) has been upgraded, enter the following command:

```

{backup}
user@switch> show version invoke-on all-routing-engines
re0:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [11.3-20110429.1]
JUNOS Base OS Software Suite [11.3-20110429.1]
JUNOS Kernel Software Suite [11.3-20110429.1]
JUNOS Crypto Software Suite [11.3-20110429.1]
JUNOS Online Documentation [11.3-20110429.1]
JUNOS Enterprise Software Suite [11.3-20110429.1]
LC JUNOS Installation Software [11.3-20110429.1]
JUNOS Routing Software Suite [11.3-20110429.1]
JUNOS Web Management [11.3-20110429.1]

re1:
-----
Hostname: switch
Model: ex8208
JUNOS Base OS boot [12.1-20111229.0]
JUNOS Base OS Software Suite [12.1-20111229.0]
JUNOS Kernel Software Suite [12.1-20111229.0]
JUNOS Crypto Software Suite [12.1-20111229.0]
JUNOS Online Documentation [12.1-20111229.0]
JUNOS Enterprise Software Suite [12.1-20111229.0]
LC JUNOS Installation Software [12.1-20111229.0]
JUNOS Routing Software Suite [12.1-20111229.0]
JUNOS Web Management [12.1-20111229.0]

```

6. To verify that the line cards that were online before the upgrade are online after the upgrade, log in to the new primary Routing Engine and enter the **show chassis nonstop-upgrade** command:

```
{backup}
user@switch> request routing-engine login master

--- JUNOS 12.1-20111229.0 built 2011-12-29 04:12:22 UTC
{master}
user@switch> show chassis nonstop-upgrade
```

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online	
FPC 5	Online	
FPC 6	Online	
FPC 7	Online	

7. To ensure that the resilient dual-root partitions feature operates correctly, copy the new Junos OS image into the alternate root partition of the Routing Engine:

```
user@switch> request system snapshot slice alternate
```

Resilient dual-root partitions allow the switch to boot transparently from the alternate root partition if the system fails to boot from the primary root partition.

Upgrading the Original Primary Routing Engine (EX8200 Switch Only)

This procedure describes how to upgrade the original primary Routing Engine after you have upgraded the original backup Routing Engine as described in ["Upgrading One Routing Engine Using NSSU \(EX8200 Switch Only\)" on page 618](#) for an EX8200 switch.

1. Log in to the current primary Routing Engine (**re1**).
2. Enter configuration mode and disable nonstop active routing:

```
{master}[edit]
user@switch# delete routing-options nonstop-routing
```

3. Deactivate graceful Routing Engine switchover and commit the configuration:

```
{master}[edit]
user@switch# deactivate chassis redundancy graceful-switchover

{master}[edit]
user@switch# commit
```

4. Log in to the current backup Routing Engine (**re0**) using a console connection.

5. Request a software installation:

```
user@switch> request system software add reboot /var/tmp/package-name-m.nZx-
distribution.tgz
```

NOTE: When you use NSSU to upgrade only one Routing Engine, the installation package is not automatically deleted from **/var/tmp**, leaving the package available to be used to upgrade the original primary Routing Engine.

6. After the upgrade completes, log in to the current primary Routing Engine (**re1**) and enter CLI configuration mode.
7. Re-enable nonstop active routing and graceful Routing Engine switchover:

```
[edit]
user@switch# activate chassis redundancy graceful-switchover

[edit]
user@switch# set routing-options nonstop-routing

[edit]
user@switch# commit
```

8. To ensure that the resilient dual-root partitions feature operates correctly, exit the CLI configuration mode and copy the new Junos OS image into the alternate root partition of the Routing Engine:

```
user@switch> request system snapshot slice alternate
```

Resilient dual-root partitions allow the switch to boot transparently from the alternate root partition if the system fails to boot from the primary root partition.

9. (Optional) To return control to the original primary Routing Engine (**re0**), enter the following command:

```
{master}
user@switch> request chassis routing-engine master switch
Toggle mastership between routing engines ? [yes,no] (no) yes
```

You can verify that **re0** is the primary Routing Engine by executing the `show chassis routing-engine` command.

RELATED DOCUMENTATION

[Understanding Nonstop Software Upgrade on EX Series Switches | 597](#)

Configuring Dual-Root Partitions

Troubleshooting Software Installation on EX Series Switches

Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade (CLI Procedure)

IN THIS SECTION

- [Preparing the Switch for Software Installation | 919](#)
- [Upgrading the Software Using NSSU | 920](#)

You can use nonstop software upgrade (NSSU) to upgrade the software on an EX8200 Virtual Chassis. NSSU upgrades the software running on all Routing Engines with minimal traffic disruption during the upgrade. NSSU is supported on EX8200 Virtual Chassis with redundant XRE200 External Routing Engines running Junos OS Release 11.1 or later.

NOTE: NSSU upgrades all Routing Engines on all members of the Virtual Chassis and on the XRE200 External Routing Engines. Using NSSU, you cannot choose to upgrade the backup Routing Engines only, nor can you choose to upgrade a specific member of the Virtual Chassis. If you need to upgrade a specific member of the Virtual Chassis, see *Installing Software for a Single Device in an EX8200 Virtual Chassis*.

This topic covers:

Preparing the Switch for Software Installation

Before you begin software installation using NSSU:

- (Optional) Configure line-card upgrade groups as described in ["Configuring Line-Card Upgrade Groups for Nonstop Software Upgrade"](#) on page 607. You can configure line-card upgrade groups for nonstop software upgrade (NSSU) operations on supporting platforms. Line-card upgrade groups can reduce the total time required to complete an NSSU operation and enable you to control the upgrade sequence among the switches being upgraded." By default, NSSU upgrades line cards one at a time, starting with the line card in slot 0 of member 0. This permits aggregated Ethernet links that have members on different line cards remain up through the upgrade process. Configuring line-card upgrade groups reduces the time an upgrade takes because the line cards in each upgrade group are upgraded at the same time rather than sequentially.
- Verify that the members are running the same version of the software:

```
{master:8}
user@external-routing-engine> show version all-members
```

If the Virtual Chassis members are not running the same version of the software, use the `request system software add` command to upgrade the software on the inconsistent members. For instructions, see *Installing Software for a Single Device in an EX8200 Virtual Chassis*.

- Ensure that nonstop active routing (NSR) and graceful Routing Engine switchover (GRES) are enabled. To verify that they are enabled, you need to check only the state of nonstop active routing—if nonstop active routing is enabled, then graceful Routing Engine switchover is enabled.

To verify that nonstop active routing is enabled:

```
{master:8}
user@switch> show task replication
Stateful Replication: Enabled
```



```
RE mode: Master
```

Protocol	Synchronization Status
PIM	Complete

If nonstop active routing is not enabled (**Stateful Replication** is **Disabled**), see [Configuring Nonstop Active Routing on Switches](#) for information on how to enable it.

Upgrading the Software Using NSSU

This procedure describes how to upgrade the software running on all Routing Engines using NSSU. When the upgrade completes, all Routing Engines are running the new version of the software. The backup external Routing Engine is now the primary external Routing Engine, and the internal backup Routing Engines in the member switches are now the internal primary Routing Engines in those member switches.

To upgrade all Routing Engines using NSSU:

1. Download the software package for the XRE200 External Routing Engine by following one of the procedures in [Downloading Software](#). The name of the software package for the XRE200 External Routing Engine contains the term **xre200**.
2. Copy the software package to the switch. We recommend that you use FTP to copy the file to the **/var/tmp** directory.
3. Log in to the primary external Routing Engine using the console connection. You can perform an NSSU from the management interface, but a console connection allows you to monitor the progress of the primary Routing Engine reboot.
4. Install the new software package:

```
{master:8}
user@external-routing-engine> request system software nonstop-upgrade reboot
/var/tmp/package-name-m.nZx-distribution.tgz
```

where *package-name-m.nZx-distribution.tgz* is, for example, **jinstall-ex-xre200-11.1R2.5-domestic-signed.tgz**.

NOTE: You can omit **reboot** option. When you include the **reboot** option, NSSU automatically reboots the original primary Routing Engines after the new image has been installed on them. If you omit the **reboot** option, you must manually reboot the original primary Routing Engines (now the backup Routing Engines) to complete the upgrade. To perform the reboot, you must

establish a connection to the console port on the Switch Fabric and Routing Engine (SRE) module or Routing Engine (RE) module.

The switch displays status messages similar to the following messages as the upgrade executes:

```
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing LCC Backup REs
ISSU: Preparing Backup RE
Pushing bundle /var/tmp/jinstall-ex-xre200-11.1-20110208.0-domestic-
signed.tgz to member9
member9:
-----
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
VC Backup upgrade done
Rebooting VC Backup RE

Rebooting member9
ISSU: Backup RE Prepare Done
Waiting for VC Backup RE reboot
Pushing bundle to member0-backup
Pushing bundle to member1-backup
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately

Rebooting member0-backup
Rebooting LCC [member0-backup]

Rebooting member1-backup
Rebooting LCC [member1-backup]
ISSU: LCC Backup REs Prepare Done
GRES operational
Initiating Chassis Nonstop-Software-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
```

ISSU: Ready for Switchover

Checking Nonstop-Upgrade status

member0:

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 5	Online (ISSU)	

member1:

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 5	Online (ISSU)	

member0:

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 5	Online (ISSU)	

member1:

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 5	Online (ISSU)	

ISSU: Upgrading Old Master RE

Pushing bundle /var/tmp/incoming-package-8200.tgz to member0-master

Pushing bundle /var/tmp/incoming-package-8200.tgz to member1-master

ISSU: RE switchover Done

WARNING: A reboot is required to install the software

WARNING: Use the 'request system reboot' command immediately

ISSU: Old Master Upgrade Done

ISSU: IDLE

*** FINAL System shutdown message from root@ ***

```
System going down
IMMEDIATELY

Shutdown NOW!
```

NOTE: If you omit the **reboot** option in this step, you must complete the upgrade by separately rebooting the original primary Routing Engine on each Virtual Chassis member and the original primary external Routing Engine. To reboot the original primary Routing Engine on a Virtual Chassis member, you must establish a connection to the console port on the Switch Fabric and Routing Engine (SRE) module or Routing Engine (RE) module.

5. Log in after the reboot completes. To verify that the software on all Routing Engines in the Virtual Chassis members has been upgraded, enter the following command:

```
{backup:8}
user@external-routing-engine> show version all-members
```

6. Verify that the line cards that were online before the upgrade are online after the upgrade by entering the `show chassis nonstop-upgrade` command:

```
{backup:8}
user@external-routing-engine> show chassis nonstop-upgrade
member0:
-----
  Item           Status      Reason
  FPC 0          Online
  FPC 1          Online
  FPC 2          Online
  FPC 5          Online

member1:
-----
  Item           Status      Reason
  FPC 0          Online
  FPC 1          Online
```

FPC 2	Online
FPC 5	Online

RELATED DOCUMENTATION

[Upgrading Software Using Nonstop Software Upgrade on EX Series Virtual Chassis and Mixed Virtual Chassis \(CLI Procedure\) | 924](#)

[Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade \(CLI Procedure\)](#)

[Understanding Nonstop Software Upgrade on EX Series Switches | 597](#)

[Configuring Dual-Root Partitions](#)

[Troubleshooting Software Installation on EX Series Switches](#)

[Understanding Nonstop Software Upgrade on EX Series Switches | 597](#)

[Understanding Software Installation on EX Series Switches](#)

Upgrading Software Using Nonstop Software Upgrade on EX Series Virtual Chassis and Mixed Virtual Chassis (CLI Procedure)

IN THIS SECTION

- [Preparing the Switch for Software Installation | 925](#)
- [Upgrading the Software Using NSSU | 926](#)

You can use nonstop software upgrade (NSSU) to upgrade the software running on all member switches in most EX Series Virtual Chassis with minimal traffic disruption during the upgrade.

NSSU is supported on the following EX Series Virtual Chassis platforms:

- EX3300 Virtual Chassis
- EX3400 Virtual Chassis
- EX4200 Virtual Chassis
- EX4300 Virtual Chassis

- EX4500 Virtual Chassis
- EX4550 Virtual Chassis
- All mixed Virtual Chassis composed of EX4200, EX4500, and EX4550 switches
- EX8200 Virtual Chassis

This topic covers:

Preparing the Switch for Software Installation

Before you begin software installation using NSSU:

- Ensure that the Virtual Chassis is configured correctly to support NSSU. Verify that:
 - The Virtual Chassis members are connected in a ring topology. A ring topology prevents the Virtual Chassis from splitting during an NSSU.
 - The Virtual Chassis primary and backup are adjacent to each other in the ring topology. Adjacency permits the primary and backup to always be in sync, even when the switches in linecard roles are rebooting.
 - The Virtual Chassis is preprovisioned so that the linecard role has been explicitly assigned to member switches acting in the linecard role. During an NSSU, the Virtual Chassis members must maintain their roles—the primary and backup must maintain their primary and backup roles (although primary role will change), and the other member switches must maintain their linecard roles.

For information on configuring a preprovisioned Virtual Chassis, see *Configuring an EX3300 Virtual Chassis (CLI Procedure)*, *Configuring an EX4200, EX4500, or EX4550 Virtual Chassis (CLI Procedure)*, *Configuring an EX2300, EX3400, or EX4300 Virtual Chassis*, and *Configuring an EX8200 Virtual Chassis (CLI Procedure)*.

- A two-member Virtual Chassis has `no-split-detection` configured so that the Virtual Chassis does not split when an NSSU upgrades a member.
- Verify that the members are running the same version of the software:

```
user@switch> show version
```

If the Virtual Chassis members are not running the same version of the software, use the `request system software add` command to upgrade the software on the inconsistent members.

- Ensure that nonstop active routing (NSR) and graceful Routing Engine switchover (GRES) are enabled. To verify that they are enabled, you need to check only the state of nonstop active routing—if nonstop active routing is enabled, then graceful Routing Engine switchover is enabled.

To verify that nonstop active routing is enabled:

```
user@switch> show task replication
    Stateful Replication: Enabled
    RE mode: Master

Protocol                Synchronization Status
-----                -
OSPF                    Complete
BGP                     Complete
PIM                     Complete
```

If nonstop active routing is not enabled (**Stateful Replication is Disabled**), see [Configuring Nonstop Active Routing on Switches](#) for information on how to enable it.

- For the EX4300 Virtual Chassis, you should enable the **vcp-no-hold-time** statement at the [edit **virtual-chassis**] hierarchy level before performing a software upgrade using NSSU. If you do not enable the **vcp-no-hold-time** statement, the Virtual Chassis may split during the upgrade. A split Virtual Chassis can cause disruptions to your network, and you may have to manually reconfigure your Virtual Chassis after the NSSU if the split and merge feature was disabled. For more information about a split Virtual Chassis, see *Understanding Split and Merge in a Virtual Chassis*.
- (Optional) Enable nonstop bridging (NSB). Enabling NSB ensures that all NSB-supported Layer 2 protocols operate seamlessly during the Routing Engine switchover that is part of the NSSU.
- (Optional) Back up the system software—Junos OS, the active configuration, and log files—on each member to an external storage device with the `request system snapshot` command.

Upgrading the Software Using NSSU

This procedure describes how to upgrade the software running on all Virtual Chassis members using NSSU. When the upgrade completes, all members are running the new version of the software. Because a graceful Routing Engine switchover occurs during the upgrade, the original Virtual Chassis backup is the new primary.

To upgrade all members using NSSU:

1. Download the software package. If you are upgrading the software running on a mixed Virtual Chassis, download the software packages for both switch types.
2. Copy the software package or packages to the Virtual Chassis. We recommend that you copy the file to the `/var/tmp` directory on the primary.
3. Log in to the Virtual Chassis using the console connection or the virtual management Ethernet (VME) interface. Using a console connection allows you to monitor the progress of the primary switch reboot.

4. Start the NSSU:

- On an EX3300 Virtual Chassis, EX3400 Virtual Chassis, EX4200 Virtual Chassis, EX4300 Virtual Chassis, EX4500 Virtual Chassis, or EX4550 Virtual Chassis, enter:

```
user@switch> request system software nonstop-upgrade /var/tmp/package-name.tgz
```

where *package-name.tgz* is, for example, *jinstall-ex4200-12.1R2.5-domestic-signed.tgz*.

- On a mixed Virtual Chassis, enter:

```
user@switch> request system software nonstop-upgrade set [/var/tmp/package-name.tgz /var/tmp/package-name.tgz]
```

where *[/var/tmp/package-name.tgz /var/tmp/package-name.tgz]* specifies the EX4200 and EX4500 software packages.

The switch displays status messages similar to the following messages as the upgrade executes:

```
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing Backup RE
Installing image on other FPC's along with the backup

Checking pending install on fpc1
Pushing bundle to fpc1
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc1

Checking pending install on fpc2
Pushing bundle to fpc2
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc2

Rebooting fpc1
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
```



```

Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
  Item           Status           Reason
  FPC 0          Online
  FPC 1          Online
  FPC 2          Online (ISSU)
Going to install image on master
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
relinquish mastership
ISSU: IDLE

*** FINAL System shutdown message from user@switch ***

System going down IMMEDIATELY

Shutdown NOW!
[pid 9336]

```

5. Log in after the reboot of the original primary switch completes. To verify that the software on all Routing Engines in the Virtual Chassis members has been upgraded, enter the following command:

```
user@switch> show version
```

6. To ensure that the resilient dual-root partitions feature operates correctly, copy the new Junos OS image into the alternate root partitions of all members:

```
user@switch> request system snapshot slice alternate all-members
```

Resilient dual-root partitions allow the switch to boot transparently from the alternate root partition if the system fails to boot from the primary root partition.

RELATED DOCUMENTATION

Understanding Nonstop Software Upgrade on EX Series Switches 597
Configuring Dual-Root Partitions
Understanding Software Installation on EX Series Switches
Troubleshooting Software Installation on EX Series Switches
Understanding Nonstop Software Upgrade on EX Series Switches 597

Verification Tasks

IN THIS CHAPTER

- [Verifying Power Configuration and Use | 930](#)

Verifying Power Configuration and Use

IN THIS SECTION

- [Purpose | 930](#)
- [Action | 931](#)
- [Meaning | 932](#)

Purpose

Verify on an EX Series switch:

- The power redundancy and line card priority settings
- The PoE power budgets for line cards that support PoE
- Whether the $N+1$ or $N+N$ power requirements are being met
- Whether the switch has sufficient power for a new line card or an $N+N$ configuration

Action

Enter the following command:

```
user@switch> show chassis power-budget-statistics
```

Example output for an EX6200 switch:

```

PSU  0      (EX6200-PWR-AC2500)          :    2500 W   Online
PSU  1      (EX6200-PWR-AC2500)          :    2500 W   Online
PSU  2      (EX6200-PWR-AC2500)          :    2500 W   Online
PSU  3      (EX6200-PWR-AC2500)          :    2500 W   Online
Total Power supplied by all Online PSUs  :   10000 W
Power Redundancy Configuration           :      N+1
Power Reserved for the Chassis            :     500 W

Fan Tray Statistics                      Base power  Power Used
FTC  0                                     :    300 W    43.04 W

FPC Statistics                          Base power  Power Used  PoE power  Priority
FPC  1  (EX6200-48P)                    :    220 W    49.47 W    1440 W     1
FPC  2  (EX6200-48P)                    :    220 W    47.20 W     800 W     2
FPC  3  (EX6200-48P)                    :    220 W   1493.57 W    1440 W     0
FPC  4  (EX6200-SRE64-4XS)              :    100 W     51.38 W      0 W      0
FPC  5  (EX6200-SRE64-4XS)              :    100 W     50.28 W      0 W      0
FPC  6  (EX6200-48P)                    :    220 W    49.38 W     800 W     6
FPC  8  (EX6200-48P)                    :    220 W    61.41 W    1440 W     9
FPC  9  (EX6200-48T)                    :    150 W    12.49 W      0 W      9

Total (non-PoE) Power allocated           :    1750 W
Total Power allocated for PoE             :    5920 W
Power Available (Redundant case)          :    5750 W
Total Power Available                     :    2515 W

```

Example output for an EX8200 switch:

```

PSU  0      (EX8200-AC2K)                :    1200 W   Online
PSU  1      (EX8200-AC2K)                :    1200 W   Online
PSU  2      (EX8200-AC2K)                :    1200 W   Online
PSU  3      (EX8200-AC2K)                :    1200 W   Online

```

```

Total Power supplied by all Online PSUs      :    4800 W
Power Redundancy Configuration                :    N+1
Power Reserved for the Chassis                :    1600 W

FPC Statistics                               Base power   PoE power   Priority
FPC  0   (EX8200-48T)                       :    350 W      0 W        2
FPC  1   (EX8200-2XS-40P)                   :    387 W     300 W      0
FPC  2   (EX8200-48PL)                     :    267 W     350 W     15
FPC  4   (EX8200-2XS-40P)                   :    387 W     300 W      1
FPC  5   (EX8200-48TL)                     :    230 W      0 W     15
FPC  6   (EX8200-48TL)                     :    230 W      0 W     15

Total (non-PoE) Power allocated              :    3451 W
Total Power allocated for PoE                :    950 W
Power Available (Redundant case)              :    149 W
Total Power Available                        :    510 W

```

Meaning

- Example output for an EX6200 switch –The online power supplies can supply a total of 10,000 W to the switch. The switch is configured for *N*+1 redundancy, which means 7500 W of redundant power can be supplied. The **Power Available (Redundant case)** field shows that the switch is meeting the *N*+1 power requirements, with an additional 5750 W available. This value is calculated by subtracting all power allocations except PoE power allocations from redundant power (7500 W).

The total amount of power available on the switch is 2515 W. This value is calculated by subtracting all power allocations, including PoE power allocations, from the total power (10,000 W). On a switch with PoE line cards, if **Total Power Available** is 0, some or all of the PoE line cards might not be allocated their configured PoE power budgets, which means power to some or all PoE ports might be disabled.

The power priority order of the line cards, from highest priority line card to the lowest priority line card, is 4, 5, 3, 1, 2, 6, 8, 9. Slots 4 and 5, which contain the Switch Fabric and Routing Engine (SRE) modules, always have highest priority, even if a lower-numbered slot, such as slot 3 in this example, has a priority of 0. Should two or more 2500 W power supplies fail, power management will remove or reduce the PoE power allocations from the PoE line cards in the following order to balance the power budget: 8, 6, 2, 1, and 3.

The **Power Used** values for the fan tray and line cards shows the actual power being consumed for these components at the time the command was executed. These values are for your information only; power management uses allocated power, which is based on the maximum power the component might consume, and not actual power consumed, in determining its power budget.

- Example output for an EX8200 switch—The online power supplies can supply a total of 4800 W to the switch. The switch is configured for $N+1$ redundancy, which means 3600 W of redundant power can be supplied. The **Power Available (Redundant case)** field shows that the switch is meeting the $N+1$ power requirements, with an additional 149 W available. This value is calculated by subtracting all power allocations except PoE power allocations from redundant power (3600 W). Because 149 W is insufficient power for a line card, another line card cannot be added to the switch while maintaining $N+1$ redundancy.

The total amount of power available on the switch is 510 W. This value is calculated by subtracting all power allocations, including PoE power allocations, from the total power (4800 W). On a switch with PoE line cards, if **Total Power Available** is 0, some or all of the PoE line cards might not be allocated their configured PoE power budgets, which means power to some or all PoE ports might be disabled.

The power priority order of the line cards, from highest priority line card to the lowest priority line card, is 1, 4, 0, 2, 5, 6. Should one or more 1200 W power supplies fail, power management will remove or reduce the PoE power allocations from the PoE line cards in the following order to balance the power budget: 2, 4, and 1.

RELATED DOCUMENTATION

[Configuring Power Supply Redundancy \(CLI Procedure\) | 393](#)

[Configuring the Power Priority of Line Cards \(CLI Procedure\) | 392](#)

Operational Commands

IN THIS CHAPTER

- `show bgp neighbor` | 936
- `show log` | 972
- `show (ospf | ospf3) overview` | 979
- `show chassis dedicated-ukern-cpu` | 988
- `show chassis in-service-upgrade` | 989
- `show chassis realtime-ukern-thread` | 995
- `show chassis redundancy feb` | 996
- `clear vrrp` | 1001
- `clear chassis high-availability data-plane statistics` | 1002
- `clear security ike security-associations` | 1003
- `clear security ipsec security-associations` | 1006
- `request chassis high-availability failover services-redundancy-group` | 1008
- `request chassis redundancy feb slot` | 1009
- `request chassis routing-engine master` | 1011
- `request chassis sfm master switch` | 1019
- `request chassis ssb master switch` | 1021
- `request redundant-power-system multi-backup` | 1023
- `request system software in-service-upgrade` | 1024
- `request system software in-service-upgrade (MX Series 5G Universal Routing Platforms and EX9200 Switches)` | 1045
- `request system software nonstop-upgrade` | 1068
- `request system software validate in-service-upgrade` | 1082
- `show chassis high-availability information` | 1087
- `show chassis high-availability services-redundancy-group` | 1096
- `show chassis high-availability data-plane statistics` | 1100
- `show chassis nonstop-upgrade` | 1106

- [show chassis nonstop-upgrade node-group | 1109](#)
- [show chassis power-budget-statistics | 1111](#)
- [show chassis redundant-power-system | 1117](#)
- [show protection-group ethernet-ring aps | 1120](#)
- [show protection-group ethernet-ring configuration | 1126](#)
- [show protection-group ethernet-ring data-channel | 1135](#)
- [show protection-group ethernet-ring flush-info | 1139](#)
- [show protection-group ethernet-ring interface | 1141](#)
- [show protection-group ethernet-ring node-state | 1147](#)
- [show protection-group ethernet-ring statistics | 1154](#)
- [show protection-group ethernet-ring vlan | 1162](#)
- [show redundant-power-system led | 1168](#)
- [show redundant-power-system multi-backup | 1171](#)
- [show redundant-power-system network | 1172](#)
- [show redundant-power-system power-supply | 1174](#)
- [show redundant-power-system status | 1176](#)
- [show redundant-power-system upgrade | 1179](#)
- [show redundant-power-system version | 1181](#)
- [show security ike security-associations | 1183](#)
- [show security ike active-peer | 1202](#)
- [show security ipsec security-associations | 1209](#)
- [show security ipsec statistics | 1243](#)
- [show chassis ssb | 1250](#)
- [show nonstop-routing | 1252](#)
- [show pfe ssb | 1257](#)
- [show system switchover | 1266](#)
- [show task replication | 1272](#)
- [show vrrp | 1276](#)
- [show vrrp track | 1296](#)

show bgp neighbor

IN THIS SECTION

- [Syntax | 936](#)
- [Syntax \(EX Series Switch, QFX Series, OCX Series, and cRPD\) | 936](#)
- [Syntax \(SRX Series\) | 937](#)
- [Description | 937](#)
- [Options | 937](#)
- [Additional Information | 938](#)
- [Required Privilege Level | 938](#)
- [Output Fields | 938](#)
- [Sample Output | 955](#)
- [Release Information | 971](#)

Syntax

```
show bgp neighbor
<exact-instance instance-name>
<instance instance-name>
<logical-system (all | logical-system-name)>
<neighbor-address>
<output-queue>
<orf (detail | neighbor-address)>
<rib-sharding (main | rib-shard-name)>
```

Syntax (EX Series Switch, QFX Series, OCX Series, and cRPD)

```
show bgp neighbor
<instance instance-name>
<exact-instance instance-name>
<neighbor-address>
```

```
<orf (neighbor-address | detail)>
<rib-sharding neighbor-address>
```

Syntax (SRX Series)

```
show bgp neighbor
<neighbor-address>
<instance instance-name>
```

Description

Display information about BGP peers.

Options

none	Display information about all BGP peers.
exact-instance <i>instance-name</i>	(Optional) Display information for the specified instance only.
instance <i>instance-name</i>	(Optional) Display information about BGP peers for all routing instances whose name begins with this string (for example, cust1 , cust11 , and cust111 are all displayed when you run the show bgp neighbor instance cust1 command).
logical-system (all <i>logical-system-name</i>)	(Optional) Perform this operation on all logical systems or on a particular logical system.
neighbor-address	(Optional) Display information for only the BGP peer at the specified IP address.
orf (detail <i>neighbor-address</i>)	(Optional) Display outbound route-filtering information for all BGP peers or only for the BGP peer at the specified IP address. The default is to display brief output. Use the detail option to display detailed output.
output-queue	(Optional) Display information regarding the number of routes currently queued in the 17 prioritized BGP output queues.
rib-sharding (main junos-bgpshard <i>shard-number</i>)	(Optional) Display information for specific shard only. For example, junos-bgpshard0. If omitted, displays aggregated data from all shards including main shard.

Additional Information

For information about the **local-address**, **nlri**, **hold-time**, and **preference** statements, see the [Junos OS Routing Protocols Library for Routing Devices](#).

Required Privilege Level

view

Output Fields

[Table 39 on page 938](#) describes the output fields for the **show bgp neighbor** command. Output fields are listed in the approximate order in which they appear.

Table 39: show bgp neighbor Output Fields

Field Name	Field Description
Peer	Address of the BGP neighbor. The address is followed by the neighbor port number.
AS	AS number of the peer.
Local	Address of the local routing device. The address is followed by the peer port number.
Type	Type of peer: Internal or External .

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
State	Current state of the BGP session: • Active—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message. • Connect—BGP is waiting for the transport protocol connection to be completed. • Established—The BGP session has been established, and the peers are exchanging update messages. • Idle—This is the first stage of a connection. BGP is waiting for a Start event. • OpenConfirm—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message. • OpenSent—BGP has sent an open message and is waiting to receive an open message from the peer. • route reflector client—The BGP session is established with a route reflector client.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
Flags	Internal BGP flags: • Aggregate Label—BGP has aggregated a set of incoming labels (labels received from the peer) into a single forwarding label. • CleanUp—The peer session is being shut down. • Delete—This peer has been deleted. • Idled—This peer has been permanently idled. • ImportEval—At the last commit operation, this peer was identified as needing to reevaluate all received routes. • Initializing—The peer session is initializing. • PurgePending—This flag marks one or more routing table (also known as routing information base [RIB]) entries for deletion. The purge job to delete these entries begins after the peer is closed. A purge job keeps running if new routing table entries are marked for deletion. • PurgeInProgress—The purge job has started and is not yet complete. • PurgeImpatient—The purge begins as a low priority background job. The Adj-RIB-Out can be cleaned up and a new peering can be established in the background before all routes are deleted. After the peer goes down and the group has closed, the purge becomes a normal priority job. • SendRtn—Messages are being sent to the peer. • Sync—This peer is synchronized with the rest of the peer group. • RSync—This peer in the backup Routing Engine is synchronized with the BGP peer in the primary Routing Engine for nonstop active routing. • TryConnect—Another attempt is being made to connect to the peer. • Unconfigured—This peer is not configured. • WriteFailed—An attempt to write to this peer failed.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
Last state	Previous state of the BGP session: • Active—BGP is initiating a transport protocol connection in an attempt to connect to a peer. If the connection is successful, BGP sends an Open message. • Connect—BGP is waiting for the transport protocol connection to be completed. • Established—The BGP session has been established, and the peers are exchanging update messages. • Idle—This is the first stage of a connection. BGP is waiting for a Start event. • OpenConfirm—BGP has acknowledged receipt of an open message from the peer and is waiting to receive a keepalive or notification message. • OpenSent—BGP has sent an open message and is waiting to receive an open message from the peer.

Table 39: show bgp neighbor Output Fields *(Continued)*

Field Name	Field Description
Last event	Last activity that occurred in the BGP session: • Closed—The BGP session closed. • ConnectRetry—The transport protocol connection failed, and BGP is trying again to connect. • HoldTime—The session ended because the hold timer expired. • KeepAlive—The local routing device sent a BGP keepalive message to the peer. • Open—The local routing device sent a BGP open message to the peer. • OpenFail—The local routing device did not receive an acknowledgment of a BGP open message from the peer. • RecvKeepAlive—The local routing device received a BGP keepalive message from the peer. • RecvNotify—The local routing device received a BGP notification message from the peer. • RecvOpen—The local routing device received a BGP open message from the peer. • RecvUpdate—The local routing device received a BGP update message from the peer. • Start—The peering session started. • Stop—The peering session stopped. • TransportError—A TCP error occurred.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
Last error	Last error that occurred in the BGP session: • Cease—An error occurred, such as a version mismatch, that caused the session to close. • Finite State Machine Error—In setting up the session, BGP received a message that it did not understand. • Hold Time Expired—The session's hold time expired. • Message Header Error—The header of a BGP message was malformed. • Open Message Error—A BGP open message contained an error. • None—No errors occurred in the BGP session. • Update Message Error—A BGP update message contained an error.
Export	Name of the export policy that is configured on the peer.
Import	Name of the import policy that is configured on the peer.

Table 39: show bgp neighbor Output Fields (Continued)

Field Name	Field Description
Options	Configured BGP options: • AddressFamily—Configured address family: inet or inet-vpn. • AdvertiseBGPStatic—Configured BGP static routes are advertised. • AutheKeyChain—Authentication key change is enabled. • BfdEnabled—Status of BFD. • DontGRHelpFateSharingBfdDown—Status of the dont-help-shared-fate-bfd-down option. If this option is configured the device does not go into graceful restart helper mode. • DropPathAttributes—Certain path attributes are configured to be dropped from neighbor updates during inbound processing. • GracefulRestart—Graceful restart is configured. • HoldTime—Hold time configured with the hold-time statement. The hold time is three times the interval at which keepalive messages are sent. • IgnorePathAttributes—Certain path attributes are configured to be ignored in neighbor updates during inbound processing. • Local Address—Address configured with the local-address statement. • LLGR—BGP long-lived graceful restart capability is configured. • LLGRHelperDisabled—BGP long-lived graceful restart is completely disabled for a neighbor. • Multihop—Allow BGP connections to external peers that are not on a directly connected network. • NLRI—Configured MBGP state for the BGP group: multicast, unicast, or both if you have configured nlri any. • Peer AS—Configured peer autonomous system (AS). • Preference—Preference value configured with the preference statement.

Table 39: show bgp neighbor Output Fields *(Continued)*

Field Name	Field Description
	• Refresh—Configured to refresh automatically when the policy changes. • Rib-group—Configured routing table group. • RFC6514CompliantSafi129—Configured SAFI 129 according to RFC 6514 (BGP VPN multicast used to use SAFI 128).
Path-attributes dropped	Path attribute codes that are dropped from neighbor updates.
Path-attributes ignored	Path attribute codes that are ignored during neighbor updates.
Peer does not support LLGR Restarter or Receiver functionality	BGP neighbor does not support long-lived graceful restart (LLGR) restarter mode completely.
Peer does not support LLGR Restarter functionality	BGP neighbor does not support long-lived graceful restart (LLGR) restarter mode for any family.
Authentication key change	(Appears only if the authentication-keychain statement has been configured) Name of the authentication keychain enabled.
Authentication algorithm	(Appears only if the authentication-algorithm statement has been configured) Type of authentication algorithm enabled: hmac or md5 .
Address families configured	Names of configured address families for the VPN.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
BGP-Static Advertisement Policy	Name of the BGP static policy that is configured on the peer.
Local Address	Address of the local routing device.
Remove-private options	Options associated with the <code>remove-private</code> statement.
Holdtime	Hold time configured with the hold-time statement. The hold time is three times the interval at which keepalive messages are sent.
Flags for NLRI inet-label-unicast	Flags related to labeled-unicast: • TrafficStatistics—Collection of statistics for labeled-unicast traffic is enabled.
Traffic statistics	Information about labeled-unicast traffic statistics: • Options—Options configured for collecting statistics about labeled-unicast traffic. • File—Name and location of statistics log files. • size—Size of all the log files, in bytes. • files—Number of log files.
Traffic Statistics Interval	Time between sample periods for labeled-unicast traffic statistics, in seconds.
Preference	Preference value configured with the preference statement.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
Outbound Timer	Time for which the route is available in Junos OS routing table before it is exported to BGP. This field is displayed in the output only if the out-delay parameter is configured to a non-zero value.
Number of flaps	Number of times the BGP session has gone down and then come back up.
Threads related state	Displays thread related state if update threading is enabled: • Thread sync pending—Thread sync is yet to begin. • Update thread sync—Syncing peer up with update threads. • Shard sync—Syncing peer up with shards. If the peer is in shard sync state, it also displays a hex value indicating which shards are yet to send peer up acknowledgement. • Thread sync complete—Peer has been synced in update threads and shards. • Peer UP acknowledgement received from Update Thread—Display peer up acknowledgement received from update threads.
Peer ID	Router identifier of the peer.
Group index	Index number for the BGP peer group. The index number differentiates between groups when a single BGP group is split because of different configuration options at the group and peer levels.
Peer index	Index that is unique within the BGP group to which the peer belongs.
Local ID	Router identifier of the local routing device.
Local Interface	Name of the interface on the local routing device.
Active holdtime	Hold time that the local routing device negotiated with the peer.

Table 39: show bgp neighbor Output Fields *(Continued)*

Field Name	Field Description
Keepalive Interval	Keepalive interval, in seconds.
I/O Session Thread	Displays the BGP I/O session thread and its state if update threading is enabled.
I/O Session Thread	Displays the BGP I/O session thread and its state if update threading is enabled.
BFD	Status of BFD failure detection.
Local Address	Name of directly connected interface over which direct EBGp peering is established.
NLRI and times for LLGR configured on peer	Names of address families and stale time for BGP long-lived graceful restart configured on the BGP peer or neighbor. Times are displayed using the routing protocol daemon (rpd) %#OT format: <weeks>w<days>d <hours>:<minutes>:<seconds> Zero leading elements are omitted, for example, a value less than one week do not include the weeks.
NLRI and times that peer supports LLGR Restarter for	Names of address families and stale time that the BGP peer supports for restarter mode for BGP long-lived graceful restart. Times are displayed using the routing protocol daemon (rpd) %#OT format: <weeks>w<days>d <hours>:<minutes>:<seconds> Zero leading elements are omitted, for example, a value less than one week do not include the weeks.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
NLRI that peer saved LLGR forwarding for	Name of the address family for which the BGP peer saved BGP long-lived graceful restart forwarding.
Graceful Restart Details	Amount of time that is remaining until LLGR expires and the time remaining on the GR stale timer, along with RIB details, are displayed while LLGR receiver mode is active (a peer that negotiated LLGR has disconnected and not yet reconnected).
NLRI we are holding stale routes for	Names of address families (NLRIs) for which that stale routes are held or preserved when BGP graceful restart receiver mode is active for a neighbor.
Time until end-of-rib is assumed for stale routes	Amount of time remaining on the stale timer until which end-of-RIB (EoR) markers are assumed when BGP graceful restart receiver mode is active for a neighbor. Time is displayed in Coordinated Universal Time (UTC) format (YYYY-MM-DD-HH:MM:SS). Note that the stale timer display ('Time until end-of-rib is assumed') is also present when a session is active, but the neighbor as not yet sent all of the end-of-rib indications.
Time until stale routes are deleted or become long-lived stale	Amount of time up to which stale routes are deleted or become long-lived stale routes when BGP graceful restart receiver mode is active for a neighbor.
NLRI for restart configured on peer	Names of address families configured for restart.
NLRI advertised by peer	Address families supported by the peer: unicast or multicast .

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
NLRI for this session	Address families being used for this session.
Peer supports Refresh capability	Remote peer's ability to send and request full routing table readvertisement (route refresh capability). For more information, see RFC 2918, <i>Route Refresh Capability for BGP-4</i> .
Restart time configured on peer	Configured time allowed for restart on the neighbor.
Stale routes from peer are kept for	When graceful restart is negotiated, the maximum time allowed to hold routes from neighbors after the BGP session has gone down.
Peer does not support Restarter functionality	Graceful restart restarter-mode is disabled on the peer.
Peer does not support Receiver functionality	Graceful restart helper-mode is disabled on the peer.
Restart time requested by this peer	Restart time requested by this neighbor during capability negotiation.
Restart flag received from the peer	When this field appears, the BGP speaker has restarted (Restarting), and this peer should not wait for the end-of-rib marker from the speaker before advertising routing information to the speaker.

Table 39: show bgp neighbor Output Fields *(Continued)*

Field Name	Field Description
NLRI that peer supports restart for	Neighbor supports graceful restart for this address family.
NLRI peer can save forwarding state	Neighbor supporting this address family saves all forwarding states.
NLRI that peer saved forwarding for	Neighbor saves all forwarding states for this address family.
NLRI that restart is negotiated for	Router supports graceful restart for this address family.
NLRI of received end-of-rib markers	Address families for which end-of-routing-table markers are received from the neighbor.
NLRI of all end-of-rib markers sent	Address families for which end-of-routing-table markers are sent to the neighbor.
Peer supports 4 byte AS extension (peer-as 1)	Peer understands 4-byte AS numbers in BGP messages. The peer is running Junos OS Release 9.1 or later.
NLRIs for which peer can receive multiple paths	Appears in the command output of the local router if the downstream peer is configured to receive multiple BGP routes to a single destination, instead of only receiving the active route. Possible value is inet-unicast.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
NLRIs for which peer can send multiple paths: inet-unicast	Appears in the command output of the local router if the upstream peer is configured to send multiple BGP routes to a single destination, instead of only sending the active route. Possible value is inet-unicast.
Table inet.number	Information about the routing table: • RIB State—BGP is in the graceful restart process for this routing table: restart is complete or restart in progress. • Bit—Number that represents the entry in the routing table for this peer. • Send state—State of the BGP group: in sync, not in sync, or not advertising. • Active prefixes—Number of prefixes received from the peer that are active in the routing table. • Received prefixes—Total number of prefixes from the peer, both active and inactive, that are in the routing table. • Accepted prefixes—Total number of prefixes from the peer that have been accepted by a routing policy. • Suppressed due to damping—Number of routes currently inactive because of damping or other reasons. These routes do not appear in the forwarding table and are not exported by routing protocols.
Last traffic (seconds)	Last time any traffic was received from the peer or sent to the peer, and the last time the local routing device checked.
Input messages	Messages that BGP has received from the receive socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
Output messages	Messages that BGP has written to the transmit socket buffer, showing the total number of messages, number of update messages, number of times a policy is changed and refreshed, and the buffer size in octets. The buffer size is 16 KB.
Input dropped path attributes	Information about dropped path attributes: • Code—Path attribute code. • Count—Path attribute count.
Input ignored path attributes	Information about ignored path attributes: • Code—Path attribute code. • Count—Path attribute count.
Output queue	Number of BGP packets that are queued to be transmitted to a particular neighbor for a particular routing table. Output queue 0 is for unicast NLRI, and queue 1 is for multicast NLRI. It also specifies the routing table name and the NLRI that the table was advertised through, in the format (<i>routing table name, NLRI</i>). If update threading is enabled, the Output Queue field will display the Output Queue count from update threads with an additional field that displays the Output Queue count per RIB as fetched from main or shards. NOTE: The output queue of routing tables that are not advertised, will only show up at extensive output level.
Trace options	Configured tracing of BGP protocol packets and operations.
Trace file	Name of the file to receive the output of the tracing operation.

Table 39: show bgp neighbor Output Fields (*Continued*)

Field Name	Field Description
Filter Updates recv	(orf option only) Number of outbound-route filters received for each configured address family. NOTE: The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.
Immediate	(orf option only) Number of route updates received with the immediate flag set. The immediate flag indicates that the BGP peer should readvertise the updated routes. NOTE: The counter is cumulative. For example, the counter is increased after the remote peer either resends or clears the outbound route filtering prefix list.
Filter	(orf option only) Type of prefix filter received: prefix-based or extended-community .
Received filter entries	(orf option only) List of received filters displayed.
seq	(orf option only) Numerical order assigned to this prefix entry among all the received outbound route filter prefix entries.
prefix	(orf option only) Address for the prefix entry that matches the filter.
minlength	(orf option only) Minimum prefix length, in bits, required to match this prefix.
maxlength	(orf option only) Maximum prefix length, in bits, required to match this prefix.
match	(orf option only) For this prefix match, whether to permit or deny route updates.

Sample Output

show bgp neighbor

```
user@host > show bgp neighbor
```

For M Series, MX Series, and T Series routers running Junos OS Release 16.1 or later, the **show bgp neighbor** output includes the BGP group the peer belongs to, the routing instance (if any) that the peer is configured in, and the routing instance that the peer is using for the forwarding context (if applicable). An example follows.

```
Peer: 10.255.7.250+179 AS 10   Local: 10.255.7.248+63740 AS 10
Group: toAsbr2                Routing-Instance: master
Forwarding routing-instance: toAs2
  Type: Internal    State: Established    Flags: <Sync>
Last State: OpenConfirm    Last Event: RecvKeepAlive
Last Error: None
Export: [ redist_static ]
Options: <Preference LocalAddress PeerAS Refresh>
Options: <AdvertiseBGPStatic>
Local Address: 10.255.7.248 Holdtime: 90 Preference: 170 Outbound Timer: 50
Number of flaps: 0
Peer ID: 10.255.7.250    Local ID: 10.255.7.248    Active Holdtime: 90
Keepalive Interval: 30    Group index: 0    Peer index: 0
BFD: disabled, down
NLRI for restart configured on peer: inet-unicast
NLRI advertised by peer: inet-unicast
NLRI for this session: inet-unicast
Peer supports Refresh capability (2)
Stale routes from peer are kept for: 300
Peer does not support Restarter functionality
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer supports 4 byte AS extension (peer-as 10)
Peer does not support Addpath
NLRI that we support extended nexthop encoding for: inet-unicast
NLRI that peer supports extended nexthop encoding for: inet-unicast

Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
```

```

    Send state: in sync
    Active prefixes:          1
    Received prefixes:        1
    Accepted prefixes:        1
    Suppressed due to damping: 0
    Advertised prefixes:      1
    Last traffic (seconds): Received 9    Sent 5    Checked 5
    Input messages:  Total 36    Updates 2    Refreshes 0    Octets 718
    Output messages: Total 37    Updates 1    Refreshes 0    Octets 796
    Output Queue[0]: 0          (inet.0, inet-unicast)

Peer: 10.255.162.214+52193 AS 100 Local: 10.255.167.205+179 AS 100
  Type: Internal    State: Established (route reflector client)Flags: <Sync>
  Last State: OpenConfirm    Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress Cluster AddressFamily Rib-group Refresh>
  Address families configured: inet-unicast inet-vpn-unicast route-target
  Local Address: 10.255.167.205 Holdtime: 90 Preference: 170
  Number of flaps: 0
  Peer ID: 10.255.162.214    Local ID: 10.255.167.205    Active Holdtime: 90
  Keepalive Interval: 30      Group index: 0    Peer index: 1

```

show bgp neighbor (dont-help-shared-fate-bfd-down is configured)

```

user@host> show bgp neighbor

Peer: 10.1.1.1 AS 200          Local: unspecified AS 17
  Group: one                   Routing-Instance: master
  Forwarding routing-instance: master
  Type: External    State: Idle          Flags: <PeerInterfaceError>
  Last State: NoState    Last Event: NoEvent
  Last Error: None
  Options: <Preference PeerAS Refresh>
  Options: <BfdEnabled>
  Options: <DontGRHelpFateSharingBfdDown>
  Holdtime: 90 Preference: 170
  Number of flaps: 0
  Trace options: bridge
  Trace file: /var/log/bgp-log size 131072 files 10

Peer: 20.1.1.1 AS 200          Local: unspecified AS 17

```

```

Group: one                      Routing-Instance: master
Forwarding routing-instance: master
Type: External      State: Idle      Flags: <PeerInterfaceError>
Last State: NoState      Last Event: NoEvent
Last Error: None
Options: <Preference PeerAS Refresh>
Options: <BfdEnabled>
Options: <DontGRHelpFateSharingBfdDown>
Holdtime: 90 Preference: 170
Number of flaps: 0
Trace options: bridge
Trace file: /var/log/bgp-log size 131072 files 10

Peer: 30.1.1.1 AS 200          Local: unspecified AS 17
Group: two                    Routing-Instance: master
Forwarding routing-instance: master
Type: External      State: Idle      Flags: <PeerInterfaceError>
Last State: NoState      Last Event: NoEvent
Last Error: None
Options: <Preference PeerAS Refresh>
Options: <BfdEnabled>
Options: <DontGRHelpFateSharingBfdDown>
Holdtime: 90 Preference: 170
Number of flaps: 0
Trace options: bridge
Trace file: /var/log/bgp-log size 131072 files 10

```

show bgp neighbor (CLNS)

```

user@host> show bgp neighbor
Peer: 10.245.245.1+179 AS 200 Local: 10.245.245.3+3770 AS 100
Type: External      State: Established      Flags: <ImportEval Sync>
Last State: OpenConfirm      Last Event: RecvKeepAlive
Last Error: None
Options: <Multihop Preference LocalAddress HoldTime AddressFamily PeerAS
Rib-group Refresh>
Address families configured: iso-vpn-unicast
Local Address: 10.245.245.3 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 10.245.245.1      Local ID: 10.245.245.3      Active Holdtime: 90
Keepalive Interval: 30      Peer index: 0

```

```

NLRI advertised by peer: iso-vpn-unicast
NLRI for this session: iso-vpn-unicast
Peer supports Refresh capability (2)
Table bgp.isovpn.0 Bit: 10000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:           3
  Received prefixes:         3
  Suppressed due to damping: 0
  Advertised prefixes:       3
Table aaaa.iso.0
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: not advertising
  Active prefixes:           3
  Received prefixes:         3
  Suppressed due to damping: 0
Last traffic (seconds): Received 6    Sent 5    Checked 5
Input messages:  Total 1736    Updates 4    Refreshes 0    Octets 33385
Output messages: Total 1738    Updates 3    Refreshes 0    Octets 33305
Output Queue[0]: 0            (bgp.isovpn.0, iso-vpn-unicast)
Output Queue[1]: 0            (aaaa.iso.0, iso-vpn-unicast)

```

show bgp neighbor (Layer 2 VPN)

```

user@host> show bgp neighbor
Peer: 10.69.103.2      AS 65536 Local: 10.69.103.1      AS 65539
  Type: External      State: Active      Flags: <ImportEval>
  Last State: Idle      Last Event: Start
  Last Error: None
  Export: [ BGP-INET-import ]
  Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
  PeerAS Refresh>
  Address families configured: inet-unicast
  Local Address: 10.69.103.1 Holdtime: 90 Preference: 170
  Number of flaps: 0
Peer: 10.69.104.2      AS 65539 Local: 10.69.104.1      AS 65539
  Type: External      State: Active      Flags: <ImportEval>
  Last State: Idle      Last Event: Start
  Last Error: None

```

```

Export: [ BGP-L-import ]
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
PeerAS Refresh>
Address families configured: inet-labeled-unicast
Local Address: 10.69.104.1 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer: 10.255.14.182+179 AS 69      Local: 10.255.14.176+2131 AS 69
Type: Internal      State: Established      Flags: <ImportEval>
Last State: OpenConfirm      Last Event: RecvKeepAlive
Last Error: None
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily      Rib-
group Refresh>
Address families configured: inet-vpn-unicast l2vpn
Local Address: 10.255.14.176 Holdtime: 90 Preference: 170
Number of flaps: 0
Peer ID: 10.255.14.182      Local ID: 10.255.14.176      Active Holdtime: 90
Keepalive Interval: 30
NLRI for restart configured on peer: inet-vpn-unicast l2vpn
NLRI advertised by peer: inet-vpn-unicast l2vpn
NLRI for this session: inet-vpn-unicast l2vpn
Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast l2vpn
NLRI peer can save forwarding state: inet-vpn-unicast l2vpn
NLRI that peer saved forwarding for: inet-vpn-unicast l2vpn
NLRI that restart is negotiated for: inet-vpn-unicast l2vpn
NLRI of received end-of-rib markers: inet-vpn-unicast l2vpn
Table bgp.l3vpn.0 Bit: 10000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          10
  Received prefixes:        10
  Suppressed due to damping: 0
Table bgp.l2vpn.0 Bit: 20000
  RIB State: BGP restart in progress
  RIB State: VPN restart in progress
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        1
  Suppressed due to damping: 0

```


Table BGP-INET.inet.0 Bit: 30000

RIB State: BGP restart in progress
 RIB State: VPN restart in progress
 Send state: in sync
 Active prefixes: 2
 Received prefixes: 2
 Suppressed due to damping: 0

Table BGP-L.inet.0 Bit: 40000

RIB State: BGP restart in progress
 RIB State: VPN restart in progress
 Send state: in sync
 Active prefixes: 2
 Received prefixes: 2
 Suppressed due to damping: 0

Table LDP.inet.0 Bit: 50000

RIB State: BGP restart is complete
 RIB State: VPN restart in progress
 Send state: in sync
 Active prefixes: 1
 Received prefixes: 1
 Suppressed due to damping: 0

Table OSPF.inet.0 Bit: 60000

RIB State: BGP restart is complete
 RIB State: VPN restart in progress
 Send state: in sync
 Active prefixes: 2
 Received prefixes: 2
 Suppressed due to damping: 0

Table RIP.inet.0 Bit: 70000

RIB State: BGP restart is complete
 RIB State: VPN restart in progress
 Send state: in sync
 Active prefixes: 2
 Received prefixes: 2
 Suppressed due to damping: 0

Table STATIC.inet.0 Bit: 80000

RIB State: BGP restart is complete
 RIB State: VPN restart in progress
 Send state: in sync
 Active prefixes: 1
 Received prefixes: 1
 Suppressed due to damping: 0

Table L2VPN.l2vpn.0 Bit: 90000

```

RIB State: BGP restart is complete
RIB State: VPN restart in progress
Send state: in sync
Active prefixes:          1
Received prefixes:        1
Suppressed due to damping: 0
Last traffic (seconds): Received 0    Sent 0    Checked 0
Input messages:  Total 14    Updates 13    Refreshes 0    Octets 1053
Output messages: Total 3     Updates 0     Refreshes 0    Octets 105
Output Queue[0]: 0          (bgp.l3vpn.0, inet-vpn-unicast)
Output Queue[1]: 0          (bgp.l2vpn.0, inet-vpn-unicast)
Output Queue[2]: 0          (BGP-INET.inet.0, inet-vpn-unicast)
Output Queue[3]: 0          (BGP-L.inet.0, inet-vpn-unicast)
Output Queue[4]: 0          (LDP.inet.0, inet-vpn-unicast)
Output Queue[5]: 0          (OSPF.inet.0, inet-vpn-unicast)
Output Queue[6]: 0          (RIP.inet.0, inet-vpn-unicast)
Output Queue[7]: 0          (STATIC.inet.0, inet-vpn-unicast)
Output Queue[8]: 0          (L2VPN.l2vpn.0, inet-vpn-unicast)

```

show bgp neighbor (Layer 3 VPN) (Not supported on the OCX Series.)

```

user@host> show bgp neighbor
Peer: 192.0.2.0.179      AS 10045 Local: 192.0.2.1+1214      AS 10045
Type: Internal      State: Established      Flags: <ImportEval>
Last State: OpenConfirm      Last Event: RecvKeepAlive
Last Error: None
Export: [ match-all ] Import: [ match-all ]
Options: <Preference LocalAddress HoldTime GracefulRestart AddressFamily
      Rib-group Refresh>
Address families configured: inet-vpn-unicast
Local Address: 192.0.2.1 Holdtime: 90 Preference: 170
Flags for NLRI inet-labeled-unicast: TrafficStatistics
Traffic Statistics: Options: all File: /var/log/bstat.log
                        size 131072 files 10
Traffic Statistics Interval: 60
Number of flaps: 0
Peer ID: 192.168.1.110      Local ID: 192.168.1.111      Active Holdtime: 90
Keepalive Interval: 30
NLRI for restart configured on peer: inet-vpn-unicast
NLRI advertised by peer: inet-vpn-unicast
NLRI for this session: inet-vpn-unicast

```

```

Peer supports Refresh capability (2)
Restart time configured on the peer: 120
Stale routes from peer are kept for: 300
Restart time requested by this peer: 120
NLRI that peer supports restart for: inet-vpn-unicast
NLRI peer can save forwarding state: inet-vpn-unicast
NLRI that peer saved forwarding for: inet-vpn-unicast
NLRI that restart is negotiated for: inet-vpn-unicast
NLRI of received end-of-rib markers: inet-vpn-unicast
NLRI of all end-of-rib markers sent: inet-vpn-unicast
Table bgp.13vpn.0 Bit: 10000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Table vpn-green.inet.0 Bit: 20001
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: in sync
  Active prefixes:          2
  Received prefixes:        2
  Suppressed due to damping: 0
Last traffic (seconds): Received 15   Sent 20   Checked 20
Input messages:  Total 40      Updates 2      Refreshes 0      Octets 856
Output messages: Total 44      Updates 2      Refreshes 0      Octets 1066
Output Queue[0]: 0           (bgp.13vpn.0, inet-vpn-unicast)
Output Queue[1]: 0           (vpn-green.inet.0, inet-vpn-unicast)
Trace options: detail packets
Trace file: /var/log/bgpgr.log size 131072 files 10

```

show bgp neighbor neighbor-address

```

user@host> show bgp neighbor 192.168.1.111
Peer: 10.255.245.12+179 AS 35 Local: 10.255.245.13+2884 AS 35
  Type: Internal   State: Established (route reflector client)Flags: <Sync>
  Last State: OpenConfirm Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress HoldTime Cluster AddressFamily Rib-group
  Refresh>

```

```

Options: RFC6514CompliantSafi129
Address families configured: inet-vpn-unicast inet-labeled-unicast
Local Address: 10.255.245.13 Holdtime: 90 Preference: 170
Flags for NLRI inet-vpn-unicast: AggregateLabel
Flags for NLRI inet-labeled-unicast: AggregateLabel
Number of flaps: 0
Peer ID: 10.255.245.12    Local ID: 10.255.245.13    Active Holdtime: 90
Keepalive Interval: 30
BFD: disabled
NLRI advertised by peer: inet-vpn-unicast inet-labeled-unicast
NLRI for this session: inet-vpn-unicast inet-labeled-unicast
Peer supports Refresh capability (2)
Restart time configured on the peer: 300
Stale routes from peer are kept for: 60
Restart time requested by this peer: 300
NLRI that peer supports restart for: inet-unicast inet6-unicast
NLRI that restart is negotiated for: inet-unicast inet6-unicast
NLRI of received end-of-rib markers: inet-unicast inet6-unicast
NLRI of all end-of-rib markers sent: inet-unicast inet6-unicast
Table inet.0 Bit: 10000
  RIB State: restart is complete
  Send state: in sync
  Active prefixes: 4
  Received prefixes: 6
  Suppressed due to damping: 0
Table inet6.0 Bit: 20000
  RIB State: restart is complete
  Send state: in sync
  Active prefixes: 0
  Received prefixes: 2
  Suppressed due to damping: 0
Last traffic (seconds): Received 3    Sent 3    Checked 3
Input messages:  Total 9        Updates 6        Refreshes 0        Octets 403
Output messages: Total 7        Updates 3        Refreshes 0        Octets 365
Output Queue[0]: 0              (inet.0, inet-unicast)
Output Queue[1]: 0              (inet6.0, inet6-unicast)
Trace options: detail packets
Trace file: /var/log/bgpgr size 131072 files 10

```

show bgp neighbor neighbor-address

```

user@host> show bgp neighbor 192.168.4.222
Peer: 192.168.4.222+4902 AS 65501 Local: 192.168.4.221+179 AS 65500
  Type: External      State: Established      Flags: <Sync>
  Last State: OpenConfirm  Last Event: RecvKeepAlive
  Last Error: Cease
  Export: [ export-policy ] Import: [ import-policy ]
  Options: <Preference HoldTime AddressFamily PeerAS PrefixLimit Refresh>
  Address families configured: inet-unicast inet-multicast
  Holdtime: 60000 Preference: 170
  Number of flaps: 4
  Last flap event: RecvUpdate
  Error: 'Cease' Sent: 5 Recv: 0
  Peer ID: 10.255.245.6      Local ID: 10.255.245.5      Active Holdtime: 60000
  Keepalive Interval: 20000      Peer index: 0
  BFD: disabled, down
  Local Interface: fxp0.0
  NLRI advertised by peer: inet-unicast inet-multicast
  NLRI for this session: inet-unicast inet-multicast
  Peer supports Refresh capability (2)
  Table inet.0 Bit: 10000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:           8
    Received prefixes:         10
    Accepted prefixes:         10
    Suppressed due to damping: 0
    Advertised prefixes:       3
  Table inet.2 Bit: 20000
    RIB State: BGP restart is complete
    Send state: in sync
    Active prefixes:           0
    Received prefixes:         0
    Accepted prefixes:         0
    Suppressed due to damping: 0
    Advertised prefixes:       0
  Last traffic (seconds): Received 357 Sent 357 Checked 357
  Input messages: Total 4      Updates 2      Refreshes 0      Octets 211
  Output messages: Total 4      Updates 1      Refreshes 0      Octets 147
  Output Queue[0]: 0          (inet.0, inet-unicast)
  Output Queue[1]: 0          (inet.2, inet-multiicast)

```

```
Trace options:  all
Trace file: /var/log/bgp size 10485760 files 10
```

show bgp neighbor neighbor-address (BGP Graceful Restart Enabled)

```
user@router> show bgp neighbor 10.255.255.16

Peer: 10.255.255.16 AS 100      Local: 10.255.255.12 AS 100
  Type: Internal      State: Active      Flags: <>
  Last State: Idle      Last Event: Start
  Last Error: None
  Options: <Preference LocalAddress AddressFamily Rib-group Refresh>
  Options: <LLGR>
  Address families configured: l2vpn
  Local Address: 10.255.255.12 Holdtime: 90 Preference: 170
  NLRI l2vpn:
  Number of flaps: 6
  Last flap event: Restart
  NLRI we are holding stale routes for: inet-vpn-unicast
  Time until stale routes are deleted or become long-lived stale: 00:01:57
  Time until end-of-rib is assumed for stale routes: 00:04:43
  Table bgp.l3vpn.0
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
    Send state: not advertising
    Active prefixes:          0
    Received prefixes:        7
    Accepted prefixes:        7
    Suppressed due to damping: 0
  Table foo.inet.0 Bit: 30000
    RIB State: BGP restart is complete
    RIB State: VPN restart is complete
    Send state: not in sync
    Active prefixes:          0
    Received prefixes:        7
    Accepted prefixes:        7
    Suppressed due to damping: 0
```

show bgp neighbor neighbor-address (BGP Long-Lived Graceful Restart)

```

user@router> show bgp neighbor 10.4.12.11

Peer: 10.4.12.11 AS 100          Local: 10.6.128.225 AS 100
Type: Internal      State: Active      Flags: <>
Last State: Idle      Last Event: Start
Last Error: None
Export: [ foo ]
Options: <Preference LocalAddress Refresh GracefulRestart>
Options: <LLGR>
Local Address: 10.6.128.225 Holdtime: 90 Preference: 170
Number of flaps: 3
Last flap event: Restart
Error: 'Cease' Sent: 0 Recv: 1
Time until long-lived stale routes deleted: inet-vpn-unicast 10:00:22 route-
target 10:00:22
Table bgp.l3vpn.0
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: not advertising
  Active prefixes:          0
  Received prefixes:        7
  Accepted prefixes:        7
  Suppressed due to damping: 0
Table foo.inet.0 Bit: 30000
  RIB State: BGP restart is complete
  RIB State: VPN restart is complete
  Send state: not in sync
  Active prefixes:          0
  Received prefixes:        7
  Accepted prefixes:        7
  Suppressed due to damping: 0

```

show bgp neighbor orf neighbor-address detail

```

user@host > show bgp neighbor orf 192.168.165.56 detail
Peer: 192.168.165.56+179 Type: External
Group: ext1

```

```

inet-unicast
  Filter updates rcv:          1 Immediate:          1
  Filter: prefix-based receive
  Received filter entries:
    seq 1: prefix 2.2.2.2/32: minlen 32: maxlen 32: match deny:

inet6-unicast
  Filter updates rcv:          0 Immediate:          1
  Filter: prefix-based receive
  Received filter entries:
    *:*
```

show bgp neighbor logical-system

```

user@host > show bgp neighbor logical-system ITR1
Peer: 10.79.8.2+179 AS 65536   Local: 10.79.8.1+50891 AS 65500
  Description: MX1
  Type: External   State: Established   Flags: <ImportEval Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
....
Table inet.0 Bit: 10000
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          1
  Received prefixes:        1
  Accepted prefixes:        1
  Suppressed due to damping: 0
  Advertised prefixes:      10
  Stale prefixes:           4: <=new, line only appears if count is non-0
It is the Number of prefixes marked as stale;
  LLGR-stale prefixes:      5: <=new, line only appears if count is non-0
It is the Number of prefixes marked as LLGR-stale
```

show bgp neighbor output-queue

```

user@host > show bgp neighbor output-queue
Peer: 192.0.2.2+179 AS 103      Local: 192.0.2.1+50799 AS 102
  Output Queue[0]: 0            (inet.0, inet-unicast)
```



```

Priority 1 : 0
Priority 2 : 0
Priority 3 : 0
Priority 4 : 0
Priority 5 : 0
Priority 6 : 0
Priority 7 : 0
Priority 8 : 0
Priority 9 : 0
Priority 10: 0
Priority 11: 0
Priority 12: 0
Priority 13: 0
Priority 14: 0
Priority 15: 0
Priority 16: 0
Expedited  : 0

```

show bgp neighbor (Segment Routing Traffic Engineering)

```

user@host > show bgp neighbor
run show bgp neighbor 1.1.1.254
  Peer: 1.1.1.254+60180 AS 100   Local: 1.1.1.1+179 AS 100
  Group: toB                     Routing-Instance: master
  Forwarding routing-instance: master
  Type: Internal   State: Established   Flags: <Sync>
  Last State: OpenConfirm   Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress>
  Address families configured: inet-segment-routing-te
  Local Address: 1.1.1.1 Holdtime: 90 Preference: 170 Local AS: 100 Local System
AS: 0
  Number of flaps: 0
  Peer ID: 128.9.150.15   Local ID: 128.9.150.110   Active Holdtime: 90
  Keepalive Interval: 30   Group index: 0   Peer index: 0
  I/O Session Thread: bgpio-0 State: Enabled
  BFD: disabled, down
  NLRI for restart configured on peer: inet-segment-routing-te
  NLRI advertised by peer: inet-segment-routing-te
  NLRI for this session: inet-segment-routing-te
  Peer supports Refresh capability (2)

```

```

Stale routes from peer are kept for: 300
Peer does not support Restarter functionality
Restart flag received from the peer: Notification
NLRI that restart is negotiated for: inet-segment-routing-te
Peer does not support LLGR Restarter functionality
Peer supports 4 byte AS extension (peer-as 100)
Peer does not support Addpath
Last traffic (seconds): Received 17628 Sent 25 Checked 17628
Input messages:  Total 2          Updates 0          Refreshes 0          Octets 82
Output messages: Total 1          Updates 0          Refreshes 0          Octets 19
Trace options:  all
Trace file: /var/log/bgp.log size 10485760 files 10

```

show bgp neighbor (with rib-sharding configured)

```

user@host > show bgp neighbor rib-sharding main
Peer: 1.1.1.1+179 AS 1          Local: 2.2.2.1+60231 AS 1
  Group: toFeeder                Routing-Instance: master
  Forwarding routing-instance: master
  Type: Internal    State: Established    Flags: <Sync>
  Last State: OpenConfirm    Last Event: RecvKeepAlive
  Last Error: None
  Options: <Preference LocalAddress Refresh>
  Options: <ConnectRetryInterval>
  Options: <GracefulShutdownRcv>
  Local Address: 2.2.2.1 Holdtime: 90 Preference: 170
  Graceful Shutdown Receiver local-preference: 0
  Number of flaps: 0
  Threads related state:
    Internal State: Thread sync complete
    Peer UP acknowledgement received from Update Thread
  Peer ID: 1.1.1.1          Local ID: 2.2.2.1          Active Holdtime: 90
  Keepalive Interval: 30    Group index: 0    Peer index: 0    SNMP index:
0
  I/O Session Thread: bgp-updio-2 State: Enabled
  BFD: disabled, down
  NLRI for restart configured on peer: inet-unicast
  NLRI advertised by peer: inet-unicast
  NLRI for this session: inet-unicast
  Peer supports Refresh capability (2)
  Stale routes from peer are kept for: 300

```

```

Peer does not support Restarter functionality
Restart flag received from the peer: Notification
NLRI that restart is negotiated for: inet-unicast
NLRI of received end-of-rib markers: inet-unicast
NLRI of all end-of-rib markers sent: inet-unicast
Peer does not support LLGR Restarter functionality
Peer supports 4 byte AS extension (peer-as 1)
Peer does not support Addpath
NLRI(s) enabled for color nexthop resolution: inet-unicast
Table inet.0 Bit: 20002
  RIB State: BGP restart is complete
  Send state: in sync
  Active prefixes:          0
  Received prefixes:       0
  Accepted prefixes:       0
  Suppressed due to damping: 0
  Advertised prefixes:     0
Last traffic (seconds): Received 7    Sent 11    Checked 3910
Input messages:  Total 145    Updates 1      Refreshes 0      Octets 2759
Output messages: Total 135    Updates 0      Refreshes 0      Octets 2569
Output Queue[1]: 0            (inet.0, inet-unicast)
Output Queue[1]: 0            (inet.0, inet-unicast) (Main/Shards)

```

show bgp neighbor (with rib-sharding configured on crpd)

```
user@host > show bgp neighbor rib-sharding junos-bgpshard14
```

```

Peer: 2.2.2.1 AS 100          Local: 20.255.255.10 AS 100
Description: To_Adolf
Group: G101_V4                Routing-Instance: master
Forwarding routing-instance: master
Type: Internal    State: Idle          (route reflector client)Flags: <>
Last State: Established    Last Event: Stop
Last Error: None
Import: [ Block_bgp ]
Options: <Preference LocalAddress HoldTime Cluster AddressFamily Rib-group
Refresh>
Options: <GracefulShutdownRcv>
Address families configured: inet-unicast inet-vpn-unicast inet6-vpn-unicast
route-target

```

```

Local Address: 20.255.255.10 Holdtime: 10 Preference: 170
Graceful Shutdown Receiver local-preference: 0
Number of flaps: 1
Last flap event: Stop
Peer: 5.5.1.1 AS 100          Local: 20.255.255.10 AS 100
Description: To_stonepark
Group: G201_V4               Routing-Instance: master
Forwarding routing-instance: master
Type: Internal      State: Idle          (route reflector client)Flags: <>
Last State: Established   Last Event: Stop
Last Error: None
Import: [ Block_bgp ]
Options: <Preference LocalAddress HoldTime Cluster AddressFamily Rib-group
Refresh>
Options: <GracefulShutdownRcv>
Address families configured: inet-vpn-unicast inet6-vpn-unicast route-target
Local Address: 20.255.255.10 Holdtime: 10 Preference: 170
Graceful Shutdown Receiver local-preference: 0
Number of flaps: 2
Last flap event: Stop
Trace options:  all
Trace file: /var/log/aaaaaa size 1073741824 files 10

```

Release Information

Command introduced before Junos OS Release 7.4.

orf option introduced in Junos OS Release 9.2.

exact-instance option introduced in Junos OS Release 11.4.

output-queue option introduced in Junos OS Release 16.1.

DontGRHelpFateSharingBfdDown is added to the **options** field of the command output in Junos OS Release 18.3R1.

PurgePending, **PurgeInProgress**, and **PurgeImpatient** are added to the **Flags** field of the command output in Junos OS Release 19.4R1.

rib-sharding option introduced in cRPD Release 20.1R1.

RELATED DOCUMENTATION

| *clear bgp neighbor*

show log

IN THIS SECTION

- [Syntax | 972](#)
- [Syntax \(QFX Series and OCX Series\) | 972](#)
- [Syntax \(TX Matrix Router\) | 973](#)
- [Description | 973](#)
- [Options | 973](#)
- [Required Privilege Level | 974](#)
- [Sample Output | 974](#)
- [Release Information | 979](#)

Syntax

```
show log  
<filename | user <username>>
```

Syntax (QFX Series and OCX Series)

```
show log filename  
<device-type (device-id | device-alias)>
```

Syntax (TX Matrix Router)

```
show log
<all-lcc | lcc number | scc>
<filename | user <username>>
```

Description

List log files, display log file contents, or display information about users who have logged in to the router or switch.

NOTE: On MX Series routers, modifying a configuration to replace a service interface with another service interface is treated as a catastrophic event. When you modify a configuration, the entire configuration associated with the service interface—including NAT pools, rules, and service sets—is deleted and then re-created for the newly specified service interface. If there are active sessions associated with the service interface that is being replaced, these sessions are deleted and the NAT pools are then released, which leads to the generation of the NAT_POOL_RELEASE system log messages. However, because NAT pools are already deleted as a result of the catastrophic configuration change and no longer exist, the NAT_POOL_RELEASE system log messages are not generated for the changed configuration.

Options

none	List all log files.
<all-lcc lcc <i>number</i> scc>	(Routing matrix only)(Optional) Display logging information about all T640 routers (or line-card chassis) or a specific T640 router (replace <i>number</i> with a value from 0 through 3) connected to a TX Matrix router. Or, display logging information about the TX Matrix router (or switch-card chassis).
device-type	(QFabric system only) (Optional) Display log messages for only one of the following device types: director-device—Display logs for Director devices. infrastructure-device—Display logs for the logical components of the QFabric system infrastructure, including the diagnostic Routing Engine, fabric control

Routing Engine, fabric manager Routing Engine, and the default network Node group and its backup (NW-NG-0 and NW-NG-0-backup).

- **interconnect-device**—Display logs for Interconnect devices.
- **node-device**—Display logs for Node devices.

NOTE: If you specify the **device-type** optional parameter, you must also specify either the **device-id** or **device-alias** optional parameter.

(*device-id* | *device-alias*) If a device type is specified, display logs for a device of that type. Specify either the device ID or the device alias (if configured).

filename (Optional) Display the log messages in the specified log file. For the routing matrix, the filename must include the chassis information.

NOTE: The *filename* parameter is mandatory for the QFabric system. If you did not configure a syslog filename, specify the default filename of **messages**.

user
<*username*> (Optional) Display logging information about users who have recently logged in to the router or switch. If you include ***username***, display logging information about the specified user.

Required Privilege Level

trace

Sample Output

show log

```

user@host> show log
total 57518
-rw-r--r--  1 root  bin      211663 Oct  1 19:44 dcd
-rw-r--r--  1 root  bin      999947 Oct  1 19:41 dcd.0
-rw-r--r--  1 root  bin      999994 Oct  1 17:48 dcd.1
-rw-r--r--  1 root  bin      238815 Oct  1 19:44 rpd
-rw-r--r--  1 root  bin     1049098 Oct  1 18:00 rpd.0

```

```

-rw-r--r-- 1 root bin      1061095 Oct  1 12:13 rpd.1
-rw-r--r-- 1 root bin      1052026 Oct  1 06:08 rpd.2
-rw-r--r-- 1 root bin      1056309 Sep 30 18:21 rpd.3
-rw-r--r-- 1 root bin      1056371 Sep 30 14:36 rpd.4
-rw-r--r-- 1 root bin      1056301 Sep 30 10:50 rpd.5
-rw-r--r-- 1 root bin      1056350 Sep 30 07:04 rpd.6
-rw-r--r-- 1 root bin      1048876 Sep 30 03:21 rpd.7
-rw-rw-r-- 1 root bin          19656 Oct  1 19:37 wtmp

```

show log filename

```

user@host> show log rpd
Oct  1 18:00:18 trace_on: Tracing to ?/var/log/rpd? started
Oct  1 18:00:18 EVENT <MTU> ds-5/2/0.0 index 24 <Broadcast PointToPoint Multicast
Oct  1 18:00:18
Oct  1 18:00:19 KRT recv len 56 V9 seq 148 op add Type route/if af 2 addr
192.0.2.21 nhop type local nhop 192.0.2.21
Oct  1 18:00:19 KRT recv len 56 V9 seq 149 op add Type route/if af 2 addr
192.0.2.22 nhop type unicast nhop 192.0.2.22
Oct  1 18:00:19 KRT recv len 48 V9 seq 150 op add Type ifaddr index 24 devindex
43
Oct  1 18:00:19 KRT recv len 144 V9 seq 151 op chnge Type ifdev devindex 44
Oct  1 18:00:19 KRT recv len 144 V9 seq 152 op chnge Type ifdev devindex 45
Oct  1 18:00:19 KRT recv len 144 V9 seq 153 op chnge Type ifdev devindex 46
Oct  1 18:00:19 KRT recv len 1272 V9 seq 154 op chnge Type ifdev devindex 47
...

user@host:LSYS1> show log flow_lsys1.log
Nov  7 07:34:09 07:34:09.491800:CID-0:THREAD_ID-00:LSYS_ID-01:RT:got route table
lock

Nov  7 07:34:09 07:34:09.491809:CID-0:THREAD_ID-00:LSYS_ID-01:RT:released route
table lock

Nov  7 07:34:09 07:34:09.491840:CID-0:THREAD_ID-00:LSYS_ID-01:RT:got route table
lock

Nov  7 07:34:09 07:34:09.491841:CID-0:THREAD_ID-00:LSYS_ID-01:RT:released route
table lock

Nov  7 07:34:09 07:34:09.491854:CID-0:THREAD_ID-00:LSYS_ID-01:RT:cache final

```



```

sw_nh 0x0

Nov  7 07:34:09 07:34:09.491868:CID-0:THREAD_ID-00:LSYS_ID-01:RT:got route table
lock

Nov  7 07:34:09 07:34:09.491869:CID-0:THREAD_ID-00:LSYS_ID-01:RT:released route
table lock

Nov  7 07:34:09 07:34:09.491881:CID-0:THREAD_ID-00:LSYS_ID-01:RT:cache final
sw_nh 0x0
user@host:TSYS1> show log flow_tsys1.log
Nov  7 13:21:47 13:21:47.217744:CID-0:THREAD_ID-05:LSYS_ID-32:RT:<192.0.2.0/0-
>198.51.100.0/9011;1,0x0> :

Nov  7 13:21:47 13:21:47.217747:CID-0:THREAD_ID-05:LSYS_ID-32:RT:packet [84]
ipid = 39281, @0x7f490ae56d52

Nov  7 13:21:47 13:21:47.217749:CID-0:THREAD_ID-05:LSYS_ID-32:RT:----
flow_process_pkt: (thd 5): flow_ctxt type 0, common flag 0x0, mbuf 0x4882b600,
rtbl7

Nov  7 13:21:47 13:21:47.217752:CID-0:THREAD_ID-05:LSYS_ID-32:RT: flow process
pak fast ifl 88 in_ifp lt-0/0/0.101

Nov  7 13:21:47 13:21:47.217753:CID-0:THREAD_ID-05:LSYS_ID-32:RT:
lt-0/0/0.101:192.0.2.0->198.51.100.0, icmp, (0/0)

Nov  7 13:21:47 13:21:47.217756:CID-0:THREAD_ID-05:LSYS_ID-32:RT: find flow:
table 0x11d0a2680, hash 20069(0xffff), sa 192.0.2.0, da 198.51.100.0, sp 0, d0

Nov  7 13:21:47 13:21:47.217760:CID-0:THREAD_ID-05:LSYS_ID-32:RT:Found: session
id 0x12. sess tok 28685

Nov  7 13:21:47 13:21:47.217761:CID-0:THREAD_ID-05:LSYS_ID-32:RT:  flow got
session.

Nov  7 13:21:47 13:21:47.217761:CID-0:THREAD_ID-05:LSYS_ID-32:RT:  flow session
id 18

Nov  7 13:21:47 13:21:47.217763:CID-0:THREAD_ID-05:LSYS_ID-32:RT: vector bits
0x200 vector 0x84ae85f0

Nov  7 13:21:47 13:21:47.217764:CID-0:THREAD_ID-05:LSYS_ID-32:RT:set nat

```

```

0x11e463550(18) timeout const to 2

Nov  7 13:21:47 13:21:47.217765:CID-0:THREAD_ID-05:LSYS_ID-32:RT:
set_nat_timeout 2 on session 18

Nov  7 13:21:47 13:21:47.217765:CID-0:THREAD_ID-05:LSYS_ID-32:RT:refresh nat
0x11e463550(18) timeout to 2

Nov  7 13:21:47 13:21:47.217767:CID-0:THREAD_ID-05:LSYS_ID-32:RT:insert usp tag
for apps

Nov  7 13:21:47 13:21:47.217768:CID-0:THREAD_ID-05:LSYS_ID-32:RT:mbuf
0x4882b600, exit nh 0xffffb0006

```

show log filename (QFabric System)

```

user@qfabric> show log messages
Mar 28 18:00:06 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:06
ED1486 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 2159)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07
ED1486 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 2191)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07
ED1492 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 242726)
Mar 28 18:00:07 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:07
ED1492 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 2, jnxFruL3Index 0,
jnxFruName PIC: @ 0/1/*, jnxFruType 11, jnxFruSlot 0, jnxFruOfflineReason 2,
jnxFruLastPowerOff 0, jnxFruLastPowerOn 242757)
Mar 28 18:00:16 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:16 ED1486
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:00:27 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:27 ED1486
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)

```

```

Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:50 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:50
_DCF_default__NW-INE-0_RE0_ file: UI_COMMIT: User 'root' requested 'commit'
operation (comment: none)
Mar 28 18:00:55 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:00:55 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:01:10 qfabric file: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:01:10 ED1492
file: UI_COMMIT: User 'root' requested 'commit' operation (comment: none)
Mar 28 18:02:37 qfabric chassisd: QFABRIC_INTERNAL_SYSLOG: Mar 28 18:02:37
ED1491 chassisd: CHASSISD_SNMP_TRAP10: SNMP trap generated: FRU power on
(jnxFruContentsIndex 8, jnxFruL1Index 1, jnxFruL2Index 1, jnxFruL3Index 0,
jnxFruName PIC: 48x 10G-SFP+ @ 0/0/*, jnxFruType 11, jnxFruSlot 0,
jnxFruOfflineReason 2, jnxFruLastPowerOff 0, jnxFruLastPowerOn 33809)

```

show log user

```

user@host> show log user

```

usera	mg2546		Thu Oct 1 19:37	still logged in
usera	mg2529		Thu Oct 1 19:08 - 19:36	(00:28)
usera	mg2518		Thu Oct 1 18:53 - 18:58	(00:04)
root	mg1575		Wed Sep 30 18:39 - 18:41	(00:02)
root	ttyp2	aaa.bbbb.com	Wed Sep 30 18:39 - 18:41	(00:02)
userb	ttyp1	192.0.2.0	Wed Sep 30 01:03 - 01:22	(00:19)

show log accepted-traffic (SRX4600, SRX5400, SRX5600, and SRX5800)

```

user@host> show log accepted-traffic

```

Jul 17 20:26:04	sourpunch	RT_FLOW: RT_FLOW_SESSION_CREATE: session created
3.3.3.5/2->4.4.4.2/63	0x0 None	3.3.3.5/2->4.4.4.2/63 0x0 N/A N/A N/A N/A 17 p2
TRUST UNTRUST 2617282058	N/A(N/A)	xe-7/0/0.0 UNKNOWN UNKNOWN UNKNOWN N/A N/A -1
N/A N/A N/A		
Jul 17 20:26:04	sourpunch	RT_FLOW: RT_FLOW_SESSION_CREATE: session created
3.3.3.4/4->4.4.4.2/63	0x0 None	3.3.3.4/4->4.4.4.2/63 0x0 N/A N/A N/A N/A 17 p2
TRUST UNTRUST 2550162754	N/A(N/A)	xe-7/0/0.0 UNKNOWN UNKNOWN UNKNOWN N/A N/A -1
N/A N/A N/A		
Jul 17 20:26:04	sourpunch	RT_FLOW: RT_FLOW_SESSION_CREATE: session created

```

3.3.3.4/1->4.4.4.2/63 0x0 None 3.3.3.4/1->4.4.4.2/63 0x0 N/A N/A N/A N/A 17 p2
TRUST UNTRUST 2550162755 N/A(N/A) xe-7/0/0.0 UNKNOWN UNKNOWN UNKNOWN N/A N/A -1
N/A N/A N/A
Jul 17 20:26:04 sourpunch RT_FLOW: RT_FLOW_SESSION_CREATE: session created
3.3.3.3/0->4.4.4.2/63 0x0 None 3.3.3.3/0->4.4.4.2/63 0x0 N/A N/A N/A N/A 17 p2
TRUST UNTRUST 2550162752 N/A(N/A) xe-7/0/0.0 UNKNOWN UNKNOWN UNKNOWN N/A N/A -1
N/A N/A N/A
Jul 17 20:26:04 sourpunch RT_FLOW: RT_FLOW_SESSION_CREATE: session created
3.3.3.5/5->4.4.4.2/63 0x0 None 3.3.3.5/5->4.4.4.2/63 0x0 N/A N/A N/A N/A 17 p2
TRUST UNTRUST 2550162751 N/A(N/A) xe-7/0/0.0 UNKNOWN UNKNOWN UNKNOWN N/A N/A -1
N/A N/A N/A
Jul 17 20:26:04 sourpunch RT_FLOW: RT_FLOW_SESSION_CREATE: session created
3.3.3.3/3->4.4.4.2/63 0x0 None 3.3.3.3/3->4.4.4.2/63 0x0 N/A N/A N/A N/A 17 p2
TRUST UNTRUST 2550162753 N/A(N/A) xe-7/0/0.0 UNKNOWN UNKNOWN UNKNOWN N/A N/A -1
N/A N/A N/A

```

Release Information

Command introduced before Junos OS Release 7.4.

Option *device-type* (*device-id* | *device-alias*) is introduced in Junos OS Release 13.1 for the QFX Series.

RELATED DOCUMENTATION

| [syslog \(System\)](#)

show (ospf | ospf3) overview

IN THIS SECTION

- [Syntax | 980](#)
- [Syntax \(EX Series Switch and QFX Series\) | 980](#)
- [Description | 980](#)
- [Options | 980](#)
- [Required Privilege Level | 981](#)

- [Output Fields | 981](#)
- [Sample Output | 984](#)
- [Release Information | 987](#)

Syntax

```
show (ospf | ospf3) overview
<brief | extensive>
<instance instance-name>
<logical-system (all | logical-system-name)>
<realm (ipv4-multicast | ipv4-unicast | ipv6-multicast)>
```

Syntax (EX Series Switch and QFX Series)

```
show (ospf | ospf3) overview
<brief | extensive>
<instance instance-name>
```

Description

Display Open Shortest Path First (OSPF) overview information.

Options

none	Display standard information about all OSPF neighbors for all routing instances.
brief extensive	(Optional) Display the specified level of output.
instance <i>instance-name</i>	(Optional) Display all OSPF interfaces under the named routing instance.
logical-system (all <i>logical-system-name</i>)	(Optional) Perform this operation on all logical systems or on a particular logical system.

realm (ipv4-multicast |
ipv4-unicast | ipv6-
multicast)

(Optional) (OSPFv3 only) Display information about the specified OSPFv3 realm, or address family. Use the **realm** option to specify an address family for OSPFv3 other than IPv6 unicast, which is the default.

Required Privilege Level

view

Output Fields

[Table 40 on page 981](#) lists the output fields for the **show ospf overview** command. Output fields are listed in the approximate order in which they appear.

Table 40: show ospf overview Output Fields

Field name	Field Description	Level of Output
Instance	OSPF routing instance.	All levels
Router ID	Router ID of the routing device.	All levels
Route table index	Route table index.	All levels
Configured overload	Overload capability is enabled. If the overload timer is also configured, display the time that remains before it is set to expire. This field is not displayed after the timer expires.	All levels
Topology	Topology identifier.	All levels
Prefix export count	Number of prefixes exported into OSPF.	All levels
Full SPF runs	Number of complete Shortest Path First calculations.	All levels
SPF delay	Delay before performing consecutive Shortest Path First calculations.	All levels

Table 40: show ospf overview Output Fields *(Continued)*

Field name	Field Description	Level of Output
SPF holddown	Delay before performing additional Shortest Path First (SPF) calculations after the maximum number of consecutive SPF calculations is reached.	All levels
SPF rapid runs	Maximum number of Shortest Path First calculations that can be performed in succession before the hold-down timer begins.	All levels
LSA refresh time	Refresh period for link-state advertisement (in minutes).	All levels
SPRING	Source protocol routing in networking: enable or disable.	All levels
Node Segments	Nodes of source protocol routing in networking:enable or disable.	All levels
Ipv4 Index	Ipv4 Index.	All levels
Index Range	Ipv4 Index range.	All levels
Node Segment Blocks Allocated	Details about node segment blocks.	All levels
Database protection state	Current state of database protection.	All levels
Warning threshold	Threshold at which a warning message is logged (percentage of maximum LSA count).	All levels
Non self-generated LSAs	Number of LSAs whose router ID is not equal to the local router ID: Current, Warning (threshold), and Allowed.	All levels
Ignore time	How long the database has been in the ignore state.	All levels

Table 40: show ospf overview Output Fields (*Continued*)

Field name	Field Description	Level of Output
Reset time	How long the database must stay out of the ignore or isolated state before it returns to normal operations.	All levels
Ignore count	Number of times the database has been in the ignore state: Current and Allowed.	All levels
Restart	Graceful restart capability: enabled or disabled.	All levels
Restart duration	Time period for complete reacquisition of OSPF neighbors.	All levels
Restart grace period	Time period for which the neighbors should consider the restarting routing device as part of the topology.	All levels
Graceful restart helper mode	(OSPFv2) Standard graceful restart helper capability (based on RFC 3623): enabled or disabled.	All levels
Restart-signaling helper mode	(OSPFv2) Restart signaling-based graceful restart helper capability (based on RFC 4811, RFC 4812, and RFC 4813): enabled or disabled.	All levels
Helper mode	(OSPFv3) Graceful restart helper capability: enabled or disabled.	All levels
Trace options	OSPF-specific trace options.	extensive
Trace file	Name of the file to receive the output of the tracing operation.	extensive
Area	Area number. Area 0.0.0.0 is the backbone area.	All levels
Stub type	Stub type of area: Normal Stub, Not Stub, or Not so Stubby Stub.	All levels

Table 40: show ospf overview Output Fields (*Continued*)

Field name	Field Description	Level of Output
Authentication Type	Type of authentication: None, Password, or MD5. NOTE: The Authentication Type field refers to the authentication configured at the <code>[edit protocols ospf area <i>area-id</i>]</code> level. Any authentication configured for an interface in this area will not affect the value of this field.	All levels
Area border routers	Number of area border routers.	All levels
Neighbors	Number of autonomous system boundary routers.	All levels

Sample Output

show ospf overview (without SRGB)

```

user@host> show ospf overview
Instance: master
  Router ID: 10.255.245.6
  Route table index: 0
    Configured overload, expires in 118 seconds
  LSA refresh time: 50 minutes
  SPRING: Enabled
  Node Segments: Enabled
  Ipv4 Index : 10, Index Range: 2048
  Node Segment Blocks Allocated:
    Start Index : 0, Size : 256, Label-Range: [ 802048, 802303 ]
    Start Index : 256, Size : 256, Label-Range: [ 802304, 802559 ]
    Start Index : 512, Size : 256, Label-Range: [ 802560, 802815 ]
    Start Index : 768, Size : 256, Label-Range: [ 802816, 803071 ]
    Start Index : 1024, Size : 256, Label-Range: [ 803072, 803327 ]
    Start Index : 1280, Size : 256, Label-Range: [ 803328, 803583 ]
    Start Index : 1536, Size : 256, Label-Range: [ 803584, 803839 ]
    Start Index : 1792, Size : 256, Label-Range: [ 803840, 804095 ]
  Restart: Enabled
    Restart duration: 20 sec

```

```

Restart grace period: 40 sec
Helper mode: enabled
Area: 0.0.0.0
Stub type: Not Stub
Authentication Type: None
Area border routers: 0, AS boundary routers: 0
Neighbors
Up (in full state): 0
Topology: default (ID 0)
Prefix export count: 0
Full SPF runs: 1
SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3

```

show ospf overview (with SRGB)

```

user@host> show ospf overview
Instance: master
Router ID: 10.10.10.10
Route table index: 0
LSA refresh time: 50 minutes
Traffic engineering
SPRING: Enabled
SRGB Config Range :
  SRGB Start-Label : 1000, SRGB Index-Range : 2000
SRGB Block Allocation: Success
  SRGB Start Index : 1000, SRGB Size : 2000, Label-Range: [ 1000, 2999 ]
Node Segments: Enabled
Ipv4 Index : 1000
Post Convergence Backup: Disabled
Area: 0.0.0.0
Stub type: Not Stub
Authentication Type: None
Area border routers: 0, AS boundary routers: 0
Neighbors
Up (in full state): 3
Topology: default (ID 0)
Prefix export count: 0
Full SPF runs: 5

```

```
SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
Backup SPF: Enabled, Remote Backup calculation enabled
```

show ospf overview (With Database Protection)

```
user@host> show ospf overview
Instance: master
  Router ID: 10.255.112.218
  Route table index: 0
  LSA refresh time: 50 minutes
  Traffic engineering
  Restart: Enabled
    Restart duration: 180 sec
    Restart grace period: 210 sec
    Graceful restart helper mode: Enabled
    Restart-signaling helper mode: Enabled
  Database protection state: Normal
    Warning threshold: 70 percent
    Non self-generated LSAs: Current 582, Warning 700, Allowed 1000
    Ignore time: 30, Reset time: 60
    Ignore count: Current 0, Allowed 1
  Area: 0.0.0.0
    Stub type: Not Stub
    Authentication Type: None
    Area border routers: 0, AS boundary routers: 0
    Neighbors
      Up (in full state): 160
  Topology: default (ID 0)
    Prefix export count: 0
    Full SPF runs: 70
    SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
    Backup SPF: Not Needed
```

show ospf3 overview (With Database Protection)

```
user@host> show ospf3 overview
Instance: master
  Router ID: 10.255.112.128
  Route table index: 0
```

```

LSA refresh time: 50 minutes
Database protection state: Normal
  Warning threshold: 80 percent
  Non self-generated LSAs: Current 3, Warning 8, Allowed 10
  Ignore time: 30, Reset time: 60
  Ignore count: Current 0, Allowed 2
Area: 0.0.0.0
  Stub type: Not Stub
  Area border routers: 0, AS boundary routers: 0
  Neighbors
    Up (in full state): 1
Topology: default (ID 0)
  Prefix export count: 0
  Full SPF runs: 7
  SPF delay: 0.200000 sec, SPF holddown: 5 sec, SPF rapid runs: 3
  Backup SPF: Not Needed

```

show ospf overview extensive

```

user@host> show ospf overview extensive
Instance: master
  Router ID: 1.1.1.103
  Route table index: 0
  Full SPF runs: 13, SPF delay: 0.200000 sec
  LSA refresh time: 50 minutes
  Restart: Disabled
  Trace options: lsa
  Trace file: /var/log/ospf size 131072 files 10
Area: 0.0.0.0
  Stub type: Not Stub
  Authentication Type: None
  Area border routers: 0, AS boundary routers: 0
  Neighbors
    Up (in full state): 1

```

Release Information

Command introduced in Junos OS Release 7.4.

realm option introduced in Junos OS Release 9.2.

Database protection introduced in Junos 10.2.

show chassis dedicated-ukern-cpu

IN THIS SECTION

- [Syntax | 988](#)
- [Description | 988](#)
- [Options | 988](#)
- [Required Privilege Level | 988](#)
- [Output Fields | 989](#)
- [Sample Output | 989](#)
- [Release Information | 989](#)

Syntax

```
show chassis dedicated-ukern-cpu
```

Description

Display whether dedicated Bidirectional Forwarding Detection (BFD) is enabled or disabled. If dedicated BFD is enabled, the output of the show command displays the value of the **Dedicated Ukern CPU Status** field as **Enabled**.

Options

This command has no options.

Required Privilege Level

view

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

show chassis dedicated-ukern-cpu

```
user@host> show chassis dedicated-ukern-cpu
Dedicated Ukern CPU Status: Enabled
```

Release Information

Command introduced in Junos OS Release 15.1X49-D100.

RELATED DOCUMENTATION

[Enabling Dedicated and Real-Time BFD | 123](#)

[dedicated-ukern-cpu \(BFD\) | 661](#)

[Understanding BFD for BGP | 33](#)

[Understanding Distributed BFD | 46](#)

show chassis in-service-upgrade

IN THIS SECTION

- [Syntax | 990](#)
- [Description | 990](#)
- [Options | 990](#)
- [Required Privilege Level | 990](#)
- [Output Fields | 990](#)
- [Sample Output | 991](#)
- [Release Information | 994](#)

Syntax

```
show chassis in-service-upgrade
```

Description

Display the status of Flexible PIC Concentrators (FPCs) and their corresponding PICs after the most recent unified in-service software upgrade (ISSU). This command must be issued on the primary Routing Engine.

NOTE: Only Intelligent Queuing (IQ) PICs are displayed by this command output. Unified ISSU status for other PIC types is controlled internally by the FPC.

Options

This command has no options.

Required Privilege Level

view

Output Fields

Table 41 on page 990 lists the output fields for the **show chassis in-service-upgrade** command. Output fields are listed in the approximate order in which they appear.

Table 41: show chassis in-service-upgrade Output Fields

Field Name	Field Description
Item	Flexible PIC Concentrator (FPC) slot number.
Status	FPC and corresponding PIC state. State can be either of the follwing: • Online—FPC is online and running. • Offline—FPC is powered down.

Table 41: show chassis in-service-upgrade Output Fields (Continued)

Field Name	Field Description
Reason	Reason for the state (if offline).

Sample Output

show chassis in-service-upgrade

```

user@host> show chassis in-service-upgrade

  Item           Status           Reason
  FPC 0          Online
  FPC 1          Online
  FPC 2          Online
    PIC 0        Online
    PIC 1        Online
  FPC 3          Offline          Offlined by CLI
command
  FPC 4          Online
    PIC 1        Online
  FPC 5          Online
    PIC 0        Online
  FPC 6          Online
    PIC 3        Online
  FPC 7          Online

```

show chassis in-service-upgrade (MX2010 Router)

```

user@host> show chassis in-service-upgrade

  Item           Status           Reason
  FPC 0          Online
  FPC 1          Online
  FPC 8          Online
  FPC 9          Online

```


show chassis in-service-upgrade (MX2020 Router)

```
user@host> show chassis in-service-upgrade
```

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online	
FPC 3	Online	
FPC 4	Online	
FPC 5	Online	
FPC 6	Online	
FPC 7	Online	
FPC 8	Online	
FPC 9	Online	
FPC 10	Online	
FPC 11	Online	
FPC 12	Online	
FPC 13	Online	
FPC 14	Online	
FPC 15	Online	
FPC 16	Online	
FPC 17	Online	
FPC 18	Online	
FPC 19	Online	

show chassis in-service-upgrade (MX2008 Router)

```
user@host> show chassis in-service-upgrade
```

Item	Status	Reason
FPC 0	Online	
FPC 3	Online	
FPC 5	Online	
FPC 7	Online	
FPC 9	Online	

show chassis in-service-upgrade (TX Matrix Plus Router)

```
user@host> show chassis in-service-upgrade
lcc0-re0:
```

```

-----
Item          Status          Reason
FPC 1         Online
  PIC 0        Online
FPC 2         Online
FPC 3         Online
  PIC 1        Online
FPC 4         Online
FPC 6         Online
FPC 7         Online

```

lcc1-re0:

```

-----
Item          Status          Reason
FPC 0         Online
  PIC 3        Online
FPC 1         Online
FPC 2         Online
FPC 4         Online
FPC 6         Online
FPC 7         Online

```

lcc2-re0:

```

-----
Item          Status          Reason
FPC 0         Online
FPC 2         Online
FPC 3         Online
  PIC 0        Online
FPC 4         Online
FPC 6         Online
FPC 7         Online
  PIC 1        Online

```

lcc3-re0:

```

-----
Item          Status          Reason
FPC 0         Online
  PIC 0        Online
FPC 1         Online
FPC 2         Online
FPC 3         Online
  PIC 2        Online

```

FPC 4	Online
FPC 5	Online
FPC 6	Online
FPC 7	Online
PIC 1	Online

show chassis in-service-upgrade (QFX5100 Switch)

user@switch> show chassis in-service-upgrade		
Item	Status	Reason
FPC 0	Online (ISSU)	

show chassis in-service-upgrade (EX9253 Switch)

user@switch> show chassis in-service-upgrade		
Item	Status	Reason
FPC 0	Online	
FPC 1	Online	

Release Information

Command introduced in Junos OS Release 9.0.

RELATED DOCUMENTATION

<i>request system software abort</i>
request system software in-service-upgrade 1024
Getting Started with Unified In-Service Software Upgrade 495
Example: Performing a Unified ISSU 537

show chassis realtime-ukern-thread

IN THIS SECTION

- [Syntax | 995](#)
- [Description | 995](#)
- [Options | 995](#)
- [Required Privilege Level | 995](#)
- [Output Fields | 995](#)
- [Sample Output | 996](#)
- [Release Information | 996](#)

Syntax

```
show chassis realtime-ukern-thread
```

Description

Display whether real-time Bidirectional Forwarding Detection (BFD) is enabled or disabled. If real-time BFD is enabled, the output of the show command displays the value of the **realtime Ukern thread Status** field as **Enabled**.

Options

This command has no options.

Required Privilege Level

view

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

show chassis realtime-ukern-thread

```

user@host> show chassis realtime-ukern-thread
realtime Ukern thread Status: Enabled
    
```

Release Information

Command introduced in Junos OS Release 15.1X49-D100.

RELATED DOCUMENTATION

Enabling Dedicated and Real-Time BFD 123
realtime-ukern-thread (BFD) 662
Understanding BFD for BGP 33
Understanding Distributed BFD 46

show chassis redundancy feb

IN THIS SECTION

- [Syntax | 997](#)
- [Description | 997](#)
- [Options | 997](#)
- [Required Privilege Level | 997](#)
- [Output Fields | 997](#)
- [Sample Output | 999](#)
- [Release Information | 1000](#)

Syntax

```
show chassis redundancy feb
<errors>
<redundancy-group group-name>
```

Description

(M120 routers only) Display information about the status of configured Forwarding Engine Board (FEB) redundancy groups.

Options

- none** Display information about the status of all configured FEB redundancy groups.
- redundancy-group group-name** (Optional) Display information about the specified configured redundancy group.
- errors** (Optional) Display information about any errors encountered on the components in configured redundancy groups or on links between a FEB and a Flexible PIC Concentrator (FPC).

Required Privilege Level

view

Output Fields

[Table 42 on page 997](#) lists the output fields for the **show chassis redundancy feb** command. Output fields are listed in the approximate order in which they appear.

Table 42: show chassis redundancy feb Output Fields

Field name	Field Description
Group	Name of configured redundancy group.
FEB	Slot number of each FEB included in redundancy groups.

Table 42: show chassis redundancy feb Output Fields *(Continued)*

Field name	Field Description
State	State of each FEB: • Online—FEB is online and running. • Offline—FEB is powered down.
Priority	(Standard and redundancy-group option) Status of FEB in the redundancy group: Backup , Primary , Other , or null.
Connected FPCs	(Standard and redundancy-group option) Slot number of each FPC connected to the FEB. The status Check is displayed when an error might have occurred.
Redundancy State	(Standard and redundancy-group option) Status of the FEB: • Active—FEB is currently active. • Ready—Backup FEB is ready for a switchover • Not Ready—Backup FEB is not ready for a switchover.
Auto-failover	(Standard and redundancy-group option) Automatic failover status of redundancy group: Enabled or Disabled .
Switch-reason	(Standard and redundancy-group option) Reason a switchover occurred to the backup FEB in the redundancy group.
Hard error: Yes	(errors option only) Displayed when a hard error occurs on a FEB.
FPC	(errors option only) Slot number and status of FPC: link ok or link error .
Fabric plane	(errors option only) Slot number and status of fabric plane.

Sample Output

show chassis redundancy feb

```
user@host> show chassis redundancy feb
Group:          cfpc
  FEB  State             Priority  Connected FPCs  Redundancy state
  0    Offline            Backup                    Not ready
  1    Online              5                    Active
Auto-failover: Enabled
Group:          grp0
  FEB  State             Priority  Connected FPCs  Redundancy state
  3    Offline            Backup                    Not ready
  5    Online              Primary  0              Active
Auto-failover: Enabled
```

show chassis redundancy feb redundancy-group grp1

```
user@host> show chassis redundancy feb redundancy-group grp1
Group:          grp1
  FEB  State             Priority  Connected FPCs  Redundancy state
  0    Online             Other      0              Active
  1    Online             Other      1              Active
  4    Online             Primary   4              Active
  5    Online             Backup                    Ready
Autofailover: Enabled
Switch-reason: Switchover from CLI
```

show chassis redundancy feb redundancy-group grp0 errors

```
user@host> show chassis redundancy feb redundancy-group grp0 errors
Group: grp0
  FEB: 0      State: Online
    FPC 0 link OK
    Fabric plane 0 OK
    Fabric plane 1 OK
    Fabric plane 2 OK
    Fabric plane 3 OK
```



```
FEB: 1      State: Online
    FPC 0 link OK
    Fabric plane 0 OK
    Fabric plane 1 OK
    Fabric plane 2 OK
    Fabric plane 3 OK
FEB: 2      State: Online
    FPC 2 link OK
    Fabric plane 0 OK
    Fabric plane 1 OK
    Fabric plane 2 OK
    Fabric plane 3 OK
FEB: 3      State: Online
    FPC 3 link OK
    Fabric plane 0 OK
    Fabric plane 1 OK
    Fabric plane 2 OK
    Fabric plane 3 OK
FEB: 4      State: Online
    FPC 4 link OK
    Fabric plane 0 OK
    Fabric plane 1 OK
    Fabric plane 2 OK
    Fabric plane 3 OK
FEB: 5      State: Online
    FPC 5 link OK
    Fabric plane 0 OK
    Fabric plane 1 OK
    Fabric plane 2 OK
    Fabric plane 3 OK
```

Release Information

Command introduced in Junos OS Release 8.2.

RELATED DOCUMENTATION

[request chassis redundancy feb slot | 1009](#)

[Configuring FEB Redundancy on the M120 Router | 21](#)

[Understanding Switching Control Board Redundancy | 15](#)

clear vrrp

IN THIS SECTION

- [Syntax | 1001](#)
- [Description | 1001](#)
- [Options | 1001](#)
- [Required Privilege Level | 1001](#)
- [Output Fields | 1001](#)
- [Sample Output | 1002](#)
- [Release Information | 1002](#)

Syntax

```
clear vrrp (all | interface interface-name)
```

Description

Set Virtual Router Redundancy Protocol (VRRP) interface statistics to zero.

Options

all	Clear statistics on all interfaces.
interface <i>interface-name</i>	Clear statistics on the specified interface only.

Required Privilege Level

clear

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

clear vrrp all

```
user@host> clear vrrp all
```

Release Information

Command introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [show vrrp](#) | [1276](#)

clear chassis high-availability data-plane statistics

IN THIS SECTION

- [Syntax](#) | [1002](#)
- [Description](#) | [1003](#)
- [Required Privilege Level](#) | [1003](#)
- [Output Fields](#) | [1003](#)
- [Sample Output](#) | [1003](#)
- [Release Information](#) | [1003](#)

Syntax

```
clear chassis high-availability data-plane statistics
```

Description

Clear the data plane statistics of high availability.

Required Privilege Level

clear

Output Fields

Sample Output

clear chassis high-availability data-plane statistics

```
user@host> clear chassis high-availability data-plane statistics
Cleared data-plane statistics
```

Release Information

Command introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

| [show chassis high-availability data-plane statistics](#) | [1100](#)

clear security ike security-associations

IN THIS SECTION

- [Syntax](#) | [1004](#)
- [Description](#) | [1004](#)
- [Options](#) | [1004](#)
- [Required Privilege Level](#) | [1005](#)

- [Output Fields | 1005](#)
- [Release Information | 1005](#)

Syntax

```
clear security ike security-associations
<peer-address>
<family (inet | inet6)>
<fpc slot-number>
<index SA-index-number>
<kmd-instance (all | kmd-instance-name)>
<pic slot-number>
<port port-number>
<sa-type shortcut>
<ha-link-encryption>
```

Description

Clear information about the current Internet Key Exchange security associations (IKE SAs). For IKEv2, the device clears the information about the IKE SAs and the associated IPSec SA.

Options

- **none**—Clear all IKE SAs.
- ***peer-address***—(Optional) Clear IKE SAs for the destination peer at this IP address.
- **family**—(Optional) Clear IKE SAs by family.
 - **inet**—IPv4 address family.
 - **inet6**—IPv6 address family.
- **fpc *slot-number***—Specific to SRX Series devices. Clear information about existing IKE SAs in this Flexible PIC Concentrator (FPC) slot.
- **index *SA-index-number***—(Optional) Clear the IKE SA with this index number.

- **kmd-instance**—Specific to SRX Series devices. Clear information about existing IKE SAs in the key management process (the daemon, which in this case is KMD) identified by FPC *slot-number* and PIC *slot-number*.
 - **all**—All KMD instances running on the Services Processing Unit (SPU).
 - **kmd-instance-name**—Name of the KMD instance running on the SPU.
- **pic slot-number**—Specific to SRX Series devices. Clear information about existing IKE SAs in this PIC slot.
- **port port-number**—(Optional) Port number of SA (1 through 65,535).
- **sa-type shortcut**—(Optional for ADVPN) Type of SA. **shortcut** is the only option for this release.
- **ha-link-encryption**—(Optional) Clear information about the current IKE SAs for high availability (HA) link tunnel only. When you enable High Availability feature, you cannot delete customer tunnels on the backup node.

Required Privilege Level

clear

Output Fields

This command produces no output.

Release Information

Command introduced in Junos OS Release 8.5. The **fpc**, **pic**, and **kmd-instance** options added in Junos OS Release 9.3. The **port** option added in Junos OS Release 10.0. The **family** option added in Junos OS Release 11.1.

Support for the **ha-link-encryption** option added in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

| *show security ike security-associations*

clear security ipsec security-associations

IN THIS SECTION

- [Syntax | 1006](#)
- [Description | 1006](#)
- [Options | 1006](#)
- [Required Privilege Level | 1007](#)
- [Output Fields | 1007](#)
- [Release Information | 1007](#)

Syntax

```
clear security ipsec security-associations
<family (inet | inet6)>
<fpc slot-number>
<index SA-index-number>
<kmd-instance (all | kmd-instance-name)>
<pic slot-number>
<ha-link-encryption>
```

Description

Clear information about IPsec security associations (SAs).

Options

- **none**—Clear all IPsec SAs.
- **family**—(Optional) Clear SAs by family.
 - **inet**—IPv4 address family.
 - **inet6**—IPv6 address family.
- **fpc slot-number**—Specific to SRX Series devices. Clear information about existing IPsec SAs in this Flexible PIC Concentrator (FPC) slot.

- **index *SA-index-number***—(Optional) Clear the IPsec SA with this index number.
- **kmd-instance**—Specific to SRX Series devices. Clear information about existing IPsec SAs in the key management process (the daemon, which in this case is KMD) identified by FPC ***slot-number*** and PIC ***slot-number***.
 - **all**—All KMD instances running on the Services Processing Unit (SPU).
 - ***kmd-instance-name***—Name of the KMD instance running on the SPU.
- **pic *slot-number***—Specific to SRX Series devices. Clear information about existing IPsec SAs in this PIC slot.
- **ha-link-encryption**—(Optional) Clear information about IPsec SAs for interchassis link tunnel only. See *ipsec (High Availability)*. When you enable High Availability feature, you cannot delete customer tunnels on the backup node.

Required Privilege Level

clear

Output Fields

This command produces no output.

Release Information

Command introduced in Junos OS Release 8.5. The **fpc**, **pic**, and **kmd-instance** options added in Junos OS Release 9.3. The **family** option added in Junos OS Release 11.1.

Support for the **ha-link-encryption** option added in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

| *show security ipsec security-associations*

request chassis high-availability failover services-redundancy-group

IN THIS SECTION

- [Syntax | 1008](#)
- [Description | 1008](#)
- [Options | 1008](#)
- [Required Privilege Level | 1008](#)
- [Output Fields | 1009](#)
- [Sample Output | 1009](#)
- [Release Information | 1009](#)

Syntax

```
request chassis high-availability failover services-redundancy-group services-  
redundancy-group peer-id peer-id
```

Description

Initiate a manual failover on service redundancy group 1 to the peer node. The command must be executed on the master node of the service redundancy group.

Options

services-redundancy-group	Number of the service redundancy group on which to initiate manual failover. ● Range: 1 through 256
peer-id	Node identifier of the new primary. ● Range: 1 through 10

Required Privilege Level

maintenance

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

request chassis high-availability failover services-redundancy-group 1

```
user@host> request chassis high-availability failover services-redundancy-group 1 peer-id 2
Initiated manual failover for redundancy group 1
```

Release Information

Command introduced in Junos OS 20.4R1.

RELATED DOCUMENTATION

| [show chassis high-availability information](#) | [1087](#)

request chassis redundancy feb slot

IN THIS SECTION

- [Syntax](#) | [1010](#)
- [Description](#) | [1010](#)
- [Options](#) | [1010](#)
- [Required Privilege Level](#) | [1010](#)
- [Output Fields](#) | [1010](#)
- [Sample Output](#) | [1010](#)
- [Release Information](#) | [1011](#)

Syntax

```
request chassis redundancy feb slot slot-number (switch-to-backup | revert-from-backup)
```

Description

(M120 routers only) Control the operation of the specified Forwarding Engine Board (FEB) in a redundancy group.

Options

<i>slot-number</i>	FEB slot number. Replace <i>slot-number</i> with a value from 0 through 5 .
switch-to-backup	Initiate a switchover from the specified active FEB to the backup FEB for the redundancy group.
revert-from-backup	Initiate a revert to the specified FEB following a switchover from the backup FEB for a redundancy group.

Required Privilege Level

maintenance

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

request chassis redundancy feb slot 2 switch-to-backup

```
user@host> request chassis redundancy feb slot 2 switch-to-backup
Switch initiated, use "show chassis redundancy febs" to verify
```

request chassis redundancy feb slot 3 revert-from-backup

```
user@host> request chassis redundancy feb slot 3 revert-from-backup
Revert initiated, use "show chassis redundancy febs" to verify
```

Release Information

Command introduced in Junos OS Release 8.2.

RELATED DOCUMENTATION

[show chassis redundancy feb | 996](#)

[Configuring FEB Redundancy on the M120 Router | 21](#)

[Understanding Switching Control Board Redundancy | 15](#)

request chassis routing-engine master

IN THIS SECTION

- [Syntax | 1012](#)
- [Syntax \(M Series, MX Series, T Series Routers\) | 1012](#)
- [Syntax \(TX Matrix Routers\) | 1012](#)
- [Syntax \(TX Matrix Plus Routers\) | 1012](#)
- [Syntax \(MX Series Virtual Chassis\) | 1012](#)
- [Syntax \(QFX Series\) | 1013](#)
- [Syntax | 1013](#)
- [Description | 1013](#)
- [Options | 1014](#)
- [Additional Information | 1015](#)
- [Required Privilege Level | 1016](#)
- [Output Fields | 1016](#)
- [Sample Output | 1016](#)

Syntax

```
request chassis routing-engine master (acquire | release | switch)
<no-confirm>
```

Syntax (M Series, MX Series, T Series Routers)

```
request chassis routing-engine master (acquire | release | switch)
<no-confirm>
<check>
```

Syntax (TX Matrix Routers)

```
request chassis routing-engine master (acquire | release | switch) (lcc number |
scc | all-chassis)
<no-confirm>
```

Syntax (TX Matrix Plus Routers)

```
request chassis routing-engine master (acquire | release | switch) (lcc number |
sfc | all-chassis | all-lcc)
<no-confirm>
```

Syntax (MX Series Virtual Chassis)

```
request chassis routing-engine master (acquire | release | switch)
<all-members>
<check>
<local>
```

```
<member member-id>
<no-confirm>
```

Syntax (QFX Series)

```
request chassis routing-engine master (release | switch)
<check>
<interconnect-device name>
<node-group name>
<no-confirm>
```

Syntax

Description

For routers or switches with multiple Routing Engines, control which Routing Engine is the primary.



CAUTION: (Routing matrix based on the TX Matrix or TX Matrix Plus routers only)
Within the routing matrix, we recommend that all Routing Engines run the same Junos OS Release. If you run different releases on the Routing Engines and a change in primary role occurs on any backup Routing Engine in the routing matrix, one or all routers (in a routing matrix based on the TX Matrix router or in a routing matrix based on a TX Matrix Plus router) might become logically disconnected from the TX Matrix router and cause data loss. For more information, see the [TX Matrix Router Hardware Guide](#) or the [Junos OS High Availability User Guide](#).

NOTE: Successive graceful Routing Engine switchover events must be a minimum of 240 seconds (4 minutes) apart after both Routing Engines have come up.

If the router or switch displays a warning message similar to “Standby Routing Engine is not ready for graceful switchover. Packet Forwarding Engines that are not ready for graceful switchover might be reset,” do not attempt switchover. If you choose to proceed with switchover, only the Packet Forwarding Engines that were not ready for graceful switchover are reset. None of the Flexible PIC concentrators (FPCs) should spontaneously restart. We recommend that you wait until the warning no longer appears and then proceed with the switchover.

You will receive an error message stating “Command terminated. Not ready for primary role switch, try after n seconds” when this command is re-entered before 240 seconds have elapsed on EX Series switches.

NOTE: On a QFabric system, to avoid traffic loss on the network Node group, switch primary role of the routing engine to the backup routing engine, and then reboot.

Options

acquire (Not available for Junos OS Evolved) Attempt to become the primary Routing Engine.

release (Not available for Junos OS Evolved) Request that the other Routing Engine become the primary.

switch Toggle primary role between Routing Engines.

NOTE: The **acquire** option should be used with caution because acquiring a Routing Engine may result in a corrupted database. If possible, use the **switch** option instead.

The **acquire**, **release**, and **switch** options have the following suboptions:

- all-chassis** (TX Matrix and TX Matrix Plus routers only) On a routing matrix composed of a TX Matrix router and the attached T640 routers, switch primary role on all the Routing Engines in the routing matrix. Likewise, on a routing matrix composed of a TX Matrix Plus router and the attached T1600 or T4000 routers, switch primary role on all the Routing Engines in the routing matrix.
- all-lcc** (TX Matrix Plus routers only) Request to acquire primary role for all line-card chassis (LCC).
- all-members** (MX Series routers only) (Optional) Control Routing Engine primary role on the Routing Engines in all member routers of the Virtual Chassis configuration.
- check** (QFabric systems, MX104, MX480, MX960, MX2010, MX2020, and MX2008 routers, and PTX5000 routers only) (Optional) Available with the **switch**, **release**, and **acquire** options. Check graceful switchover status of the standby Routing Engine before toggling primary role between Routing Engines.

interconnect-device <i>name</i>	(QFabric systems only) (Optional) Control Routing Engine primary role on the Routing Engines on an Interconnect device.
lcc <i>number</i>	(TX Matrix router and TX Matrix Plus router only) (Optional) Line-card chassis number. Replace <i>number</i> with the following values depending on the LCC configuration: • 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix. • 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix. • 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix. • 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.
local	(MX Series routers only) (Optional) Control Routing Engine primary role on the Routing Engines in the local Virtual Chassis member.
member <i>member-id</i>	(MX Series routers only) (Optional) Control Routing Engine primary role on the Routing Engines of the specified member in the Virtual Chassis configuration. Replace <i>member-id</i> with a value of 0 or 1.
no-confirm	(Optional) Do not request confirmation for the switch.
node-group <i>name</i>	(QFabric systems only) (Optional) Control Routing Engine primary role on the Routing Engines on a Node group.
scc	(TX Matrix routers only) TX Matrix (switch-card chassis).
sfc	(TX Matrix Plus routers only) TX Matrix Plus router (or switch-fabric chassis).

Additional Information

Because both Routing Engines are always running, the transition from one to the other as the primary Routing Engine is immediate. However, the changeover interrupts communication to the System and Switch Board (SSB). The SSB takes several seconds to reinitialize the Flexible PIC Concentrators (FPCs) and restart the PICs. Interior gateway protocol (IGP) and BGP convergence times depend on the specific network environment.

By default, the Routing Engine in slot 0 (**RE0**) is the primary and the Routing Engine in slot 1 (**RE1**) is the backup. To change the default primary Routing Engine, include the **routing-engine** statement at the **[edit chassis redundancy]** hierarchy level in the configuration. For more information, see the [Junos OS Administration Library for Routing Devices](#)

To have the backup Routing Engine become the primary Routing Engine, use the **request chassis routing-engine master switch** command. If you use this command to change the primary and then restart the chassis software for any reason, the primary reverts to the default setting.

NOTE: Although the configurations on the two Routing Engines do not have to be the same and are not automatically synchronized, we recommend making both configurations the same.

Required Privilege Level

maintenance

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

request chassis routing-engine primary acquire

```
user@host> request chassis routing-engine master acquire

warning: Traffic will be interrupted while the PFE is re-initialized

warning: The other routing engine's file system could be corrupted

Reset other routing engine and become master ? [yes,no] (no)
```

request chassis routing-engine primary switch

```
user@host> request chassis routing-engine master switch

warning: Traffic will be interrupted while the PFE is re-initialized

Toggle mastership between Routing Engines ? [yes,no] (no) yes
```

```
Resolving mastership...
Complete. The other Routing Engine becomes the master.
```

Switch primary role back to the local Routing Engine:

```
user@host> request chassis routing-engine master switch

warning: Traffic will be interrupted while the PFE is re-initialized
Toggle mastership between routing engines ? [yes,no] (no) yes

Resolving mastership...
Complete. The local routing engine becomes the master.
```

request chassis routing-engine master switch (Junos OS Evolved)

```
user@host> request chassis routing-engine master switch
Resolving mastership...
Complete. The other Routing Engine becomes the master.
```

Switching back to primary router:

```
user@host> request chassis routing-engine master switch
Resolving mastership...
Complete. The local Routing Engine becomes the master.
```

If you did not switch back and tried to enter configuration mode, you would get the following error message:

```
user@host> configure
error: unknown command: configure
Configuration is allowed only from the master Routing Engine.
```

request chassis routing-engine primary switch check

Usage shown for M Series, MX Series, and T Series routers.

```
{master}[edit]

user@host> request chassis routing-engine master switch check
```

command-name

```
warning: Standby Routing Engine is not ready for graceful switchover.

{master}[edit]

user@host> request chassis routing-engine master switch check
Switchover Ready
```

You can similarly check the backup Routing Engine.

request chassis routing-engine master switch check (DRAM Size Mismatch Between Primary and Standby)

```
user@host> request chassis routing-engine master switch check
error: Standby mirror connection is not up:RE DRAM Size Mismatch

{master}
```

Release Information

Command introduced before Junos OS Release 7.4.

all-chassis option added in Junos OS Release 8.0.

sfc option introduced for the TX Matrix Plus router in Junos OS Release 9.6.

RELATED DOCUMENTATION

| *show chassis routing-engine*

request chassis sfm master switch

IN THIS SECTION

- [Syntax | 1019](#)
- [Description | 1019](#)
- [Options | 1019](#)
- [Additional Information | 1020](#)
- [Required Privilege Level | 1020](#)
- [Output Fields | 1020](#)
- [Sample Output | 1020](#)
- [Release Information | 1020](#)

Syntax

```
request chassis sfm master switch  
<no-confirm>
```

Description

(M40e and M160 routers only) Control which Switching and Forwarding Module (SFM) is primary.

Options

no-confirm (Optional) Do not display a switch warning or query.

Additional Information

By default, the SFM in slot 0 (SFM0) is the primary and the SFM in slot 1 (SFM1) is the backup. If you use this command to change the primary, and then restart the chassis software for any reason, the primary reverts to the default setting. To change the default primary SFM, include the **sfm** statement at the **[edit chassis redundancy]** hierarchy level in the configuration. For more information, see the [Junos OS Administration Library for Routing Devices](#).

All installed SFMs are always working together to forward packets. If an SFM fails, the other SFMs take over and traffic continues to flow uninterrupted.

Required Privilege Level

maintenance

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

request chassis sfm primary switch

```
user@host> request chassis sfm master switch
warning: Traffic will be interrupted while the PFE is re-initialized
Toggle mastership between system forwarding module? [yes,no] (no) yes

Switch initiated, use "show chassis sfm" to verify
```

request chassis sfm primary switch no-confirm

```
user@host> request chassis sfm master switch no-confirm
Switch initiated, use "show chassis sfm" to verify
```

Release Information

Command introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

show chassis sfm

Switching the Global Primary and Backup Roles in a Virtual Chassis Configuration

request chassis ssb master switch

IN THIS SECTION

- [Syntax | 1021](#)
- [Description | 1021](#)
- [Options | 1021](#)
- [Additional Information | 1022](#)
- [Required Privilege Level | 1022](#)
- [Output Fields | 1022](#)
- [Sample Output | 1022](#)
- [Release Information | 1023](#)

Syntax

```
request chassis ssb master switch  
<no-confirm>
```

Description

(M20 router only) Control which System and Switch Board (SSB) is primary.

Options

no-confirm (Optional) Do not request confirmation for the switch.

Additional Information

By default, the SSB in slot 0 (SSB0) is the primary and the SSB in slot 1 (SSB1) is the backup. If you use this command to change the primary, and then restart the chassis software for any reason, the primary reverts to the default setting. To change the default primary SSB, include the **ssb** statement at the **[edit chassis redundancy]** hierarchy level in the configuration. For more information, see the [Junos OS Administration Library for Routing Devices](#).

The configurations on the two SSBs do not have to be the same, and they are not automatically synchronized. If you configure both SSBs as primaries, when the chassis software restarts for any reason, the SSB in slot 0 becomes the primary and the one in slot 1 becomes the backup.

The switchover from the primary SSB to the backup SSB is immediate. The SSB takes several seconds to reinitialize the Flexible PIC Concentrators (FPCs) and restart the PICs. The interior gateway protocol (IGP) and BGP convergence times depend on the specific network environment.

Required Privilege Level

maintenance

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

request chassis ssb primary switch

```
user@host> request chassis ssb master switch
warning: Traffic will be interrupted while the PFE is re-initialized
Toggle mastership between system switch boards ? [yes,no] (no) yes

Switch initiated, use "show chassis ssb" to verify
```

request chassis ssb primary switch no-confirm

```
user@host> request chassis ssb master switch no-confirm
Switch initiated, use "show chassis ssb" to verify
```

Release Information

Command introduced before Junos OS Release 7.4.

RELATED DOCUMENTATION

| [show chassis ssb](#) | [1250](#)

request redundant-power-system multi-backup

IN THIS SECTION

- [Syntax](#) | [1023](#)
- [Description](#) | [1024](#)
- [Required Privilege Level](#) | [1024](#)
- [Sample Output](#) | [1024](#)
- [Release Information](#) | [1024](#)

Syntax

EX2200 switch:

```
request redundant-power-system multi-backup
request redundant-power-system no-multi-backup
```

EX3300 switch:

```
request redundant-power-system multi-backup member member-number

request redundant-power-system no-multi-backup member member-number
```


Description

Configure a redundant power system (RPS) to back up six non-Power-over-Ethernet (PoE) powered switches instead of the default which is to back up three PoE-powered switches.

Required Privilege Level

admin—To view this statement in the configuration.

admin-control—To add this statement to the configuration.

Sample Output

request redundant-power-system multi-backup

```
user@switch> request redundant-power-system multi-backup member 1
Sending multi-backup setting to RPS
```

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

| [EX Series Redundant Power System Hardware Overview](#) | 395

request system software in-service-upgrade

IN THIS SECTION

- [Syntax](#) | 1025
- [Syntax](#) | 1025
- [Description](#) | 1025
- [Options](#) | 1025

- [Additional Information | 1027](#)
- [Required Privilege Level | 1027](#)
- [Output Fields | 1027](#)
- [Sample Output | 1027](#)
- [Release Information | 1044](#)

Syntax

```
request system software in-service-upgrade package-name
<no-old-master-upgrade>
<reboot>
<status>
<enhanced-mode>
```

Syntax

Syntax (QFX Series)

```
request system software in-service-upgrade package-name
```

Description

Perform a unified in-service software upgrade (ISSU). A unified ISSU enables you to upgrade from one Junos OS release to another with no disruption on the control plane and with minimal disruption of traffic.

On QFX5100 and QFX5200 switches, enable nonstop active routing (NSR) and nonstop bridging (NSB).

Options

package-name

Location from which the software package or bundle is to be installed. For example:

- ***/var/tmp/package-name***— For a software package or bundle that is being installed from a local directory on the router.

- ***protocol://hostname/pathname/package-name***—For a software package or bundle that is to be downloaded and installed from a remote location. Replace ***protocol*** with one of the following:
 - **ftp**—File Transfer Protocol
 - **http**—Hypertext Transfer Protocol
 - **scp**—Secure copy (available only for Canada and U.S. version)

no-old-master-upgrade

(Optional) When the **no-old-master-upgrade** option is included, after the backup Routing Engine is rebooted with the new software package and a switchover occurs to make it the new primary Routing Engine, the former primary (new backup) Routing Engine will not be upgraded to the new software. In this case, you must manually upgrade the former primary (new backup) Routing Engine. If you do not include the **no-old-master-upgrade** option, the system will automatically upgrade the former primary Routing Engine.

NOTE: This option is not available on QFX5100 and QFX5200 switches.

reboot

(Optional) When the **reboot** option is included, the former primary (new backup) Routing Engine is automatically rebooted after being upgraded to the new software. When the **reboot** option is not included, you must manually reboot the former primary (new backup) Routing Engine using the **request system reboot** command.

NOTE: This option is not available on the QFX Series switches.

status

(Optional) Starting in Junos OS Release 19.4R1, use this option to display the status of a unified ISSU during the upgrade. You will need to run this command on the Routing Engine where the ISSU was triggered to display the correct ISSU log file.

NOTE: This option is only available on MX240, MX480, MX960, MX2010, MX2020, PTX3000, and PTX5000 routers.

enhanced-mode

(Optional) Starting in Junos OS Release 20.1R1, runs unified ISSU in enhanced mode, a mode of ISSU that eliminates packet loss during the unified ISSU process.

NOTE: This option is only available on MPC7E, MPC8E, and MPC9E line cards.

Additional Information

The following conditions apply to unified ISSUs:

- Unified ISSU is not supported on every platform. For a list of supported platforms, see ["Unified ISSU System Requirements" on page 507](#).
- Unsupported PICs are restarted during a unified ISSU on certain routing devices. For information about supported PICs, see the [Junos OS High Availability User Guide](#).
- Unsupported protocols will experience packet loss during a unified ISSU. For information about supported protocols, see the [Junos OS High Availability User Guide](#).
- During a unified ISSU, you cannot bring any PICs online or offline on certain routing devices.

For more information, see the [Junos OS High Availability User Guide](#).

Required Privilege Level

view

Output Fields

When you enter this command, you are provided feedback on the status of your request.

Sample Output

request system software in-service-upgrade reboot

```
{master}
user@host> request system software in-service-upgrade /var/tmp/jinstall-9.0-20080114.2-domestic-
signed.tgz reboot
ISSU: Validating Image
PIC 0/3 will be offlined (In-Service-Upgrade not supported)
Do you want to continue with these actions being taken ? [yes,no] (no) yes

ISSU: Preparing Backup RE
```

```

Pushing bundle to rel
Checking compatibility with configuration
Initializing...
Using jbase-9.0-20080114.2
Verified manifest signed by PackageProduction_9_0_0
Using /var/tmp/jinstall-9.0-20080114.2-domestic-signed.tgz
Verified jinstall-9.0-20080114.2-domestic.tgz signed by PackageProduction_9_0_0
Using jinstall-9.0-20080114.2-domestic.tgz
Using jbundle-9.0-20080114.2-domestic.tgz
Checking jbundle requirements on /
Using jbase-9.0-20080114.2.tgz
Verified manifest signed by PackageProduction_9_0_0
Using jkernel-9.0-20080114.2.tgz
Verified manifest signed by PackageProduction_9_0_0
Using jcrypto-9.0-20080114.2.tgz
Verified manifest signed by PackageProduction_9_0_0
Using jpfe-9.0-20080114.2.tgz
Using jdocs-9.0-20080114.2.tgz
Verified manifest signed by PackageProduction_9_0_0
Using jroute-9.0-20080114.2.tgz
Verified manifest signed by PackageProduction_9_0_0
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
Installing package '/var/tmp/jinstall-9.0-20080114.2-domestic-signed.tgz' ...
Verified jinstall-9.0-20080114.2-domestic.tgz signed by PackageProduction_9_0_0
Adding jinstall...
Verified manifest signed by PackageProduction_9_0_0

WARNING:      This package will load JUNOS 9.0-20080114.2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

```

```

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-9.0-20080114.2-domestic-
signed.tgz ...
Saving state for rollback ...
Backup upgrade done
Rebooting Backup RE

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU started
ISSU: Backup RE Prepare Done
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

```

Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
ISSU: Upgrading Old Master RE
Installing package '/var/tmp/paKEuy' ...
Verified jinstall-9.0-20080114.2-domestic.tgz signed by PackageProduction_9_0_0
Adding jinstall...
Verified manifest signed by PackageProduction_9_0_0

WARNING:      This package will load JUNOS 9.0-20080114.2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information

```

```

WARNING:      stored on this machine.  It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-9.0-20080114.2-domestic-
signed.tgz ...
cp: /var/tmp/paKEuy is a directory (not copied).
Saving state for rollback ...
ISSU: Old Master Upgrade Done
ISSU: IDLE
Shutdown NOW!
Reboot consistency check bypassed - jinstall 9.0-20080114.2 will complete
installation upon reboot
[pid 30227]

*** FINAL System shutdown message from root@host ***

System going down IMMEDIATELY

Connection to host closed.

```

request system software in-service-upgrade reboot (TX Matrix Plus Router)

```

{master}
user@host> request system software in-service-upgrade /var/tmp/jinstall-12.3R2-domestic-signed.tgz
Chassis ISSU Check Done
ISSU: Validating Image
PIC 8/1 will be offlined (In-Service-Upgrade not supported)
PIC 19/2 will be offlined (In-Service-Upgrade not supported)

```

```

PIC 15/3 will be offlined (In-Service-Upgrade not supported)
Do you want to continue with these actions being taken ? [yes,no] (no) yes

Checking compatibility with configuration
Initializing...
Using jbase-12.3R2
Verified manifest signed by PackageProduction_12_3_0
Using /var/tmp/jinstall-12.3R2-domestic-signed.tgz
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Using jinstall-12.3R2-domestic.tgz
Using jbundle-12.3R2-domestic.tgz
Checking jbundle requirements on /
Using jbase-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jbase-12.3R2 signed by PackageProduction_12_3_0
Using /var/validate/chroot/tmp/jbundle/jboot-12.3R2.tgz
Using jcrypto-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jcrypto-12.3R2 signed by PackageProduction_12_3_0
Using jdocs-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jdocs-12.3R2 signed by PackageProduction_12_3_0
Using jkernel-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jkernel-12.3R2 signed by PackageProduction_12_3_0
Using jpfe-12.3R2.tgz
WARNING: jpfe-12.3R2.tgz: not a signed package
WARNING: jpfe-common-12.3R2.tgz: not a signed package
Verified jpfe-common-12.3R2 signed by PackageProduction_12_3_0
WARNING: jpfe-T-12.3R2.tgz: not a signed package
Verified jpfe-T-12.3R2 signed by PackageProduction_12_3_0
Using jplatform-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jplatform-12.3R2 signed by PackageProduction_12_3_0
Using jroute-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jroute-12.3R2 signed by PackageProduction_12_3_0
Using jruntime-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jruntime-12.3R2 signed by PackageProduction_12_3_0
Using jservices-12.3R2.tgz
Using jservices-crypto-12.3R2.tgz
Hardware Database regeneration succeeded

```



```

Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
ISSU: Preparing LCC Backup REs
Pushing bundle to lcc0-re1
Pushing bundle to lcc1-re1
Pushing bundle to lcc2-re1
Pushing bundle to lcc3-re1
Pushing bundle to sfc0-re1
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...
Saving state for rollback ...
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information

```

```

WARNING:      stored on this machine.  It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...
Saving state for rollback ...
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine.  It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...

```

```

Saving state for rollback ...
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...
Saving state for rollback ...
ISSU: Preparing SFC Backup RE
NOTICE: Validating configuration against jinstall-12.3R2-domestic-signed.tgz.
NOTICE: Use the 'no-validate' option to skip this if desired.
Checking compatibility with configuration
Initializing...
Using jbase-12.3R2
Verified manifest signed by PackageProduction_12_3_0
Using /var/tmp/jinstall-12.3R2-domestic-signed.tgz
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Using jinstall-12.3R2-domestic.tgz
Using jbundle-12.3R2-domestic.tgz
Checking jbundle requirements on /
Using jbase-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jbase-12.3R2 signed by PackageProduction_12_3_0
Using /var/validate/chroot/tmp/jbundle/jboot-12.3R2.tgz

```

```

Using jcrypto-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jcrypto-12.3R2 signed by PackageProduction_12_3_0
Using jdocs-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jdocs-12.3R2 signed by PackageProduction_12_3_0
Using jkernel-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jkernel-12.3R2 signed by PackageProduction_12_3_0
Using jpfe-12.3R2.tgz
WARNING: jpfe-12.3R2.tgz: not a signed package
WARNING: jpfe-common-12.3R2.tgz: not a signed package
Verified jpfe-common-12.3R2 signed by PackageProduction_12_3_0
WARNING: jpfe-T-12.3R2.tgz: not a signed package
Verified jpfe-T-12.3R2 signed by PackageProduction_12_3_0
Using jplatform-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jplatform-12.3R2 signed by PackageProduction_12_3_0
Using jroute-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jroute-12.3R2 signed by PackageProduction_12_3_0
Using jruntime-12.3R2.tgz
Verified manifest signed by PackageProduction_12_3_0
Verified jruntime-12.3R2 signed by PackageProduction_12_3_0
Using jservices-12.3R2.tgz
Using jservices-crypto-12.3R2.tgz
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

```

```

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...
Saving state for rollback ...
SFC Backup upgrade done
Rebooting SFC Backup RE

Rebooting sfc0-rel
ISSU: SFC Backup RE Prepare Done
Waiting for SFC Backup RE reboot

Rebooting lcc0-rel
Rebooting LCC [lcc0-rel]

Rebooting lcc1-rel
Rebooting LCC [lcc1-rel]

Rebooting lcc2-rel
Rebooting LCC [lcc2-rel]

Rebooting lcc3-rel
Rebooting LCC [lcc3-rel]
LCC Backup REs have rebooted
Waiting for LCC Backup REs come back online
ISSU: LCC Backup REs Prepare Done
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

lcc0-re0:

Item	Status	Reason
FPC 1	Online (ISSU)	
PIC 0	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Online (ISSU)	
PIC 1	Online (ISSU)	
FPC 4	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

lcc1-re0:

Item	Status	Reason
FPC 0	Online (ISSU)	
PIC 3	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 4	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

lcc2-re0:

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Online (ISSU)	
PIC 0	Online (ISSU)	
FPC 4	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	
PIC 1	Online (ISSU)	

lcc3-re0:

Item	Status	Reason
FPC 0	Online (ISSU)	
PIC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Online (ISSU)	

```

    PIC 2      Online (ISSU)
    FPC 4      Online (ISSU)
    FPC 5      Online (ISSU)
    FPC 6      Online (ISSU)
    FPC 7      Online (ISSU)
    PIC 1      Online (ISSU)

lcc0-re0:
-----
Resolving mastership...
Complete. The other routing engine becomes the master.

lcc1-re0:
-----
Resolving mastership...
Complete. The other routing engine becomes the master.

lcc2-re0:
-----
Resolving mastership...
Complete. The other routing engine becomes the master.

lcc3-re0:
-----
Resolving mastership...
Complete. The other routing engine becomes the master.
Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
ISSU: Upgrading SFC Old Master RE

lcc0-re0:
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when

```

WARNING: you reboot the system.

Saving the config files ...

NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-install

Installing the bootstrap installer ...

WARNING: A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the

WARNING: 'request system reboot' command when software installation is

WARNING: complete. To abort the installation, do not reboot your system,

WARNING: instead use the 'request system software delete jinstall'

WARNING: command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...

Saving state for rollback ...

lcc1-re0:

Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...

Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0

Adding jinstall...

Verified manifest signed by PackageProduction_12_3_0

WARNING: This package will load JUNOS 12.3R2 software.

WARNING: It will save JUNOS configuration files, and SSH keys

WARNING: (if configured), but erase all other files and information

WARNING: stored on this machine. It will attempt to preserve dumps

WARNING: and log files, but this can not be guaranteed. This is the

WARNING: pre-installation stage and all the software is loaded when

WARNING: you reboot the system.

Saving the config files ...

NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-install

Installing the bootstrap installer ...

WARNING: A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the

WARNING: 'request system reboot' command when software installation is

WARNING: complete. To abort the installation, do not reboot your system,

WARNING: instead use the 'request system software delete jinstall'

WARNING: command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...

Saving state for rollback ...


```

lcc2-re0:
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...
Saving state for rollback ...

lcc3-re0:
Installing package '/var/tmp/jinstall-12.3R2-domestic-signed.tgz' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

```

```

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed.tgz ...
Saving state for rollback ...
Installing package '/var/tmp/paBWTg' ...
Verified jinstall-12.3R2-domestic.tgz signed by PackageProduction_12_3_0
Adding jinstall...
Verified manifest signed by PackageProduction_12_3_0

WARNING:      This package will load JUNOS 12.3R2 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-12.3R2-domestic-signed ...
cp: /var/tmp/paBWTg is a directory (not copied).
Saving state for rollback ...
ISSU: SFC Old Master Upgrade Done
ISSU: IDLE

```

request system software in-service-upgrade (QFX5100 Switch)

```
{master}
user@switch> request system software in-service-upgrade /var/tmp/jinstall-qfx-132_x51_vjunos.0-
domestic.tgz
ISSU: Validating Image
Prepare for ISSU
spawn the backup VM
ISSU: Preparing Backup RE
Backup upgrade done
ISSU: Backup RE Prepare Done
waiting for backup RE switchover ready
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: FPC Warm Booting
ISSU: FPC Warm Booted
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
  Item                Status                Reason
  FPC 0                Online (ISSU)
send ISSU done to chassisd on backup VM
Chassis ISSU Completed
ISSU: IDLE
mgd_package_opus_issu: Initiate em0 device handoff
```

request system software in-service-upgrade status

```
{master}
user@host> request system software in-service-upgrade /var/tmp/jinstall-12.3R2-domestic-signed.tgz
[Apr 29 01:31:11]:ISSU: Validating Image
[Apr 29 01:43:13]:ISSU: Validating Image Done
[Apr 29 01:43:13]:ISSU: Preparing Backup RE
[Apr 29 01:43:13]:ISSU: Pushing /var/tmp/jinstall-12.3R2-domestic-signed.tgz to
rel:/var/tmp/jinstall-12.3R2-domestic-signed.tgz
[Apr 29 01:44:48]:ISSU: Pushing package /var/tmp/jinstall-12.3R2-domestic-
```

```

signed.tgz to rel done
[Apr 29 01:44:48]:ISSU: Installing package /var/tmp/jinstall-12.3R2-domestic-
signed.tgz on rel
[Apr 29 01:52:35]:ISSU: Installing package /var/tmp/jinstall-12.3R2-domestic-
signed.tgz on rel done
[Apr 29 01:52:35]:ISSU: Rebooting Backup RE
[Apr 29 01:52:36]:ISSU: Backup RE Prepare Done
[Apr 29 01:52:36]:ISSU: Waiting for Backup RE reboot
[Apr 29 01:56:45]:ISSU: Backup RE reboot done. Backup RE is up
[Apr 29 01:56:45]:ISSU: Waiting for Backup RE state synchronization
[Apr 29 01:57:10]:ISSU: Backup RE state synchronization done
[Apr 29 01:57:10]:ISSU: GRES operational
[Apr 29 01:58:16]:ISSU: Preparing Daemons
[Apr 29 01:58:40]:ISSU: Daemons Ready for ISSU
[Apr 29 01:58:46]:ISSU: Offline Incompatible FRUs
[Apr 29 01:58:51]:ISSU: Starting Upgrade for FRUs
[Apr 29 02:03:32]:ISSU: Preparing for Switchover
[Apr 29 02:03:57]:ISSU: Ready for Switchover
[Apr 29 02:03:59]:ISSU: RE switchover Done
[Apr 29 02:03:59]:ISSU: Upgrading Old Master RE
[Apr 29 02:12:51]:ISSU: Old Master Upgrade Done
[Apr 29 02:12:51]:ISSU: IDLE

```

request system software in-service-upgrade enhanced-mode

```

{master}
user@host> request system software in-service-upgrade /var/tmp/junos-install-mx-x86-32-20.1.tgz
reboot enhanced-mode
Chassis ISSU enhanced-mode
ISSU: set chassis enhanced-mode
Chassis ISSU Check Done
ISSU: Validating Image
..
mgd: commit complete
Validation succeeded
  Validating Image Done
  Preparing Backup RE
  Pushing /var/tmp/junos-install-mx-x86-32-20.1.tgz to rel:/var/tmp/junos-install-
mx-x86-32-20.1.tgz
  Pushing package /var/tmp/junos-install-mx-x86-32-20.1.tgz to rel done
  Installing package /var/tmp/junos-install-mx-x86-32-20.1.tgz on rel

```

```

...
Verified sflow-mx signed by PackageDevelopmentEc_2019 method ECDSA256+SHA256
NOTICE: 'pending' set will be activated at next reboot...
ISSU: Installing package /var/tmp/junos-install-mx-x86-32-20.1.tgz on re1 done
ISSU: Rebooting Backup RE

Rebooting re1
Backup RE Prepare Done
Waiting for Backup RE reboot
Backup RE reboot done. Backup RE is up
Waiting for Backup RE state synchronization
Backup RE state synchronization done
GRES operational
"Initiating Chassis In-Service-Upgrade"
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Offline Incompatible FRUs
ISSU: Starting Upgrade for FRUs
...

ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
  Item           Status           Reason
  FPC 1          Online (ISSU)
  FPC 2          Offline           Configured power off
Resolving mastership...
Complete. The other routing engine becomes the master.

```

Release Information

Command introduced in Junos OS Release 9.0.

status option introduced in Junos OS Release 19.4R1 for MX240, MX480, MX960, MX2010, MX2020, PTX3000, and PTX5000 routers.

RELATED DOCUMENTATION

request system software abort

[show chassis in-service-upgrade](#) | 989

[Getting Started with Unified In-Service Software Upgrade | 495](#)

[Performing an In-Service Software Upgrade \(ISSU\) with Non-Stop Routing | 575](#)

[Example: Performing a Unified ISSU | 537](#)

request system software in-service-upgrade (MX Series 5G Universal Routing Platforms and EX9200 Switches)

IN THIS SECTION

- [Syntax | 1045](#)
- [Description | 1045](#)
- [Options | 1046](#)
- [Additional Information | 1047](#)
- [Required Privilege Level | 1047](#)
- [Output Fields | 1047](#)
- [Sample Output | 1047](#)
- [Release Information | 1068](#)

Syntax

```
request system software in-service-upgrade package-name
<no-copy>
<no-old-master-upgrade>
<reboot>
<unlink>
```

Description

Perform a unified in-service software upgrade (unified ISSU). Unified ISSU enables you to upgrade from one Junos OS release to another with no disruption on the control plane and with minimal disruption of traffic. Unified ISSU is supported only by dual Routing Engine platforms. In addition, graceful Routing Engine switchover (GRES) and nonstop active routing (NSR) must be enabled.

Options

<i>package-name</i>	Location from which the software package or bundle is to be installed. For example: • <i>/var/tmp/package-name</i>— For a software package or bundle that is being installed from a local directory on the router. • <i>protocol://hostname/pathname/package-name</i>—For a software package or bundle that is to be downloaded and installed from a remote location. Replace <i>protocol</i> with one of the following: • ftp—File Transfer Protocol • http—Hypertext Transfer Protocol • scp—Secure copy (available only for Canada and U.S. version)
no-copy	(Optional) When the no-copy option is included, copies of package files are not saved on the Packet Forwarding Engine. The no-copy option is not available for an MX Series Virtual Chassis or an EX9200 Virtual Chassis.
no-old-master-upgrade	(Optional) When the no-old-master-upgrade option is included, after the backup Routing Engine is rebooted with the new software package and a switchover occurs to make it the new primary Routing Engine, the former primary (new backup) Routing Engine is not upgraded to the new software. In this case, you must manually upgrade the former primary (new backup) Routing Engine. If you do not include the no-old-master-upgrade option, the system automatically upgrades the former primary Routing Engine. The no-old-master-upgrade option is not available for an MX Series Virtual Chassis or an EX9200 Virtual Chassis.
reboot	(Optional) When the reboot option is included, the former primary (new backup) Routing Engine is automatically rebooted after being upgraded to the new software. When the reboot option is not included, you must manually reboot the former primary (new backup) Routing Engine using the request system reboot command. The reboot option is accepted but ignored for an MX Series Virtual Chassis or an EX9200 Virtual Chassis. A unified ISSU in an MX Series Virtual Chassis or EX9200 Virtual Chassis always reboots all Routing Engines in the member routers or switches.
unlink	(Optional) When the unlink option is included, the package is removed from /var/home whether the installation is successful or unsuccessful.

The **unlink** option is not available for an MX Series Virtual Chassis or an EX9200 Virtual Chassis.

Additional Information

The following conditions apply to unified ISSUs:

- Unified ISSUs are supported on MX Series 5G Universal Routing Platforms and EX9200 switches.
- Unsupported PICs (on EX9200, PICs are known as “line cards”) are restarted during a unified ISSU. For information about supported PICs, see the [Junos OS High Availability User Guide](#). For information about supported EX9200 line cards, see ["Unified ISSU System Requirements" on page 507](#).
- Unsupported protocols will experience packet loss during a unified ISSU. For information about supported protocols, see the [Junos OS High Availability User Guide](#) or, for EX9200, see ["Unified ISSU System Requirements" on page 507](#).
- During a unified ISSU, you cannot bring any PICs online or offline.

For more information, see the [Junos OS High Availability User Guide](#).

Required Privilege Level

view

Output Fields

When you enter this command, you are provided feedback about the status of your request.

Sample Output

request system software in-service-upgrade reboot

```
{master}
user@host> request system software in-service-upgrade /var/tmp/jinstall-11.2B2.1-domestic-signed.tgz
reboot
Chassis ISSU Check Done
ISSU: Validating Image
Checking compatibility with configuration
Initializing...
```



```

Using jbase-11.2B1.5
Verified manifest signed by PackageProduction_11_2_0
Verified jbase-11.2B1.5 signed by PackageProduction_11_2_0
Using /var/tmp/jinstall-11.2B2.1-domestic-signed.tgz
Verified jinstall-11.2B2.1-domestic.tgz signed by PackageProduction_11_2_0
Using jinstall-11.2B2.1-domestic.tgz
Using jbundle-11.2B2.1-domestic.tgz
Checking jbundle requirements on /
Using jbase-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jbase-11.2B2.1 signed by PackageProduction_11_2_0
Using /var/validate/chroot/tmp/jbundle/jboot-11.2B2.1.tgz
Using jcrypto-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jcrypto-11.2B2.1 signed by PackageProduction_11_2_0
Using jdocs-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jdocs-11.2B2.1 signed by PackageProduction_11_2_0
Using jkernel-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jkernel-11.2B2.1 signed by PackageProduction_11_2_0
Using jpfe-11.2B2.1.tgz
Using jroute-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jroute-11.2B2.1 signed by PackageProduction_11_2_0
Using jruntime-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jruntime-11.2B2.1 signed by PackageProduction_11_2_0
Using jservices-11.2B2.1.tgz
Auto-deleting old jservices-voice ...
Removing /opt/sdk/service-packages/jservices-voice ...
Removing jservices-voice-bsg-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-voice ...
Verified jservices-voice-bsg-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /var/sw/pkg ...
Creating /opt/sdk/service-packages/jservices-voice ...
Storing jservices-voice-bsg-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-voice/jservices-voice-bsg -
> /var/sw/pkg/jservices-voice-bsg-11.2B2.1.tgz...
Auto-deleting old jservices-bgf ...
Removing /opt/sdk/service-packages/jservices-bgf ...
Removing jservices-bgf-pic-11.2B1.5.tgz from /var/sw/pkg ...

```

```

Notifying mspd ...
Installing new jservices-bgf ...
Verified jservices-bgf-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-bgf ...
Storing jservices-bgf-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-bgf/jservices-bgf-pic -> /var/sw/pkg/
jservices-bgf-pic-11.2B2.1.tgz...
Auto-deleting old jservices-aacl ...
Removing /opt/sdk/service-packages/jservices-aacl ...
Removing jservices-aacl-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-aacl ...
Verified jservices-aacl-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-aacl ...
Storing jservices-aacl-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-aacl/jservices-aacl-pic -> /var/sw/pkg/
jservices-aacl-pic-11.2B2.1.tgz...
Auto-deleting old jservices-llpdf ...
Removing /opt/sdk/service-packages/jservices-llpdf ...
Removing jservices-llpdf-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-llpdf ...
Verified jservices-llpdf-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-llpdf ...
Storing jservices-llpdf-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-llpdf/jservices-llpdf-pic -
> /var/sw/pkg/jservices-llpdf-pic-11.2B2.1.tgz...
Auto-deleting old jservices-ptsp ...
Removing /opt/sdk/service-packages/jservices-ptsp ...
Removing jservices-ptsp-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-ptsp ...
Verified jservices-ptsp-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-ptsp ...
Storing jservices-ptsp-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-ptsp/jservices-ptsp-pic -> /var/sw/pkg/
jservices-ptsp-pic-11.2B2.1.tgz...
Auto-deleting old jservices-sfw ...
Removing /opt/sdk/service-packages/jservices-sfw ...
Removing jservices-sfw-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-sfw ...
Verified jservices-sfw-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0

```

```

Creating /opt/sdk/service-packages/jservices-sfw ...
Storing jservices-sfw-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-sfw/jservices-sfw-pic -> /var/sw/pkg/
jservices-sfw-pic-11.2B2.1.tgz...
Auto-deleting old jservices-nat ...
Removing /opt/sdk/service-packages/jservices-nat ...
Removing jservices-nat-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-nat ...
Verified jservices-nat-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-nat ...
Storing jservices-nat-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-nat/jservices-nat-pic -> /var/sw/pkg/
jservices-nat-pic-11.2B2.1.tgz...
Auto-deleting old jservices-alg ...
Removing /opt/sdk/service-packages/jservices-alg ...
Removing jservices-alg-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-alg ...
Verified jservices-alg-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-alg ...
Storing jservices-alg-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-alg/jservices-alg-pic -> /var/sw/pkg/
jservices-alg-pic-11.2B2.1.tgz...
Auto-deleting old jservices-cpcd ...
Removing /opt/sdk/service-packages/jservices-cpcd ...
Removing jservices-cpcd-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-cpcd ...
Verified jservices-cpcd-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-cpcd ...
Storing jservices-cpcd-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-cpcd/jservices-cpcd-pic -> /var/sw/pkg/
jservices-cpcd-pic-11.2B2.1.tgz...
Auto-deleting old jservices-rpm ...
Removing /opt/sdk/service-packages/jservices-rpm ...
Removing jservices-rpm-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-rpm ...
Verified jservices-rpm-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-rpm ...
Storing jservices-rpm-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-rpm/jservices-rpm-pic -> /var/sw/pkg/

```

```

jservices-rpm-pic-11.2B2.1.tgz...
Auto-deleting old jservices-hcm ...
Removing /opt/sdk/service-packages/jservices-hcm ...
Removing jservices-hcm-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-hcm ...
Verified jservices-hcm-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-hcm ...
Storing jservices-hcm-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-hcm/jservices-hcm-pic -> /var/sw/pkg/
jservices-hcm-pic-11.2B2.1.tgz...
Auto-deleting old jservices-appid ...
Removing /opt/sdk/service-packages/jservices-appid ...
Removing jservices-appid-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-appid ...
Verified jservices-appid-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-appid ...
Storing jservices-appid-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-appid/jservices-appid-pic -
> /var/sw/pkg/jservices-appid-pic-11.2B2.1.tgz...
Auto-deleting old jservices-idp ...
Removing /opt/sdk/service-packages/jservices-idp ...
Removing jservices-idp-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-idp ...
Verified jservices-idp-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-idp ...
Storing jservices-idp-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-idp/jservices-idp-pic -> /var/sw/pkg/
jservices-idp-pic-11.2B2.1.tgz...
Using jservices-crypto-11.2B2.1.tgz
Auto-deleting old jservices-crypto-base ...
Removing /opt/sdk/service-packages/jservices-crypto-base ...
Removing jservices-crypto-base-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-crypto-base ...
Verified jservices-crypto-base-pic-11.2B2.1.tgz signed by
PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-crypto-base ...
Storing jservices-crypto-base-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-crypto-base/jservices-crypto-base-pic -
> /var/sw/pkg/jservices-crypto-base-pic-11.2B2.1.tgz...

```

```

Auto-deleting old jservices-ssl ...
Removing /opt/sdk/service-packages/jservices-ssl ...
Removing jservices-ssl-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-ssl ...
Verified jservices-ssl-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-ssl ...
Storing jservices-ssl-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-ssl/jservices-ssl-pic -> /var/sw/pkg/
jservices-ssl-pic-11.2B2.1.tgz...
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
ISSU: Preparing Backup RE
Pushing bundle to rel
NOTICE: Validating configuration against jinstall-11.2B2.1-domestic-signed.tgz.
NOTICE: Use the 'no-validate' option to skip this if desired.
Checking compatibility with configuration
Initializing...
Using jbase-11.2B1.5
Verified manifest signed by PackageProduction_11_2_0
Verified jbase-11.2B1.5 signed by PackageProduction_11_2_0
Using /var/tmp/jinstall-11.2B2.1-domestic-signed.tgz
Verified jinstall-11.2B2.1-domestic.tgz signed by PackageProduction_11_2_0
Using jinstall-11.2B2.1-domestic.tgz
Using jbundle-11.2B2.1-domestic.tgz
Checking jbundle requirements on /
Using jbase-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jbase-11.2B2.1 signed by PackageProduction_11_2_0
Using /var/validate/chroot/tmp/jbundle/jboot-11.2B2.1.tgz
Using jcrypto-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jcrypto-11.2B2.1 signed by PackageProduction_11_2_0
Using jdocs-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jdocs-11.2B2.1 signed by PackageProduction_11_2_0
Using jkernel-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jkernel-11.2B2.1 signed by PackageProduction_11_2_0
Using jpfe-11.2B2.1.tgz
Using jroute-11.2B2.1.tgz

```

```

Verified manifest signed by PackageProduction_11_2_0
Verified jroute-11.2B2.1 signed by PackageProduction_11_2_0
Using jruntime-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jruntime-11.2B2.1 signed by PackageProduction_11_2_0
Using jservices-11.2B2.1.tgz
Auto-deleting old jservices-voice ...
Removing /opt/sdk/service-packages/jservices-voice ...
Removing jservices-voice-bsg-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-voice ...
Verified jservices-voice-bsg-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /var/sw/pkg ...
Creating /opt/sdk/service-packages/jservices-voice ...
Storing jservices-voice-bsg-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-voice/jservices-voice-bsg -
> /var/sw/pkg/jservices-voice-bsg-11.2B2.1.tgz...
Auto-deleting old jservices-bgf ...
Removing /opt/sdk/service-packages/jservices-bgf ...
Removing jservices-bgf-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-bgf ...
Verified jservices-bgf-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-bgf ...
Storing jservices-bgf-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-bgf/jservices-bgf-pic -> /var/sw/pkg/
jservices-bgf-pic-11.2B2.1.tgz...
Auto-deleting old jservices-aacl ...
Removing /opt/sdk/service-packages/jservices-aacl ...
Removing jservices-aacl-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-aacl ...
Verified jservices-aacl-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-aacl ...
Storing jservices-aacl-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-aacl/jservices-aacl-pic -> /var/sw/pkg/
jservices-aacl-pic-11.2B2.1.tgz...
Auto-deleting old jservices-llpdf ...
Removing /opt/sdk/service-packages/jservices-llpdf ...
Removing jservices-llpdf-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-llpdf ...
Verified jservices-llpdf-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0

```

```

Creating /opt/sdk/service-packages/jservices-llpdf ...
Storing jservices-llpdf-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-llpdf/jservices-llpdf-pic -
> /var/sw/pkg/jservices-llpdf-pic-11.2B2.1.tgz...
Auto-deleting old jservices-ptsp ...
Removing /opt/sdk/service-packages/jservices-ptsp ...
Removing jservices-ptsp-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-ptsp ...
Verified jservices-ptsp-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-ptsp ...
Storing jservices-ptsp-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-ptsp/jservices-ptsp-pic -> /var/sw/pkg/
jservices-ptsp-pic-11.2B2.1.tgz...
Auto-deleting old jservices-sfw ...
Removing /opt/sdk/service-packages/jservices-sfw ...
Removing jservices-sfw-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-sfw ...
Verified jservices-sfw-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-sfw ...
Storing jservices-sfw-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-sfw/jservices-sfw-pic -> /var/sw/pkg/
jservices-sfw-pic-11.2B2.1.tgz...
Auto-deleting old jservices-nat ...
Removing /opt/sdk/service-packages/jservices-nat ...
Removing jservices-nat-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-nat ...
Verified jservices-nat-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-nat ...
Storing jservices-nat-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-nat/jservices-nat-pic -> /var/sw/pkg/
jservices-nat-pic-11.2B2.1.tgz...
Auto-deleting old jservices-alg ...
Removing /opt/sdk/service-packages/jservices-alg ...
Removing jservices-alg-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-alg ...
Verified jservices-alg-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-alg ...
Storing jservices-alg-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-alg/jservices-alg-pic -> /var/sw/pkg/

```

```

jservices-alg-pic-11.2B2.1.tgz...
Auto-deleting old jservices-cpcd ...
Removing /opt/sdk/service-packages/jservices-cpcd ...
Removing jservices-cpcd-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-cpcd ...
Verified jservices-cpcd-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-cpcd ...
Storing jservices-cpcd-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-cpcd/jservices-cpcd-pic -> /var/sw/pkg/
jservices-cpcd-pic-11.2B2.1.tgz...
Auto-deleting old jservices-rpm ...
Removing /opt/sdk/service-packages/jservices-rpm ...
Removing jservices-rpm-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-rpm ...
Verified jservices-rpm-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-rpm ...
Storing jservices-rpm-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-rpm/jservices-rpm-pic -> /var/sw/pkg/
jservices-rpm-pic-11.2B2.1.tgz...
Auto-deleting old jservices-hcm ...
Removing /opt/sdk/service-packages/jservices-hcm ...
Removing jservices-hcm-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-hcm ...
Verified jservices-hcm-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-hcm ...
Storing jservices-hcm-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-hcm/jservices-hcm-pic -> /var/sw/pkg/
jservices-hcm-pic-11.2B2.1.tgz...
Auto-deleting old jservices-appid ...
Removing /opt/sdk/service-packages/jservices-appid ...
Removing jservices-appid-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-appid ...
Verified jservices-appid-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-appid ...
Storing jservices-appid-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-appid/jservices-appid-pic -
> /var/sw/pkg/jservices-appid-pic-11.2B2.1.tgz...
Auto-deleting old jservices-idp ...
Removing /opt/sdk/service-packages/jservices-idp ...

```



```

Removing jservices-idp-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-idp ...
Verified jservices-idp-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-idp ...
Storing jservices-idp-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-idp/jservices-idp-pic -> /var/sw/pkg/
jservices-idp-pic-11.2B2.1.tgz...
Using jservices-crypto-11.2B2.1.tgz
Auto-deleting old jservices-crypto-base ...
Removing /opt/sdk/service-packages/jservices-crypto-base ...
Removing jservices-crypto-base-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-crypto-base ...
Verified jservices-crypto-base-pic-11.2B2.1.tgz signed by
PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-crypto-base ...
Storing jservices-crypto-base-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-crypto-base/jservices-crypto-base-pic -
> /var/sw/pkg/jservices-crypto-base-pic-11.2B2.1.tgz...
Auto-deleting old jservices-ssl ...
Removing /opt/sdk/service-packages/jservices-ssl ...
Removing jservices-ssl-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-ssl ...
Verified jservices-ssl-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-ssl ...
Storing jservices-ssl-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-ssl/jservices-ssl-pic -> /var/sw/pkg/
jservices-ssl-pic-11.2B2.1.tgz...
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
Installing package '/var/tmp/jinstall-11.2B2.1-domestic-signed.tgz' ...
Verified jinstall-11.2B2.1-domestic.tgz signed by PackageProduction_11_2_0
Adding jinstall...
Verified manifest signed by PackageProduction_11_2_0

```

```

WARNING:      This package will load JUNOS 11.2B2.1 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps

```

```

WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-11.2B2.1-domestic-signed.tgz ...
Saving state for rollback ...
Backup upgrade done
Rebooting Backup RE

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
  Item          Status          Reason
  FPC 1         Online (ISSU)
  FPC 4         Online (ISSU)
  FPC 8         Online (ISSU)
  FPC 10        Online (ISSU)
Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
ISSU: Upgrading Old Master RE
NOTICE: Validating configuration against jinstall-11.2B2.1-domestic-signed.tgz.
NOTICE: Use the 'no-validate' option to skip this if desired.

```

```

Checking compatibility with configuration
Initializing...
Using jbase-11.2B1.5
Verified manifest signed by PackageProduction_11_2_0
Verified jbase-11.2B1.5 signed by PackageProduction_11_2_0
Using /var/tmp/jinstall-11.2B2.1-domestic-signed.tgz
Verified jinstall-11.2B2.1-domestic.tgz signed by PackageProduction_11_2_0
Using jinstall-11.2B2.1-domestic.tgz
Using jbundle-11.2B2.1-domestic.tgz
Checking jbundle requirements on /
Using jbase-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jbase-11.2B2.1 signed by PackageProduction_11_2_0
Using /var/validate/chroot/tmp/jbundle/jboot-11.2B2.1.tgz
Using jcrypto-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jcrypto-11.2B2.1 signed by PackageProduction_11_2_0
Using jdocs-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jdocs-11.2B2.1 signed by PackageProduction_11_2_0
Using jkernel-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jkernel-11.2B2.1 signed by PackageProduction_11_2_0
Using jpfe-11.2B2.1.tgz
Using jroute-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jroute-11.2B2.1 signed by PackageProduction_11_2_0
Using jruntime-11.2B2.1.tgz
Verified manifest signed by PackageProduction_11_2_0
Verified jruntime-11.2B2.1 signed by PackageProduction_11_2_0
Using jservices-11.2B2.1.tgz
Auto-deleting old jservices-voice ...
Removing /opt/sdk/service-packages/jservices-voice ...
Removing jservices-voice-bsg-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-voice ...
Verified jservices-voice-bsg-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /var/sw/pkg ...
Creating /opt/sdk/service-packages/jservices-voice ...
Storing jservices-voice-bsg-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-voice/jservices-voice-bsg -
> /var/sw/pkg/jservices-voice-bsg-11.2B2.1.tgz...
Auto-deleting old jservices-bgf ...

```

```

Removing /opt/sdk/service-packages/jservices-bgf ...
Removing jservices-bgf-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-bgf ...
Verified jservices-bgf-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-bgf ...
Storing jservices-bgf-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-bgf/jservices-bgf-pic -> /var/sw/pkg/
jservices-bgf-pic-11.2B2.1.tgz...
Auto-deleting old jservices-aacl ...
Removing /opt/sdk/service-packages/jservices-aacl ...
Removing jservices-aacl-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-aacl ...
Verified jservices-aacl-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-aacl ...
Storing jservices-aacl-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-aacl/jservices-aacl-pic -> /var/sw/pkg/
jservices-aacl-pic-11.2B2.1.tgz...
Auto-deleting old jservices-llpdf ...
Removing /opt/sdk/service-packages/jservices-llpdf ...
Removing jservices-llpdf-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-llpdf ...
Verified jservices-llpdf-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-llpdf ...
Storing jservices-llpdf-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-llpdf/jservices-llpdf-pic -
> /var/sw/pkg/jservices-llpdf-pic-11.2B2.1.tgz...
Auto-deleting old jservices-ptsp ...
Removing /opt/sdk/service-packages/jservices-ptsp ...
Removing jservices-ptsp-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-ptsp ...
Verified jservices-ptsp-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-ptsp ...
Storing jservices-ptsp-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-ptsp/jservices-ptsp-pic -> /var/sw/pkg/
jservices-ptsp-pic-11.2B2.1.tgz...
Auto-deleting old jservices-sfw ...
Removing /opt/sdk/service-packages/jservices-sfw ...
Removing jservices-sfw-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...

```

```

Installing new jservices-sfw ...
Verified jservices-sfw-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-sfw ...
Storing jservices-sfw-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-sfw/jservices-sfw-pic -> /var/sw/pkg/
jservices-sfw-pic-11.2B2.1.tgz...
Auto-deleting old jservices-nat ...
Removing /opt/sdk/service-packages/jservices-nat ...
Removing jservices-nat-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-nat ...
Verified jservices-nat-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-nat ...
Storing jservices-nat-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-nat/jservices-nat-pic -> /var/sw/pkg/
jservices-nat-pic-11.2B2.1.tgz...
Auto-deleting old jservices-alg ...
Removing /opt/sdk/service-packages/jservices-alg ...
Removing jservices-alg-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-alg ...
Verified jservices-alg-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-alg ...
Storing jservices-alg-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-alg/jservices-alg-pic -> /var/sw/pkg/
jservices-alg-pic-11.2B2.1.tgz...
Auto-deleting old jservices-cpcd ...
Removing /opt/sdk/service-packages/jservices-cpcd ...
Removing jservices-cpcd-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-cpcd ...
Verified jservices-cpcd-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-cpcd ...
Storing jservices-cpcd-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-cpcd/jservices-cpcd-pic -> /var/sw/pkg/
jservices-cpcd-pic-11.2B2.1.tgz...
Auto-deleting old jservices-rpm ...
Removing /opt/sdk/service-packages/jservices-rpm ...
Removing jservices-rpm-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-rpm ...
Verified jservices-rpm-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-rpm ...

```

```

Storing jservices-rpm-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-rpm/jservices-rpm-pic -> /var/sw/pkg/
jservices-rpm-pic-11.2B2.1.tgz...
Auto-deleting old jservices-hcm ...
Removing /opt/sdk/service-packages/jservices-hcm ...
Removing jservices-hcm-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-hcm ...
Verified jservices-hcm-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-hcm ...
Storing jservices-hcm-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-hcm/jservices-hcm-pic -> /var/sw/pkg/
jservices-hcm-pic-11.2B2.1.tgz...
Auto-deleting old jservices-appid ...
Removing /opt/sdk/service-packages/jservices-appid ...
Removing jservices-appid-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-appid ...
Verified jservices-appid-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-appid ...
Storing jservices-appid-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-appid/jservices-appid-pic -
> /var/sw/pkg/jservices-appid-pic-11.2B2.1.tgz...
Auto-deleting old jservices-idp ...
Removing /opt/sdk/service-packages/jservices-idp ...
Removing jservices-idp-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-idp ...
Verified jservices-idp-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-idp ...
Storing jservices-idp-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-idp/jservices-idp-pic -> /var/sw/pkg/
jservices-idp-pic-11.2B2.1.tgz...
Using jservices-crypto-11.2B2.1.tgz
Auto-deleting old jservices-crypto-base ...
Removing /opt/sdk/service-packages/jservices-crypto-base ...
Removing jservices-crypto-base-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-crypto-base ...
Verified jservices-crypto-base-pic-11.2B2.1.tgz signed by
PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-crypto-base ...
Storing jservices-crypto-base-pic-11.2B2.1.tgz in /var/sw/pkg ...

```

```

Link: /opt/sdk/service-packages/jservices-crypto-base/jservices-crypto-base-pic -
> /var/sw/pkg/jservices-crypto-base-pic-11.2B2.1.tgz...
Auto-deleting old jservices-ssl ...
Removing /opt/sdk/service-packages/jservices-ssl ...
Removing jservices-ssl-pic-11.2B1.5.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-ssl ...
Verified jservices-ssl-pic-11.2B2.1.tgz signed by PackageProduction_11_2_0
Creating /opt/sdk/service-packages/jservices-ssl ...
Storing jservices-ssl-pic-11.2B2.1.tgz in /var/sw/pkg ...
Link: /opt/sdk/service-packages/jservices-ssl/jservices-ssl-pic -> /var/sw/pkg/
jservices-ssl-pic-11.2B2.1.tgz...
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
Installing package '/var/tmp/jinstall-11.2B2.1-domestic-signed.tgz' ...
Verified jinstall-11.2B2.1-domestic.tgz signed by PackageProduction_11_2_0
Adding jinstall...
Verified manifest signed by PackageProduction_11_2_0

```

```

WARNING:      This package will load JUNOS 11.2B2.1 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

```

```

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

```

```

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

```

```

Saving package file in /var/sw/pkg/jinstall-11.2B2.1-domestic-signed.tgz ...
Saving state for rollback ...
ISSU: Old Master Upgrade Done

```

```

ISSU: IDLE
Shutdown NOW!
Reboot consistency check bypassed - jinstall 11.2B2.1 will complete installation
upon reboot
[pid 66780]

*** FINAL System shutdown message from user@host> ***
System going down IMMEDIATELY

```

request system software in-service-upgrade (MX Series Virtual Chassis)

```

{master:member0-re0}
user@host> request system software in-service-upgrade jinstall-14.1-20140114.2-domestic-signed.tgz
[Jan 30 10:45:32]:ISSU: IDLE

Beginning in-service-upgrade at Jan 30, 2014; 10:45:34
[Jan 30 10:45:34]:ISSU: Validating Image
Validating VC readiness...
Validating required configuration...
Validating release compatibility...
Validation successful
Initiating chassis in-service-upgrade
[Jan 30 10:46:56]:ISSU: Preparing LCC Backup REs
Copying new release to all RE's
Pushing bundle to member0-re0
Pushing bundle to member1-re0
Pushing bundle to member1-rel
[Jan 30 10:51:11]:ISSU: Preparing Backup RE
Arming new release on all RE's
member0-re0:
-----
Installing package '/var/tmp/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-
signed.tgz' ...
Verified jinstall-14.1-20140114_ib_14_1_psd.1-domestic.tgz signed by
PackageDevelopmentEc_2014
Adding jinstall...

WARNING:      The software that is being installed has limited support.
WARNING:      Run 'file show /etc/notices/unsupported.txt' for details.

verixec: accepting signer: PackageDevelopmentEc_2014

```


Verified manifest signed by PackageDevelopmentEc_2014

```
WARNING:      This package will load JUNOS 14.1-20140114_ib_14_1_psd.1 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.
```

Saving the config files ...

NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-install

Installing the bootstrap installer ...

```
WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.
```

Saving package file in /var/sw/pkg/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-signed.tgz ...

Saving state for rollback ...

member1-re0:

Installing package '/var/tmp/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-signed.tgz' ...

Verified jinstall-14.1-20140114_ib_14_1_psd.1-domestic.tgz signed by
PackageDevelopmentEc_2014

Adding jinstall...

```
WARNING:      The software that is being installed has limited support.
WARNING:      Run 'file show /etc/notices/unsupported.txt' for details.
```

verixec: accepting signer: PackageDevelopmentEc_2014

Verified manifest signed by PackageDevelopmentEc_2014

```
WARNING:      This package will load JUNOS 14.1-20140114_ib_14_1_psd.1 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
```

```

WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-
signed.tgz ...
Saving state for rollback ...

member1-rel:
-----
Installing package '/var/tmp/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-
signed.tgz' ...
Verified jinstall-14.1-20140114_ib_14_1_psd.1-domestic.tgz signed by
PackageDevelopmentEc_2014
Adding jinstall...

WARNING:      The software that is being installed has limited support.
WARNING:      Run 'file show /etc/notices/unsupported.txt' for details.

verixec: accepting signer: PackageDevelopmentEc_2014
Verified manifest signed by PackageDevelopmentEc_2014

WARNING:      This package will load JUNOS 14.1-20140114_ib_14_1_psd.1 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine.  It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed.  This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-

```

```

install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

Saving package file in /var/sw/pkg/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-
signed.tgz ...
Saving state for rollback ...
Installing package '/var/tmp/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-
signed.tgz' ...
Verified jinstall-14.1-20140114_ib_14_1_psd.1-domestic.tgz signed by
PackageDevelopmentEc_2014
Adding jinstall...

WARNING:      The software that is being installed has limited support.
WARNING:      Run 'file show /etc/notices/unsupported.txt' for details.

verixec: accepting signer: PackageDevelopmentEc_2014
Verified manifest signed by PackageDevelopmentEc_2014

WARNING:      This package will load JUNOS 14.1-20140114_ib_14_1_psd.1 software.
WARNING:      It will save JUNOS configuration files, and SSH keys
WARNING:      (if configured), but erase all other files and information
WARNING:      stored on this machine. It will attempt to preserve dumps
WARNING:      and log files, but this can not be guaranteed. This is the
WARNING:      pre-installation stage and all the software is loaded when
WARNING:      you reboot the system.

Saving the config files ...
NOTICE: uncommitted changes have been saved in /var/db/config/juniper.conf.pre-
install
Installing the bootstrap installer ...

WARNING:      A REBOOT IS REQUIRED TO LOAD THIS SOFTWARE CORRECTLY. Use the
WARNING:      'request system reboot' command when software installation is
WARNING:      complete. To abort the installation, do not reboot your system,
WARNING:      instead use the 'request system software delete jinstall'
WARNING:      command as soon as this operation completes.

```

```

Saving package file in /var/sw/pkg/jinstall-14.1-20140114_ib_14_1_psd.1-domestic-
signed.tgz ...
Saving state for rollback ...
[Jan 30 11:03:12]:ISSU: Backup RE Prepare Done
Rebooting standby RE's
Sending Reboot Command to member0-re0
Shutdown NOW!
Reboot consistency check bypassed - jinstall 14.1-20140114_ib_14_1_psd.1 will
complete installation upon reboot
[pid 2757]
Sending Reboot Command to member1-re1
Shutdown NOW!
Reboot consistency check bypassed - jinstall 14.1-20140114_ib_14_1_psd.1 will
complete installation upon reboot
[pid 2670]
Waiting for standby RE's to boot
[Jan 30 11:18:26]:ISSU: LCC Backup REs Prepare Done
Waiting for standby RE's to have the correct ISSU state
Waiting for protocol backup to be ready to switch mastership
Switching mastership on the protocol backup chassis to slot 1
Waiting for protocol backup chassis master switch to complete
Globally updating ISSU state
Waiting for protocol backup chassis to become GRES ready
[Jan 30 11:19:18]:ISSU: VC Protocol Backup has Switched
Passing ISSU control to chassisd
Chassis ISSU Started
[Jan 30 11:21:01]:ISSU: Preparing Daemons
[Jan 30 11:22:02]:ISSU: Daemons Ready for ISSU
[Jan 30 11:22:06]:ISSU: Starting Upgrade for FRUs
[Jan 30 11:25:42]:ISSU: Preparing for Switchover
[Jan 30 11:26:06]:ISSU: Ready for Switchover
[Jan 30 11:26:20]:ISSU: All VC Members Ready for Switchover
Waiting for master chassis to be switch ready
Switching mastership locally
Resolving mastership...
Complete. The other routing engine becomes the master.
Waiting for virtual chassis roles to switch
Globally updating ISSU state to IDLE
[Jan 30 11:26:33]:ISSU: IDLE
Rebooting protocol backup standby RE.
Sending Reboot Command to member1-re0

member1-re0:

```

```

-----
Shutdown NOW!
Reboot consistency check bypassed - jinstall 14.1-20140114_ib_14_1_psd.1 will
complete installation upon reboot
[pid 10462]
Rebooting locally to complete the in service upgrade.
Shutdown NOW!
Reboot consistency check bypassed - jinstall 14.1-20140114_ib_14_1_psd.1 will
complete installation upon reboot
[pid 13458]

{local:member0-rel}
user@host>
*** FINAL System shutdown message from user@host ***

System going down IMMEDIATELY

Connection closed by foreign host.

```

Release Information

Command introduced in Junos OS Release 11.2.

RELATED DOCUMENTATION

request system software abort

[show chassis in-service-upgrade](#) | [989](#)

request system software nonstop-upgrade

IN THIS SECTION

- [Syntax](#) | [1069](#)
- [Description](#) | [1069](#)
- [Options](#) | [1071](#)

- [Required Privilege Level | 1073](#)
- [Output Fields | 1073](#)
- [Sample Output | 1073](#)
- [Release Information | 1081](#)

Syntax

```
request system software nonstop-upgrade (package-name | set [package-name
package-name])
<force-host>
<no-copy>
<no-old-master-upgrade>
<reboot >
<unlink>
```

Description

Perform a nonstop software upgrade (NSSU) on a switch with redundant Routing Engines or on a Virtual Chassis or Virtual Chassis Fabric (VCF). The behavior of this command depends on the type of switch, Virtual Chassis, or VCF where you run it, as follows:

- When you run this command on any of the following Virtual Chassis or VCF configurations, NSSU upgrades all members of the Virtual Chassis:
 - EX3300, EX3400, EX4200, EX4300, EX4400, EX4500, EX4550, EX4600, or EX4650-48Y Virtual Chassis
 - Mixed Virtual Chassis composed of any combination of EX4200, EX4500, and EX4550 switches, or EX4300 and EX4600 switches
 - QFX3500 and QFX3600 Virtual Chassis
 - QFX5100 Virtual Chassis
 - QFX5120-48Y, QFX5120-48T or QFX5120-32C Virtual Chassis
 - Fixed configuration of switches in a VCF (QFX3500/QFX3600 and QFX5100 switches)
 - Mixed VCF composed of any combination of QFX3500/QFX3600, QFX5100, and EX4300 switches

The original Virtual Chassis or VCF backup becomes the primary. The new primary automatically upgrades and reboots the original primary, which then rejoins the Virtual Chassis or VCF as the backup.

- When you run this command on an EX6200 or EX8200 switch, NSSU upgrades both the backup and primary Routing Engines. The original backup Routing Engine becomes the new primary at the end of the upgrade.
 - On an EX6200 switch, NSSU automatically reboots the original primary Routing Engine.
 - On an EX8200 switch, NSSU does not automatically reboot the original primary Routing Engine unless you specify the **reboot** option.
- When you run this command on an EX8200 Virtual Chassis, NSSU upgrades all primary and backup Routing Engines in the Virtual Chassis, including the external Routing Engines. The original backup Routing Engines become the new primary Routing Engines. NSSU does not automatically reboot the original primary Routing Engines unless you specify the **reboot** option.

This command has the following requirements:

- All Virtual Chassis members, VCF members, and all Routing Engines must be running the same Junos OS release.
- You must enable Graceful Routing Engine switchover (GRES)..
- You must enable Nonstop active routing (NSR).

NOTE: Although not required, we recommend you also enable nonstop bridging (NSB). NSB ensures that all NSB-supported Layer 2 protocols operate seamlessly during the Routing Engine switchover during NSSU. See [Configuring Nonstop Bridging on EX Series Switches \(CLI Procedure\)](#).

- You must run the command from the primary Routing Engine on a standalone switch or from the primary on a Virtual Chassis.
- For minimal traffic disruption, you must define link aggregation groups (LAGs) such that the member links reside on different Virtual Chassis or VCF member switches (or on different line cards for EX6200 and EX8200 switches and EX8200 Virtual Chassis).
- For all Virtual Chassis (except EX8200 Virtual Chassis):
 - The Virtual Chassis members must be connected in a ring topology. A ring topology prevents the Virtual Chassis from splitting during an NSSU.

- The Virtual Chassis primary and backup must be adjacent to each other in the ring topology. With adjacent placement, the primary and backup are always in sync while the switches in line-card roles are rebooting.
- The Virtual Chassis must be preprovisioned so the line-card role is explicitly assigned to member switches acting in a line-card role. During an NSSU, the primary and backup member switches must maintain their Routing Engine roles (although the primary role switches to the backup), and the remaining switches must maintain their line-card roles.
- In a two-member Virtual Chassis, you must configure **no-split-detection** so the Virtual Chassis doesn't split during NSSU.
- For Virtual Chassis Fabric:
 - You can only have two members preprovisioned in the Routing Engine role. If more than two Routing Engines are configured, NSSU issues a warning message and the NSSU process stops.
 - The VCF members should be connected in a spine and leaf topology. A spine and leaf topology prevents the VCF from splitting during NSSU. Each leaf device must be connected to both spine devices.
 - The VCF must be preprovisioned so that the line-card role has been explicitly assigned to member switches acting in a line-card role, and likewise the Routing Engine role has been explicitly assigned to the member switches acting in a Routing Engine role. During an NSSU, the primary and backup member switches must maintain their Routing Engine roles (although the primary role switches to the backup), and the remaining switches must maintain their line-card roles.
 - You must configure **no-split-detection** in a two-member VCF so the VCF does not split during NSSU.

Options

package-name

Location of the software package or bundle to be installed. For example:

- */var/tmp/package-name*—For a software package or bundle installed from a local directory on the switch.
- *protocol://hostname/pathname/package-name*—For a software package or bundle downloaded and installed from a remote location. Replace *protocol* with one of the following:
 - **ftp**—File Transfer Protocol.

Use **ftp://** *hostname/ pathname/ package-name*.

To specify authentication credentials, use **ftp://**
<username>:<password>@hostname/ pathname/ package-name.

To have the system prompt you for the password, specify **prompt** in place of the password.

The command displays an error message if a password is required and you do not specify the password or **prompt**.

- **http**—Hypertext Transfer Protocol.

Use **http://** *hostname/ pathname/ package-name*.

To specify authentication credentials, use **http://**
<username>:<password>@hostname/ pathname/ package-name.

The command prompts you for a password if one is required and you didn't include it.

- **scp**—Secure copy (available only for Canada and U.S. version).

Use **scp://** *hostname/ pathname/ package-name*.

To specify authentication credentials, use **scp://**
<username>:<password>@hostname/ pathname/ package-name.

NOTE: The *pathname* in the protocol is the relative path to the user home directory on the remote system and not the root directory.

set
[package-
name
package-
name]

(Mixed Virtual Chassis only) Locations of the different installation packages required by the different types of member switches. These packages must be for the same Junos OS release. See this command's *package-name* option for information about how to specify the installation packages.

force-host

(Optional) Force adding the host software package or bundle (and ignore warnings) on EX4650, QFX5100, or QFX5120 devices.

no-copy	(Optional) Install a software package or bundle, but do not save copies of the package or bundle files.
no-old-master-upgrade	(Optional) (EX8200 switches only) Upgrade the backup Routing Engine only. After the upgrade completes, the original primary Routing Engine becomes the backup Routing Engine and continues running the previous software version.
reboot	(Optional) (EX8200 switches and EX8200 Virtual Chassis only) When you include the reboot option, NSSU automatically reboots the original primary (new backup) Routing Engine after being upgraded to the new software. When you omit the reboot option, you must manually reboot the original primary (new backup) Routing Engine using the <code>request system reboot</code> command.

NOTE: If you do not use the **reboot** option on an EX8200 Virtual Chassis, you must establish a connection to the console port on the Switch Fabric and Routing Engine (SRE) module or Routing Engine (RE) module to manually reboot the backup Routing Engines.

unlink (Optional) Remove the software package after a successful upgrade.

Required Privilege Level

maintenance

Output Fields

This command reports feedback on the status of the request. Some functions are shared between NSSU and the in-service software upgrade (ISSU) feature, so you might see what appear to be ISSU messages as well as NSSU messages in the output from this command.

Sample Output

request system software nonstop-upgrade (EX4200 Virtual Chassis)

```
user@switch> request system software nonstop-upgrade
/var/tmp/jinstall-ex-4200-12.1R5.5-domestic-signed.tgz
Chassis ISSU Check Done
ISSU: Validating Image
```

```
ISSU: Preparing Backup RE
Installing image on other FPC's along with the backup

Checking pending install on fpc1
Pushing bundle to fpc1
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc1

Checking pending install on fpc2
Pushing bundle to fpc2
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc2

Checking pending install on fpc3
Pushing bundle to fpc3
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc3

Checking pending install on fpc4
Pushing bundle to fpc4
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc4

Checking pending install on fpc5
Pushing bundle to fpc5
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc5

Checking pending install on fpc6
Pushing bundle to fpc6
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Completed install on fpc6

Checking pending install on fpc7
Pushing bundle to fpc7
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
```

```

Completed install on fpc7
Backup upgrade done
Rebooting Backup RE

Rebooting fpc1
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online (ISSU)	
FPC 3	Online (ISSU)	
FPC 4	Online (ISSU)	
FPC 5	Online (ISSU)	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	

```

Going to install image on master
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
relinquish mastership
ISSU: IDLE

*** FINAL System shutdown message from root@switch ***

System going down IMMEDIATELY

Shutdown NOW!
[pid 9336]

```

request system software nonstop-upgrade (EX6200 Switch)

```

{master}
user@switch> request system software nonstop-upgrade
/var/tmp/jinstall-ex-6200-12.2R5.5-domestic-signed.tgz
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing Backup RE
Pushing bundle to re0
NOTICE: Validating configuration against jinstall-ex-6200-12.2R5.5-domestic-
signed.tgz.
NOTICE: Use the 'no-validate' option to skip this if desired.
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Backup upgrade done
Rebooting Backup RE

Rebooting re0
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 3	Online (ISSU)	
FPC 4	Online	
FPC 5	Online	
FPC 6	Online (ISSU)	
FPC 7	Online (ISSU)	
FPC 8	Online (ISSU)	
FPC 9	Online (ISSU)	

```

Going to install image on master

```

```

NOTICE: Validating configuration against jinstall-ex-6200-12.2R5.5-domestic-
signed.tgz.
NOTICE: Use the 'no-validate' option to skip this if desired.
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
relinquish mastership
ISSU: IDLE
Trying to relinquish mastership before rebooting...
Resolving mastership...
Complete. The other routing engine becomes the master.

*** FINAL System shutdown message from user@switch ***

System going down IMMEDIATELY

```

request system software nonstop-upgrade reboot (EX8200 Switch)

```

{master}
user@switch> request system software nonstop-upgrade reboot
/var/tmp/jinstall-ex-8200-10.4R1.5-domestic-signed.tgz
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing Backup RE
Pushing bundle to rel
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Backup upgrade done
Rebooting Backup RE

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU
ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status

```

```

Item           Status           Reason
FPC 0          Online (ISSU)
FPC 2          Offline              Offlined by CLI command
FPC 3          Online (ISSU)
Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
ISSU: Upgrading Old Master RE
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
ISSU: Old Master Upgrade Done
ISSU: IDLE
Shutdown NOW!
[pid 2635]

*** FINAL System shutdown message from user@switch ***
System going down IMMEDIATELY

```

request system software nonstop-upgrade no-old-master-upgrade (EX8200 Switch)

```

{master}
user@switch> request system software nonstop-upgrade no-old-master-upgrade
/var/tmp/jinstall-ex-8200-10.4R1.5-domestic-signed.tgz
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing Backup RE
Pushing bundle to rel
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Backup upgrade done
Rebooting Backup RE

Rebooting rel
ISSU: Backup RE Prepare Done
Waiting for Backup RE reboot
GRES operational
Initiating Chassis In-Service-Upgrade
Chassis ISSU Started
ISSU: Preparing Daemons
ISSU: Daemons Ready for ISSU

```

```

ISSU: Starting Upgrade for FRUs
ISSU: Preparing for Switchover
ISSU: Ready for Switchover
Checking In-Service-Upgrade status
  Item           Status           Reason
  FPC 0          Online (ISSU)
  FPC 1          Online (ISSU)
  FPC 2          Online (ISSU)
  FPC 3          Offline           Offlined by CLI command
  FPC 4          Online (ISSU)
  FPC 5          Online (ISSU)
  FPC 6          Online (ISSU)
  FPC 7          Online (ISSU)
Resolving mastership...
Complete. The other routing engine becomes the master.
ISSU: RE switchover Done
Skipping Old Master Upgrade
ISSU: IDLE

```

request system software nonstop-upgrade reboot (EX8200 Virtual Chassis)

```

{master:9}
user@external-routing-engine> request system software nonstop-upgrade reboot
/var/tmp/jinstall-ex-xre200-11.1-20101130.0-domestic-signed.tgz
Chassis ISSU Check Done
ISSU: Validating Image
ISSU: Preparing LCC Backup REs
ISSU: Preparing Backup RE
Pushing bundle /var/tmp/jinstall-ex-xre200-11.1-20101130.0-domestic-signed.tgz
to member8
-----
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
VC Backup upgrade done
Rebooting VC Backup RE

Rebooting member8
ISSU: Backup RE Prepare Done
Waiting for VC Backup RE reboot
Pushing bundle to member0-backup
Pushing bundle to member1-backup

```


WARNING: A reboot is required to install the software
 WARNING: Use the 'request system reboot' command immediately
 WARNING: A reboot is required to install the software
 WARNING: Use the 'request system reboot' command immediately

Rebooting member0-backup
 Rebooting LCC [member0-backup]

Rebooting member1-backup
 Rebooting LCC [member1-backup]
 ISSU: LCC Backup REs Prepare Done
 GRES operational
 Initiating Chassis Nonstop-Software-Upgrade
 Chassis ISSU Started
 ISSU: Preparing Daemons
 ISSU: Daemons Ready for ISSU
 ISSU: Starting Upgrade for FRUs
 ISSU: Preparing for Switchover
 ISSU: Ready for Switchover
 Checking Nonstop-Upgrade status
 member0:

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Online (ISSU)	
FPC 2	Online (ISSU)	
FPC 5	Online (ISSU)	

member1:

Item	Status	Reason
FPC 0	Online (ISSU)	
FPC 1	Offline	Offlined due to config
FPC 2	Online (ISSU)	
FPC 3	Online (ISSU)	
FPC 4	Online (ISSU)	
FPC 5	Online (ISSU)	
FPC 7	Online (ISSU)	

member0:

Item	Status	Reason
FPC 0	Online (ISSU)	

```

FPC 1      Online (ISSU)
FPC 2      Online (ISSU)
FPC 5      Online (ISSU)

member1:
-----
Item        Status          Reason
FPC 0      Online (ISSU)
FPC 1      Offline             Offlined due to config
FPC 2      Online (ISSU)
FPC 3      Online (ISSU)
FPC 4      Online (ISSU)
FPC 5      Online (ISSU)
FPC 7      Online (ISSU)
ISSU: Upgrading Old Master RE
Pushing bundle /var/tmp/incoming-package-8200.tgz to member0-master
Pushing bundle /var/tmp/incoming-package-8200.tgz to member1-master

ISSU: RE switchover Done
WARNING: A reboot is required to install the software
WARNING:      Use the 'request system reboot' command immediately
Rebooting ...
shutdown: [pid 2188]
Shutdown NOW!
ISSU: Old Master Upgrade Done
ISSU: IDLE
Shutdown NOW!

*** FINAL System shutdown message from root@ ***
System going down IMMEDIATELY

```

Release Information

Command introduced in Junos OS Release 10.4.

Option **set** [*package-name package-name*] added in Junos OS Release 12.1 for EX Series switches.

RELATED DOCUMENTATION

[show chassis nonstop-upgrade](#) | **1106**

[Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade \(CLI Procedure\)](#)

[Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade \(CLI Procedure\)](#)

[Upgrading Software on a Virtual Chassis and Mixed Virtual Chassis Using Nonstop Software Upgrade](#)

[Upgrading Software on a Virtual Chassis Fabric Using Nonstop Software Upgrade](#)

request system software validate in-service-upgrade

IN THIS SECTION

- [Syntax | 1082](#)
- [Description | 1082](#)
- [Options | 1083](#)
- [Additional Information | 1083](#)
- [Required Privilege Level | 1083](#)
- [Output Fields | 1083](#)
- [Sample Output | 1083](#)
- [Release Information | 1086](#)

Syntax

```
request system software validate in-service-upgrade package-name
<enhanced-mode>
```

Description

Perform a compatibility check to ensure that the software and hardware components and the configuration on the device support unified ISSU. The **request system software validate in-service-upgrade** command enables you to detect any compatibility issues before actually issuing the **request system software in-service-upgrade** command to initiate unified ISSU.

Options

<i>package-name</i>	Location from which the software package or bundle is to be installed. For example: • <i>/var/tmp/package-name</i>—For a software package or bundle that is being installed from a local directory on the router. • <i>protocol://hostname/pathname/package-name</i>—For a software package or bundle that is to be downloaded and installed from a remote location. Replace <i>protocol</i> with one of the following: • ftp—File Transfer Protocol • http—Hypertext Transfer Protocol • scp—Secure copy (available only for Canada and U.S. version)
enhanced-mode	(Optional) Starting in Junos OS Release 20.1R1, checks for compatibility with enhanced mode, a mode of ISSU available on MPC7E, MPC8E, and MPC9E line cards that eliminates packet loss during the unified ISSU process.

Additional Information

Unified ISSU is not supported on every platform. For a list of supported platforms, see ["Unified ISSU System Requirements" on page 507](#).

Required Privilege Level

view

Output Fields

When you enter this command, Junos OS displays the status of your request.

Sample Output

request system software validate in-service-upgrade

```
{master}
user@host> request system software validate in-service-upgrade /var/tmp/jinstall-9.0-20080114.2-
domestic-signed.tgz reboot
Checking compatibility with configuration
```

```

Initializing...
Using jbase-9.5-20090127.0
Verified manifest signed by PackageProduction_9_5_0
Using /var/tmp/jinstall-9.6-daily-domestic-signed.tgz
Verified jinstall-9.6-20090706.0-domestic.tgz signed by PackageProduction_9_6_0
Using jinstall-9.6-20090706.0-domestic.tgz
Using jbundle-9.6-20090706.0-domestic.tgz
Checking jbundle requirements on /
Using jbase-9.6-20090706.0.tgz
Verified manifest signed by PackageProduction_9_6_0
Using jkernel-9.6-20090706.0.tgz
Verified manifest signed by PackageProduction_9_6_0
Using jcrypto-9.6-20090706.0.tgz
Verified manifest signed by PackageProduction_9_6_0
Using jpfe-9.6-20090706.0.tgz
Using jdocs-9.6-20090706.0.tgz
Verified manifest signed by PackageProduction_9_6_0
Using jroute-9.6-20090706.0.tgz
Verified manifest signed by PackageProduction_9_6_0
Using jservices-9.6-20090706.0.tgz
[: /var/validate/chroot/tmp/jservices/packages/jservices-voice-9.6-20090706.0.tgz: unexpected operator
Auto-deleting old jservices-voice ...
Removing /opt/sdk/jservices-voice ...
Removing jservices-voice-bsg-9.5-20090127.0.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-voice ...
Verified jservices-voice-bsg-9.6-20090706.0.tgz signed by PackageProduction_9_6_0
Creating /var/sw/pkg ...
Creating /opt/sdk/jservices-voice ...
Storing jservices-voice-bsg-9.6-20090706.0.tgz in /var/sw/pkg ...
Link: /opt/sdk/jservices-voice/jservices-voice-bsg -> /var/sw/pkg/jservices-voice-bsg-9.6-20090706.0.tgz...
Installing new jservices-bgf ...
Verified jservices-bgf-pic-9.6-20090706.0.tgz signed by PackageProduction_9_6_0
Creating /opt/sdk/jservices-bgf ...
Storing jservices-bgf-pic-9.6-20090706.0.tgz in /var/sw/pkg ...
Link: /opt/sdk/jservices-bgf/jservices-bgf-pic -> /var/sw/pkg/jservices-bgf-pic-9.6-20090706.0.tgz...
Auto-deleting old jservices-aacl ...
Removing /opt/sdk/jservices-aacl ...
Removing jservices-aacl-pic-9.5-20090127.0.tgz from /var/sw/pkg ...
Notifying mspd ...

```

```

Installing new jservices-aacl ...
Verified jservices-aacl-pic-9.6-20090706.0.tgz signed by PackageProduction_9_6_0
Creating /opt/sdk/jservices-aacl ...
Storing jservices-aacl-pic-9.6-20090706.0.tgz in /var/sw/pkg ...
Link: /opt/sdk/jservices-aacl/jservices-aacl-pic -> /var/sw/pkg/jservices-aacl-
pic-9.6-20090706.0.tgz...
Auto-deleting old jservices-llpdf ...
Removing /opt/sdk/jservices-llpdf ...
Removing jservices-llpdf-pic-9.5-20090127.0.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-llpdf ...
Verified jservices-llpdf-pic-9.6-20090706.0.tgz signed by PackageProduction_9_6_0
Creating /opt/sdk/jservices-llpdf ...
Storing jservices-llpdf-pic-9.6-20090706.0.tgz in /var/sw/pkg ...
Link: /opt/sdk/jservices-llpdf/jservices-llpdf-pic -> /var/sw/pkg/jservices-
llpdf-pic-9.6-20090706.0.tgz...
Auto-deleting old jservices-sfw ...
Removing /opt/sdk/jservices-sfw ...
Removing jservices-sfw-pic-9.5-20090127.0.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-sfw ...
Verified jservices-sfw-pic-9.6-20090706.0.tgz signed by PackageProduction_9_6_0
Creating /opt/sdk/jservices-sfw ...
Storing jservices-sfw-pic-9.6-20090706.0.tgz in /var/sw/pkg ...
Link: /opt/sdk/jservices-sfw/jservices-sfw-pic -> /var/sw/pkg/jservices-sfw-
pic-9.6-20090706.0.tgz...
Auto-deleting old jservices-appid ...
Removing /opt/sdk/jservices-appid ...
Removing jservices-appid-pic-9.5-20090127.0.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-appid ...
Verified jservices-appid-pic-9.6-20090706.0.tgz signed by PackageProduction_9_6_0
Creating /opt/sdk/jservices-appid ...
Storing jservices-appid-pic-9.6-20090706.0.tgz in /var/sw/pkg ...
Link: /opt/sdk/jservices-appid/jservices-appid-pic -> /var/sw/pkg/jservices-
appid-pic-9.6-20090706.0.tgz...
Auto-deleting old jservices-idp ...
Removing /opt/sdk/jservices-idp ...
Removing jservices-idp-pic-9.5-20090127.0.tgz from /var/sw/pkg ...
Notifying mspd ...
Installing new jservices-idp ...
Verified jservices-idp-pic-9.6-20090706.0.tgz signed by PackageProduction_9_6_0
Creating /opt/sdk/jservices-idp ...

```

```

Storing jservices-idp-pic-9.6-20090706.0.tgz in /var/sw/pkg ...
Link: /opt/sdk/jservices-idp/jservices-idp-pic -> /var/sw/pkg/jservices-idp-
pic-9.6-20090706.0.tgz...
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
mgd: commit complete
Validation succeeded
PIC 7/0 will be offlined (In-Service-Upgrade not supported)
PIC 7/1 will be offlined (In-Service-Upgrade not supported)
PIC 4/2 will be offlined (In-Service-Upgrade not supported)
PIC 4/3 will be offlined (In-Service-Upgrade not supported)

```

request system software validate in-service-upgrade enhanced-mode

```

{master}
user@host> request system software validate in-service-upgrade /var/tmp/junos-install-mx-
x86-32-20.1.tgz enhanced-mode
ISSU: enhanced-mode check passed
Verified junos-install-mx-x86-32-20.1 signed by PackageDevelopmentEc_2019 method
ECDSA256+SHA256
Verified manifest signed by PackageDevelopmentEc_2019 method ECDSA256+SHA256
...
Checking PIC combinations
Adding junos-mx-x86-32-20.1 ...
Verified fips-mode signed by PackageDevelopmentEc_2019 method ECDSA256+SHA256
...
Hardware Database regeneration succeeded
Validating against /config/juniper.conf.gz
...
Validation succeeded
ISSU: Validating Image Done

```

Release Information

Command introduced in Junos OS Release 9.6.

RELATED DOCUMENTATION

request system software validate

[request system software in-service-upgrade | 1024](#)[*request system software abort*](#)[show chassis in-service-upgrade | 989](#)[Getting Started with Unified In-Service Software Upgrade | 495](#)[Example: Performing a Unified ISSU | 537](#)

show chassis high-availability information

IN THIS SECTION

- [Syntax | 1087](#)
- [Description | 1087](#)
- [Required Privilege Level | 1087](#)
- [Output Fields | 1088](#)
- [Sample Output | 1091](#)
- [Release Information | 1096](#)

Syntax

```
show chassis high-availability information
```

Description

Display control plane cold sync readiness and health status of the peer node as advertised in a chassis high availability configuration.

Required Privilege Level

view

Output Fields

Table 43 on page 1088 lists the output fields for the **show chassis high-availability information** command. Output fields are listed in the approximate order in which they appear.

Table 43: show chassis high-availability information

Field Name	Field Description
Node failure codes	Node failure codes are: • HW Hardware monitoring • MB Mbuf monitoring • CS Cold Sync monitoring • LB Loopback monitoring • SP SPU monitoring
Node Status	• status of the node • Local-id—local identifier • Local-IP—local IP address of the node
HA Peer Information	• Description—peer information • Peer Id—peer identifier • IP address—peer IP address • Interface—interface name • Routing Instance—routing instance name • Encrypted—data encrypted status • Cold Sync Status—cold sync status of the node.

Table 43: show chassis high-availability information *(Continued)*

Field Name	Field Description
Services Redundancy Group	• Current State—current state of the node • Peer Information—peer information • Peer Id—peer identifier
SRG failure event codes	• BF BFD monitoring—monitor Bidirectional Forwarding Detection. • IP IP monitoring—monitor IP address • CP Control Plane monitoring—monitor control plane state

Table 43: show chassis high-availability information *(Continued)*

Field Name	Field Description
Services Redundancy Group	• Status—node status • Activeness Priority—the node with the higher activeness priority become active for the service redundancy group. • Process Packet In Backup State—packet processing in Backup state. • Control Plane State—Displays the Control plane cold sync readiness after taking over the backup role. Means the control plane finished syncing all the control plane data from the new active node. The options are: • READY—Active mode • READY/NOT READY—Backup node based on the actual state • N/A—in other states • System Integrity Check—Displays if the hold timer is running and system integrity check is under progress. Applicable only in BACKUP and INELIGIBLE state. • Failure Events—Displays local service redundancy group related attribute failure events. • Peer Information—Displays peer node information. • Peer Id • Status • Health Status—Displays health status of the peer node as advertised last • HEALTHY—Peer node SRG state is healthy • UNHEALTHY—Peer node SRG state is Unhealthy • UNKNOWN—if Peer Link is down • SRG NOT CONFIGURED—SRG not configured at peer node.

Table 43: show chassis high-availability information (*Continued*)

Field Name	Field Description
	- Failover Readiness—Displays Failover readiness of the peer node and applicable only in Active state. The options are: - READY—Peer's healthy, control and data plane cold sync is complete and hence peer is ready for a failover. A manual failover can be done - NOT READY—Peer is either unhealthy, or data/control plane cold sync is pending - UNKNOWN—Peer's failover readiness is awaited or if peer link is down - N/A—In all states other than Active.

Sample Output

show chassis high-availability information

```

user@host> show chassis high-availability information
Node failure codes:
    HW  Hardware monitoring    LB  Loopback monitoring
    MB  Mbuf monitoring        SP  SPU monitoring
    CS  Cold Sync monitoring

Node Status: ONLINE
Local-id: 1
Local-IP: 9.9.9.1

HA Peer Information:

    Description: peer
    Peer Id: 2      IP address: 9.9.9.2      Interface: ae0.0
    Routing Instance: ha-link
    Encrypted: YES   Conn State: DOWN
    Cold Sync Status: IN PROGRESS

```

```

Services Redundancy Group: 0
    Current State: ONLINE
    Peer Information:
        Peer Id: 2

SRG failure event codes:
    BF  BFD monitoring
    IP  IP monitoring
    CP  Control Plane monitoring

Services Redundancy Group: 1
    Status: ACTIVE
    Activeness Priority: 10
    Process Packet In Backup State: NO
    Control Plane State: READY
    System Integrity Check: N/A
    Failure Events: NONE
    Peer Information:
        Peer Id: 2
        Status : UNKNOWN
        Health Status: UNKNOWN
        Failover Readiness: UNKNOWN

```

show chassis high-availability information detail

```

user@host> show chassis high-availability information detail
Node level Information:
    Node Status: ONLINE
    Local-id: 2
    Local-IP: 22.0.0.2

HA Peer Information:

Peer-ID: 1      IP address: 22.0.0.1      Interface:
xe-0/0/3.0
    Routing Instance: default
    Encrypted: NO      Conn State: UP
    Cold Sync Status: COMPLETE
    Internal Interface: N/A
    Internal Local-IP: N/A
    Internal Peer-IP: N/A

```

Internal Routing-instance: N/A

Packet Statistics:

Receive Error : 0 Send Error : 0

Packet-type	Sent	Received
SRG Status Msg	3	6
SRG Status Ack	6	3
Attribute Msg	2	1
Attribute Ack	1	1

HA Peer Conn events:

May 21 18:12:31.260 : HA Peer 22.0.0.1 BFD conn came up

Cold Synchronization:

Status:

Cold synchronization completed for: FPC 2 PIC 0, FPC 2 PIC 1

Cold synchronization failed for: N/A

Cold synchronization not known for: N/A

Current Monitoring Weight: 0

Progress:

CS Prereq	2 of 2 SPU's completed
1. if_state sync	2 SPU's completed
2. ha peer conn	2 SPU's completed
3. policy data sync	2 SPU's completed
4. cp ready	2 SPU's completed
5. VPN data sync	2 SPU's completed
6. IPID data sync	2 SPU's completed
7. All SPU ready	2 SPU's completed
8. AppID ready	2 SPU's completed
9. Tunnel Sess ready	2 SPU's completed
CS RTO sync	2 of 2 SPU's completed
CS Postreq	2 of 2 SPU's completed

Statistics:

Number of cold synchronization completed: 2

Number of cold synchronization failed: 0

PFE

Cold-Sync complete

Cold-Sync failed

```

-----
FPC 2 PIC 0          1          0
FPC 2 PIC 1          1          0

```

Events:

```

Oct 22 11:19:04.913 : Cold sync for PFE FPC 2 PIC 0 is Pre-req check in
process
Oct 22 11:19:12.476 : Cold sync for PFE FPC 2 PIC 1 is Pre-req check in
process
Oct 22 11:19:33.863 : Cold sync for PFE FPC 2 PIC 1 is RTO sync in
process
Oct 22 11:19:33.865 : Cold sync for PFE FPC 2 PIC 0 is RTO sync in
process
Oct 22 11:19:50.190 : Cold sync for PFE FPC 2 PIC 0 is Post-req check in
process
Oct 22 11:19:51.296 : Cold sync for PFE FPC 2 PIC 0 is Completed
Oct 22 11:19:16.620 : Cold sync for PFE FPC 2 PIC 1 is Post-req check in
process
Oct 22 11:19:17.724 : Cold sync for PFE FPC 2 PIC 1 is Completed

```

SPU monitoring:

Status: Enabled

Current monitoring weight: 0

```

PIC Name          State
-----
FPC 2 PIC 0      SPC3 cp-flow combo PIC Up
FPC 2 PIC 1      SPC3 flow PIC Up

```

Statistics:

```

SPU up count: 2
NPC up count: 0
SPU down count: 0
NPC down count: 0
Chassis info processing error count: 0

```

Events:

```

Oct 22 11:17:38.017 : ioc2 PIC Up in slot FPC 0 PIC 0
Oct 22 11:19:04.914 : SPC3 cp-flow combo PIC  in slot FPC 2 PIC 0
Oct 22 11:19:12.476 : SPC3 flow PIC Up in slot FPC 2 PIC 1

```

Loopback Information:

```

PIC Name          Loopback          Nexthop          Mbuf

```

```

-----
FPC 2 PIC 0      Success      Success      Success
FPC 2 PIC 1      Success      Success      Success

```

Hardware monitoring:

Status:

```

  Activation status: Enabled
  Ctrl Plane Hardware errors: 0
  Data Plane Hardware errors: 0

```

Services Redundancy Group: 0

```

  Current State: ONLINE
  Peer Information:
    Peer Id: 1

```

SRGS Information:

Services Redundancy Group: 1

```

  Status: BACKUP
  Activeness Priority: 0
  Hold Timer: 30
  plan In Backup State: NO
  Control Plane State: READY
  System Integrity Check: COMPLETE
  Peer Information:
  Failure events: NONE
    Peer-id: 1
    Status : BACKUP
    Health status: HEALTHY
    Failover Readiness: READY

```

Signal Route Info:

```

  Active Signal Route:
    IP: 39.0.0.1
    Routing Instance: default
    Status: INSTALLED

```

```

  Backup Signal Route:
    IP: 39.0.0.2
    Routing Instance: default
    Status: NOT INSTALLED

```

SRG state change events:

```

  Oct 22 18:12:36.267 : SRG[1] state HOLD -> BACKUP, reason: Peer
  mastership adv received
  Oct 22 18:23:09.045 : SRG[1] state BACKUP -> ACTIVE, reason: Peer

```



```

mastership relinquished
BFD Monitoring:
    SRC-IP: 3.0.0.2      DST-IP: 3.0.0.1
    Routing Instance: default
    Type: MULTI-HOP      IFL: 0
    Status: DOWN

    IP Monitoring:
    DST-IP: 6.0.0.2
    Routing Instance: N/A
    Status: REACHABLE     Reason: N/A
IP-monitoring status events:
    Oct 22 18:12:41.458 : SRG[1] HA ipmon dst 6.0.0.2 became reachable,
reason: N/A

Probe status events:
    Oct 22 18:12:26.467 : SRG[1] HA probe dst 111.0.0.1 became unreachable,
reason: UNKNOWN

```

Release Information

Command introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

[High-Availability \(Chassis\) | 759](#)

show chassis high-availability services-redundancy-group

IN THIS SECTION

- [Syntax | 1097](#)
- [Description | 1097](#)
- [Required Privilege Level | 1097](#)
- [Output Fields | 1097](#)

- [Sample Output | 1099](#)
- [Release Information | 1100](#)

Syntax

```
show chassis high-availability services-redundancy-group <services-redundancy-group-id>
```

Description

Display service redundancy group information.

Required Privilege Level

view

Output Fields

[Table 44 on page 1097](#) lists the output fields for the **show chassis high-availability service-redundancy-group** command. Output fields are listed in the approximate order in which they appear.

Table 44: show chassis high-availability services-redundancy-group

Field Name	Field Description
SRG failure event codes	SRG failure event codes are: • BF BFD monitoring • IP IP monitoring • CP Control Plane monitoring

Table 44: show chassis high-availability services-redundancy-group *(Continued)*

Field Name	Field Description
Services Redundancy Group	• Status • Activeness Priority • Process Packet In Backup State • Control Plane State • System Integrity Check • Failure Events • Peer Information • Peer Id • Status • Health Status • Failover Readiness • Signal Route Info • Active Signal Route • IP • Routing Instance • Status • Backup Signal Route • IP • Routing Instance • Status • IP Monitoring • DST-IP

Table 44: show chassis high-availability services-redundancy-group (Continued)

Field Name	Field Description
	• Routing Instance • Status • Reason

Sample Output

show chassis high-availability services-redundancy-group 1

```
user@host> show chassis high-availability services-redundancy-group 1
```

```
SRG failure event codes:
```

```
BF  BFD monitoring
```

```
IP  IP monitoring
```

```
CP  Control Plane monitoring
```

```
Services Redundancy Group: 1
```

```
Status: ACTIVE
```

```
Activeness Priority: 10
```

```
Process Packet In Backup State: NO
```

```
Control Plane State: READY
```

```
System Integrity Check: N/A
```

```
Failure Events: NONE
```

```
Peer Information:
```

```
Peer Id: 2
```

```
Status : UNKNOWN
```

```
Health Status: UNKNOWN
```

```
Failover Readiness: UNKNOWN
```

```
Signal Route Info:
```

```
Active Signal Route:
```

```
IP: 49.1.1.1
```

```
Routing Instance: default
```

```
Status: INSTALLED
```

```
Backup Signal Route:
```

```
IP: 59.1.1.1
Routing Instance: default
Status: NOT INSTALLED
IP Monitoring:
DST-IP: 5.5.5.2
Routing Instance: N/A
Status: reachable      Reason: N/A
```

Release Information

Command introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

| [show chassis high-availability information](#) | 1087

show chassis high-availability data-plane statistics

IN THIS SECTION

- [Syntax](#) | 1100
- [Description](#) | 1101
- [Required Privilege Level](#) | 1101
- [Output Fields](#) | 1101
- [Sample Output](#) | 1105
- [Release Information](#) | 1106

Syntax

```
show chassis high-availability data-plane statistics
```

Description

Display information about high availability data plane statistics.

Required Privilege Level

view

Output Fields

Table 45: show chassis cluster data-plane statistics Output Fields

Field Name	Field Description
Services Synchronized	• Service name—Name of the service. • Translation context—Messages synchronizing Network Address Translation (NAT) translation context. • Incoming NAT—Messages synchronizing incoming Network Address Translation (NAT) service. • Resource manager—Messages synchronizing resource manager groups and resources. • DS-LITE create—Messages synchronizing DS-LITE create sessions. • Session create—Messages synchronizing session creation. • IPv6 session create—Messages synchronizing IPv6 session create sessions. • IPv4/6 session RTO ACK—Messages synchronizing IPv4/6 session RTO ACK sessions. • Session close—Messages synchronizing session close. • IPv6 session close—Messages synchronizing IPv6 session close sessions. • Session change—Messages synchronizing session change. • IPv6 session change—Messages synchronizing IPv6 session change sessions. • ALG Support Library—Messages synchronizing ALG Support Library sessions. • Gate create—Messages synchronizing creation of pinholes (temporary openings in the firewall). • Session ageout refresh request—Messages synchronizing request session after age-out.

Table 45: show chassis cluster data-plane statistics Output Fields *(Continued)*

Field Name	Field Description
	• IPv6 session ageout refresh requests—Messages synchronizing IPv6 session ageout refresh requests. • Session ageout refresh replies—Messages synchronizing reply session after age-out. • IPv6 session ageout refresh replies—Messages synchronizing IPv6 session ageout refresh replies sessions. • IPsec VPN—Messages synchronizing VPN session. • Firewall user authentication—Messages synchronizing firewall user authentication session. • MGCP ALG—Messages synchronizing MGCP ALG sessions. • H323 ALG—Messages synchronizing H.323 ALG sessions. • SIP ALG—Messages synchronizing SIP ALG sessions. • SCCP ALG—Messages synchronizing SCCP ALG sessions. • PPTP ALG—Messages synchronizing PPTP ALG sessions. • JSF PPTP ALG—Messages synchronizing JSF PPTP ALG sessions. • RPC ALG—Messages synchronizing RPC ALG sessions. • RTSP ALG—Messages synchronizing RTSP ALG sessions. • RAS ALG—Messages synchronizing RAS ALG sessions. • MAC address learning—Messages synchronizing MAC address learning sessions. • GPRS GTP—Messages synchronizing GPRS GTP sessions. • GPRS SCTP—Messages synchronizing GPRS SCTP sessions. • GPRS FRAMEWORK—Messages synchronizing GPRS FRAMEWORK sessions.

Table 45: show chassis cluster data-plane statistics Output Fields (*Continued*)

Field Name	Field Description
	• JSF RTSP ALG—Messages synchronizing JSF RTSP ALG sessions. • JSF SUNRPC MAP—Messages synchronizing JSF SUNRPC MAP sessions. • JSF MSRPC MAP—Messages synchronizing JSF MSRPC MAP sessions. • DS-LITE delete—Messages synchronizing DS-LITE delete sessions. • JSF SLB—Messages synchronizing JSF SLB sessions. • APPID—Messages synchronizing APPID sessions. • JSF MGCP MAP—Messages synchronizing JSF MGCP MAP sessions. • JSF H323 ALG—Messages synchronizing JSF H323 ALG sessions. • JSF RAS ALG—Messages synchronizing JSF RAS ALG sessions. • JSF SCCP MAP—Messages synchronizing JSF SCCP MAP sessions. • JSF SIP MAP—Messages synchronizing JSF SIP MAP sessions. • PST_NAT_CREATE—Messages synchronizing PST NAT CREATE sessions. • PST_NAT_CLOSE—Messages synchronizing PST NAT CLOSE sessions. • PST_NAT_UPDATE—Messages synchronizing PST NAT UPDATE sessions. • JSF TCP STACK—Messages synchronizing JSF TCP STACK sessions. • JSF IKE ALG—Messages synchronizing JSF IKE ALG sessions.

Sample Output

show chassis high-availability data-plane statistics

```
user@host> show chassis high-availability data-plane statistics
```

```
Services Synchronized:
```

Service name	RTOs sent	RTOs received
Translation context	0	0
Incoming NAT	0	0
Resource manager	0	0
DS-LITE create	0	0
Session create	0	0
IPv6 session create	0	0
IPv4/6 session RTO ACK	0	0
Session close	0	0
IPv6 session close	0	0
Session change	0	0
IPv6 session change	0	0
ALG Support Library	0	0
Gate create	0	0
Session ageout refresh requests	0	0
IPv6 session ageout refresh requests	0	0
Session ageout refresh replies	0	0
IPv6 session ageout refresh replies	0	0
IPSec VPN	0	0
Firewall user authentication	0	0
MGCP ALG	0	0
H323 ALG	0	0
SIP ALG	0	0
SCCP ALG	0	0
PPTP ALG	0	0
JSF PPTP ALG	0	0
RPC ALG	0	0
RTSP ALG	0	0
RAS ALG	0	0
MAC address learning	0	0
GPRS GTP	0	0
GPRS SCTP	0	0
GPRS FRAMEWORK	0	0
JSF RTSP ALG	0	0
JSF SUNRPC MAP	0	0
JSF MSRPC MAP	0	0

DS-LITE delete	0	0
JSF SLB	0	0
APPID	0	0
JSF MGCP MAP	0	0
JSF H323 ALG	0	0
JSF RAS ALG	0	0
JSF SCCP MAP	0	0
JSF SIP MAP	0	0
PST_NAT_CREATE	0	0
PST_NAT_CLOSE	0	0
PST_NAT_UPDATE	0	0
JSF TCP STACK	0	0
JSF IKE ALG	0	0

Release Information

Command introduced in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

[clear chassis high-availability data-plane statistics](#) | [1002](#)

show chassis nonstop-upgrade

IN THIS SECTION

- [Syntax](#) | [1107](#)
- [Description](#) | [1107](#)
- [Required Privilege Level](#) | [1107](#)
- [Output Fields](#) | [1107](#)
- [Sample Output](#) | [1108](#)
- [Release Information](#) | [1109](#)

Syntax

```
show chassis nonstop-upgrade
```

Description

(EX6200 switches, EX8200 switches, EX8200 Virtual Chassis, QFX3500 and QFX3600 Virtual Chassis, and Virtual Chassis Fabric only) Display the status of the line cards or Virtual Chassis members in the linecard role after the most recent nonstop software upgrade (NSSU). You must issue this command on the primary Routing Engine.

Required Privilege Level

view

Output Fields

[Table 46 on page 1107](#) lists the output fields for the **show chassis nonstop-upgrade** command. Output fields are listed in the approximate order in which they appear.

Table 46: show chassis nonstop-upgrade Output Fields

Field Name	Field Description
Item	Line card slot number.
Status	State of line card: • Error—Line card is in an error state. • Offline—Line card is powered down. • Online—Line card is online and running.
Reason	Reason for the state (if the line card is offline).

Sample Output

show chassis nonstop-upgrade (EX8200 Switch)

```
user@switch> show chassis nonstop-upgrade
```

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online	
FPC 3	Offline	Offlined by CLI command
FPC 4	Online	
FPC 5	Online	
FPC 6	Online	
FPC 7	Online	

show chassis nonstop-upgrade (EX8200 Virtual Chassis)

```
user@external-routing-engine> show chassis nonstop-upgrade
```

```
member0:
```

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online	
FPC 5	Online	

```
member1:
```

Item	Status	Reason
FPC 0	Online	
FPC 1	Offline	Offlined due to config
FPC 2	Online	
FPC 3	Online	
FPC 4	Online	
FPC 5	Online	
FPC 7	Online	

show chassis nonstop-upgrade (Virtual Chassis Fabric)

Item	Status	Reason
FPC 0	Online	
FPC 1	Online	
FPC 2	Online	
FPC 3	Online	
FPC 4	Online	
FPC 5	Online	

Release Information

Command introduced in Junos OS Release 10.4.

RELATED DOCUMENTATION

request system software nonstop-upgrade 1068
Upgrading Software on an EX6200 or EX8200 Standalone Switch Using Nonstop Software Upgrade (CLI Procedure)
Upgrading Software on a Virtual Chassis and Mixed Virtual Chassis Using Nonstop Software Upgrade
<i>Upgrading Software on a Virtual Chassis Fabric Using Nonstop Software Upgrade</i>
Upgrading Software on an EX8200 Virtual Chassis Using Nonstop Software Upgrade (CLI Procedure)

show chassis nonstop-upgrade node-group

IN THIS SECTION

- [Syntax | 1110](#)
- [Description | 1110](#)
- [Required Privilege Level | 1110](#)
- [Output Fields | 1110](#)
- [Sample Output | 1111](#)
- [Release Information | 1111](#)

Syntax

```
show chassis nonstop-upgrade node-group node-group-name
```

Description

Display the status of the Node group after the most recent nonstop software upgrade (NSSU).

Required Privilege Level

view

Output Fields

[Table 47 on page 1110](#) lists the output fields for the **show chassis nonstop-upgrade node-group** command. Output fields are listed in the approximate order in which they appear.

Table 47: show chassis nonstop-upgrade node-group Output Fields

Field Name	Field Description
Item	Node device slot number.
Status	State of Node device: • Error—Node device is in an error state. • Offline—Node device is powered down. • Online—Node device is online and running.
Reason	Reason for the state (if the line card is offline).

Sample Output

show chassis nonstop-upgrade node-group

```
user@qfabric> show chassis nonstop-upgrade node-group NW-NG-0
```

Item	Status	Reason
P1550-C	Online	

Release Information

Command introduced in Junos OS Release 12.2.

RELATED DOCUMENTATION

<i>Performing a Nonstop Software Upgrade on the QFabric System</i>
<i>request system software nonstop-upgrade</i>

show chassis power-budget-statistics

IN THIS SECTION

- [Syntax | 1111](#)
- [Description | 1112](#)
- [Required Privilege Level | 1112](#)
- [Output Fields | 1112](#)
- [Sample Output | 1115](#)
- [Release Information | 1117](#)

Syntax

show chassis power-budget-statistics

Description

Display the power budget of the device.

Required Privilege Level

view

Output Fields

[Table 48 on page 1112](#) lists the output fields for the **show chassis power-budget-statistics** command. Output fields are listed in the approximate order in which they appear.

Table 48: show chassis power-budget-statistics Output Fields

Field Name	Field Description
PSU <i>n</i> (supply type)	Capacity rating of the power supply and whether the power supply is currently operating (Online) or not (Offline). If a power supply is offline, the capacity is shown as 0 W.
Total Power supplied by all Online PSUs	Total number of watts supplied by all currently operating power supplies.
Power Redundancy Configuration	Configured power redundancy setting, either <i>N</i> +1 or <i>N</i> + <i>N</i> .
Base power reserved	Total number of watts reserved for the device.
Non-PoE power being consumed	The amount of power, in W, currently being consumed for PoE.

Table 48: show chassis power-budget-statistics Output Fields (*Continued*)

Field Name	Field Description
Power Reserved for the Chassis	Power reserved for the chassis: • For an EX6200 switch, 500 W. • For an EX8208 switch: 1600 W in an $N+1$ configuration; 1200 W in an $N+N$ configuration • For an EX8216 switch: 2400 W in an $N+1$ configuration; 1800 W in an $N+N$ configuration The power reserved for the chassis includes the maximum power requirements for the fan tray and Switch Fabric and Routing Engine (SRE), Routing Engine (RE), and Switch Fabric (SF) modules in both base and redundant configurations.
Fan Tray Statistics	(EX6200 switch only) Information about the fan tray: • Base power—Power allocated to the fan tray in the power budget. This allocation is included in Power Reserved for the Chassis. • Power Used—Actual power being used by the fan tray. This value is for informational purposes only: the power budget for the switch is based on allocated power (the theoretical maximum the fan tray might use) rather than used power.

Table 48: show chassis power-budget-statistics Output Fields (*Continued*)

Field Name	Field Description
FPC <i>n</i> (card type	Information about the line card installed in slot <i>n</i>. For EX6200 switches, information about the SRE modules in slot 4 and slot 5 is also shown. Base power—For line cards without PoE ports, the total power allocated to the line card. For line cards with PoE ports, the power allocated to the line card before the PoE power budget is allocated. The base power includes 37 W of PoE power that is always allocated to line cards that support PoE. Power Used—(EX6200 switch only) The actual power being consumed by the line card or SRE module, including PoE power. This value is for informational purposes only: the power budget for the switch is based on allocated power (the theoretical maximum the line card might use) rather than used power. PoE power—For line cards with PoE ports, the PoE power budget allocated to the line card. This value includes the 37 W of PoE power that is always part of the base power allocation for line cards that support PoE. For line cards without PoE ports, the value is always 0 W. - The power priority assigned to the line card slot.
Total (non-PoE) Power allocated	Power budgeted for all the components in the switch, excluding the PoE power budget allocated to line cards. This value is equal to the power reserved for the chassis plus the base power allocations of all online line cards.

Table 48: show chassis power-budget-statistics Output Fields (*Continued*)

Field Name	Field Description
Total Power allocated for PoE	The total of the PoE power budgets allocated to the line cards in the switch. This figure includes the 37 W of PoE power always included in the base allocation for each line card that supports PoE.
Total PoE power consumed	The amount of power that has been consumed by PoE.
Total PoE power remaining	The amount of available power remaining that can be used for PoE.
Power Available (Redundant case)	Unused power available to the switch in the power budget, not including the power reserved for redundancy. If power is insufficient to meet the $N+1$ or $N+N$ redundancy requirements, this value is 0. PoE power allocations are not included in the calculation of this value.
Total Power Available	Unused power available to the switch in the power budget. This value is derived by subtracting all power allocations, including PoE power allocations, from the total power available on the switch (the Total Power supplied by all Online PSUs value).

Sample Output

show chassis power-budget-statistics (EX6200 Switch)

```

user@switch> show chassis power-budget-statistics
      PSU  0      (EX6200-PWR-AC2500)      :    2500 W    Online
      PSU  1      (EX6200-PWR-AC2500)      :    2500 W    Online

```

```

PSU 2      (EX6200-PWR-AC2500)      :    2500 W   Online
PSU 3      (EX6200-PWR-AC2500)      :    2500 W   Online
Total Power supplied by all Online PSUs :   10000 W
Power Redundancy Configuration       :      N+1
Power Reserved for the Chassis       :     500 W

Fan Tray Statistics      Base power   Power Used
FTC 0                   :    300 W    43.04 W
FPC Statistics          Base power   Power Used   PoE power   Priority
FPC 1  (EX6200-48P)     :    220 W    49.47 W    1440 W     1
FPC 2  (EX6200-48P)     :    220 W    47.20 W     800 W     2
FPC 3  (EX6200-48P)     :    220 W   1493.57 W    1440 W     0
FPC 4  (EX6200-SRE64-4XS) :    100 W    51.38 W     0 W     0
FPC 5  (EX6200-SRE64-4XS) :    100 W    50.28 W     0 W     0
FPC 6  (EX6200-48P)     :    220 W    49.38 W     800 W     6
FPC 8  (EX6200-48P)     :    220 W    61.41 W    1440 W     9
FPC 9  (EX6200-48T)     :    150 W    12.49 W     0 W     9

Total (non-PoE) Power allocated      :    1750 W
Total Power allocated for PoE        :    5920 W
Power Available (Redundant case)     :    5750 W
Total Power Available                :    2515 W

```

show chassis power-budget-statistics (EX8200 Switch)

```

user@switch> show chassis power-budget-statistics

PSU 0      (EX8200-AC2K)      :    2000 W   Online
PSU 1      (EX8200-AC2K)      :    2000 W   Online
PSU 2      (EX8200-AC2K)      :    2000 W   Online
PSU 3      (EX8200-AC2K)      :    2000 W   online
PSU 4      (EX8200-AC2K)      :    2000 W   Online
Total Power supplied by all Online PSUs :   10000 W
Power Redundancy Configuration       :      N+1
Power Reserved for the Chassis       :    2400 W

FPC Statistics          Base power   PoE power   Priority
FPC 1  (EX8200-48T)     :    350 W     0 W     15
FPC 5  (EX8200-2XS-40P) :    387 W    792 W     0
FPC 9  (EX8200-48PL)    :    267 W    915 W    15
FPC 10  (EX8200-2XS-40T) :    350 W     0 W     1
FPC 12  (EX8200-48T)    :    350 W     0 W    15

Total (non-PoE) Power allocated      :    4104 W

```

```

Total Power allocated for PoE           :    1707 W
Power Available (Redundant case)         :    3896 W
Total Power Available                   :    4263 W

```

show chassis power-budget-statistics (SRX380 device)

```

user@host> show chassis power-budget-statistics

PSU 0      (JPSU-600W-AC-AFO  )      :    600 W   Online
PSU 1      (JPSU-600W-AC-AFO  )      :    600 W   Online
Power redundancy configuration         :    N+N
Total power supplied by all online PSUs :    600 W
Base power reserved                    :    300 W
Non-PoE power being consumed           :    300 W
Total power allocated for PoE          :    300 W
Total PoE power consumed                :    289 W
Total PoE power remaining              :     11 W

```

Release Information

Command introduced in Junos OS Release 10.2.

RELATED DOCUMENTATION

[Understanding Power Management on EX Series Switches | 385](#)

[Configuring the Power Priority of Line Cards \(CLI Procedure\) | 392](#)

[Configuring Power Supply Redundancy \(CLI Procedure\) | 393](#)

show chassis redundant-power-system

IN THIS SECTION

- [Syntax | 1118](#)
- [Description | 1118](#)
- [Required Privilege Level | 1118](#)

- [Output Fields | 1118](#)
- [Sample Output | 1119](#)
- [Release Information | 1120](#)

Syntax

```
show chassis redundant-power-system
```

Description

Display information about the Redundant Power Systems (RPS) connected to the switch.

Required Privilege Level

view

Output Fields

[Table 49 on page 1118](#) lists the output fields for the **show chassis redundant-power-system** command. Output fields are listed in the approximate order in which they appear.

Table 49: show chassis redundant-power-system Output Fields

Field Name	Field Description	Level of Output
Member	Member number of the switch connected to the RPS—For a switch that has never been configured in a Virtual Chassis, the value is always zero. For a Virtual Chassis member, the range is zero through the maximum number of members in the Virtual Chassis.	All levels

Table 49: show chassis redundant-power-system Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Status	Status of the RPS: • ARMED—The switch is ready to get backup power from the RPS if power supply fails on the switch. • OFF—The switch has zero and is not configured to receive backup power from the RPS. • BACKED-UP—The switch is receiving power backup from the RPS. • OVER-SUBSCRIBED—The switch cannot receive backup power from the RPS even if you set the .	All levels
RPS	Serial number of the RPS.	
Port	Number of the switch connector on the RPS that is connected to a switch.	All levels

Sample Output

show chassis redundant-power-system (Standalone Switch)

```
user@switch> show chassis redundant-power-system
```

```
Member Status      RPS              Port
  0      Armed      CG0209121807    0
```

show chassis redundant-power-system (Virtual Chassis member)

```
user@switch> show chassis redundant-power-system
```

```
Member Status      RPS              Port
```


0	Armed	CG0209121814	5
2	Armed	CG0209121815	4

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

[Determining and Setting Priority for Switches Connected to an EX Series RPS](#) | 402

show protection-group ethernet-ring aps

IN THIS SECTION

- [Syntax](#) | 1120
- [Description](#) | 1121
- [Options](#) | 1121
- [Required Privilege Level](#) | 1121
- [Output Fields](#) | 1121
- [Sample Output](#) | 1122
- [Sample Output](#) | 1123
- [Sample Output](#) | 1123
- [Release Information](#) | 1125

Syntax

```
show protection-group ethernet-ring aps
```

Description

Display the status of the Automatic Protection Switching (APS) and Ring APS (RAPS) messages on an Ethernet ring.

Options

This command has no options.

Required Privilege Level

view

Output Fields

[Table 50 on page 1121](#) lists the output fields for the **show protection-group ethernet-ring aps** command. Output fields are listed in the approximate order in which they appear.

Table 50: show protection-group ethernet-ring aps Output Fields

Field Name	Field Description
Ethernet Ring	Name configured for the Ethernet ring.
Request/State	Status of the Ethernet ring RAPS messages. • NR—Indicates that there is no request for APS on the ring. • SF—Indicates that there is a signal failure on the ring. • FS—Indicates that there are active forced-switch requests in the ring. • MS—Indicates that there are active manual-switch requests in the ring. NOTE: Both FS and MS values are valid only when G.8032v2 is supported.
Ring Protection Link Blocked	Blocking on the ring protection link: Yes or No .

Table 50: show protection-group ethernet-ring aps Output Fields *(Continued)*

Field Name	Field Description
No Flush	Indicates the value of the Do Not Flush (DNF) flag in the received RAPS PDU. If the value is Yes, then FDB flush is not triggered as part of processing of the received RAPS PDU.
Blocked Port Reference	This parameter is the reference to the blocked ring port. If the east ring port is blocked, the Blocked Port Reference (BPR) value is 0. If the west ring port is blocked, the BPR value is 1. If both ring ports are blocked, this parameter can take any value. If both east and west ports are blocked or not blocked, the value would be 0. This field is valid only when G.8032v2 is supported.
Blocked Port Reference	Reference of the ring port on which traffic is blocked.
Originator	Indicates whether the node is the originator of the RAPS messages.
Remote Node ID	Identifier (in MAC address format) of the remote node.

Sample Output

show protection-group ethernet-ring aps (EX Switches)

```

user@switch>show protection-group ethernet-ring aps
Ring Name      Request/state  No Flush  RPL Blocked  Originator  Remote Node ID
erp1           NR            No        Yes          No          00:1F:12:30:B8:81

```

Sample Output

show protection-group ethernet-ring aps (Owner Node, Normal Operation on ACX and MX Routers)

```
user@host> show protection-group ethernet-ring aps
Ethernet Ring   Request/state  RPL Blocked  No Flush  BPR  Originator  Remote
Node ID
Erp_1           NR             Yes           No         1    No
00:00:00:02:00:01
```

Sample Output

show protection-group ethernet-ring aps detail (Owner Node, Normal Operation on ACX and MX Routers)

```
user@host> show protection-group ethernet-ring aps detail
Ethernet-Ring name      : Erp_1
Request/State           : NR
Ring Protection Link blocked : Yes
No Flush Flag           : No
Blocked Port Reference  : 1
Originator              : No
Remote Node ID          : 00:00:00:02:00:01
```

show protection-group ethernet-ring aps (MX RPL Owner Ring Node, Failure condition on non-RPL link of the ring)

```
user@host> show protection-group ethernet-ring aps
Ethernet Ring   Request/state  RPL Blocked  No Flush
pg101           SF             No           No

Originator  Remote Node ID
No          00:01:02:00:00:01
```

show protection-group ethernet-ring aps (MX Interconnection Ring Node, Failure condition in major ring on non-RPL link of the ring)

```

user@host>show protection-group ethernet-ring aps
Ethernet Ring   Request/state  RPL Blocked  No Flush  BPR
pg_major        SF              No            No         0
pg_subring      NR              Yes           Yes        Yes
0

Originator      Remote Node ID
No               00:01:00:00:00:01
No               00:02:00:00:00:02

```

show protection-group ethernet-ring aps (MX Series router)

```

user@host>show protection-group ethernet-ring aps
Ethernet Ring   Request/state  RPL Blocked  No Flush  BPR  Originator  Remote
Node ID
Inst_Vlans_1-15 NR              Yes           Yes        1     Yes
NA
Inst_Vlans_16-30 NR              Yes           Yes        0     No
00:00:00:03:00:02

```

show protection-group ethernet-ring aps detail (MX Series router)

```

user@host>show protection-group ethernet-ring aps
Ethernet-Ring name      : Inst_Vlans_1-15
Request/State           : NR
Ring Protection Link blocked : Yes
No Flush Flag           : Yes
Blocked Port Reference   : 1
Originator              : Yes
Remote Node ID          : NA

Ethernet-Ring name      : Inst_Vlans_16-30
Request/State           : NR
Ring Protection Link blocked : Yes
No Flush Flag           : Yes
Blocked Port Reference   : 0

```

```

Originator          : No
Remote Node ID      : 00:00:00:03:00:02

```

show protection-group ethernet-ring aps (MX Interconnection Ring Node as RPL owner of major ring, rings in IDLE state)

```

user@host>show protection-group ethernet-ring aps detail

Ethernet-Ring name      : pg_major
Request/State           : NR
Ring Protection Link blocked : Yes
No Flush Flag           : Yes
Blocked Port Reference   : 0
Originator              : Yes
Remote Node ID          : NA

Ethernet-Ring name      : pg_subring
Request/State           : NR
Ring Protection Link blocked : Yes
No Flush Flag           : Yes
Blocked Port Reference   : 0
Originator              : No
Remote Node ID          : 00:00:03:00:00:03

```

show protection-group ethernet-ring aps detail (EX2300 and EX3400 Switches)

```

user@switch>show protection-group ethernet-ring aps detail

Ethernet-Ring name      : pg1001
Request/State           : NR
Ring Protection Link blocked : Yes
No Flush Flag           : Yes
Blocked Port Reference   : 0
Originator              : Yes
Remote Node ID          : NA

```

Release Information

Command introduced in Junos OS Release 9.4.

Command introduced in Junos OS Release 18.1 for EX2300 and EX3400 switches.

RELATED DOCUMENTATION

show protection-group ethernet-ring data-channel

show protection-group ethernet-ring interface

show protection-group ethernet-ring node-state

show protection-group ethernet-ring statistics

show protection-group ethernet-ring vlan

show protection-group ethernet-ring configuration

IN THIS SECTION

- [Syntax | 1126](#)
- [Description | 1126](#)
- [Required Privilege Level | 1126](#)
- [Output Fields | 1127](#)
- [Sample Output | 1130](#)
- [Release Information | 1135](#)

Syntax

```
show protection-group ethernet-ring configuration
```

Description

Display the configuration of Ethernet ring protection group on EX Switches and MX Series routers.

Required Privilege Level

view

Output Fields

Table 51 on page 1127 lists the output fields for the **show protection-group ethernet-ring configuration** command. Output fields are listed in the approximate order in which they appear.

Table 51: show protection-group ethernet-ring configuration Output Fields

Output Fields	Field Description
G8032 Compatability Version	This is the compatibility version mode of ERP. This parameter always takes the value 1 in the case of G8032v1. This parameter is valid only for MX Series routers.
East Interface	One of the two switch interfaces that participates in a ring link. When Junos supports G8032v2, this interface is treated as interface 0.
West Interface	One of the two interfaces in a switch that participates in a ring link. When Junos supports G8032v2, this interface is treated as interface 1.
Restore Interval	Configured interval of wait time after a link is restored. When a link goes down, the RPL link is activated. When the down link becomes active again, the RPL owner receives a notification. The RPL owner waits for the restore interval before issuing a block on the RPL link. The configured restore interval can be 5 through 12 minutes for ER Pv1 and 1 through 12 minutes for ER Pv2. This configuration is a global configuration and applies to all Ethernet rings if the Ethernet ring does not have a more specific configuration for this value. If no parameter is configured at the protection group level, the global configuration of this parameter uses the default value. NOTE: Wait to Restore (WTR) configuration values on EX2300 and EX3400 switches must be 5-12 minutes.

Table 51: show protection-group ethernet-ring configuration Output Fields *(Continued)*

Output Fields	Field Description
Wait to Block Interval	Configured interval of wait time for link restoration when a manual command (manual switch or force switch) is cleared. On clearing the manual command, the RPL owner receives NR messages, which starts a timer with interval 'Wait to Block' to restore the RPL link after its expiration. This delay timer is set to be 5 seconds longer than the guard timer. The configured number can be from 5 seconds through 10 seconds. The parameter is valid only for G.8032v2. NOTE: The Wait To Block Timer (WTB) is always disabled on EX2300 and EX3400 switches because it is not supported in ERPSv1. Any configuration you make to the WTB setting has no effect. The output from the CLI command 'show protection-group ethernet-ring node-state detail' lists a WTB setting but that setting has no effect.
Guard Interval	Configured number of milliseconds (in 10 millisecond intervals, 10 milliseconds through 2000 milliseconds) that the node does not process any Ethernet ring protection protocol data units (PDUs). This configuration is a global configuration and applies to all Ethernet rings if the Ethernet ring does not have a more specific configuration for this value. If no parameter is configured at the protection group level, the global configuration of this parameter uses the default value.
Hold off interval	This is the interval at which the link is held down even before declaring that the link is down. Because the parameter is not supported at present, its value is always considered 0. This parameter is valid only for MX Series routers.
Node ID	Node ID for the switch or router. If the node ID is not configured, it is assigned by default. For EX Series switches, the Node ID value cannot be configured, whereas for MX Series routers, it can be configured.
Ring ID	In G8032v2, the ring ID can be within the range 1–239. All the nodes in a ring should have the same ring ID. In the case of G8032v1, the value of the ring ID is always 1. This parameter is valid only for MX Series routers.

Table 51: show protection-group ethernet-ring configuration Output Fields *(Continued)*

Output Fields	Field Description
Node Role	Indicates whether the ring node is operating as a normal ring-node or RPL-owner or RPL-neighbor. For G8032v1 RPL-neighbor role is not supported. This parameter is valid only for MX Series routers.
Revertive Mode of Operation	This parameter indicates whether the ring is operating in revertive mode or nonrevertive mode. In nonrevertive mode of operation, when all links in the ring and Ethernet Ring Nodes have recovered and no external requests are active, the Ethernet Ring does not automatically revert. G8032v1 supports only revertive mode of operation. This parameter is valid only for MX Series routers.
RAPS Tx Dot1p priority	The RAPS Tx Dot1p priority is a parameter with which the RAPS is transmitted from the ring node. For G8032v1, the value of this parameter is always 0. For G8032v2, the value of this parameter can be within the range 0–7. This parameter is valid only for MX Series routers.
Node type	Indicates whether ring node is a normal ring node having two ring-links or a open ring-node having only a single ring-link or a interconnection ring-node. An interconnection ring node can be connected to major ring in non virtual-channel mode or in virtual channel mode. Ring interconnection is not supported for G8032v1. This parameter is valid only for MX Series routers.
Major ring name	If the node type is interconnection in the ring, this parameter takes the name of the major ring to which the sub-ring node is connected. This parameter is valid only for MX Series routers.
Interconnection mode	Indicates the interconnection mode if the type of the node is interconnection. An interconnection ring node can be connected to major ring in non-virtual channel mode or in virtual channel mode. This parameter is valid only for MX Series routers.

Table 51: show protection-group ethernet-ring configuration Output Fields *(Continued)*

Output Fields	Field Description
Propagate Topology Change event	When Propagate Topology Change event is set to 1, the change in the topology of sub-ring is propagated to the major ring, enabling the transmission of EVENT FLUSH RAPS PDU in the major ring. When the parameter is set to 0, the topology change in the sub-ring is not propagated to the major ring blocking EVENT FLUSH RAPS PDU transmission in the major ring. This parameter is valid only for MX Series routers.
Control Vlan	The VLAN that transfers ERP PDUs from one node to another.
Physical Ring	Physical ring if the east and west interfaces are nontrunk ports. For MX Series routers, the ring is termed a physical ring if no data channels are defined for the ring and the entire physical port forwarding is controlled by ERP.
Data Channel VLAN(s)	Data VLANs for which forwarding behavior is controlled by the ring instance.

Sample Output

show protection-group ethernet-ring configuration (EX Switch)

```

user@switch>show protection-group ethernet-ring configuration
Ethernet ring configuration parameters for protection group erp1
East Interface   : ge-0/0/3.0
West Interface  : ge-0/0/9.0
Restore Interval : 5 minutes
Guard Interval   : 500 ms
Node Id         : 00:1F:12:30:B8:81
Control Vlan     : 101
Physical Ring    : yes

```

show protection-group ethernet-ring configuration detail (MX Series Router)

```

user@switch>show protection-group ethernet-ring configuration detail
Ethernet Ring configuration information for protection group pg_101
G8032 Compatibility Version           : 2
East interface (interface 0)         : xe-2/3/0.1
West interface (interface 1)         : xe-2/2/1.1
Restore interval                      : 5 minutes
Wait to Block interval               : 5 seconds
Guard interval                       : 500 ms
Hold off interval                    : 0 ms
Node ID                             : 64:87:88:65:37:D0
Ring ID (1 ... 239)                  : 1
Node role (normal/rpl-owner/rpl-neighbour) : normal
Revertive mode of operation          : 1
RAPS Tx Dot1p priority (0 .. 7)     : 0
Node type (normal/open/interconnection) : Normal
Control Vlan                         : 100
Physical Ring                        : No
Data Channel Vlan(s)                 : 200,300

```

show protection-group ethernet-ring configuration (MX Series Router)

```

user@switch>show protection-group ethernet-ring configuration
Ethernet Ring configuration information for protection group pg_101
G8032 Compatibility Version           : 2
East interface (interface 0)         : xe-2/3/0.1
West interface (interface 1)         : xe-2/2/1.1
Restore interval                      : 5 minutes
Wait to Block interval               : 5 seconds
Guard interval                       : 500 ms
Hold off interval                    : 0 ms
Node ID                             : 64:87:88:65:37:D0
Ring ID (1 ... 239)                  : 1
Node role (normal/rpl-owner/rpl-neighbour) : rpl-neighbour
Node RPL end                         : east-port
Revertive mode of operation          : 1
RAPS Tx Dot1p priority (0 .. 7)     : 0
Node type (normal/open/interconnection) : Normal
Control Vlan                         : 100

```

Physical Ring	: No
Data Channel Vlan(s)	: 200,300

show protection-group ethernet-ring configuration detail (MX Series Router)

```

user@switch>show protection-group ethernet-ring configuration detail
Ethernet Ring configuration information for protection group pg_101
G8032 Compatibility Version           : 2
East interface (interface 0)         : xe-2/3/0.1
West interface (interface 1)         : xe-2/2/1.1
Restore interval                     : 5 minutes
Wait to Block interval               : 5 seconds
Guard interval                      : 500 ms
Hold off interval                   : 0 ms
Node ID                             : 64:87:88:65:37:D0
Ring ID (1 ... 239)                 : 1
Node role (normal/rpl-owner/rpl-neighbour) : rpl-owner
Node RPL end                        : east-port
Revertive mode of operation          : 1
RAPS Tx Dot1p priority (0 .. 7)     : 0
Node type (normal/open/interconnection) : Normal
Control Vlan                        : 100
Physical Ring                       : No
Data Channel Vlan(s)                : 200,300

```

show protection-group ethernet-ring configuration detail (MX Series Router)

```

user@switch>show protection-group ethernet-ring configuration detail
Ethernet Ring configuration information for protection group pg_101
G8032 Compatibility Version           : 2
East interface (interface 0)         : xe-2/3/0.1
West interface (interface 1)         : (no erp)
Restore interval                     : 5 minutes
Wait to Block interval               : 5 seconds
Guard interval                      : 500 ms
Hold off interval                   : 0 ms
Node ID                             : 64:87:88:65:37:D0
Ring ID (1 ... 239)                 : 1
Node role (normal/rpl-owner/rpl-neighbour) : rpl-owner

```

```

Node RPL end                : east-port
Revertive mode of operation  : 1
RAPS Tx Dot1p priority (0 .. 7) : 0
Node type (normal/open/interconnection) : Open
Control Vlan                 : 100
Physical Ring                 : No
Data Channel Vlan(s)         : 200,300

```

show protection-group ethernet-ring configuration (MX Series Router)

```

user@switch>show protection-group ethernet-ring configuration
Ethernet Ring configuration information for protection group pg_major
G8032 Compatibility Version      : 2
East interface (interface 0)     : xe-2/3/0.1
West interface (interface 1)     : xe-2/2/1.1
Restore interval                  : 5 minutes
Wait to Block interval           : 5 seconds
Guard interval                   : 500 ms
Hold off interval                : 0 ms
Node ID                          : 64:87:88:65:37:D0
Ring ID (1 ... 239)             : 1
Node role (normal/rpl-owner/rpl-neighbour) : rpl-owner
Node RPL end                     : east-port
Revertive mode of operation      : 1
RAPS Tx Dot1p priority (0 .. 7) : 0
Node type (normal/open/interconnection) : Normal
Control Vlan                     : 100
Physical Ring                    : No
Data Channel Vlan(s)             : 200,300

Ethernet Ring configuration information for protection group pg_subring
G8032 Compatibility Version      : 2
East interface (interface 0)     : ge-2/0/0.1
West interface (interface 1)     : (no erp)
Restore interval                  : 5 minutes
Wait to Block interval           : 5 seconds
Guard interval                   : 500 ms
Hold off interval                : 0 ms
Node ID                          : 64:87:88:65:37:D0
Ring ID (1 ... 239)             : 2
Node role (normal/rpl-owner/rpl-neighbour) : normal

```

```

Revertive mode of operation          : 1
RAPS Tx Dot1p priority (0 .. 7)     : 0
Node type (normal/open/interconnection) : Non-VC-Interconnection
Major ring name                      : pg_major
Interconnection mode (VC/Non-VC)     : Non-VC mode
Propagate Topology Change event      : 0
Control Vlan                         : 101
Physical Ring                        : No
Data Channel Vlan(s)                 : 200,300

```

show protection-group ethernet-ring configuration detail (MX Series Router)

```

user@switch>show protection-group ethernet-ring configuration detail
Ethernet Ring configuration information for protection group pg_major
G8032 Compatibility Version          : 2
East interface (interface 0)        : xe-2/3/0.1
West interface (interface 1)        : xe-2/2/1.1
Restore interval                     : 5 minutes
Wait to Block interval              : 5 seconds
Guard interval                      : 500 ms
Hold off interval                   : 0 ms
Node ID                             : 64:87:88:65:37:D0
Ring ID (1 ... 239)                 : 1
Node role (normal/rpl-owner/rpl-neighbour) : rpl-owner
Node RPL end                        : east-port
Revertive mode of operation          : 1
RAPS Tx Dot1p priority (0 .. 7)     : 0
Node type (normal/open/interconnection) : Normal
Control Vlan                         : 100
Physical Ring                        : No
Data Channel Vlan(s)                 : 200,300

Ethernet Ring configuration information for protection group pg_subring
G8032 Compatibility Version          : 2
East interface (interface 0)        : ge-2/0/0.1
West interface (interface 1)        : (no erp)
Restore interval                     : 5 minutes
Wait to Block interval              : 5 seconds
Guard interval                      : 500 ms
Hold off interval                   : 0 ms
Node ID                             : 64:87:88:65:37:D0

```

```

Ring ID (1 ... 239)                : 2
Node role (normal/rpl-owner/rpl-neighbour) : normal
Revertive mode of operation        : 1
RAPS Tx Dot1p priority (0 .. 7)    : 0
Node type (normal/open/interconnection) : Non-VC-Interconnection
Major ring name                    : pg_major
Interconnection mode (VC/Non-VC)    : Non-VC mode
Propagate Topology Change event    : 0
Control Vlan                       : 101
Physical Ring                      : No
Data Channel Vlan(s)               : 200,300

```

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

show protection-group ethernet-ring aps

show protection-group ethernet-ring data-channel

show protection-group ethernet-ring interface

show protection-group ethernet-ring node-state

show protection-group ethernet-ring statistics

show protection-group ethernet-ring vlan

show protection-group ethernet-ring data-channel

IN THIS SECTION

- [Syntax | 1136](#)
- [Description | 1136](#)
- [Options | 1136](#)
- [Required Privilege Level | 1136](#)
- [Output Fields | 1136](#)

- [Sample Output | 1137](#)
- [Release Information | 1139](#)

Syntax

```
show protection-group ethernet-ring data-channel  
<brief | detail>  
<group-name group-name>
```

Description

Display the configuration of Ethernet ring protection group on EX Switches and MX Series routers.

Options

brief | detail (Optional) Display the specified level of output.

group-name (Optional) Protection group for which to display statistics. If you omit this optional field, all protection group statistics for configured groups will be displayed.

Required Privilege Level

view

Output Fields

[Table 52 on page 1137](#) lists the output fields for the **show protection-group ethernet-ring data-channel** command. Output fields are listed in the approximate order in which they appear.

Table 52: show protection-group ethernet-ring data-channel Output Fields

Field Name	Field Description
Interface	Name of the interface configured for the Ethernet ring.
STP index	The Spanning Tree Protocol (STP) index number used by each interface in an Ethernet ring. The STP index controls the forwarding behavior for a set of VLANs on a data channel on an Ethernet ring port. For multiple Ethernet ring instances on an physical ring port, there are multiple STP index numbers. Different ring instances will have different STP index numbers and may have different forwarding behavior.
Forward State	Forwarding state on the Ethernet ring. • fowarding—Indicates packets are being forwarded. • discarding—Indicates packets are being discarded.

Sample Output

show protection-group ethernet-ring data-channel

```

user@host> show protection-group ethernet-ring data-channel
Ethernet ring data channel information for protection group pg301

Interface      STP index  Forward State
xe-5/0/2       78         forwarding
xe-2/2/0       79         discarding

Ethernet ring data channel parameters for protection group pg302

Interface      STP index  Forward State
xe-5/0/2       80         forwarding
xe-2/2/0       81         forwarding

```

show protection-group ethernet-ring data-channel detail

```

user@host> show protection-group ethernet-ring data-channel detail
Ethernet ring data channel parameters for protection group pg301

Interface name           : xe-5/0/2
STP index                 : 78
Forward State             : forwarding

Interface name           : xe-2/2/0
STP index                 : 79
Forward State             : discarding


Ethernet ring data channel parameters for protection group pg302

Interface name           : xe-5/0/2
STP index                 : 80
Forward State             : forwarding

Interface name           : xe-2/2/0
STP index                 : 81
Forward State             : forwarding

```

show protection-group ethernet-ring data-channel detail (EX2300 and EX3400 Switches)

```

user@switch> show protection-group ethernet-ring data-channel detail
Ethernet ring data channel parameters for protection group pg1001

Interface name           : ge-0/0/42
STP index                 : 52
Forward State             : discarding

Interface name           : ge-0/0/38
STP index                 : 53
Forward State             : forwarding

```

Release Information

Command introduced in Junos OS Release 10.2.

RELATED DOCUMENTATION

<i>show protection-group ethernet-ring aps</i>
<i>show protection-group ethernet-ring interface</i>
<i>show protection-group ethernet-ring node-state</i>
<i>show protection-group ethernet-ring statistics</i>
<i>show protection-group ethernet-ring vlan</i>

show protection-group ethernet-ring flush-info

IN THIS SECTION

- [Syntax | 1139](#)
- [Description | 1139](#)
- [Options | 1140](#)
- [Required Privilege Level | 1140](#)
- [Output Fields | 1140](#)
- [Sample Output | 1140](#)
- [Release Information | 1141](#)

Syntax

```
show protection-group ethernet-ring flush-info
```

Description

Display information about flush ports in an Ethernet ring.

Options

This command has no options.

Required Privilege Level

view

Output Fields

Table 53 on page 1140 lists the output fields for the **show protection-group ethernet-ring flush-info** command. Output fields are listed in the approximate order in which they appear.

Table 53: show protection-group ethernet-ring flush-info Output Fields

Field Name	Field Description
Interface	Physical interface configured for the Ethernet ring. This can be an aggregated Ethernet link also.
Originating Node	Node from which RAPS protocol data units originates on the Ethernet Ring.
Blocked Port Reference	Reference of the ring port on which traffic is blocked.

Sample Output

show protection-group ethernet-ring flush-info (ACX and MX Series Routers)

```

user@host> show protection-group ethernet-ring flush-info
Ethernet ring flush port information for protection group pg100

Interface      Originating Node  Blocked Port Reference
xe-5/0/2.4001  00:00:00:00:00:00  0
xe-2/2/0.4001  00:00:00:00:00:00  0

```

show protection-group ethernet-ring flush-info detail (ACX and MX Series Routers)

```

user@host> show protection-group ethernet-ring flush-info detail
Ethernet ring flush port information for protection group pg100

Interface name           : xe-5/0/2.4001
Originating Node         : 00:00:00:00:00:00
Blocked Port Reference   : 0

Interface name           : xe-2/2/0.4001
Originating Node         : 00:00:00:00:00:00
Blocked Port Reference   : 0

```

Release Information

Command introduced in Junos OS Release 14.2.

RELATED DOCUMENTATION

show protection-group ethernet-ring data-channel

show protection-group ethernet-ring aps

show protection-group ethernet-ring node-state

show protection-group ethernet-ring statistics

show protection-group ethernet-ring vlan

show protection-group ethernet-ring interface

IN THIS SECTION

- [Syntax | 1142](#)
- [Description | 1142](#)
- [Options | 1142](#)
- [Required Privilege Level | 1142](#)

- [Output Fields | 1142](#)
- [Sample Output | 1143](#)
- [Release Information | 1146](#)

Syntax

```
show protection-group ethernet-ring interface
```

Description

Displays the status of the Automatic Protection Switching (APS) interfaces on an Ethernet ring.

Options

This command has no options.

Required Privilege Level

view

Output Fields

[Table 54 on page 1142](#) lists the output fields for both the EX Series switch, and the ACX Series and MX Series router **show protection-group ethernet-ring interface** commands. Output fields are listed in the approximate order in which they appear.

Table 54: MX Series Routers show protection-group ethernet-ring interface Output Fields

Field Name	Field Description
Ethernet ring port parameters for protection group <i>group-name</i>	Output is organized by configured protection group.

Table 54: MX Series Routers show protection-group ethernet-ring interface Output Fields *(Continued)*

Field Name	Field Description
Interface	Physical interfaces configured for the Ethernet ring. This can be an aggregated Ethernet link also.
Control Channel	(MX Series router only) Logical unit configured on the physical interface.
Direction	Direction of the traffic.
Forward State	State of the ring forwarding on the interface: discarding or forwarding .
Ring Protection Link End	Whether this interface is the end of the ring: Yes or No .
Signal Failure	Whether there a signal failure exists on the link: Clear or Set .
Admin State	State of the interface: For EX switches, ready , ifl ready , or waiting . For MX routers, IFF ready or IFF disabled .

Sample Output

show protection-group ethernet-ring interface (EX Series Switch Owner Node)

```

user@host> show protection-group ethernet-ring interface
Ethernet ring port parameters for protection group pg101

Interface      Forward State  RPL End  Signal Failure  Admin State
-----
ge-0/0/3.0     discarding     Yes       Clear           ready
ge-0/0/9.0     forwarding     No        Clear           ready

```


show protection-group ethernet-ring interface (Owner Node MX Series Router)

```

user@host> show protection-group ethernet-ring interface
Ethernet ring port parameters for protection group pg101

Interface  Control Channel  Direction  Forward State  RPL End  SF      Admin State
ge-1/2/0   ge-1/2/0.100     east       forwarding     No       Clear   IFF ready
ge-1/2/2   ge-1/2/2.100     west       forwarding     No       Clear   IFF ready

```

show protection-group ethernet-ring interface detail (Owner Node MX Series Router)

```

user@host> show protection-group ethernet-ring interface detail
Ethernet ring port parameters for protection group pg101

Interface name           : ge-1/2/0
Control channel name     : ge-1/2/0.100
Interface direction      : east
Ring Protection Link End : No
Signal Failure           : Clear
Forward State            : forwarding
Interface Admin State    : IFF ready

Interface name           : ge-1/2/2
Control channel name     : ge-1/2/2.100
Interface direction      : west
Ring Protection Link End : No
Signal Failure           : Clear
Forward State            : forwarding
Interface Admin State    : IFF ready

```

show protection-group ethernet-ring interface (EX Series Switch Ring Node)

```

user@host> show protection-group ethernet-ring interface
Ethernet ring port parameters for protection group pg102

Ethernet ring port parameters for protection group pg101

Interface      Forward State  RPL End  Signal Failure  Admin State

```

ge-0/0/3.0	discarding	Yes	Clear	ready
ge-0/0/9.0	forwarding	No	Clear	ready

show protection-group ethernet-ring interface detail (ACX Series and MX Series)

```

user@host> show protection-group ethernet-ring interface detail
Ethernet ring port parameters for protection group Exp_1

Interface name           : xe-0/0/0
Control channel name     : xe-0/0/0.1
Interface direction      : east
Ring Protection Link End : No
Signal Failure           : Clear
Forward State            : forwarding
Interface Admin State    : IFF ready

Interface name           : et-0/0/48
Control channel name     : et-0/0/48.1
Interface direction      : west
Ring Protection Link End : No
Signal Failure           : Clear
Forward State            : forwarding
Interface Admin State    : IFF ready

```

show protection-group ethernet-ring interface detail (EX2300 and EX3400 Switches)

```

user@switch> show protection-group ethernet-ring interface detail
Ethernet ring port parameters for protection group pg1001

Interface name           : ge-0/0/14
Control channel name     : ge-0/0/14.0
Interface direction      : east
Ring Protection Link End : No
Signal Failure           : Clear
Forward State            : forwarding
Interface Admin State    : IFF ready

Interface name           : ge-0/0/18

```

```

Control channel name      : ge-0/0/18.0
Interface direction      : west
Ring Protection Link End  : No
Signal Failure            : Clear
Forward State             : forwarding
Interface Admin State     : IFF ready

```

show protection-group ethernet-ring interface detail (EX2300 and EX3400 Switches)

```

user@switch>show protection-group ethernet-ring interface detail
Ethernet ring port parameters for protection group pg1001

Interface name           : ge-0/0/42
Control channel name     : ge-0/0/42.0
Interface direction      : east
Ring Protection Link End : Yes
Signal Failure           : Clear
Forward State            : discarding
Interface Admin State     : IFF ready

Interface name           : ge-0/0/38
Control channel name     : ge-0/0/38.0
Interface direction      : west
Ring Protection Link End : No
Signal Failure           : Clear
Forward State            : forwarding
Interface Admin State     : IFF ready

```

Release Information

Command introduced in Junos OS Release 9.4.

Command introduced in Junos OS Release 12.3X54 for ACX Series routers.

RELATED DOCUMENTATION

show protection-group ethernet-ring data-channel

show protection-group ethernet-ring aps

show protection-group ethernet-ring node-state

```
show protection-group ethernet-ring statistics
```

```
show protection-group ethernet-ring vlan
```

show protection-group ethernet-ring node-state

IN THIS SECTION

- [Syntax | 1147](#)
- [Description | 1147](#)
- [Options | 1147](#)
- [Required Privilege Level | 1147](#)
- [Output Fields | 1148](#)
- [Sample Output | 1150](#)
- [Release Information | 1153](#)

Syntax

```
show protection-group ethernet-ring node-state
```

Description

Display the status of the Automatic Protection Switching (APS) nodes on an Ethernet ring.

Options

This command has no options.

Required Privilege Level

view

Output Fields

Table 55 on page 1148 lists the output fields for the **show protection-group ethernet-ring node-state** command. Output fields are listed in the approximate order in which they appear.

Table 55: show protection-group ethernet-ring node-state Output Fields

Field Name	Field Description
Ring Name/Ethernet Ring	Name configured for the Ethernet ring.
APS State	State of the Ethernet ring APS. • idle—Indicates that the ring is working in normal condition and there is no active or pending protection-switching request in the ring. When the ring is in idle state, it is blocked at the RPL link. • protected—Indicates that there is a protection switch on the ring because of a signal failure condition on the ring link. • MS—Indicates that the manual switch command is active in the ring. • FS—Indicates that the forced switch command is active in the ring. • pending—Indicates that the ring is in pending state.

Table 55: show protection-group ethernet-ring node-state Output Fields *(Continued)*

Field Name	Field Description
Event	Events on the ring. • NR-RB—Indicates that there is no APS request and the ring link is blocked on the ring owner node. • NR—Indicates that there is no APS request pending in the ring. • local SF—Indicates that there is signal failure on one or both of the ring links of the node. • remote SF—Indicates that there is signal failure on one or more ring links of any other node of the ring. • local FS—Indicates that there is a forced switched command active on one or both of the ring links of the node. • remote FS—Indicates that there is a forced switch command active on one or more ring links of any other node of the ring. • local MS—Indicates that there is a manual switch command active on one of the ring links of the node. • remote MS—Indicates that there is a manual switch command active on one or more ring links of any other node of the ring. • WTR running—Indicates that the wait to restore timer is running on the RPL owner. • WTB running—Indicates that the wait to block timer is running on the RPL owner.
RPL Owner / Ring Protection Link Owner	Whether this node is the ring owner: Yes or No .
WTR Timer / Restore Timer	Restoration timer: running or disabled .

Table 55: show protection-group ethernet-ring node-state Output Fields *(Continued)*

Field Name	Field Description
WTB Timer / Wait to block timer	Wait to block timer: running or disabled . NOTE: The Wait To Block Timer (WTB) is always disabled on EX2300 and EX3400 switches because it is not supported in ERPSv1. Any configuration you make to the WTB setting has no effect. The output from the CLI command 'show protection-group ethernet-ring node-state detail' lists a WTB setting but that setting has no effect.
Wait to block timer (WTB Timer)	Wait to block interval. NOTE: The Wait To Block Timer (WTB) is always disabled on EX2300 and EX3400 switches because it is not supported in ERPSv1. Any configuration you make to the WTB setting has no effect. The output from the CLI command 'show protection-group ethernet-ring node-state detail' lists a WTB setting but that setting has no effect.
Guard Timer	Guard timer: running or disabled .
Op State / Operational State	State of the node: Operational or any internal wait state..

Sample Output

show protection-group ethernet-ring node-state (MX Series Router - RPL Owner Node, Normal Operation)

```

user@host> show protection-group ethernet-ring node-state
Ethernet ring   APS State  Event      RPL Owner  WTR Timer  WTB Timer  Guard
Timer  Operation state
pg101         idle      NR-RB      Yes        disabled   disabled
disabled      operational
pg102         idle      NR-RB      No         disabled   disabled
disabled      operational

```

show protection-group ethernet-ring node-state (MX Series Router - Normal Ring Node, Normal Operation)

```
user@host> show protection-group ethernet-ring node-state
```

Ethernet ring	APS State	Event	RPL Owner
pg102	idle	NR-RB	No

WTR Timer	WTB Timer	Guard Timer	Operation state
disabled	disabled	disabled	operational

show protection-group ethernet-ring node-state (MX Series Router - RPL Owner Node, Remote Failure Condition)

```
user@host> show protection-group ethernet-ring node-state
```

Ethernet ring	APS State	Event	RPL Owner
pg101	protected	remote SF	Yes

WTR Timer	WTB Timer	Guard Timer	Operation state
disabled	disabled	disabled	operational

show protection-group ethernet-ring node-state detail (ACX Series and MX Series Router)

```
user@host> show protection-group ethernet-ring node-state detail
```

Ethernet-Ring name	: Erp_1
APS State	: idle
Event	: NR-RB
Ring Protection Link Owner	: No
Wait to Restore Timer	: disabled
Wait to Block Timer	: disabled
Guard Timer	: disabled
Operation state	: operational

show protection-group ethernet-ring node-state detail (MX Series Router - RPL Owner Node, Normal Operation)

```
user@host> show protection-group ethernet-ring node-state detail
```

Ethernet-Ring name	: pg101


```

APS State           : idle
Event               : NR-RB
Ring Protection Link Owner : Yes
Wait to Restore Timer : disabled
Wait to Block Timer  : disabled
Guard Timer         : disabled
Operation state     : operational

```

```

Ethernet-Ring name   : pg102
APS State            : idle
Event               : NR-RB
Ring Protection Link Owner : No
Wait to Restore Timer : disabled
Wait to Block Timer  : disabled
Guard Timer         : disabled
Operation state     : operational

```

show protection-group ethernet-ring node-state detail (MX Series Router with WTR Timer)

```

user@host> show protection-group ethernet-ring node-state detail

Ethernet-Ring name   : pg_major
APS State            : pending
Event               : WTR running
Ring Protection Link Owner : Yes
Wait to Restore Timer : running (time to expire: 269 sec)
Wait to Block Timer  : disabled
Guard Timer         : disabled
Operation state     : operational

Ethernet-Ring name   : pg_subring
APS State            : pending
Event               : NR
Ring Protection Link Owner : No
Wait to Restore Timer : disabled
Wait to Block Timer  : disabled
Guard Timer         : disabled
Operation state     : operational

```

show protection-group ethernet-ring node-state detail (MX Series Router with WTB Timer)

```

user@host> show protection-group ethernet-ring node-state detail
Ethernet-Ring name      : Pg-2
APS State               : pending
Event                  : WTB running
Ring Protection Link Owner : Yes
Wait to Restore Timer   : disabled
Wait to Block Timer     : running (time to expire: 2 sec)
Guard Timer            : disabled
Operation state         : operational

```

show protection-group ethernet-ring node-state detail (EX2300 and EX3400 Switches)

```

user@switch>show protection-group ethernet-ring node-state detail
Ethernet-Ring name      : pg1001
APS State               : idle
Event                  : NR-RB
Ring Protection Link Owner : Yes
Wait to Restore Timer   : disabled
Wait to Block Timer     : disabled    <-field not supported. Always
disabled.
Guard Timer            : disabled
Operation state         : operational

```

Release Information

Command introduced in Junos OS Release 9.4.

Command introduced in Junos OS Release 12.3X54 for ACX Series routers.

RELATED DOCUMENTATION

show protection-group ethernet-ring data-channel

show protection-group ethernet-ring aps

show protection-group ethernet-ring interface

show protection-group ethernet-ring statistics

show protection-group ethernet-ring vlan

show protection-group ethernet-ring statistics

IN THIS SECTION

- [Syntax | 1154](#)
- [Description | 1154](#)
- [Options | 1154](#)
- [Required Privilege Level | 1154](#)
- [Output Fields | 1155](#)
- [Sample Output | 1157](#)
- [Release Information | 1161](#)

Syntax

```
show protection-group ethernet-ring statistics group-name group-name
```

<brief | detail>

Description

Display statistics regarding Automatic Protection Switching (APS) protection groups on an Ethernet ring.

Options

group-name Display statistics for the protection group. If you omit this option, protection group statistics for all configured groups are displayed.

brief—Display brief statistics for the protection group.

detail—Display detailed statistics for the protection group.

Required Privilege Level

view

Output Fields

Table 56 on page 1155 lists the output fields for the **show protection-group ethernet-ring statistics** command.

Table 56: show protection-group ethernet-ring statistics Output Fields

Field Name	Field Description
Ethernet Ring Statistics for PG	Name of the protection group for which statistics are displayed.
RAPS event sent	Number of times Ring Automatic Protection Switching (RAPS) message transmission event occurred locally. This field is applicable only to MX Series routers.
RAPS event received	Number of RAPS messages received and processed by ERP state-machine and which resulted in state transition. This field is applicable only to MX Series routers.
Local SF	Number of times a signal failure has occurred locally.
Remote SF	Number of times a signal failure has occurred anywhere else on the ring.
NR event	Number of times a No Request event has occurred on the ring. This field is applicable only to EX Series switches.
NR event sent	Number of times a No Request event has occurred locally. This field is applicable only to MX Series routers.
NR event received	Number of times a No Request event has occurred anywhere else on the ring. This field is applicable only to MX Series routers.
NR-RB event	Number of times a No Request, Ring Blocked event has occurred on the ring. This field is applicable only to EX Series switches.

Table 56: show protection-group ethernet-ring statistics Output Fields *(Continued)*

Field Name	Field Description
NR-RB event sent	Number of times a No Request, Ring Blocked event has occurred locally. This field is applicable only to MX Series routers.
NR-RB event received	Number of times a No Request, Ring Blocked event has occurred anywhere else on the ring. This field is applicable only to MX Series routers.
Flush event sent	Number of times flush-event RAPS message transmission event occurred locally. This field is applicable only to MX Series routers.
Flush event received	Number of flush-event RAPS messages received and processed by the ring instance control process. This field is applicable only to MX Series routers.
Local FS event sent	Number of times a forced switch event has occurred locally. This field is applicable only to MX Series routers.
Remote FS event received	Number of times a forced switch event has occurred anywhere else on the ring. This field is applicable only to MX Series routers.
Local MS event sent	Number of times a manual switch event has occurred locally. This field is applicable only to MX Series routers.
Remote MS event received	Number of times a manual switch event has occurred anywhere else on the ring. This field is applicable only to MX Series routers.

Table 57 on page 1157 lists the output fields for the **show protection-group ethernet-ring statistics** command when the **detail** option is used. These fields are valid only for MX Series routers.

Table 57: show protection-group ethernet-ring statistics detail Output Fields (for MX Series Routers)

Field Name	Field Description
Total number of FDB flush	Number of times forwarding database (FDB) flush has happened for the ring instance.
Flush-logic triggered flush	Number of times FDB flush has happened because of flush-logic based on node ID and Blocked Port Reference (BPR).
Remote RAPS PDU received	Number of valid RAPS PDU messages received. This counter counts only RAPS messages generated by other devices on the ring.
Remote RAPS dropped due to guard-timer	Number of RAPS messages dropped by the device because the guard timer is running.
Invalid remote RAPS PDU dropped	Number of RAPS messages dropped by the device because the messages are invalid.
RAPS dropped due to miscellaneous errors	Number of RAPS messages dropped because of any other reason. For example, messages dropped because of unsupported functionality.
Local received RAPS PDU dropped	Number of self-generated RAPS messages received and dropped.

Sample Output

show protection-group ethernet-ring statistics (EX Series Switch)

```

user@switch> show protection-group ethernet-ring statistics
Ring Name Local SF Remote SF NR Event NR-RB Event
erp1      2      1      2      3

```

show protection-group ethernet-ring statistics (MX Series Router)

```
user@host> show protection-group ethernet-ring statistics
```

```
Ethernet Ring statistics for PG Pg-1
```

```
RAPS event sent           : 1
RAPS event received       : 1152
Local SF happened:        : 0
Remote SF happened:       : 428
NR event sent:           : 1
NR event received:       : 133
NR-RB event sent:        : 0
NR-RB event received:    : 591
Flush event sent         : 0
Flush event received:    : 0
Local FS event sent:     : 0
Remote FS event received: : 0
Local MS event sent:     : 0
Remote MS event received: : 0
```

show protection-group ethernet-ring statistics detail (Specific Group)(MX Series Router)

```
user@host> show protection-group ethernet-ring statistics detail
```

```
Ethernet Ring statistics for PG Pg-1
```

```
RAPS event sent           : 1
RAPS event received       : 0
Local SF happened         : 0
Remote SF happened        : 0
NR event sent            : 1
NR event received        : 0
NR-RB event sent         : 0
NR-RB event received     : 0
Flush event sent         : 0
Flush event received     : 0
Local FS event sent      : 0
Remote FS event received : 0
Local MS event sent      : 0
Remote MS event received : 0
Total number of FDB flush : 0
Flush-logic triggered flush : 0
Remote raps PDU received : 0
```

```

Remote raps dropped due to guard-timer    : 0
Invalid remote raps PDU dropped           : 0
Raps dropped due to miscellaneous errors  : 0
Local received raps PDU dropped           : 0

```

show protection-group ethernet-ring statistics (Owner Node, Failure Condition on ACX and MX Router)

```

user@host> show protection-group ethernet-ring statistics group-name pg101
Ethernet Ring statistics for PG pg101
RAPS sent                        : 1
RAPS received                    : 0
Local SF happened:                : 0
Remote SF happened:               : 0
NR event happened:                : 0
NR-RB event happened:             : 1
NR event sent:                   : 0
NR event received:               : 0
NR-RB event sent:                : 1
NR-RB event received:            : 0
Flush event sent                 : 0
Flush event received:            : 0
Local FS event sent:             : 0
Remote FS event received:        : 0
Local MS event sent:             : 0
Remote MS event received:        : 0

```

show protection-group ethernet-ring statistics (Ring Node, Failure Condition on ACX and MX Router)

```

user@host> show protection-group ethernet-ring statistics group-name pg102
Ethernet Ring statistics for PG pg102
RAPS sent                        : 1
RAPS received                    : 0
Local SF happened:                : 0
Remote SF happened:               : 0
NR event happened:                : 0
NR-RB event happened:             : 1
NR event sent:                   : 0

```



```

NR event received:           : 0
NR-RB event sent:           : 1
NR-RB event received:       : 0
Flush event sent            : 0
Flush event received:       : 0
Local FS event sent:        : 0
Remote FS event received:   : 0
Local MS event sent:        : 0
Remote MS event received:   : 0

```

show protection-group ethernet-ring statistics detail (EX2300 and EX3400 Switches)

```
user@switch>show protection-group ethernet-ring statistics detail
```

```
Ethernet Ring statistics for PG pg1001
```

```

RAPS event sent              : 1
RAPS event received          : 1
Local SF happened            : 0
Remote SF happened           : 0
NR event sent                : 1
NR event received            : 0
NR-RB event sent            : 0
NR-RB event received         : 1
Flush event sent             : 0
Flush event received         : 0
Local FS event sent          : 0
Remote FS event received     : 0
Local MS event sent          : 0
Remote MS event received     : 0
Total number of FDB flush    : 0
Flush-logic triggered flush  : 0
Remote raps PDU received     : 145
Remote raps dropped due to guard-timer : 0
Invalid remote raps PDU dropped : 0
Raps dropped due to miscellaneous errors : 0
Local received raps PDU dropped : 0

```

show protection-group ethernet-ring statistics detail (EX2300 and EX3400 Switches)

```

user@switch>show protection-group ethernet-ring statistics detail
Ethernet Ring statistics for PG pg1001
RAPS event sent                : 2
RAPS event received            : 0
Local SF happened              : 0
Remote SF happened             : 0
NR event sent                  : 1
NR event received              : 0
NR-RB event sent               : 1
NR-RB event received           : 0
Flush event sent               : 0
Flush event received           : 0
Total number of FDB flush      : 0
Remote raps PDU received       : 211
Remote raps dropped due to guard-timer : 0
Invalid remote raps PDU dropped : 0
Raps dropped due to miscellaneous errors : 0
Local received raps PDU dropped : 91

```

Release Information

Command introduced in Junos OS Release 9.4.

Command introduced in Junos OS Release 12.3X54 for ACX Series routers.

RELATED DOCUMENTATION

- show protection-group ethernet-ring data-channel*
- show protection-group ethernet-ring aps*
- show protection-group ethernet-ring node-state*
- show protection-group ethernet-ring interface*
- show protection-group ethernet-ring vlan*

show protection-group ethernet-ring vlan

IN THIS SECTION

- [Syntax | 1162](#)
- [Description | 1162](#)
- [Options | 1162](#)
- [Required Privilege Level | 1163](#)
- [Output Fields | 1163](#)
- [Sample Output | 1163](#)
- [Release Information | 1167](#)

Syntax

```
show protection-group ethernet-ring vlan  
<brief | detail>  
<group-name group-name>
```

Description

On MX Series routers, display all data channel logical interfaces and the VLAN IDs controlled by a ring instance data channel.

Options

brief | detail (Optional) Display the specified level of output.

group-name (Optional) Protection group for which to display details such as data channel interfaces, vlan, and bridge-domain. If you omit this optional field, details for all configured protection groups will be displayed.

Required Privilege Level

view

Output Fields

Table 58 on page 1163 lists the output fields for the **show protection-group ethernet-ring vlan** command. Output fields are listed in the approximate order in which they appear.

Table 58: show protection-group ethernet-ring vlan Output Fields

Field Name	Field Description
Interface	Name of the interface configured for the Ethernet protection ring.
Vlan	Name of the VLAN associated with the interface configured for the Ethernet protection ring.
STP index	The Spanning Tree Protocol (STP) index number used by each interface in an Ethernet ring. The STP index controls the forwarding behavior for a set of VLANs on a data channel on an Ethernet ring port. For multiple Ethernet ring instances on an physical ring port, there are multiple STP index numbers. Different ring instances will have different STP index numbers and may have different forwarding behavior.
Bridge Domain	Name of the bridge domain that is associated with the VLAN configured for the Ethernet protection ring.

Sample Output

show protection-group ethernet-ring vlan

```
user@host> show protection-group ethernet-ring vlan
Ethernet ring IFBD parameters for protection group vkm01
```

Interface	Vlan	STP Index	Bridge Domain
xe-5/0/2	1	78	default-switch/bd1
xe-2/2/0	1	79	default-switch/bd1

xe-5/0/2	2	78	default-switch/bd2
xe-2/2/0	2	79	default-switch/bd2
xe-5/0/2	3	78	default-switch/bd3
xe-2/2/0	3	79	default-switch/bd3
xe-5/0/2	4	78	default-switch/bd4
xe-2/2/0	4	79	default-switch/bd4
xe-5/0/2	5	78	default-switch/bd5
xe-2/2/0	5	79	default-switch/bd5
xe-5/0/2	6	78	default-switch/bd6
xe-2/2/0	6	79	default-switch/bd6
xe-5/0/2	7	78	default-switch/bd7
xe-2/2/0	7	79	default-switch/bd7
xe-5/0/2	8	78	default-switch/bd8
xe-2/2/0	8	79	default-switch/bd8
xe-5/0/2	9	78	default-switch/bd9
xe-2/2/0	9	79	default-switch/bd9
xe-5/0/2	10	78	default-switch/bd10
xe-2/2/0	10	79	default-switch/bd10
xe-5/0/2	11	78	default-switch/bd11
xe-2/2/0	11	79	default-switch/bd11
xe-5/0/2	12	78	default-switch/bd12
xe-2/2/0	12	79	default-switch/bd12
xe-5/0/2	13	78	default-switch/bd13
xe-2/2/0	13	79	default-switch/bd13
xe-5/0/2	14	78	default-switch/bd14
xe-2/2/0	14	79	default-switch/bd14
xe-5/0/2	15	78	default-switch/bd15
xe-2/2/0	15	79	default-switch/bd15

show protection-group ethernet-ring vlan brief

```
user@host> show protection-group ethernet-ring vlan brief
Ethernet ring IFBD parameters for protection group vkm01
```

Interface	Vlan	STP Index	Bridge Domain
xe-5/0/2	1	78	default-switch/bd1
xe-2/2/0	1	79	default-switch/bd1
xe-5/0/2	2	78	default-switch/bd2
xe-2/2/0	2	79	default-switch/bd2
xe-5/0/2	3	78	default-switch/bd3
xe-2/2/0	3	79	default-switch/bd3

xe-5/0/2	4	78	default-switch/bd4
xe-2/2/0	4	79	default-switch/bd4
xe-5/0/2	5	78	default-switch/bd5
xe-2/2/0	5	79	default-switch/bd5
xe-5/0/2	6	78	default-switch/bd6
xe-2/2/0	6	79	default-switch/bd6
xe-5/0/2	7	78	default-switch/bd7
xe-2/2/0	7	79	default-switch/bd7
xe-5/0/2	8	78	default-switch/bd8
xe-2/2/0	8	79	default-switch/bd8
xe-5/0/2	9	78	default-switch/bd9
xe-2/2/0	9	79	default-switch/bd9
xe-5/0/2	10	78	default-switch/bd10
xe-2/2/0	10	79	default-switch/bd10
xe-5/0/2	11	78	default-switch/bd11
xe-2/2/0	11	79	default-switch/bd11
xe-5/0/2	12	78	default-switch/bd12
xe-2/2/0	12	79	default-switch/bd12
xe-5/0/2	13	78	default-switch/bd13
xe-2/2/0	13	79	default-switch/bd13
xe-5/0/2	14	78	default-switch/bd14
xe-2/2/0	14	79	default-switch/bd14
xe-5/0/2	15	78	default-switch/bd15
xe-2/2/0	15	79	default-switch/bd15

show protection-group ethernet-ring vlan detail

```

user@host> show protection-group ethernet-ring vlan detail
Ethernet ring IFBD parameters for protection group vkm01

Interface name      : xe-5/0/2
Vlan                : 1
STP index           : 78
Bridge Domain       : default-switch/bd1

Interface name      : xe-2/2/0
Vlan                : 1
STP index           : 79
Bridge Domain       : default-switch/bd1

Interface name      : xe-5/0/2

```

```

Vlan                : 2
STP index           : 78
Bridge Domain       : default-switch/bd2

Interface name      : xe-2/2/0
Vlan                : 2
STP index           : 79
Bridge Domain       : default-switch/bd2

Interface name      : xe-5/0/2
Vlan                : 3
STP index           : 78
Bridge Domain       : default-switch/bd3

```

show protection-group ethernet-ring vlan group-name vkm01

```
user@host> show protection-group ethernet-ring vlan vkm01
```

Ethernet ring IFBD parameters for protection group vkm01

Interface	Vlan	STP Index	Bridge Domain
xe-5/0/2	16	80	default-switch/bd16
xe-2/2/0	16	81	default-switch/bd16
xe-5/0/2	17	80	default-switch/bd17
xe-2/2/0	17	81	default-switch/bd17
xe-5/0/2	18	80	default-switch/bd18
xe-2/2/0	18	81	default-switch/bd18
xe-5/0/2	19	80	default-switch/bd19
xe-2/2/0	19	81	default-switch/bd19
xe-5/0/2	20	80	default-switch/bd20
xe-2/2/0	20	81	default-switch/bd20
xe-5/0/2	21	80	default-switch/bd21
xe-2/2/0	21	81	default-switch/bd21
xe-5/0/2	22	80	default-switch/bd22
xe-2/2/0	22	81	default-switch/bd22
xe-5/0/2	23	80	default-switch/bd23
xe-2/2/0	23	81	default-switch/bd23
xe-5/0/2	24	80	default-switch/bd24
xe-2/2/0	24	81	default-switch/bd24
xe-5/0/2	25	80	default-switch/bd25
xe-2/2/0	25	81	default-switch/bd25

xe-5/0/2	26	80	default-switch/bd26
xe-2/2/0	26	81	default-switch/bd26
xe-5/0/2	27	80	default-switch/bd27
xe-2/2/0	27	81	default-switch/bd27
xe-5/0/2	28	80	default-switch/bd28
xe-2/2/0	28	81	default-switch/bd28
xe-5/0/2	29	80	default-switch/bd29
xe-2/2/0	29	81	default-switch/bd29
xe-5/0/2	30	80	default-switch/bd30
xe-2/2/0	30	81	default-switch/bd30

show protection-group ethernet-ring vlan detail (EX2300 and EX3400 Switches)

```

user@switch>show protection-group ethernet-ring vlan detail
Ethernet ring IFBD parameters for protection group pg1001

Interface name      : ge-0/0/42
Vlan                : 2001
STP index           : 52
Bridge Domain       : default-switch/vlan2001

Interface name      : ge-0/0/38
Vlan                : 2001
STP index           : 53
Bridge Domain       : default-switch/vlan2001

```

Release Information

Command introduced in Junos OS Release 10.2.

Command introduced in Junos OS Release 18.1 for EX2300 and EX3400 switches.

RELATED DOCUMENTATION

show protection-group ethernet-ring aps

show protection-group ethernet-ring data-channel

show protection-group ethernet-ring interface

show protection-group ethernet-ring node-state

| *show protection-group ethernet-ring statistics*

show redundant-power-system led

IN THIS SECTION

- [Syntax | 1168](#)
- [Description | 1168](#)
- [Required Privilege Level | 1168](#)
- [Output Fields | 1168](#)
- [Sample Output | 1170](#)
- [Release Information | 1171](#)

Syntax

```
show redundant-power-system led
```

Description

Display information about fan status, Redundant Power System (RPS) status, and the switch connectors as displayed by the corresponding LEDs on the RPS.

Required Privilege Level

view

Output Fields

[Table 59 on page 1169](#) lists the output fields for the **show redundant-power-system led** command. Output fields are listed in the approximate order in which they appear.

Table 59: show redundant-power-system led Output Fields

Field Name	Field Description	Level of Output
RPS	The serial number of the RPS.	
RPS Fan	Status of the RPS power supply fans as displayed by the LED: • Green—All RPS power supply fans are operating fine. • Amber—A fan has failed in at least one RPS power supply.	All levels
RPS System Status	Status of the RPS system as displayed by the LED: • Green—The RPS is active. • Blinking green—The RPS is booting. • Amber—An RPS power supply has failed. • Off—The RPS is off.	All levels
RPS Port LED Status	Status of the RPS switch connectors as displayed by the LEDs. These LEDs indicate whether the redundant power source is being used. • Green—The RPS connector is enabled and connected to a switch but the RPS is not actively backing up the switch. • Blinking green—The RPS is backing up the switch connected to the port. • Off—The RPS connector is not connected to a switch. • Amber—The RPS is oversubscribed and the backup power to the switch has failed.	All levels
Port	Number of one of the six switch connectors on the RPS.	All levels
Status	Status of each switch connector on the RPS.	All levels

Sample Output

show redundant-power-system led (Standalone Switch)

```
user@switch> show redundant-power-system led
```

```
Gathering requested information.
```

```
RPS-CG0209121807
```

```
    RPS Fan: GREEN
```

```
    RPS System Status: GREEN
```

```
RPS Port LED Status
```

```
Port  Status
```

```
0  GREEN
```

```
1  OFF
```

```
2  OFF
```

```
3  OFF
```

```
4  OFF
```

```
5  OFF
```

show redundant-power-system led (EX3300 Virtual Chassis)

```
user@switch> show redundant-power-system led
```

```
Gathering requested information.
```

```
RPS-CG0209121814
```

```
    RPS Fan: GREEN
```

```
    RPS System Status: GREEN
```

```
RPS Port LED Status
```

```
Port  Status
```

```
0  OFF
```

```
1  OFF
```

```
2  OFF
```

```
3  OFF
```

```
4  OFF
```

```
5  GREEN
```

```
RPS-CG0209121815
```

```
    RPS Fan: GREEN
```

```
    RPS System Status: GREEN
```

```
RPS Port LED Status
```

```
Port  Status
```

0	OFF
1	OFF
2	OFF
3	OFF
4	GREEN
5	OFF

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

| [LEDs on an EX Series Redundant Power System](#)

show redundant-power-system multi-backup

IN THIS SECTION

- [Syntax | 1171](#)
- [Description | 1172](#)
- [Required Privilege Level | 1172](#)
- [Sample Output | 1172](#)
- [Release Information | 1172](#)

Syntax

```
show redundant-power-system multi-backup
```

```
show redundant-power-system multi-backup member member-number
```

Description

Display the current status of the Redundant Power System's (RPS's) ability to back up two switches per power supply when enough power to support Power over Ethernet (PoE) is not needed. This ability is referred to as the RPS's multi-backup ability.

Required Privilege Level

view

Sample Output

show redundant-power-system multi-backup

```
User@switch> show redundant-power-system multi-backup
Requesting information from redundant-power-system..      Multi-Backup: enabled
```

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

| [request redundant-power-system multi-backup](#) | 1023

show redundant-power-system network

IN THIS SECTION

- [Syntax](#) | 1173
- [Description](#) | 1173
- [Required Privilege Level](#) | 1173
- [Sample Output](#) | 1173
- [Release Information](#) | 1173

Syntax

```
show redundant-power-system network
```

Description

Display the Redundant Power Supply (RPS) IP address, netmask address, and gateway address required for firmware backup.

Required Privilege Level

view

Sample Output

show redundant-power-system network

```
user@switch> show redundant-power-system network
Requesting information from redundant-power-system..
  IP Address:   10.93.2.38
  Netmask: 255.255.254.0
  Gateway:   10.93.3.254
```

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

| [Upgrading Firmware on an EX Series Redundant Power System](#)

show redundant-power-system power-supply

IN THIS SECTION

- [Syntax | 1174](#)
- [Description | 1174](#)
- [Required Privilege Level | 1174](#)
- [Output Fields | 1174](#)
- [Sample Output | 1175](#)
- [Release Information | 1176](#)

Syntax

```
show redundant-power-system power-supply
```

Description

Display information about the power supplies installed in the Redundant Power System (RPS). After installing a power supply, we recommend that you use this command to be sure that the power supply installed correctly.

Required Privilege Level

view

Output Fields

[Table 60 on page 1175](#) lists the output fields for the **show redundant-power-system power-supply** command. Output fields are listed in the approximate order in which they appear.

Table 60: show redundant-power-system power-supply Output Fields

Field Name	Field Description	Level of Output
RPS	Serial number of the RPS.	All levels
PSU Slot	Number of the power supply slot. Slots are numbered 1 through 3.	All levels
Status	Status of the power supply slots: • Present—The slot contains an RPS power supply. • Empty—The slot is empty.	All levels
Description	Description of the RPS power supply installed in the slot.	All levels

Sample Output

show redundant-power-system power-supply (Standalone Switch)

```
user@switch> show redundant-power-system power-supply
```

```
Gathering requested information.
```

```
RPS-CG0209121807
```

```
PSU Slot Status      Description
```

```
1 Online    930W AC
```

```
2 offline   ---
```

```
3 Online    930W AC
```

show redundant-power-system power-supply (EX3300 Virtual Chassis)

```
user@switch> show redundant-power-system power-supply
```

```
Gathering requested information.
```

```
RPS-CG0209121814
```

```
PSU Slot Status      Description
```

```
1 Online    930W AC
```



```

      2 offline    ---
      3 Online    930W AC
RPS-CG0209121815
PSU Slot Status  Description
      1 Online    930W AC
      2 Online    930W AC
      3 Online    930W AC

```

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

[Installing a Power Supply in the EX Series Redundant Power System](#)

show redundant-power-system status

IN THIS SECTION

- [Syntax | 1176](#)
- [Description | 1177](#)
- [Required Privilege Level | 1177](#)
- [Output Fields | 1177](#)
- [Sample Output | 1178](#)
- [Release Information | 1179](#)

Syntax

```
show redundant-power-system status
```

Description

Display the status information for the switch connectors on the Redundant Power System (RPS).

Required Privilege Level

view

Output Fields

Table 61 on page 1177 lists the output fields for the **show redundant-power-system status** command. Output fields are listed in the approximate order in which they appear.

Table 61: show redundant-power-system status Output Fields

Field Name	Field Description	Level of Output
RPS	Serial number of the RPS.	All levels
Port	Number of the switch connector.	All levels
Status	Status of the switch connector: • ARMED—The switch is ready to get backup power from RPS if power supply fails on the switch. • OFF—The switch has zero and is not configured to receive backup power from RPS. • BACKED-UP—The switch is receiving power backup from RPS. • OVER-SUBSCRIBED—The switch cannot receive backup power from RPS even if you set the .	All levels
Priority	Priority value of the switch connector.	All levels
Power-Requested	Power requested by the switch on the corresponding switch connector.	All levels

Sample Output

show redundant-power-system status (Standalone Switch)

```
user@switch> show redundant-power-system status
```

Gathering requested information.

RPS-CG0209121807

Port	Status	Power-requested
0	Armed	3 930W
1	Off	1 ---
2	Off	1 ---
3	Off	1 ---
4	Off	1 ---
5	Off	1 ---

show redundant-power-system status (EX3300 Virtual Chassis)

```
user@switch> show redundant-power-system status
```

Gathering requested information.

RPS-CG0209121814

Port	Status	Power-requested
0	OFF	1 ---
1	OFF	1 ---
2	OFF	1 ---
3	OFF	1 ---
4	OFF	1 ---
5	Armed	5 930W

RPS-CG0209121815

Port	Status	Power-requested
0	OFF	1 ---
1	OFF	1 ---
2	OFF	1 ---
3	OFF	1 ---
4	Armed	4 930W
5	OFF	1 ---

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

[Determining and Setting Priority for Switches Connected to an EX Series RPS | 402](#)

[Installing a Power Supply in the EX Series Redundant Power System](#)

show redundant-power-system upgrade

IN THIS SECTION

- [Syntax | 1179](#)
- [Description | 1179](#)
- [Required Privilege Level | 1179](#)
- [Output Fields | 1180](#)
- [Sample Output | 1180](#)
- [Release Information | 1180](#)

Syntax

```
show redundant-power-system upgrade
```

Description

Display RPS firmware upgrade status (pass or fail), previous RPS firmware version, and current RPS firmware version.

Required Privilege Level

view

Output Fields

Table 62 on page 1180 lists the output fields for the **show redundant-power-system status** command. Output fields are listed in the approximate order in which they appear.

Table 62: show redundant-power-system upgrade Output Fields

Field Name	Field Description	Level of Output
Firmware Upgrade Status	Indicates whether the upgrade passed or failed	All levels
Previous Firmware Version	Firmware version before the upgrade	All levels
Current Firmware Version	Firmware version after the upgrade	

Sample Output

show redundant-power-system upgrade

```
user@switch> show redundant-power-system upgrade
Requesting information from redundant-power-system..
Firmware Upgrade Status:    Pass
Previous Firmware Version:  1.0
Current Firmware Version:   1.0
```

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

| [request redundant-power-system multi-backup](#) | 1023

show redundant-power-system version

IN THIS SECTION

- [Syntax | 1181](#)
- [Description | 1181](#)
- [Required Privilege Level | 1181](#)
- [Output Fields | 1181](#)
- [Sample Output | 1182](#)
- [Release Information | 1183](#)

Syntax

```
show redundant-power-system version
```

Description

Display version information about the Redundant Power System (RPS).

Required Privilege Level

view

Output Fields

[Table 63 on page 1181](#) lists the output fields for the **show redundant-power-system version** command. Output fields are listed in the approximate order in which they appear.

Table 63: show redundant-power-system version Output Fields

Field Name	Field Description	Level of Output
RPS	Serial number of the RPS.	All levels

Table 63: show redundant-power-system version Output Fields (Continued)

Field Name	Field Description	Level of Output
Model	Model name of the RPS.	All levels
RPS Firmware Version	Version number of the firmware installed on the RPS.	All levels
RPS U-Boot Version	Version of the bootup software installed on the RPS.	All levels

Sample Output

show redundant-power-system version (Standalone Switch)

```
user@switch> show redundant-power-system version
```

```

RPS-CG0209121807
Model: EX-PWR_RPS200
RPS Firmware Version [1.0]
RPS U-Boot   Version [1.1.6]
```

show redundant-power-system version (EX3300 Virtual Chassis)

```
user@switch> show redundant-power-system version
```

```

RPS-CG0209121814
Model: EX-PWR_RPS200
RPS Firmware Version [1.0]
RPS U-Boot   Version [1.1.6]
RPS-CG0209121815
Model: EX-PWR_RPS200
RPS Firmware Version [1.0]
RPS U-Boot   Version [1.1.6]
```

Release Information

Command introduced in Junos OS Release 12.1.

RELATED DOCUMENTATION

[Installing a Power Supply in the EX Series Redundant Power System](#)

[Packing an EX Series Redundant Power System or Redundant Power System Components for Shipping](#)

show security ike security-associations

IN THIS SECTION

- [Syntax | 1183](#)
- [Description | 1184](#)
- [Options | 1184](#)
- [Required Privilege Level | 1185](#)
- [Output Fields | 1185](#)
- [Sample Output | 1192](#)
- [Release Information | 1201](#)

Syntax

```
show security ike security-associations
  <peer-address>
  <brief | detail>
  <family (inet | inet6)>
  <fpc slot-number>
  <index SA-index-number>
  <kmd-instance (all | kmd-instance-name)>
  <pic slot-number>
```



```
<sa-type shortcut >
<ha-link-encryption>
```

Description

Display information about Internet Key Exchange security associations (IKE SAs).

Options

- **none**—Display standard information about existing IKE SAs, including index numbers.
- ***peer-address***—(Optional) Display details about a particular SA based on the IPv4 or IPv6 address of the destination peer. This option and **index** provide the same level of output.
- **brief**—(Optional) Display standard information about all existing IKE SAs. (Default)
- **detail**—(Optional) Display detailed information about all existing IKE SAs.
- **family**—(Optional) Display IKE SAs by family. This option is used to filter the output.
 - **inet**—IPv4 address family.
 - **inet6**—IPv6 address family.
- **fpc slot-number**—(Optional) Display information about existing IKE SAs in this Flexible PIC Concentrator (FPC) slot. This option is used to filter the output.

In a chassis cluster, when you execute the CLI command **show security ike security-associations pic <slot-number> fpc <slot-number>** in operational mode, only the primary node information about the existing IPsec SAs in the specified Flexible PIC Concentrator (FPC) slot and PIC slot is displayed.

- **index SA-index-number**—(Optional) Display information for a particular SA based on the index number of the SA. For a particular SA, display the list of existing SAs by using the command with no options. This option and ***peer-address*** provide the same level of output.
- **kmd-instance** —(Optional) Display information about existing IKE SAs in the key management process (in this case, it is KMD) identified by FPC *slot-number* and PIC *slot-number*. This option is used to filter the output.
 - **all**—All KMD instances running on the Services Processing Unit (SPU).
 - ***kmd-instance-name***—Name of the KMD instance running on the SPU.
- **pic slot-number** —(Optional) Display information about existing IKE SAs in this PIC slot. This option is used to filter the output.

- **sa-type**—(Optional for ADVPN) Type of SA. **shortcut** is the only option for this release.
- **ha-link-encryption**—(Optional) Display information related to interchassis link tunnel only. See *ipsec (High Availability)* and "[show security ike security-associations ha-link-encryption \(SRX5400, SRX5600, SRX5800\)](#)" on page 1201.

Required Privilege Level

view

Output Fields

Table 64 on page 1185 lists the output fields for the **show security ike security-associations** command. Output fields are listed in the approximate order in which they appear.

Table 64: show security ike security-associations Output Fields

Field Name	Field Description
IKE Peer or Remote Address	IP address of the destination peer with which the local peer communicates.
Index	Index number of an SA. This number is an internally generated number you can use to display information about a single SA.
Gateway Name	Name of the IKE gateway.
Location	• FPC—Flexible PIC Concentrator (FPC) slot number. • PIC—PIC slot number. • KMD-Instance—The name of the KMD instance running on the SPU, identified by FPC <i>slot-number</i> and PIC <i>slot-number</i>. Currently, 4 KMD instances are running on each SPU, and any particular IKE negotiation is carried out by a single KMD instance.
Role	Part played in the IKE session. The device triggering the IKE negotiation is the initiator, and the device accepting the first IKE exchange packets is the responder.

Table 64: show security ike security-associations Output Fields (*Continued*)

Field Name	Field Description
State	State of the IKE SAs: • DOWN—SA has not been negotiated with the peer. • UP—SA has been negotiated with the peer.
Initiator cookie	Random number, called a cookie, which is sent to the remote node when the IKE negotiation is triggered.
Responder cookie	Random number generated by the remote node and sent back to the initiator as a verification that the packets were received. A cookie is aimed at protecting the computing resources from attack without spending excessive CPU resources to determine the cookie's authenticity.
Exchange type	Negotiation method agreed on by the two IPsec endpoints, or peers, used to exchange information between one another. Each exchange type or mode determines the number of messages and the payload types that are contained in each message. The modes are: • main—The exchange is done with six messages. This mode encrypts the payload, protecting the identity of the neighbor. • aggressive—The exchange is done with three messages. This mode does not encrypt the payload, leaving the identity of the neighbor unprotected. IKEv2 protocol does not use the mode configuration for negotiation. Therefore, the mode displays the version number of the security association.
Authentication method	Method used to authenticate the source of IKE messages, which can be either Pre-shared-keys or digital certificates, such as DSA-signatures , ECDSA-signatures-256 , ECDSA-signatures-384 , or RSA-signatures .

Table 64: show security ike security-associations Output Fields (*Continued*)

Field Name	Field Description
Local	Address of the local peer.
Remote	Address of the remote peer.
Lifetime	Number of seconds remaining until the IKE SA expires.
Reauth Lifetime	When enabled, number of seconds remaining until reauthentication triggers a new IKEv2 SA negotiation.
IKE Fragmentation	Enabled means that both the IKEv2 initiator and responder support message fragmentation and have negotiated the support during the IKE_SA_INIT message exchange. Size shows the maximum size of an IKEv2 message before it is fragmented.

Table 64: show security ike security-associations Output Fields (*Continued*)

Field Name	Field Description
Algorithms	IKE algorithms used to encrypt and secure exchanges between the peers during the IPsec Phase 2 process: • Authentication—Type of authentication algorithm used: • sha1—Secure Hash Algorithm 1 authentication. • md5—MD5 authentication. • Encryption—Type of encryption algorithm used: • aes-256-cbc—Advanced Encryption Standard (AES) 256-bit encryption. • aes-192-cbc—AES192-bit encryption. • aes-128-cbc—AES 128-bit encryption. • 3des-cbc—3 Data Encryption Standard (DES) encryption. • aes-128-gcm—Advanced Encryption Standard (AES) 256-bit encryption. • des-cbc—DES encryption. Starting in Junos OS Release 19.4R2, when you configure aes-128-gcm or aes-256-gcm as an encryption algorithm at the [edit security ipsec proposalproposal-name] hierarchy level, the authentication algorithm field of the show security ike security-associations detail command displays the same configured encryption algorithm. • Pseudo random function—Function that generates highly unpredictable random numbers: hmac-md5 or hmac-sha1. • Diffie-Hellman group—Specifies the type of Diffie-Hellman group when performing the new Diffie-Hellman exchange. It can be one of the following: • group1—768-bit Modular Exponential (MODP) algorithm.

Table 64: show security ike security-associations Output Fields (*Continued*)

Field Name	Field Description
	• group2—1024-bit MODP algorithm. • group14—2048-bit MODP group. • group15—3072-bit MODP algorithm. • group16—4096-bit MODP algorithm. • group19—256-bit random Elliptic Curve Groups modulo a prime (ECP group) algorithm. • group20—384-bit random ECP group algorithm. • group21—521-bit random ECP group algorithm. • group24—2048-bit MODP group with 256-bit prime order subgroup.
Traffic statistics	• Input bytes—Number of bytes received. • Output bytes—Number of bytes transmitted. • Input packets—Number of packets received. • Output packets—Number of packets transmitted. • Input fragmented packets—Number of IKEv2 fragmented packets received. • Output fragmented packets—Number of IKEv2 fragmented packets transmitted.

Table 64: show security ike security-associations Output Fields (*Continued*)

Field Name	Field Description
Flags	Notification to the key management process of the status of the IKE negotiation: • caller notification sent—Caller program notified about the completion of the IKE negotiation. • waiting for done—Negotiation is done. The library is waiting for the remote end retransmission timers to expire. • waiting for remove—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation. • waiting for policy manager—Negotiation is waiting for a response from the policy manager.
IPSec security associations	• <i>number</i> created: The number of SAs created. • <i>number</i> deleted: The number of SAs deleted.

Table 64: show security ike security-associations Output Fields (*Continued*)

Field Name	Field Description
Phase 2 negotiations in progress	Number of Phase 2 IKE negotiations in progress and status information: • Negotiation type—Type of Phase 2 negotiation. Junos OS currently supports quick mode. • Message ID—Unique identifier for a Phase 2 negotiation. • Local identity—Identity of the local Phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</i>. • Remote identity—Identity of the remote Phase 2 negotiation. The format is <i>id-type-name (proto-name:port-number,[0..id-data-len] = iddata-presentation)</i>. • Flags—Notification to the key management process of the status of the IKE negotiation: • caller notification sent—Caller program notified about the completion of the IKE negotiation. • waiting for done—Negotiation is done. The library is waiting for the remote end retransmission timers to expire. • waiting for remove—Negotiation has failed. The library is waiting for the remote end retransmission timers to expire before removing this negotiation. • waiting for policy manager—Negotiation is waiting for a response from the policy manager.
Local gateway interface	Interface name of the local gateway.
Routing instance	Name of the local gateway routing instance.
IPsec Tunnel IDs	Indicates the list of child IPsec tunnel IDs

Sample Output

show security ike security-associations (IPv4)

```
user@host> show security ike security-associations
```

Index	Remote Address	State	Initiator cookie	Responder cookie	Mode
8	192.168.1.2	UP	3a895f8a9f620198	9040753e66d700bb	Main

Index	Remote Address	State	fInitiator cookie	Responder cookie	Mode
9	192.168.1.3	UP	5ba96hfa9f65067	70890755b65b80b	Main

show security ike security-associations (IPv6)

```
user@host> show security ike security-associations
```

Index	State	Initiator cookie	Responder cookie	Mode	Remote Address
5	UP	e48efd6a444853cf	0d09c59aafb720be	Aggressive	2001:db8::1112

show security ike security-associations detail (SRX300, SRX320, SRX340, SRX345, and SRX550HM Devices)

```
user@host> show security ike security-associations detail
```

IKE peer 192.168.134.245, Index 2577565, Gateway Name: tropic

Role: Initiator, State: UP

Initiator cookie: b869b3424513340a, Responder cookie: 4cb3488cb19397c3

Exchange type: Main, Authentication method: Pre-shared-keys Trusted CA group: xyz_ca_grp

Local: 192.168.134.241:500, Remote: 192.168.134.245:500

Local gateway interface: ge-0/0/0

Routing instance: default

Lifetime: Expires in 169 seconds

Peer ike-id: 192.168.134.245

AAA assigned IP: 0.0.0.0

Algorithms:

Authentication : hmac-sha1-96

```

Encryption          : aes-128-gcm
Pseudo random function: hmac-sha1
Diffie-Hellman group : DH-group-5
Traffic statistics:
Input  bytes  :          1012
Output bytes  :          1196
Input  packets:           4
Output packets:           5
Flags: IKE SA is created
IPSec security associations: 1 created, 0 deleted
Phase 2 negotiations in progress: 0

Negotiation type: Quick mode, Role: Initiator, Message ID: 0
Local: 192.168.134.241:500, Remote: 192.168.134.245:500
Local identity: 192.168.134.241
Remote identity: 192.168.134.245
Flags: IKE SA is created
IPsec SA Rekey CREATE_CHILD_SA exchange stats:
Initiator stats:
Request Out          : 1
Response In          : 1
No Proposal Chosen In : 0
Invalid KE In        : 0
TS Unacceptable In   : 0
Res DH Compute Key Fail : 0
Res Verify SA Fail    : 0
Res Verify DH Group Fail: 0
Res Verify TS Fail    : 0
Responder stats:
Request In           : 0
Response Out         : 0
No Proposal Chosen Out : 0
Invalid KE Out       : 0
TS Unacceptable Out  : 0
Res DH Compute Key Fail: 0

```

show security ike security-associations detail (SRX5400, SRX5600, and SRX5800 Devices)

```

user@host> show security ike security-associations detail
IKE peer 2.0.0.2, Index 2068, Gateway Name: IKE_GW
Role: Responder, State: DOWN
Initiator cookie: aa08091f3d4f1fb6, Responder cookie: 08c89a7add5f9332
Exchange type: IKEv2, Authentication method: Pre-shared-keys
Local gateway interface: ge-0/0/3
Routing instance: default
Local: 2.0.0.1:500, Remote: 2.0.0.2:500
Lifetime: Expires in 186 seconds
Reauth Lifetime: Disabled

```

```

IKE Fragmentation: Enabled, Size: 576
Remote Access Client Info: Unknown Client
Peer ike-id: 2.0.0.2
AAA assigned IP: 0.0.0.0
Algorithms:
  Authentication      : hmac-sha256-128
  Encryption          : aes128-cbc
  Pseudo random function: hmac-sha256
  Diffie-Hellman group : DH-group-5
Traffic statistics:
  Input  bytes  :          704
  Output bytes  :         1408
  Input  packets:           4
  Output packets:           4
  Input  fragmented packets: 0
  Output fragmented packets: 0
IPSec security associations: 4 created, 2 deleted
Phase 2 negotiations in progress: 1
IPSec Tunnel IDs: 500766, 500767

```

```

Negotiation type: Quick mode, Role: Responder, Message ID: 0
Local: 2.0.0.1:500, Remote: 2.0.0.2:500
Local identity: 2.0.0.1
Remote identity: 2.0.0.2
Flags: IKE SA is created

```

IPsec SA Rekey CREATE_CHILD_SA exchange stats:

Initiator stats:

```

Request Out          : 0
Response In          : 0
No Proposal Chosen In : 0
Invalid KE In        : 0
TS Unacceptable In    : 0
Res DH Compute Key Fail : 0
Res Verify SA Fail    : 0
Res Verify DH Group Fail: 0
Res Verify TS Fail    : 0

```

Responder stats:

```

Request In           : 0
Response Out         : 0
No Proposal Chosen Out : 0
Invalid KE Out        : 0
TS Unacceptable Out   : 0
Res DH Compute Key Fail: 0

```

command-name

The *show security ike stats* topic lists the output fields for the **show security ike security-associations detail** command.

show security ike security-associations family inet6

```
user@host> show security ike security-associations family inet6
IKE peer 2001:db8:1212::1112, Index 5, Gateway Name: tropic
Role: Initiator, State: UP
Initiator cookie: e48efd6a444853cf, Responder cookie: 0d09c59aafb720be
Exchange type: Aggressive, Authentication method: Pre-shared-keys
Local: 2001:db8:1212::1111:500, Remote: 2001:db8:1212::1112:500
Lifetime: Expires in 19518 seconds
Peer ike-id: not valid
AAA assigned IP: 0.0.0.0
Algorithms:
  Authentication      : sha1
  Encryption          : 3des-cbc
  Pseudo random function: hmac-sha1
  Diffie-Hellman group : DH-group-5
Traffic statistics:
  Input  bytes  :          1568
  Output bytes  :          2748
  Input  packets:           6
  Output packets:          23
Flags: Caller notification sent
IPSec security associations: 5 created, 0 deleted
Phase 2 negotiations in progress: 1

Negotiation type: Quick mode, Role: Initiator, Message ID: 2900338624
Local: 2001:db8:1212::1111:500, Remote: 2001:db8:1212::1112:500
Local identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Flags: Caller notification sent, Waiting for done
```

show security ike security-associations index 222075191 detail

```
user@host> show security ike security-associations index 222075191 detail
node0:
```

```

-
IKE peer 192.168.1.2, Index 222075191, Gateway Name: ZTH_HUB_GW
  Location: FPC 0, PIC 3, KMD-Instance 2
  Auto Discovery VPN:
    Type: Static, Local Capability: Suggester, Peer Capability: Partner
    Suggester Shortcut Suggestions Statistics:
      Suggestions sent      :      2
      Suggestions accepted:      4
      Suggestions declined:      1
  Role: Responder, State: UP
  Initiator cookie: 7b996b4c310d2424, Responder cookie: 5724c5882a212157
  Exchange type: IKEv2, Authentication method: RSA-signatures
  Local: 192.168.1.1:500, Remote: 192.168.1.2:500
  Lifetime: Expires in 828 seconds
  Peer ike-id: C=US, DC=example, ST=CA, L=Sunnyvale, O=example, OU=engineering,
CN=cssvk36-d
  Xauth user-name: not available
  Xauth assigned IP: 0.0.0.0
  Algorithms:
    Authentication      : hmac-sha1-96
    Encryption          : aes256-cbc
    Pseudo random function: hmac-sha1
    Diffie-Hellman group : DH-group-5
  Traffic statistics:
    Input  bytes :      20474
    Output bytes :      21091
    Input  packets:      237
    Output packets:      237
  IPSec security associations: 2 created, 0 deleted
  Phase 2 negotiations in progress: 1

  Negotiation type: Quick mode, Role: Responder, Message ID: 0
  Local: 192.168.1.1:500, Remote: 192.168.1.2:500
  Local identity: C=US, DC=example, ST=CA, L=Sunnyvale, O=example,
OU=engineering, CN=host1
  Remote identity: C=US, DC=example, ST=CA, L=Sunnyvale, O=example,
OU=engineering, CN=host2
  Flags: IKE SA is created

```

show security ike security-associations index 788674 detail

```

user@host> show security ike security-associations index 788674 detail
IKE peer 192.168.1.1, Index 788674, Gateway Name: ZTH_SPOKE_GW
  Auto Discovery VPN:
    Type: Static, Local Capability: Partner, Peer Capability: Suggester
    Partner Shortcut Suggestions Statistics:
      Suggestions received:      2
      Suggestions accepted:      2
      Suggestions declined:      0
  Role: Initiator, State: UP
  Initiator cookie: 7b996b4c310d2424, Responder cookie: 5724c5882a212157
  Exchange type: IKEv2, Authentication method: RSA-signatures
  Local: 192.168.1.2:500, Remote: 192.168.1.1:500
  Lifetime: Expires in 734 seconds
  Peer ike-id: C=US, DC=example, ST=CA, L=Sunnyvale, O=example, OU=engineering,
CN=test
  Xauth user-name: not available
  Xauth assigned IP: 0.0.0.0
  Algorithms:
    Authentication      : hmac-sha1-96
    Encryption          : aes256-cbc
    Pseudo random function: hmac-sha1
    Diffie-Hellman group : DH-group-5
  Traffic statistics:
    Input  bytes   :          22535
    Output bytes   :          21918
    Input  packets :           256
    Output packets :           256
  IPSec security associations: 2 created, 0 deleted
  Phase 2 negotiations in progress: 1

    Negotiation type: Quick mode, Role: Initiator, Message ID: 0
    Local: 192.168.1.2:500, Remote: 192.168.1.1:500
    Local identity: C=US, DC=example, ST=CA, L=Sunnyvale, O=example,
OU=engineering, CN=host1
    Remote identity: C=US, DC=example, ST=CA, L=Sunnyvale, O=example,
OU=engineering, CN=host2
    Flags: IKE SA is created

```

show security ike security-associations 192.168.1.2

```
user@host> show security ike security-associations 192.168.1.2
```

Index	State	Initiator cookie	Responder cookie	Mode	Remote Address
8	UP	3a895f8a9f620198	9040753e66d700bb	Main	192.168.1.2

show security ike security-associations fpc 6 pic 1 kmd-instance all (SRX Series Devices)

```
user@host> show security ike security-associations fpc 6 pic 1 kmd-instance all
```

Index	Remote Address	State	Initiator cookie	Responder cookie	Mode
1728053250	192.168.1.2	UP	fc959afd1070d10b	bdeb7e8c1ea99483	Main

show security ike security-associations detail (ADVPN Suggester, Static Tunnel)

```
user@host> show security ike security-associations detail
```

IKE peer 192.168.0.105, Index 13563297, Gateway Name: zth_hub_gw
 Location: FPC 0, PIC 0, KMD-Instance 1
 Auto Discovery VPN:
 Type: Static, Local Capability: Suggester, Peer Capability: Partner
 Suggester Shortcut Suggestions Statistics:
 Suggestions sent : 12
 Suggestion response accepted: 12
 Suggestion response declined: 0
 Role: Responder, State: UP
 Initiator cookie: 4d3f4e4b2e75d727, Responder cookie: 81ab914e13cecd21
 Exchange type: IKEv2, Authentication method: RSA-signatures
 Local: 192.168.0.154:500, Remote: 192.168.0.105:500
 Lifetime: Expires in 26429 seconds
 Peer ike-id: DC=example, CN=host02, L=Sunnyvale, ST=CA, C=US

show security ike security-associations detail (ADVPN Partner, Static Tunnel)

```
user@host> show security ike security-associations detail
```

IKE peer 192.168.0.154, Index 4980720, Gateway Name: zth_spoke_gw
 Location: FPC 0, PIC 0, KMD-Instance 1
 Auto Discovery VPN:

```
Type: Static, Local Capability: Partner, Peer Capability: Suggester
Partner Shortcut Suggestions Statistics:
  Suggestions received: 12
  Suggestions accepted: 12
  Suggestions declined: 0
Role: Initiator, State: UP
Initiator cookie: 4d3f4e4b2e75d727, Responder cookie: 81ab914e13cecd21
Exchange type: IKEv2, Authentication method: RSA-signatures
Local: 192.168.0.105:500, Remote: 192.168.0.154:500
Lifetime: Expires in 26252 seconds
Peer ike-id: DC=example, CN=host01, OU=SBU, O=example, L=Sunnyvale, ST=CA, C=US
```

show security ike security-associations detail (ADVPN Partner, Shortcut)

```
user@host> show security ike security-associations detail
IKE peer 192.168.0.106, Index 4980737, Gateway Name: GW-ADVPN-GT-ADVPN-
zth_spoke_vpn-268173323
Location: FPC 0, PIC 0, KMD-Instance 1
Auto Discovery VPN:
  Type: Shortcut, Local Capability: Partner, Peer Capability: Partner
Role: Responder, State: UP
Initiator cookie: eled0c655929debc, Responder cookie: 437de6ed784ba63e
Exchange type: IKEv2, Authentication method: RSA-signatures
Local: 192.168.0.105:500, Remote: 192.168.0.106:500
Lifetime: Expires in 28796 seconds
Peer ike-id: DC=example, CN=paulyd, L=Sunnyvale, ST=CA, C=US
```

show security ike security-associations sa-type shortcut (ADVPN)

```
user@host> show security ike security-associations sa-type shortcut
```

Index	State	Initiator cookie	Responder cookie	Mode	Remote Address
4980742	UP	vb56fbe694eae5b6	064dbccbfa3b2aab	IKEv2	192.168.0.106

show security ike security-associations sa-type shortcut detail (ADVPN)

```
user@host> show security ike security-associations sa-type shortcut detail
IKE peer 192.168.0.106, Index 4980742, Gateway Name: GW-ADVPN-GT-ADVPN-
zth_spoke_vpn-268173327
```



```

Location: FPC 0, PIC 0, KMD-Instance 1
Auto Discovery VPN:
  Type: Shortcut, Local Role: Partner, Peer Role: Partner
Role: Responder, State: UP

```

show security ike security-associations detail (IKEv2 Reauthentication)

```

user@host> show security ike security-associations detail
IKE peer 10.1.2.11, Index 6009224, Gateway Name: GW
  Role: Responder, State: UP
  Initiator cookie: 2c74d14c798a9d70, Responder cookie: 83cbb49bfbc80cb
  Exchange type: IKEv2, Authentication method: RSA-signatures
  Local: 10.1.1.11:500, Remote: 10.1.2.11:500
  Lifetime: Expires in 173 seconds
  Reauth Lifetime: Expires in 600 seconds
  Peer ike-id: vsrx@example.net
  AAA assigned IP: 0.0.0.0
  Algorithms:
    Authentication      : hmac-sha1-96
    Encryption          : aes128-cbc
    Pseudo random function: hmac-sha1
    Diffie-Hellman group : DH-group-2
  Traffic statistics:
    Input  bytes  :          1782
    Output bytes  :          1743
    Input  packets:           2

```

show security ike security-associations detail (IKEv2 Fragmentation)

```

user@host> show security ike security-associations detail
IKE peer 172.24.23.157, Index 11883008, Gateway Name: routebased_s2s_gw-552_1
  Role: Responder, State: UP
  Initiator cookie: f3255e720f162e3a, Responder cookie: 17555e3ff7451841
  Exchange type: Main, Authentication method: Pre-shared-keys Trusted CA group:
xyz_ca_grp
  Local: 192.168.254.1:500, Remote: 172.24.23.157:500
  Lifetime: Expires in 530 seconds
  Reauth Lifetime: Disabled
  IKE Fragmentation: Enabled, Size: 576

```

```

Peer ike-id: 172.24.23.157
AAA assigned IP: 0.0.0.0
Algorithms:
  Authentication      : hmac-sha1-96
  Encryption          : 3des-cbc
  Pseudo random function: hmac-sha1
  Diffie-Hellman group : DH-group-5
Traffic statistics:
  Input  bytes   :                1004
  Output bytes   :                756
  Input  packets:                 6
  Output packets:                 4
  Input  fragmented packets: 3
  Output fragmented packets: 3
IPSec security associations: 1 created, 1 deleted
Phase 2 negotiations in progress: 1

Negotiation type: Quick mode, Role: Responder, Message ID: 0
Local: 192.168.254.1:500, Remote: 172.24.23.157:500
Local identity: 192.168.254.1
Remote identity: 172.24.23.157
Flags: IKE SA is created

```

show security ike security-associations ha-link-encryption (SRX5400, SRX5600, SRX5800)

Starting in Junos OS Release 20.4R1, when you configure the high availability (HA) feature, you can use this show command to view only interchassis link tunnel details. The following command displays only the link encryption SAs on both nodes.

```

user@host> show security ike security-associations ha-link-encryption

```

Index	State	Initiator cookie	Responder cookie	Mode	Remote Address
4294966287	UP	7b77b4e2fd5a87e5	ab4a398e6a28687a	IKEv2	23.0.0.2

Release Information

Command introduced in Junos OS Release 8.5. Support for the **fpc**, **pic**, and **kmd-instance** options added in Junos OS Release 9.3. Support for the **family** option added in Junos OS Release 11.1. Support for Auto Discovery VPN added in Junos OS Release 12.3X48-D10. Support for IKEv2 reauthentication

added in Junos OS Release 15.1X49-D60. Support for IKEv2 fragmentation added in Junos OS Release 15.1X49-D80.

Support for the **ha-link-encryption** option added in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

[Example: Configuring a Route-Based VPN Tunnel in a User Logical Systems](#)

show security ike active-peer

IN THIS SECTION

- [Syntax | 1202](#)
- [Description | 1203](#)
- [Options | 1203](#)
- [Required Privilege Level | 1204](#)
- [Output Fields | 1204](#)
- [Sample Output | 1206](#)
- [Release Information | 1208](#)

Syntax

```
show security ike active-peer
<peer-address>
<aaa-username username>
<brief | detail>
<debug>
local-address IP address
local-ike-id IKE ID
local-port port number (1..65535)
<fpc slot-number pic slot-number>
<ike-id IKE-ID>
<kmd-instance (all | kmd-instance-name)>
```

```

<pic slot-number fpc slot-number>
<port port-number peer-address>
routing-instance name of the local gateway routing instance
stats
<ha-link-encryption>

```

Description

Display the list of connected active users with details about the peer addresses and ports they are using.

Options

<i>peer-address</i>	(Optional) Display details about the user with the specified peer address.
<i>aaa-username username</i>	(Optional) Display information about the user with the specified authentication, authorization, and accounting (AAA) username.
<i>brief</i>	(Optional) Display standard information about all users. (Default)
<i>detail</i>	(Optional) Display detailed information about all users.
<i>debug</i>	(Optional) Display debug information about all users.
<i>local-address</i>	Display information about the user with the specified local gateway IP address.
<i>local-ike-id</i>	Display information about the user with the specified local gateway IKE ID.
<i>local-port port-number</i>	Display information about users on the specified local gateway port number for specified local gateway IP address.
<i>fpc slot-number pic slot-number</i>	(Optional) Display information about users on the specified Flexible PIC Concentrator (FPC) slot and PIC slot.
<i>ike-id IKE-ID</i>	(Optional) Display information about the user with the specified IKE ID.
<i>kmd-instance (all kmd-instance-name)</i>	(Optional) Display information about users in the key management process (KMD) identified by FPC <i>slot-number</i> and PIC <i>slot-number</i>. • all—All KMD instances running on the Services Processing Unit (SPU). • <i>kmd-instance-name</i>—Name of the KMD instance running on the SPU.
<i>pic slot-number fpc slot-number</i>	(Optional) Display information about users on the specified PIC slot and FPC slot.

port <i>port-number</i> <i>peer-address</i>	(Optional) Display information about users on the specified port for the specified peer address.
routing-instance	Display information about users on the specified local gateway routing instance.
stats	Display detailed output along with IKE SA stats information accumulated at the peer.
ha-link-encryption	(Optional) Display information related to interchassis link tunnel only. See <i>ipsec (High Availability)</i> and " show security ike active-peer ha-link-encryption (SRX5400, SRX5600, SRX5800) " on page 1208.

Required Privilege Level

view

Output Fields

[Table 65 on page 1204](#) lists the output fields for the **show security ike active-peer** command. Output fields are listed in the approximate order in which they appear.

Table 65: show security ike active-peer Output Fields

Field Name	Field Description	Level of Output
Remote Address	IP address of the peer.	brief
Port	Port used by the peer.	All levels
Peer IKE-ID	IKE ID used by the peer.	All levels
AAA username	Username of the peer.	All levels
Assigned IP	IP address assigned to the peer.	brief

Table 65: show security ike active-peer Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Assigned network attributes	Network attributes assigned to the peer can include the IP address and netmask, and DNS and WINS server addresses.	detail
Previous Peer address	IP address previously assigned to the peer.	detail
Active IKE SA indexes	Index number of the SA associated with the peer. This number is an internally generated number.	detail
IKE SA negotiated	Number of IKE SAs negotiated.	detail
IPSec tunnels active	Number of IPSec tunnels active.	detail
IPSec Tunnel IDs	IDs of the active IPSec tunnels.	detail
DPD Config Info	DPD configuration values.	detail
DPD Statistics	Information about DPD operations.	detail
Local gateway interface	Interface name of the local gateway.	detail
Routing instance	Name of the local gateway routing instance.	detail
Local address	IP address of the local gateway.	detail
Local IKE-ID	IKE ID used by local gateway.	detail

Sample Output

show security ike active-peer

```
user@host> show security ike active-peer
```

Remote Address	Port	Peer IKE-ID	AAA username	Assigned IP
192.168.6.136	8034	user1tac@650a	user1	
192.168.80.225				

show security ike active-peer stats

```
user@host> show security ike active-peer stats
```

```
Local gateway interface: xe-1/1/2
Routing instance: default
Local address: 192.0.2.1, Port: 500,
Local IKE-ID : device.example.net
Peer address: 198.51.100.2, Port: 500,
Peer IKE-ID : device1.example.net
AAA username: not available
Assigned network attributes:
IP Address      : 192.0.2.10 ,   netmask      : 255.255.255.0
DNS Address     : 19851.100.25 ,   DNS2 Address  : 198.51.100.26
WINS Address    : 203.0.113.25 ,   WINS2 Address : 203.0.113.26
Assigned network attributes (IPv6):
IP Address      : :: ,   prefix       : 0
DNS Address     : 2001:db8:::ffff ,   DNS2 Address  : 2001:db8:::1001
Previous Peer address : 0.0.0.0, Port          : 0
Active IKE SA indexes : 1
IKE SA negotiated    : 1
IPSec tunnels active  : 1, IPSec Tunnel IDs    : 500001
IKE_SA_INIT exchange stats:
Initiator stats:
Request Out          : 0
Response In          : 0
Invalid KE Payload In : 0
No Proposal Chosen In : 0
Cookie Request In    : 0
Cookie Response Out  : 0
Res Invalid IKE SPI   : 0
Responder stats:
Request In           : 1
Response Out         : 1
Invalid KE Payload Out : 0
No Proposal Chosen Out : 0
Cookie Request Out   : 0
Cookie Response In   : 0
Res DH Gen Key Fail  : 0
```

```

Res Verify SA Fail      : 0
Res IKE SA Fill Fail    : 0
Res Verify DH Group Fail: 0
Res DH Compute Key Fail : 0
IKE_AUTH exchange stats:
Initiator stats:
  Request Out           : 0
  Response In           : 0
  No Proposal Chosen In : 0
  TS Unacceptable In    : 0
  Authentication Failed In: 0
Responder stats:
  Request In            : 1
  Response Out          : 1
  No Proposal Chosen Out: 0
  TS Unacceptable Out   : 0
  Authentication Failed Out: 0
IKE SA Rekey CREATE_CHILD_SA exchange stats:
Initiator stats:
  Request Out           : 0
  Response In           : 0
  No Proposal Chosen In : 0
  Invalid KE In         : 0
  Res DH Compute Key Fail: 0
  Res Verify SA Fail     : 0
  Res Fill IKE SA Fail   : 0
  Res Verify DH Group Fail: 0
Responder stats:
  Request In            : 0
  Response Out          : 0
  No Proposal Chosen Out: 0
  Invalid KE Out        : 0
  Res DH Compute Key Fail: 0
IPsec SA Rekey CREATE_CHILD_SA exchange stats:
Initiator stats:
  Request Out           : 0
  Response In           : 0
  No Proposal Chosen In : 0
  Invalid KE In         : 0
  TS Unacceptable In    : 0
  Res DH Compute Key Fail: 0
  Res Verify SA Fail     : 0
  Res Verify DH Group Fail: 0
  Res Verify TS Fail     : 0
Responder stats:
  Request In            : 0
  Response Out          : 0
  No Proposal Chosen Out: 0
  Invalid KE Out        : 0
  TS Unacceptable Out   : 0
  Res DH Compute Key Fail: 0

```

show security ike active-peer detail

```

user@host> show security ike active-peer detail
Local gateway interface: xe-1/1/2
Routing instance: default
Local address: 192.0.2.1, Port: 500,
Local IKE-ID : device.example.net
Peer address: 198.51.100.2, Port: 500,

```



```

Peer IKE-ID : device1.example.net
AAA username: not available
Assigned network attributes:
IP Address      : 192.0.2.10 ,    netmask      : 255.255.255.0
DNS Address     : 198.51.100.25 ,    DNS2 Address  : 198.51.100.26
WINS Address    : 203.0.113.25 ,    WINS2 Address  : 203.0.113.26
Assigned network attributes (IPv6):
IP Address      : 5000::1 ,    prefix       : 112
DNS Address     : 1000::ffff:ffff ,    DNS2 Address  : 1100::ffff:ffff

Previous Peer address : 0.0.0.0, Port          : 0
Active IKE SA indexes : 1
IKE SA negotiated     : 1
IPSec tunnels active  : 1, IPSec Tunnel IDs   : 500001

```

show security ike active-peer ha-link-encryption (SRX5400, SRX5600, SRX5800)

Starting in Junos OS Release 20.4R1, when you configure the high availability (HA) feature, you can use this show command to view only interchassis link tunnel details. The following command displays only interchassis link active peers and not regular active peers.

```
user@host> show security ike active-peer ha-link-encryption
```

Remote Address	Port	Peer IKE-ID	AAA username	Assigned IP
23.0.0.2	500	23.0.0.2	not available	0.0.0.0

Release Information

Command introduced in Junos OS Release 10.4. Support to display dead peer detection (DPD) statistics added in Junos OS Release 12.3X48-D10.

Support for the **ha-link-encryption** option added in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

show security ike security-associations

show security ipsec security-associations

show security ipsec security-associations

IN THIS SECTION

- [Syntax | 1209](#)
- [Description | 1209](#)
- [Options | 1210](#)
- [Required Privilege Level | 1211](#)
- [Output Fields | 1211](#)
- [Sample Output | 1222](#)
- [show security ipsec security-associations detail \(SRX Series devices and MX Series Routers\) | 1240](#)
- [Release Information | 1243](#)

Syntax

```
show security ipsec security-associations
<brief | detail>
<family (inet | inet6)>
<fpc slot-number pic slot-number>
<index SA-index-number>
<kmd-instance (all | kmd-instance-name)>
<pic slot-number fpc slot-number>
<sa-type shortcut>
<traffic-selector traffic-selector-name>
<vpn-name vpn-name>
<ha-link-encryption>
```

Description

Display information about the IPsec security associations (SAs).

In Junos OS Releases 20.1R2, 20.2R2, 20.3R2, 20.3R1, and later, when you execute the **show security ipsec security-associations detail** command, a new output field **IKE SA Index** corresponding to every IPsec SA within a tunnel is displayed under each IPsec SA information. See ["show security ipsec security-associations detail \(SRX5400, SRX5600, SRX5800\)" on page 1236](#).

Options

none	Display information about all SAs.
brief detail	(Optional) Display the specified level of output. The default is brief .
family	(Optional) Display SAs by family. This option is used to filter the output. • inet—IPv4 address family. • inet6—IPv6 address family.
fpc slot-number pic slot-number	(Optional) Display information about existing IPsec SAs in the specified Flexible PIC Concentrator (FPC) slot and PIC slot. In a chassis cluster, when you execute the CLI command show security ipsec security-associations pic <slot-number> fpc <slot-number> in operational mode, only the primary node information about the existing IPsec SAs in the specified Flexible PIC Concentrator (FPC) slot and PIC slot is displayed.
index SA-index-number	(Optional) Display detailed information about the specified SA identified by this index number. To obtain a list of all SAs that includes their index numbers, use the command with no options.
kmd-instance	(Optional) Display information about existing IPsec SAs in the key management process (in this case, it is KMD) identified by the FPC <i>slot-number</i> and PIC <i>slot-number</i> . • all—All KMD instances running on the Services Processing Unit (SPU). • kmd-instance-name—Name of the KMD instance running on the SPU.
pic slot-number fpc slot-number	(Optional) Display information about existing IPsec SAs in the specified PIC slot and FPC slot.
sa-type	(Optional for ADVPN) Display information for the specified type of SA. shortcut is the only option for this release.
traffic-selector traffic-selector-name	(Optional) Display information about the specified traffic selector.
vpn-name <i>vpn-name</i>	(Optional) Display information about the specified VPN.
ha-link-encryption	(Optional) Display information related to interchassis link tunnel only. See <i>ipsec (High Availability)</i> , " show security ipsec security-associations ha-link-encryption "

(SRX5400, SRX5600, SRX5800)" on page 1237, and "show security ipsec sa detail ha-link-encryption (SRX5400, SRX5600, SRX5800)" on page 1238.

Required Privilege Level

view

Output Fields

Table 66 on page 1211 lists the output fields for the **show security ipsec security-associations** command, Table 67 on page 1218 lists the output fields for the **show security ipsec sa** command and Table 68 on page 1219. lists the output fields for the **show security ipsec sa detail**. Output fields are listed in the approximate order in which they appear.

Table 66: show security ipsec security-associations

Field Name	Field Description	Level of Output
Total active tunnels	Total number of active IPsec tunnels.	brief
ID	Index number of the SA. You can use this number to get additional information about the SA.	All levels
Algorithm	Cryptography used to secure exchanges between peers during the IKE negotiations includes: • An authentication algorithm used to authenticate exchanges between the peers. • An encryption algorithm used to encrypt data traffic.	brief

Table 66: show security ipsec security-associations (Continued)

Field Name	Field Description	Level of Output
SPI	Security parameter index (SPI) identifier. An SA is uniquely identified by an SPI. Each entry includes the name of the VPN, the remote gateway address, the SPIs for each direction, the encryption and authentication algorithms, and keys. The peer gateways each have two SAs, one resulting from each of the two phases of negotiation: IKE and IPsec.	brief
Life: sec/kb	The lifetime of the SA, after which it expires, expressed either in seconds or kilobytes.	brief
Mon	The Mon field refers to VPN monitoring status. If VPN monitoring is enabled, then this field displays U (up) or D (down). A hyphen (-) means VPN monitoring is not enabled for this SA. A V means that IPsec datapath verification is in progress.	brief
Isys	The root system.	brief
Port	If Network Address Translation (NAT) is used, this value is 4500. Otherwise, it is the standard IKE port, 500.	All levels
Gateway	IP address of the remote gateway.	brief
Virtual-system	Name of the logical system.	detail
VPN name	IPsec name for VPN.	detail

Table 66: show security ipsec security-associations (Continued)

Field Name	Field Description	Level of Output
State	State has two options, Installed and Not Installed. • Installed—The SA is installed in the SA database. • Not Installed—The SA is not installed in the SA database. For transport mode, the value of State is always Installed.	detail
Local gateway	Gateway address of the local system.	detail
Remote gateway	Gateway address of the remote system.	detail
Traffic selector	Name of the traffic selector.	detail
Local identity	Identity of the local peer so that its partner destination gateway can communicate with it. The value is specified as an IP address, fully qualified domain name, e-mail address, or distinguished name (DN).	detail
Remote identity	IP address of the destination peer gateway.	detail
Term	Defines local IP range, remote IP range, source port range, destination port range, and protocol.	detail
Source-port	Source port range configured for a term.	detail

Table 66: show security ipsec security-associations (Continued)

Field Name	Field Description	Level of Output
Destination-Port	Destination port range configured for a term.	detail
Version	IKE version, either IKEv1 or IKEv2 .	detail
DF-bit	State of the don't fragment bit: set or cleared .	detail
Location	FPC—Flexible PIC Concentrator (FPC) slot number. PIC—PIC slot number. KMD-Instance—The name of the KMD instance running on the SPU, identified by FPC <i>slot-number</i> and PIC <i>slot-number</i>. Currently, 4 KMD instances running on each SPU, and any particular IPsec negotiation is carried out by a single KMD instance.	detail
Tunnel events	Tunnel event and the number of times the event has occurred. See Tunnel Events for descriptions of tunnel events and the action you can take.	detail
Anchorship	Anchor thread ID for the SA (for SRX4600 Series devices with the detail option).	
Direction	Direction of the SA; it can be inbound or outbound.	detail

Table 66: show security ipsec security-associations (Continued)

Field Name	Field Description	Level of Output
AUX-SPI	Value of the auxiliary security parameter index(SPI). • When the value is AH or ESP, AUX-SPI is always 0. • When the value is AH+ESP, AUX-SPI is always a positive integer.	detail
Mode	Mode of the SA: • transport—Protects host-to-host connections. • tunnel—Protects connections between security gateways.	detail
Type	Type of the SA: • manual—Security parameters require no negotiation. They are static and are configured by the user. • dynamic—Security parameters are negotiated by the IKE protocol. Dynamic SAs are not supported in transport mode.	detail
State	State of the SA: • Installed—The SA is installed in the SA database. • Not Installed—The SA is not installed in the SA database. For transport mode, the value of State is always Installed.	detail

Table 66: show security ipsec security-associations (Continued)

Field Name	Field Description	Level of Output
Protocol	Protocol supported. • Transport mode supports Encapsulation Security Protocol (ESP) and Authentication Header (AH). • Tunnel mode supports ESP and AH.	detail
Authentication	Type of authentication used.	detail
Encryption	Type of encryption used. Starting in Junos OS Release 19.4R2, when you configure aes-128-gcm or aes-256-gcm as an encryption algorithm at the [edit security ipsec proposal proposal-name] hierarchy level, the authentication algorithm field of the show security ipsec security-associations detail command displays the same configured encryption algorithm.	detail
Soft lifetime	The soft lifetime informs the IPsec key management system that the SA is about to expire. Each lifetime of an SA has two display options, hard and soft, one of which must be present for a dynamic SA. This allows the key management system to negotiate a new SA before the hard lifetime expires. • Expires in seconds—Number of seconds left until the SA expires.	detail

Table 66: show security ipsec security-associations (Continued)

Field Name	Field Description	Level of Output
Hard lifetime	The hard lifetime specifies the lifetime of the SA. • Expires in seconds—Number of seconds left until the SA expires.	detail
Lifeseize Remaining	The lifeseize remaining specifies the usage limits in kilobytes. If there is no lifeseize specified, it shows unlimited. • Expires in kilobytes—Number of kilobytes left until the SA expires.	detail
Anti-replay service	State of the service that prevents packets from being replayed. It can be Enabled or Disabled.	detail
Replay window size	Size of the antireplay service window, which is 64 bits.	detail
Bind-interface	The tunnel interface to which the route-based VPN is bound.	detail
Copy-Outer-DSCP	Indicates if the system copies the outer DSCP value from the IP header to the inner IP header.	detail
tunnel-establishment	Indicates how the IKE is activated.	detail
IKE SA index	Indicates the list of parent IKE security associations.	detail

Table 67: show security ipsec sa Output Fields

Field Name	Field Description
Total active tunnels	Total number of active IPsec tunnels.
ID	Index number of the SA. You can use this number to get additional information about the SA.
Algorithm	Cryptography used to secure exchanges between peers during the IKE Phase 2 negotiations includes: • An authentication algorithm used to authenticate exchanges between the peers. Options are hmac-md5-96, hmac-sha-256-128, or hmac-sha1-96. • An encryption algorithm used to encrypt data traffic. Options are 3des-cbc, aes-128-cbc, aes-192-cbc, aes-256-cbc, or des-cbc.
SPI	Security parameter index (SPI) identifier. An SA is uniquely identified by an SPI. Each entry includes the name of the VPN, the remote gateway address, the SPIs for each direction, the encryption and authentication algorithms, and keys. The peer gateways each have two SAs, one resulting from each of the two phases of negotiation: Phase 1 and Phase 2.
Life:sec/kb	The lifetime of the SA, after which it expires, expressed either in seconds or kilobytes.
Mon	The Mon field refers to VPN monitoring status. If VPN monitoring is enabled, then this field displays U (up) or D (down). A hyphen (-) means VPN monitoring is not enabled for this SA. A V means that IPSec datapath verification is in progress.
Isys	The root system.
Port	If Network Address Translation (NAT) is used, this value is 4500. Otherwise, it is the standard IKE port, 500.

Table 67: show security ipsec sa Output Fields *(Continued)*

Field Name	Field Description
Gateway	Gateway address of the system.

Table 68: show security ipsec sa detail Output Fields

Field Name	Field Description
ID	Index number of the SA. You can use this number to get additional information about the SA.
Virtual-system	The virtual system name.
VPN Name	IPSec name for VPN.
Local Gateway	Gateway address of the local system.
Remote Gateway	Gateway address of the remote system.
Local Identity	Identity of the local peer so that its partner destination gateway can communicate with it. The value is specified as an IP address, fully qualified domain name, e-mail address, or distinguished name (DN).
Remote Identity	IP address of the destination peer gateway.
Version	IKE version. For example, IKEv1, IKEv2.
DF-bit	State of the don't fragment bit: set or cleared .
Bind-interface	The tunnel interface to which the route-based VPN is bound.
Tunnel Events	

Table 68: show security ipsec sa detail Output Fields (*Continued*)

Field Name	Field Description
Direction	Direction of the SA; it can be inbound or outbound.
AUX-SPI	Value of the auxiliary security parameter index(SPI). • When the value is AH or ESP, AUX-SPI is always 0. • When the value is AH+ESP, AUX-SPI is always a positive integer.
VPN Monitoring	If VPN monitoring is enabled, then the Mon field displays U (up) or D (down) . A hyphen (-) means VPN monitoring is not enabled for this SA. A V means that IPsec datapath verification is in progress.
Hard lifetime	The hard lifetime specifies the lifetime of the SA. • Expires in seconds - Number of seconds left until the SA expires.
Lifeseize Remaining	The lifeseize remaining specifies the usage limits in kilobytes. If there is no lifeseize specified, it shows unlimited.
Soft lifetime	The soft lifetime informs the IPsec key management system that the SA is about to expire. Each lifetime of an SA has two display options, hard and soft, one of which must be present for a dynamic SA. This allows the key management system to negotiate a new SA before the hard lifetime expires. • Expires in seconds - Number of seconds left until the SA expires.
Mode	Mode of the SA: • transport - Protects host-to-host connections. • tunnel - Protects connections between security gateways.

Table 68: show security ipsec sa detail Output Fields (*Continued*)

Field Name	Field Description
Type	Type of the SA: • manual - Security parameters require no negotiation. They are static and are configured by the user. • dynamic - Security parameters are negotiated by the IKE protocol. Dynamic SAs are not supported in transport mode.
State	State of the SA: • Installed - The SA is installed in the SA database. • Not Installed - The SA is not installed in the SA database. For transport mode, the value of State is always Installed.
Protocol	Protocol supported. • Transport mode supports Encapsulation Security Protocol (ESP) and Authentication Header (AH). • Tunnel mode supports ESP and AH. • Authentication - Type of authentication used. • Encryption - Type of encryption used.
Anti-replay service	State of the service that prevents packets from being replayed. It can be Enabled or Disabled.
Replay window size	Configured size of the antireplay service window. It can be 32 or 64 packets. If the replay window size is 0, the antireplay service is disabled. The antireplay window size protects the receiver against replay attacks by rejecting old or duplicate packets.
Interchassis Link Tunnel	

Table 68: show security ipsec sa detail Output Fields (*Continued*)

Field Name	Field Description
HA Link Encryption Mode	High availability mode supported. Displays Multi-Node when multi-node high availability feature is enabled.

Sample Output

For brevity, the show command outputs does not display all the values of the configuration. Only a subset of the configuration is displayed. Rest of the configuration on the system has been replaced with ellipses (...).

show security ipsec security-associations (IPv4)

```

user@host> show security ipsec security-associations
Total active tunnels: 14743 Total Ipsec sas: 14743
ID      Algorithm      SPI      Life:sec/kb  Mon lsys Port  Gateway
<511672 ESP:aes-cbc-128/sha1 0x071b8cd2      -    root 500   21.0.45.152
>503327 ESP:aes-cbc-128/sha1 0x69d364dd 1584/ unlim - root 500 21.0.12.255
<503327 ESP:aes-cbc-128/sha1 0x0a577f2d 1584/ unlim - root 500 21.0.12.255
>512896 ESP:aes-cbc-128/sha1 0xd2f51c81 1669/ unlim - root 500 21.0.50.96
<512896 ESP:aes-cbc-128/sha1 0x071b8d9e 1669/ unlim - root 500 21.0.50.96
>513881 ESP:aes-cbc-128/sha1 0x95955834 1696/ unlim - root 500 21.0.54.57
<513881 ESP:aes-cbc-128/sha1 0x0a57860c 1696/ unlim - root 500 21.0.54.57
>505835 ESP:aes-cbc-128/sha1 0xf827b5c6 1598/ unlim - root 500 21.0.22.204
<505835 ESP:aes-cbc-128/sha1 0x0f43bf3f 1598/ unlim - root 500 21.0.22.204
>506531 ESP:aes-cbc-128/sha1 0x01694572 1602/ unlim - root 500 21.0.25.131
<506531 ESP:aes-cbc-128/sha1 0x0a578143 1602/ unlim - root 500 21.0.25.131
>512802 ESP:aes-cbc-128/sha1 0xdc292de4 1668/ unlim - root 500 21.0.50.1
<512802 ESP:aes-cbc-128/sha1 0x0a578558 1668/ unlim - root 500 21.0.50.1
>512413 ESP:aes-cbc-128/sha1 0xbe2c52d5 1660/ unlim - root 500 21.0.48.125
<512413 ESP:aes-cbc-128/sha1 0x1129580c 1660/ unlim - root 500 21.0.48.125
>505075 ESP:aes-cbc-128/sha1 0x2aae6647 1593/ unlim - root 500 21.0.19.213
<505075 ESP:aes-cbc-128/sha1 0x02dc5c50 1593/ unlim - root 500 21.0.19.213
>514055 ESP:aes-cbc-128/sha1 0x2b8adfcfb 1704/ unlim - root 500 21.0.54.238
<514055 ESP:aes-cbc-128/sha1 0x0f43c49a 1704/ unlim - root 500 21.0.54.238
>508898 ESP:aes-cbc-128/sha1 0xbcced4d6 1619/ unlim - root 500 21.0.34.194
<508898 ESP:aes-cbc-128/sha1 0x1492035a 1619/ unlim - root 500 21.0.34.194
>505328 ESP:aes-cbc-128/sha1 0x2a8d2b36 1594/ unlim - root 500 21.0.20.208

```

```

<505328 ESP:aes-cbc-128/sha1 0x14920107 1594/ unlim - root 500 21.0.20.208
>500815 ESP:aes-cbc-128/sha1 0xdd86c89a 1573/ unlim - root 500 21.0.3.47
<500815 ESP:aes-cbc-128/sha1 0x1129507f 1573/ unlim - root 500 21.0.3.47
>503758 ESP:aes-cbc-128/sha1 0x64cc490e 1586/ unlim - root 500 21.0.14.172
<503758 ESP:aes-cbc-128/sha1 0x14920001 1586/ unlim - root 500 21.0.14.172
>504004 ESP:aes-cbc-128/sha1 0xde0b63ee 1587/ unlim - root 500 21.0.15.164
<504004 ESP:aes-cbc-128/sha1 0x071b87d4 1587/ unlim - root 500 21.0.15.164
>508816 ESP:aes-cbc-128/sha1 0x2703b7a5 1618/ unlim - root 500 21.0.34.112
<508816 ESP:aes-cbc-128/sha1 0x071b8af6 1618/ unlim - root 500 21.0.34.112
>511341 ESP:aes-cbc-128/sha1 0x828f3330 1644/ unlim - root 500 21.0.44.77
<511341 ESP:aes-cbc-128/sha1 0x02dc6064 1644/ unlim - root 500 21.0.44.77
>500456 ESP:aes-cbc-128/sha1 0xa6f1515d 1572/ unlim - root 500 21.0.1.200
<500456 ESP:aes-cbc-128/sha1 0x1491fddb 1572/ unlim - root 500 21.0.1.200
>512506 ESP:aes-cbc-128/sha1 0x4108f3a3 1662/ unlim - root 500 21.0.48.218
<512506 ESP:aes-cbc-128/sha1 0x071b8d5d 1662/ unlim - root 500 21.0.48.218
>504657 ESP:aes-cbc-128/sha1 0x27a6b8b3 1591/ unlim - root 500 21.0.18.41
<504657 ESP:aes-cbc-128/sha1 0x112952fe 1591/ unlim - root 500 21.0.18.41
>506755 ESP:aes-cbc-128/sha1 0xc0afcff0 1604/ unlim - root 500 21.0.26.100
<506755 ESP:aes-cbc-128/sha1 0x149201f5 1604/ unlim - root 500 21.0.26.100
>508023 ESP:aes-cbc-128/sha1 0xa1a90af8 1612/ unlim - root 500 21.0.31.87
<508023 ESP:aes-cbc-128/sha1 0x02dc5e3b 1612/ unlim - root 500 21.0.31.87
>509190 ESP:aes-cbc-128/sha1 0xee52074d 1621/ unlim - root 500 21.0.35.230
<509190 ESP:aes-cbc-128/sha1 0x0f43c16e 1621/ unlim - root 500 21.0.35.230
>505051 ESP:aes-cbc-128/sha1 0x24130b1c 1593/ unlim - root 500 21.0.19.188
<505051 ESP:aes-cbc-128/sha1 0x149200d9 1593/ unlim - root 500 21.0.19.188
>513214 ESP:aes-cbc-128/sha1 0x2c4752d1 1676/ unlim - root 500 21.0.51.158
<513214 ESP:aes-cbc-128/sha1 0x071b8dd3 1676/ unlim - root 500 21.0.51.158
>510808 ESP:aes-cbc-128/sha1 0x4acd94d3 1637/ unlim - root 500 21.0.42.56
<510808 ESP:aes-cbc-128/sha1 0x071b8c42 1637/ unlim - root 500 21.0.42.56

```

show security ipsec security-associations (IPv6)

```

user@host> show security ipsec security-associations
Total active tunnels: 1

```

ID	Algorithm	SPI	Life:sec/kb	Mon	vsys	Port	Gateway
131074	ESP:aes256/sha256	14caf1d9	3597/ unlim	-	root	500	
2001:db8::1112							
131074	ESP:aes256/sha256	9a4db486	3597/ unlim	-	root	500	2001:db8::1112

show security ipsec security-associations index 511672

```

user@host> show security ipsec security-associations index 511672
ID: 511672 Virtual-system: root, VPN Name: ipsec_vpn
  Local Gateway: 20.0.0.1, Remote Gateway: 21.0.45.152
  Traffic Selector Name: ts
  Local Identity: ipv4(191.45.151.0-191.45.151.255)
  Remote Identity: ipv4(40.45.151.0-40.45.151.255)
  Version: IKEv2
  DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.0, Policy-name:
IPSEC_POL
  Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
  Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
  Location: FPC 0, PIC 1, KMD-Instance 0
  Anchorship: Thread 10
  Direction: inbound, SPI: 0x835b8b42, AUX-SPI: 0
                    , VPN Monitoring: -
    Hard lifetime: Expires in 1639 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1257 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha1-96, Encryption: aes-cbc (128 bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
  Direction: outbound, SPI: 0x071b8cd2, AUX-SPI: 0
                    , VPN Monitoring: -
    Hard lifetime: Expires in 1639 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1257 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha1-96, Encryption: aes-cbc (128 bits)
    Anti-replay service: counter-based enabled, Replay window size: 64

```

show security ipsec security-associations index 131073 detail

```

user@host> show security ipsec security-associations index 131073 detail
ID: 131073 Virtual-system: root, VPN Name: IPSEC_VPN1
  Local Gateway: 4.0.0.1, Remote Gateway: 5.0.0.1
  Local Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Remote Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Version: IKEv2

```

```

DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.1
Port: 500, Nego#: 18, Fail#: 0, Def-Del#: 0 Flag: 0x600a39
Multi-sa, Configured SAs# 9, Negotiated SAs#: 9
Tunnel events:
  Mon Apr 23 2018 22:20:54 -0700: IPSec SA negotiation successfully completed
(1 times)
  Mon Apr 23 2018 22:20:54 -0700: IKE SA negotiation successfully completed (2
times)
  Mon Apr 23 2018 22:20:18 -0700: User cleared IKE SA from CLI, corresponding
IPSec SAs cleared (1 times)
  Mon Apr 23 2018 22:19:55 -0700: IPSec SA negotiation successfully completed
(2 times)
  Mon Apr 23 2018 22:19:23 -0700: Tunnel is ready. Waiting for trigger event
or peer to trigger negotiation (1 times)
  Mon Apr 23 2018 22:19:23 -0700: Bind-interface's zone received. Information
updated (1 times)
  Mon Apr 23 2018 22:19:23 -0700: External interface's zone received.
Information updated (1 times)
Direction: inbound, SPI: 2d8e710b, AUX-SPI: 0
                        , VPN Monitoring: -
  Hard lifetime: Expires in 1930 seconds
  Lifesize Remaining:  Unlimited
  Soft lifetime: Expires in 1563 seconds
  Mode: Tunnel(0 0), Type: dynamic, State: installed
  Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc
  Anti-replay service: counter-based enabled, Replay window size: 64
  Multi-sa FC Name: default
Direction: outbound, SPI: 5f3a3239, AUX-SPI: 0
                        , VPN Monitoring: -
  Hard lifetime: Expires in 1930 seconds
  Lifesize Remaining:  Unlimited
  Soft lifetime: Expires in 1563 seconds
  Mode: Tunnel(0 0), Type: dynamic, State: installed
  Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes-256-cbc
  Anti-replay service: counter-based enabled, Replay window size: 64
  Multi-sa FC Name: default
Direction: inbound, SPI: 5d227e19, AUX-SPI: 0
                        , VPN Monitoring: -
  Hard lifetime: Expires in 1930 seconds
  Lifesize Remaining:  Unlimited
  Soft lifetime: Expires in 1551 seconds
  Mode: Tunnel(0 0), Type: dynamic, State: installed
  Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes-256-cbc

```

```

    Anti-replay service: counter-based enabled, Replay window size: 64
    Multi-sa FC Name: best-effort
    Direction: outbound, SPI: 5490da, AUX-SPI: 0
                        , VPN Monitoring: -
    Hard lifetime: Expires in 1930 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1551 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes-256-cbc
    Anti-replay service: counter-based enabled, Replay window size: 64
    ...

```

Starting with Junos OS Release 18.2R1, the CLI **show security ipsec security-associations index *index-number* detail** output displays all the child SA details including forwarding class name.

show security ipsec sa

```

user@host> show security ipsec sa
Total active tunnels: 2
ID Algorithm SPI Life:sec/kb Mon lsys Port Gateway
>67108885 ESP:aes-gcm-256/None fdef4dab 2918/ unlim - root 500 2001:db8:3000::2
>67108885 ESP:aes-gcm-256/None e785dad9 2918/ unlim - root 500 2001:db8:3000::2
>67108887 ESP:aes-gcm-256/None 34a787af 2971/ unlim - root 500 2001:db8:5000::2
>67108887 ESP:aes-gcm-256/None cf57007f 2971/ unlim - root 500 2001:db8:5000::2

```

show security ipsec sa detail

```

user@host> show security ipsec sa detail
ID: 500201 Virtual-system: root, VPN Name: IPSEC_VPN
  Local Gateway: 2.0.0.1, Remote Gateway: 2.0.0.2
  Local Identity: ipv4(0.0.0.0-255.255.255.255)
  Remote Identity: ipv4(0.0.0.0-255.255.255.255)
  Version: IKEv1
  DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.1, Policy-name:
IPSEC_POL
  Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
  Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
  Location: FPC 0, PIC 1, KMD-Instance 0
  Anchorship: Thread 1
  Distribution-Profile: default-profile

```

```

Direction: inbound, SPI: 0x0a25c960, AUX-SPI: 0
                        , VPN Monitoring: -
Hard lifetime: Expires in 91 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 44 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Anti-replay service: counter-based enabled, Replay window size: 64
tunnel-establishment: establish-tunnels-responder-only-no-rekey
Direction: outbound, SPI: 0x43e34ad3, AUX-SPI: 0
                        , VPN Monitoring: -
Hard lifetime: Expires in 91 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 44 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: 3des-cbc
Anti-replay service: counter-based enabled, Replay window size: 64
tunnel-establishment: establish-tunnels-responder-only-no-rekey
...

```

Starting with Junos OS Release 19.1R1, a new field **tunnel-establishment** in the output of the CLI **show security ipsec sa detail** displays the option configured under **ipsec vpn establish-tunnels** hierarchy.

show security ipsec security-association

```

user@host>show security ipsec security-association
Total active tunnels: 1      Total IPsec sas: 1
ID      Algorithm      SPI      Life:sec/kb  Mon lsys Port  Gateway
<500006 ESP:aes-gcm-128/aes128-gcm 0x782b233c 1432/ unlim - root 500 2.0.0.2

```

show security ipsec security-associations brief

```

user@host> show security ipsec security-associations brief
Total active tunnels: 2      Total IPsec sas: 18
ID      Algorithm      SPI      Life:sec/kb  Mon lsys Port  Gateway
<131073 ESP:aes256/sha256 89e5098 1569/ unlim - root 500
5.0.0.1
>131073 ESP:aes256/sha256 fcee9d54 1569/ unlim - root 500
5.0.0.1
<131073 ESP:aes256/sha256 f3117676 1609/ unlim - root 500

```

```

5.0.0.1
>131073 ESP:aes256/sha256 6050109f 1609/ unlim - root 500
5.0.0.1
<131073 ESP:aes256/sha256 e01f54b1 1613/ unlim - root 500
5.0.0.1
>131073 ESP:aes256/sha256 29a05dd6 1613/ unlim - root 500
5.0.0.1
<131073 ESP:aes256/sha256 606c90f6 1616/ unlim - root 500
5.0.0.1
>131073 ESP:aes256/sha256 9b5b059d 1616/ unlim - root 500
5.0.0.1
<131073 ESP:aes256/sha256 b8116d6d 1619/ unlim - root 500
5.0.0.1
>131073 ESP:aes256/sha256 b7ed6bfd 1619/ unlim - root 500
5.0.0.1
<131073 ESP:aes256/sha256 4f5ce754 1619/ unlim - root 500
5.0.0.1
>131073 ESP:aes256/sha256 af8984b6 1619/ unlim - root 500
5.0.0.1
...

```

show security ipsec security-associations detail

```

user@host> show security ipsec security-associations detail

ID: 500009 Virtual-system: root, VPN Name: IPSEC_VPN
  Local Gateway: 2.0.0.2, Remote Gateway: 2.0.0.1
  Local Identity: ipv4(0.0.0.0-255.255.255.255)
  Remote Identity: ipv4(0.0.0.0-255.255.255.255)
  Version: IKEv1
  PFS group: DH-group-14
  DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.1, Policy-name:
IPSEC_POL
  Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
  Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
  Location: FPC 0, PIC 0, KMD-Instance 0
  Anchorship: Thread 0
  Distribution-Profile: default-profile
  IKE SA Index: 2068
  Direction: inbound, SPI: 0xba7bb1f2, AUX-SPI: 0
                    , VPN Monitoring: -

```

```

Hard lifetime: Expires in 146 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 101 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: des-cbc
Anti-replay service: counter-based enabled, Replay window size: 64
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-on-traffic
Direction: outbound, SPI: 0x41650alb, AUX-SPI: 0
, VPN Monitoring: -

Hard lifetime: Expires in 146 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 101 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha1-96, Encryption: des-cbc
Anti-replay service: counter-based enabled, Replay window size: 64
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-on-traffic

```

show security ipsec security-associations family inet6

```

user@host> show security ipsec security-associations family inet6
Virtual-system: root
Local Gateway: 2001:db8:1212::1111, Remote Gateway: 2001:db8:1212::1112
Local Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
DF-bit: clear
Direction: inbound, SPI: 14caf1d9, AUX-SPI: 0
, VPN Monitoring: -

Hard lifetime: Expires in 3440 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 2813 seconds
Mode: tunnel, Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc
Anti-replay service: counter-based enabled, Replay window size: 64

Direction: outbound, SPI: 9a4db486, AUX-SPI: 0
, VPN Monitoring: -

Hard lifetime: Expires in 3440 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 2813 seconds

```

```

Mode: tunnel, Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc
Anti-replay service: counter-based enabled, Replay window size: 64

```

show security ipsec security-associations fpc 6 pic 1 kmd-instance all (SRX Series Devices)

```

user@host> show security ipsec security-associations fpc 6 pic 1 kmd-instance all
Total active tunnels: 1

```

ID	Gateway	Port	Algorithm	SPI	Life:sec/kb	Mon	vsys
<2	192.168.1.2	500	ESP:aes256/sha256	67a7d25d	28280/unlim	-	0
>2	192.168.1.2	500	ESP:aes256/sha256	a23cbcdc	28280/unlim	-	0

show security ipsec security-associations detail (ADVPN Suggester, Static Tunnel)

```

user@host> show security ipsec security-associations detail
ID: 70516737 Virtual-system: root, VPN Name: ZTH_HUB_VPN
Local Gateway: 192.168.1.1, Remote Gateway: 192.168.1.2
Local Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Version: IKEv2
DF-bit: clear
Bind-interface: st0.1

Port: 500, Nego#: 5, Fail#: 0, Def-Del#: 0 Flag: 0x608a29
Tunnel events:
Tue Nov 03 2015 01:24:27 -0800: IPSec SA negotiation successfully completed (1
times)
Tue Nov 03 2015 01:24:27 -0800: IKE SA negotiation successfully completed (4
times)
Tue Nov 03 2015 01:23:38 -0800: User cleared IPSec SA from CLI (1 times)
Tue Nov 03 2015 01:21:32 -0800: IPSec SA negotiation successfully completed (1
times)
Tue Nov 03 2015 01:21:31 -0800: IPSec SA delete payload received from peer,
corresponding IPSec SAs cleared (1 times)
Tue Nov 03 2015 01:21:27 -0800: IPSec SA negotiation successfully completed (1
times)

```

```

Tue Nov 03 2015 01:21:13 -0800: Tunnel configuration changed. Corresponding
IKE/IPSec SAs are deleted (1 times)
Tue Nov 03 2015 01:19:27 -0800: IPSec SA negotiation successfully completed (1
times)
Tue Nov 03 2015 01:19:27 -0800: Tunnel is ready. Waiting for trigger event or
peer to trigger negotiation (1 times)
Location: FPC 0, PIC 3, KMD-Instance 2
Direction: inbound, SPI: 43de5d65, AUX-SPI: 0
Hard lifetime: Expires in 1335 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 996 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256 bits)
Anti-replay service: counter-based enabled

, Replay window size: 64
Location: FPC 0, PIC 3, KMD-Instance 2
Direction: outbound, SPI: 5b6e157c, AUX-SPI: 0
Hard lifetime: Expires in 1335 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 996 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256 bits)
Anti-replay service: counter-based enabled

, Replay window size: 64

```

show security ipsec security-associations detail (ADVPN Partner, Static Tunnel)

```

user@host> show security ipsec security-associations detail
ID: 67108872 Virtual-system: root, VPN Name: ZTH_SPOKE_VPN
Local Gateway: 192.168.1.2, Remote Gateway: 192.168.1.1
Local Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Remote Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
Version: IKEv2
DF-bit: clear, Bind-interface: st0.1
Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0x8608a29
Tunnel events:
Tue Nov 03 2015 01:24:26 -0800: IPSec SA negotiation successfully completed (1
times)
Tue Nov 03 2015 01:24:26 -0800: IKE SA negotiation successfully completed (4

```



```

times)
Tue Nov 03 2015 01:23:37 -0800: IPSec SA delete payload received from peer,
corresponding IPSec SAs cleared (1 times)
Tue Nov 03 2015 01:21:31 -0800: IPSec SA negotiation successfully completed (1
times)
Tue Nov 03 2015 01:21:31 -0800: Tunnel is ready. Waiting for trigger event or
peer to trigger negotiation (1 times)
Tue Nov 03 2015 01:18:26 -0800: Key pair not found for configured local
certificate. Negotiation failed (1 times)
Tue Nov 03 2015 01:18:13 -0800: CA certificate for configured local
certificate not found. Negotiation not initiated/successful (1 times)
Direction: inbound, SPI: 5b6e157c, AUX-SPI: 0
Hard lifetime: Expires in 941 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 556 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256 bits)
Anti-replay service: counter-based enabled, Replay window size: 64
Direction: outbound, SPI: 43de5d65, AUX-SPI: 0
Hard lifetime: Expires in 941 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 556 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256 bits)
Anti-replay service: counter-based enabled, Replay window size: 64

```

show security ipsec security-associations sa-type shortcut (ADVPN)

```

user@host> show security ipsec security-associations sa-type shortcut
Total active tunnels: 1
ID           Algorithm      SPI           Life:sec/kb  Mon lsys Port  Gateway
<268173318  ESP:aes256/sha256 6f164ee0 3580/ unlim - root 500 192.168.0.111
>268173318  ESP:aes256/sha256 e6f29cb0 3580/ unlim - root 500 192.168.0.111

```

show security ipsec security-associations sa-type shortcut detail (ADVPN)

```

user@host> show security ipsec security-associations sa-type shortcut detail
node0:
-----

```

```

ID: 67108874 Virtual-system: root, VPN Name: ZTH_SPOKE_VPN
  Local Gateway: 192.168.1.2, Remote Gateway: 192.168.1.2
  Local Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Remote Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Auto Discovery VPN:
    Type: Shortcut, Shortcut Role: Initiator
  Version: IKEv2
  DF-bit: clear, Bind-interface: st0.1
  Port: 4500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0x40608a29
  Tunnel events:
    Tue Nov 03 2015 01:47:26 -0800: IPSec SA negotiation successfully completed
(1 times)
    Tue Nov 03 2015 01:47:26 -0800: Tunnel is ready. Waiting for trigger event
or peer to trigger negotiation (1 times)
    Tue Nov 03 2015 01:47:26 -0800: IKE SA negotiation successfully completed (1
times)
  Direction: inbound, SPI: b7a5518, AUX-SPI: 0
    Hard lifetime: Expires in 1766 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1381 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
  Direction: outbound, SPI: b7e0268, AUX-SPI: 0
    Hard lifetime: Expires in 1766 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1381 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64

```

show security ipsec security-associations family inet detail

```

user@host> show security ipsec security-associations family inet detail
ID: 131073 Virtual-system: root, VPN Name: ike-vpn
  Local Gateway: 192.168.1.1, Remote Gateway: 192.168.1.2
  Local Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Remote Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)

```

```

Version: IKEv1
DF-bit: clear
, Copy-Outer-DSCP Enabled
Bind-interface: st0.99

Port: 500, Nego#: 116, Fail#: 0, Def-Del#: 0 Flag: 0x600a29
Tunnel events:
Fri Oct 30 2015 15:47:21 -0700: IPSec SA rekey successfully completed (115
times)
Fri Oct 30 2015 11:38:35 -0700: IKE SA negotiation successfully completed (12
times)
Mon Oct 26 2015 16:41:07 -0700: IPSec SA negotiation successfully completed (1
times)
Mon Oct 26 2015 16:40:56 -0700: Tunnel is ready. Waiting for trigger event or
peer to trigger negotiation (1 times)
Mon Oct 26 2015 16:40:56 -0700: External interface's address received.
Information updated (1 times)
Location: FPC 0, PIC 1, KMD-Instance 1
Direction: inbound, SPI: 81b9fc17, AUX-SPI: 0
Hard lifetime: Expires in 1713 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 1090 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256 bits)
Anti-replay service: counter-based enabled

, Replay window size: 64
Location: FPC 0, PIC 1, KMD-Instance 1
Direction: outbound, SPI: 727f629d, AUX-SPI: 0
Hard lifetime: Expires in 1713 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 1090 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256 bits)
Anti-replay service: counter-based enabled

, Replay window size: 64

```

show security ipsec security-associations detail (SRX4600)

```

user@host> show security ipsec security-associations detail
ID: 131073 Virtual-system: root, VPN Name: ike-vpn
  Local Gateway: 62.1.1.3, Remote Gateway: 62.1.1.2
  Local Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Remote Identity: ipv4_subnet(any:0,[0..7]=0.0.0.0/0)
  Version: IKEv2
  DF-bit: clear, Bind-interface: st0.0
  Port: 500, Nego#: 25, Fail#: 0, Def-Del#: 0 Flag: 0x600a29
  Tunnel events:
    Fri Jan 12 2007 07:50:10 -0800: IPSec SA rekey successfully completed (23
times)
  Location: FPC 0, PIC 0, KMD-Instance 0
  Anchorship: Thread 6
  Direction: inbound, SPI: 812c9c01, AUX-SPI: 0
    Hard lifetime: Expires in 2224 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1598 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
  Location: FPC 0, PIC 0, KMD-Instance 0
  Anchorship: Thread 7
  Direction: outbound, SPI: c4de0972, AUX-SPI: 0
    Hard lifetime: Expires in 2224 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1598 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha-256, Encryption: aes256-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64

```

show security ipsec security-associations detail (SRX5400, SRX5600, SRX5800)

A new output field **IKE SA Index** corresponding to every IPsec SA within a tunnel is displayed under each IPsec SA information.

```

user@host> show security ipsec security-associations detail
ID: 500005 Virtual-system: root, VPN Name: 85BX5-OAM
  Local Gateway: 10.217.0.4, Remote Gateway: 10.200.254.118
  Traffic Selector Name: TS_DEFAULT
  Local Identity: ipv4(0.0.0.0-255.255.255.255)
  Remote Identity: ipv4(10.181.235.224-10.181.235.224)
  Version: IKEv2
  PFS group: N/A
  DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.0, Policy-name:
MACRO-IPSEC-POL
  Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
  Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
  Location: FPC 7, PIC 1, KMD-Instance 0
  Anchorship: Thread 15
  Distribution-Profile: default-profile
  Direction: inbound, SPI: 0xe2eb3838, AUX-SPI: 0
               , VPN Monitoring: -
    Hard lifetime: Expires in 644 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 159 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: aes128-gcm, Encryption: aes-gcm (128 bits)
    Anti-replay service: disabled
    Extended-Sequence-Number: Disabled
    tunnel-establishment: establish-tunnels-responder-only
    IKE SA Index: 22
  Direction: outbound, SPI: 0x4f7c3101, AUX-SPI: 0
               , VPN Monitoring: -
    Hard lifetime: Expires in 644 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 159 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: aes128-gcm, Encryption: aes-gcm (128 bits)
    Anti-replay service: disabled
    Extended-Sequence-Number: Disabled
    tunnel-establishment: establish-tunnels-responder-only
    IKE SA Index: 22

```

```

Direction: inbound, SPI: 0x30b6d66f, AUX-SPI: 0
                        , VPN Monitoring: -
Hard lifetime: Expires in 1771 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 1391 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: aes128-gcm, Encryption: aes-gcm (128 bits)
Anti-replay service: disabled
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-responder-only
IKE SA Index: 40
Direction: outbound, SPI: 0xd2db4108, AUX-SPI: 0
                        , VPN Monitoring: -
Hard lifetime: Expires in 1771 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 1391 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: aes128-gcm, Encryption: aes-gcm (128 bits)
Anti-replay service: disabled
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-responder-only
IKE SA Index: 40

```

show security ipsec security-associations ha-link-encryption (SRX5400, SRX5600, SRX5800)

Starting in Junos OS Release 20.4R1, when you configure the high availability (HA) feature, you can use this show command to view only interchassis link tunnel details.

```

user@host> show security ipsec security-associations ha-link-encryption
Total active tunnels: 1      Total IPsec sas: 91
ID      Algorithm      SPI      Life:sec/kb  Mon lsys Port  Gateway
<495001 ESP:aes-gcm-256/aes256-gcm 0x0047658d 298/  unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x0046c5cd 298/  unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x0447658d 298/  unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x0446c5cd 298/  unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x0847658d 298/  unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x0846c5cd 298/  unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x0c47658d 298/  unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x0c46c5cd 298/  unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x1047658d 298/  unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x1046c5cd 298/  unlim - root 500 23.0.0.2

```

```

<495001 ESP:aes-gcm-256/aes256-gcm 0x1447658d 298/ unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x1446c5cd 298/ unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x1847658d 298/ unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x1846c5cd 298/ unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x1c47658d 298/ unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x1c46c5cd 298/ unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x2047658d 298/ unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x2046c5cd 298/ unlim - root 500 23.0.0.2
<495001 ESP:aes-gcm-256/aes256-gcm 0x2447658d 298/ unlim - root 500 23.0.0.2
>495001 ESP:aes-gcm-256/aes256-gcm 0x2446c5cd 298/ unlim - root 500 23.0.0.2
...

```

show security ipsec sa detail ha-link-encryption (SRX5400, SRX5600, SRX5800)

Starting in Junos OS Release 20.4R1, when you configure the high availability (HA) feature, you can use this show command to view only interchassis link tunnel details. It displays the multi SAs created for interchassis link encryption tunnel.

```

user@host> show security ipsec sa detail ha-link-encryption
ID: 495001 Virtual-system: root, VPN Name: L3HA_IPSEC_VPN
  Local Gateway: 23.0.0.1, Remote Gateway: 23.0.0.2
  Traffic Selector Name: __L3HA_IPSEC_VPN_multi_node__
  Local Identity: ipv4(180.100.1.1-180.100.1.1)
  Remote Identity: ipv4(180.100.1.2-180.100.1.2)
  Version: IKEv2
  PFS group: N/A
  DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.16000, Policy-
name: L3HA_IPSEC_POL
  Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
  Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
  HA Link Encryption Mode: Multi-Node
  Location: FPC -, PIC -, KMD-Instance -
  Anchorship: Thread -
  Distribution-Profile: default-profile
  Direction: inbound, SPI: 0x00439cf8, AUX-SPI: 0
                  , VPN Monitoring: -
    Hard lifetime: Expires in 294 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 219 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: aes256-gcm, Encryption: aes-gcm (256 bits)

```

```

Anti-replay service: counter-based enabled, Replay window size: 64
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-immediately
Location: FPC 1, PIC 0, KMD-Instance 0
Anchorship: Thread 15
IKE SA Index: 4294966297
Direction: outbound, SPI: 0x004cfceb, AUX-SPI: 0
                , VPN Monitoring: -
Hard lifetime: Expires in 294 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 219 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: aes256-gcm, Encryption: aes-gcm (256 bits)
Anti-replay service: counter-based enabled, Replay window size: 64
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-immediately
Location: FPC 1, PIC 0, KMD-Instance 0
Anchorship: Thread 15
IKE SA Index: 4294966297
Direction: inbound, SPI: 0x04439cf8, AUX-SPI: 0
                , VPN Monitoring: -
Hard lifetime: Expires in 294 seconds
Lifesize Remaining: Unlimited
Soft lifetime: Expires in 219 seconds
Mode: Tunnel(0 0), Type: dynamic, State: installed
Protocol: ESP, Authentication: aes256-gcm, Encryption: aes-gcm (256 bits)
Anti-replay service: counter-based enabled, Replay window size: 64
Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-immediately
Location: FPC 1, PIC 0, KMD-Instance 0
Anchorship: Thread 16
IKE SA Index: 4294966297
Direction: outbound, SPI: 0x044cfceb, AUX-SPI: 0
                , VPN Monitoring: -
...

```


show security ipsec security-associations detail (SRX Series devices and MX Series Routers)

In Junos OS Release 20.4R2, 21.1R1, and later, you can execute the **show security ipsec security-associations detail** command to view the traffic selector type for a VPN.

```

user@host> show security ipsec security-associations detail
ID: 500024 Virtual-system: root, VPN Name: S2S_VPN2
  Local Gateway: 7.0.0.2, Remote Gateway: 2.0.0.1
  Traffic Selector Name: ts1
  Local Identity: ipv4(20.20.20.0-20.20.20.255)
  Remote Identity: ipv4(10.10.10.0-10.10.10.255)
  TS Type: traffic-selector
  Version: IKEv2
  PFS group: DH-group-14
  DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.2, Policy-name:
IPSEC_POL
  Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
  Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
  Tunnel events:
    Tue Jan 19 2021 04:43:49: IPsec SA negotiation succeeds (1 times)
  Location: FPC 0, PIC 0, KMD-Instance 0
  Anchorship: Thread 1
  Distribution-Profile: default-profile
  Direction: inbound, SPI: 0xf8642fae, AUX-SPI: 0
               , VPN Monitoring: -
    Hard lifetime: Expires in 1798 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1397 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha256-128, Encryption: aes-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
    Extended-Sequence-Number: Disabled
    tunnel-establishment: establish-tunnels-immediately
    IKE SA Index: 17
  Direction: outbound, SPI: 0xb2a26969, AUX-SPI: 0
               , VPN Monitoring: -
    Hard lifetime: Expires in 1798 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1397 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed

```

```

    Protocol: ESP, Authentication: hmac-sha256-128, Encryption: aes-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
    Extended-Sequence-Number: Disabled
    tunnel-establishment: establish-tunnels-immediately
    IKE SA Index: 17
ID: 500025 Virtual-system: root, VPN Name: S2S_VPN1
    Local Gateway: 7.0.0.1, Remote Gateway: 2.0.0.1
    Local Identity: ipv4(0.0.0.0-255.255.255.255)
    Remote Identity: ipv4(0.0.0.0-255.255.255.255)
    TS Type: proxy-id
    Version: IKEv2
    PFS group: DH-group-14
    DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.1, Policy-name:
IPSEC_POL
    Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
    Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
    Tunnel events:
        Tue Jan 19 2021 04:44:41: IPsec SA negotiation succeeds (1 times)
    Location: FPC 0, PIC 0, KMD-Instance 0
    Anchorship: Thread 1
    Distribution-Profile: default-profile
    Direction: inbound, SPI: 0xe293762a, AUX-SPI: 0
                                , VPN Monitoring: -
    Hard lifetime: Expires in 1755 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1339 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha256-128, Encryption: aes-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64
    Extended-Sequence-Number: Disabled
    tunnel-establishment: establish-tunnels-immediately
    IKE SA Index: 18
    Direction: outbound, SPI: 0x7aef9d7f, AUX-SPI: 0
                                , VPN Monitoring: -
    Hard lifetime: Expires in 1755 seconds
    Lifesize Remaining: Unlimited
    Soft lifetime: Expires in 1339 seconds
    Mode: Tunnel(0 0), Type: dynamic, State: installed
    Protocol: ESP, Authentication: hmac-sha256-128, Encryption: aes-cbc (256
bits)
    Anti-replay service: counter-based enabled, Replay window size: 64

```

```

Extended-Sequence-Number: Disabled
tunnel-establishment: establish-tunnels-immediately
IKE SA Index: 18

```

show security ipsec security-associations detail (SRX Series devices)

Starting in Junos OS Release 21.1R1, you can view the traffic selector details, that includes, local identity, remote identity, protocol, source-port range, destination port range for multiple terms defined for an IPsec SA.

In the earlier Junos Releases, traffic selection for a particular SA is performed using existing IP range defined using IP address or netmask. From Junos OS Release 21.1R1 onwards, additionally traffic is selected through protocol specified using *protocol_name*. And also, low and high port range specified for source and destination port numbers.

```
user@host> show security ipsec security-associations detail
```

```

ID: 500075 Virtual-system: root, VPN Name: pkn-r0-r1-ipsec-vpn-1
Local Gateway: 1.1.1.1, Remote Gateway: 1.1.1.2

```

```
Traffic Selector Name: ts1
```

```
Local Identity:
```

Protocol	Port	IP
17/UDP	100-200	198.51.101.0-198.51.101.255
6/TCP	250-300	198.51.102.0-198.51.102.255

```
Remote Identity:
```

Protocol	Port	IP
17/UDP	150-200	80.0.0.1-80.0.0.1
6/TCP	250-300	80.0.1.1-80.0.1.1

```
Version: IKEv2
```

```
DF-bit: clear, Copy-Outer-DSCP Disabled, Bind-interface: st0.0, Policy-name: pkn-r0-r1-ipsec-policy
```

```
Port: 500, Nego#: 0, Fail#: 0, Def-Del#: 0 Flag: 0
```

```
Multi-sa, Configured SAs# 0, Negotiated SAs#: 0
```

```
Location: FPC 0, PIC 0, KMD-Instance 0
```

```
Anchorship: Thread 1
```

```
Distribution-Profile: default-profile
```

```
Direction: inbound, SPI: .....
```

```
Direction: outbound, SPI: .....
```

Release Information

Command introduced in Junos OS Release 8.5. Support for the **family** option added in Junos OS Release 11.1.

Support for the **vpn-name** option added in Junos OS Release 11.4R3. Support for the **traffic-selector** option and traffic selector field added in Junos OS Release 12.1X46-D10.

Support for Auto Discovery VPN (ADVPN) added in Junos OS Release 12.3X48-D10.

Support for IPsec datapath verification added in Junos OS Release 15.1X49-D70.

Support for thread anchorship added in Junos OS Release 17.4R1.

Starting in Junos OS Release 18.2R2 the **show security ipsec security-associations detail** command output will include thread anchorship information for the security associations (SAs).

Starting in Junos OS Release 19.4R1, we have deprecated the CLI option **fc-name** (COS Forward Class name) in the new **iked** process that displays the security associations (SAs) under show command **show security ipsec sa**.

Support for the **ha-link-encryption** option added in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

clear security ipsec security-associations

[Example: Configuring a Route-Based VPN Tunnel in a User Logical Systems](#)

show security ipsec statistics

IN THIS SECTION

- [Syntax | 1244](#)
- [Description | 1244](#)
- [Options | 1244](#)
- [Required Privilege Level | 1244](#)
- [Output Fields | 1245](#)
- [Sample Output | 1246](#)

- Sample Output | 1247
- Sample Output | 1248
- Release Information | 1249

Syntax

```
show security ipsec statistics
<fpc slot-number>
<index SA-index-number>
<pic slot-number>
<ha-link-encryption>
```

Description

Display standard IPsec statistics.

Options

- **none**—Display statistics about all IPsec security associations (SAs).
- **fpc slot-number**—Specific to SRX Series devices. Display statistics about existing IPsec SAs in this Flexible PIC Concentrator (FPC) slot. This option is used to filter the output.
- **index SA-index-number**—(Optional) Display statistics for the SA with this index number.
- **pic slot-number**—Specific to SRX Series devices. Display statistics about existing IPsec SAs in this PIC slot. This option is used to filter the output.
- **ha-link-encryption**—(Optional) Display information related to interchassis link tunnel only. See *ipsec (High Availability)* and "[show security ipsec statistics ha-link-encryption \(SRX5400, SRX5600, SRX5800\)](#)" on page 1249.

Required Privilege Level

view

Output Fields

Table 69 on page 1245 lists the output fields for the **show security ipsec statistics** command. Output fields are listed in the approximate order in which they appear.

Table 69: show security ipsec statistics Output Fields

Field Name	Field Description
Virtual-system	The root system.
ESP Statistics	• Encrypted bytes—Total number of bytes encrypted by the local system across the IPsec tunnel. • Decrypted bytes—Total number of bytes decrypted by the local system across the IPsec tunnel. • Encrypted packets—Total number of packets encrypted by the local system across the IPsec tunnel. • Decrypted packets—Total number of packets decrypted by the local system across the IPsec tunnel.
AH Statistics	• Input bytes—Total number of bytes received by the local system across the IPsec tunnel. • Output bytes—Total number of bytes transmitted by the local system across the IPsec tunnel. • Input packets—Total number of packets received by the local system across the IPsec tunnel. • Output packets—Total number of packets transmitted by the local system across the IPsec tunnel.

Table 69: show security ipsec statistics Output Fields *(Continued)*

Field Name	Field Description
Errors	• AH authentication failures—Total number of authentication header (AH) failures. An AH failure occurs when there is a mismatch of the authentication header in a packet transmitted across an IPsec tunnel. • Replay errors—Total number of replay errors. A replay error is generated when a duplicate packet is received within the replay window. • ESP authentication failures—Total number of Encapsulation Security Payload (ESP) failures. An ESP failure occurs when there is an authentication mismatch in ESP packets. • ESP decryption failures—total number of ESP decryption errors. • Bad headers—Total number of invalid headers detected. • Bad trailers—Total number of invalid trailers detected. • Invalid SPI— Total number of invalid SPIs packets detected. • TS check fail— Total number of TS check fail detected. • Discarded— Total number of discarded packets detected.

Sample Output

show security ipsec statistics

```

user@host> show security ipsec statistics
Virtual-system: Root
ESP Statistics:
  Encrypted bytes:          0
  Decrypted bytes:         0
  Encrypted packets:       0
  Decrypted packets:       0
AH Statistics:
  Input bytes:             0

```

```
Output bytes:          0
Input packets:         0
Output packets:        0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0
  Invalid SPI: 0, TS check fail: 0
  Discarded: 0
```

Sample Output

show security ipsec statistics index 131073

```
user@host> show security ipsec statistics index 131073
ESP Statistics:
  Encrypted bytes:          952
  Decrypted bytes:          588
  Encrypted packets:        7
  Decrypted packets:        7
AH Statistics:
  Input bytes:              0
  Output bytes:             0
  Input packets:            0
  Output packets:           0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0
  Invalid SPI: 0, TS check fail: 0
  Discarded: 0

  FC Name      Encrypted Pkts  Decrypted Pkts  Encrypted bytes  Decrypted bytes
  best-effort 7          7          952
588
  custom_q1    0          0          0
0
  custom_q2    0          0          0
0
  network-control 0      0          0
0
```


custom_q4	0	0	0
0			
custom_q5	0	0	0
0			
custom_q6	0	0	0
0			
custom_q7	0	0	0
0			
default	0	0	0
0			

Starting with Junos OS Release 18.2R1, the CLI **show security ipsec statistics index 131073 *index-number*** output displays statistics for each forwarding class name.

Sample Output

show security ipsec statistics fpc 6 pic 1 (SRX Series devices)

```

user@host> show security ipsec statistics fpc 6 pic 1
ESP Statistics:
Encrypted bytes:          536408
Decrypted bytes:          696696
Encrypted packets:        1246
Decrypted packets:        888
AH Statistics:
Input bytes:              0
Output bytes:             0
Input packets:            0
Output packets:           0
Errors:
AH authentication failures: 0, Replay errors: 0
ESP authentication failures: 0, ESP decryption failures: 0
Bad headers: 0, Bad trailers: 0
Invalid SPI: 0, TS check fail: 0
Discarded: 0

```

show security ipsec statistics ha-link-encryption (SRX5400, SRX5600, SRX5800)

Starting in Junos OS Release 20.4R1, when you configure the high availability (HA) feature, you can use this show command to view only interchassis link tunnel details. The following command displays only link encryption tunnel statistics on both nodes.

```
user@host> show security ipsec statistics ha-link-encryption
ESP Statistics:
  Encrypted bytes:          10376
  Decrypted bytes:          4996
  Encrypted packets:        96
  Decrypted packets:        96
AH Statistics:
  Input bytes:              0
  Output bytes:             0
  Input packets:            0
  Output packets:           0
Errors:
  AH authentication failures: 0, Replay errors: 0
  ESP authentication failures: 0, ESP decryption failures: 0
  Bad headers: 0, Bad trailers: 0
  Invalid SPI: 0, TS check fail: 0
  Discarded: 0
```

Release Information

Command introduced in Junos OS Release 8.5. **fpc** and **pic** options added in Junos OS Release 9.3.

Support for the **ha-link-encryption** option added in Junos OS Release 20.4R1.

RELATED DOCUMENTATION

| *clear security ipsec statistics*

show chassis ssb

IN THIS SECTION

- [Syntax | 1250](#)
- [Description | 1250](#)
- [Options | 1250](#)
- [Required Privilege Level | 1250](#)
- [Output Fields | 1251](#)
- [Sample Output | 1252](#)
- [Release Information | 1252](#)

Syntax

```
show chassis ssb  
<slot>
```

Description

(M20 routers only) Display status information about the System and Switch Board (SSB).

Options

none Display information about all SSBs.

slot (Optional) Display information about the SSB in the specified slot. Replace **slot** with **0** or **1**.

Required Privilege Level

view

Output Fields

Table 70 on page 1251 lists the output fields for the `show chassis ssb` command. Output fields are listed in the approximate order in which they appear.

Table 70: show chassis ssb Output Fields

Field Name	Field Description
Failover	Number of times primary role has changed.
Slot	SSB slot number.
State	Current state of the SSB in this slot. State can be any one of the following: • Master—SSB is online, operating as primary. • Backup—SSB running as backup. • Empty—No SSB is present.
Temperature	Temperature of the air passing by the SSB, in degrees Celsius.
CPU utilization	Total percentage of the CPU being used by the SSB's processor.
Interrupt utilization	Of the total CPU being used by the SSB's processor, the percentage being used for interrupts.
Heap utilization	Percentage of heap space being used by the SSB's processor.
Buffer utilization	Percentage of buffer space being used by the SSB's processor.
DRAM	Total DRAM available to the SSB's processor.
Start time	Time when the SSB started running.

Table 70: show chassis ssb Output Fields *(Continued)*

Field Name	Field Description
Uptime	How long the SSB has been up and running.

Sample Output

show chassis ssb

```

user@host> show chassis ssb
SSB status:
  Failover:                0 time
  Slot 0:
    State:                  Master
    Temperature:            33 Centigrade
    CPU utilization:        0 percent
    Interrupt utilization:   0 percent
    Heap utilization:       0 percent
    Buffer utilization:      6 percent
    DRAM:                   64 Mbytes
    Start time:             1999-01-15 22:05:36 UTC
    Uptime:                 21 hours, 21 minutes, 22 seconds
  ...

```

Release Information

Command introduced before Junos OS Release 7.4.

show nonstop-routing

IN THIS SECTION

● [Syntax](#) | [1253](#)

- [Description | 1253](#)
- [Required Privilege Level | 1253](#)
- [Output Fields | 1253](#)
- [Sample Output | 1256](#)
- [Release Information | 1257](#)

Syntax

```
show nonstop-routing
```

Description

Display the status of nonstop active routing that includes the automerger statistics and state.

Required Privilege Level

View

Output Fields

[Table 71 on page 1253](#) describes the output fields for the **show nonstop-routing** command. Output fields are listed in the approximate order in which they appear.

Table 71: show nonstop-routing Output Fields

Field Name	Field Description
Nonstop Routing	State of NSR.

Table 71: show nonstop-routing Output Fields *(Continued)*

Field Name	Field Description
Precision Timers state	State of precision timer feature in the kernel. • Enabled By default, autokeepalive precision timers are enabled on the kernel after switchover. • Disabled Autokeepalive precision timers are disabled. • Inactive Precision timer is inactive if it is disabled. • Ready Kernel precision timer is ready but is never activated. • InProcess Kernel precision timer is operational and is generating keepalives on behalf of the RPD after switchover. The / count indicates the number of sessions being serviced against the total sessions. • Completed Kernel has completed keepalive generation for all the sessions after switchover, and RPD has taken over all of them successfully. • Error Error while retrieving the precision timer status of the kernel.
Precision Timers max period	Maximum period, in seconds, after the switchover from standby to primary event for which the kernel autogenerates keepalives on behalf of BGP.
Automerge	Status of the automerge. • Active Automerge of sockets by the kernel after switchover is active. • Inactive Automerge of sockets by the kernel after switchover is inactive.

Table 71: show nonstop-routing Output Fields *(Continued)*

Field Name	Field Description
Batching	Status of Batching. • Yes Automerge of sockets by the kernel after a switchover. • No Automerge of sockets by the kernel after switchover is inactive.
Batch count	Number of sockets merged per batch.
Batch count adjust	Speed at which the batch count is adjusted. • Slow Number of sockets merged per batch is incremented additively. • Exp Number of sockets merged per batch is incremented exponentially. • None Number of sockets merged per batch remains constant.
Batch interval	Time interval between batches of automerge operation.
Batch interval adjust	Speed at which the batch interval is adjusted. • Exp Time interval between automerge of batches is increased exponentially. • None Time interval between automerge of batches is not adjusted.

Table 71: show nonstop-routing Output Fields (Continued)

Field Name	Field Description
Automerge State	State of the automerge • Ready Ready to automerge socket pairs from secondary to primary routing engine • InProgress Kernel is performing automerge after switchover • Switchover Completed Sessions merged after switchover
Sessions Processed	Count of sessions that are automerged.

Sample Output

show nonstop-routing (MX Series Router)

```

user@host show nonstop-routing
Nonstop Routing : Enabled
  Precision Timers state: Enabled: Completed - 0/0
  Precision Timers max period: 200
  Automerge : Active
  Batching: No
  Batch count: 200
  Batch count adjust: Exponential
  Batch interval: 20 msec
  Batch interval adjust: None
  Automerge State: Ready
  Sessions Processed: 0

```

show nonstop-routing (MX Series Router)

```
user@host> show nonstop-routing

Nonstop Routing : Enabled
    Automerge : Active
    Batching: Yes
    Batch count: 500
    Batch count adjust: Slow
    Batch interval: 50 msec
    Batch interval adjust: None
    Automerge State: Ready
    Sessions Processed: 0
```

Release Information

Command introduced in Junos OS Release 13.3.

RELATED DOCUMENTATION

| [nonstop-routing](#) | [768](#)

show pfe ssb

IN THIS SECTION

- [Syntax](#) | [1258](#)
- [Description](#) | [1258](#)
- [Options](#) | [1258](#)
- [Required Privilege Level](#) | [1258](#)
- [Output Fields](#) | [1258](#)
- [Sample Output](#) | [1262](#)
- [Release Information](#) | [1265](#)

Syntax

```
show pfe ssb
```

Description

(M20 routers only) Display Packet Forwarding Engine System and Switch Board (SSB) status and statistics information.

Options

This command has no options.

Required Privilege Level

admin

Output Fields

[Table 72 on page 1258](#) lists the output fields for the **show pfe ssb** command. Output fields are listed in the approximate order in which they appear.

Table 72: show pfe ssb Output Fields

Field Name	Field Description
Uptime (total)	SSB uptime.
Failures	Number of failures .
Pending	Number of pending.
Peer message type receive qualifiers	Information about Peer message type receive qualifiers.

Table 72: show pfe ssb Output Fields *(Continued)*

Field Name	Field Description
Message Type	Peer message type.
Receive Qualifier	Peer receive qualifier.
TTP	Peer message type TTP.
IFD	Peer message type IFD.
IFL	Peer message type IFL.
Nexthop	Peer message type Nexthop.
COS	Peer message type COS.
Route	Peer message type Route.
SW Firewall	Peer message type SW Firewall.
HW Firewall	Peer message type HW Firewall.
PFE Statistics	Peer message type PFE Statistics.
PIC Statistics	Peer message type PIC Statistics.
Sampling	Peer message type Sampling .
Monitoring	Peer message type Monitoring.
ASP	Peer message type ASP.

Table 72: show pfe ssb Output Fields *(Continued)*

Field Name	Field Description
L2TP	Peer message type L2TP.
Collector	Peer message type Collector.
PIC Configuration	Peer message type PIC Configuration.
Queue Statistics	Peer message type Queue Statistics.
PFE Listener statistics	Information about Packet Forwarding Engine listener statistics: • Open—Number of PFE listeners in the “open” state. • Close—Number of PFE listeners in the “close” state. • Sleep—Number of PFE listeners in the “sleep” state. • Wakeup—Number of PFE listeners in the “wakeup” state. • Resync Request—Number of PFE listeners in the “resync request” state. • Resync Done—Number of PFE listeners in the “resync done” state. • Resync Fail—Number of PFE listeners in the “resync fail” state • Resync Time—Number of PFE listeners in the resync time state.

Table 72: show pfe ssb Output Fields *(Continued)*

Field Name	Field Description
PFE IPC statistics	Information about Packet Forwarding Engine IPC statistics. • type—Type of IPC message. • Header—IPC message type Header. • Test—IPC message type Test. • Interface—IPC message type Interface. • Chassis—IPC message type Chassis. • Boot—IPC message type Boot • Next-hop—IPC message type Next-hop. • Jtree—IPC message type Jtree. • Cprod—IPC message type Cprod. • Route—IPC message type Route. • Pfe—IPC message type PFE. • Dfw—IPC message type Dfw. • Mastership—IPC message type Primary Role. • Sampling—IPC message type Sampling. • GUCP—IPC message type GUCP. • CoS—IPC message type CoS. • GCCP—IPC message type GCCP. • GHCP—IPC message type GHCP. • IRSD—IPC message type IRSD. • Monitoring—IPC message type Monitoring.

Table 72: show pfe ssb Output Fields *(Continued)*

Field Name	Field Description
	• RE—IPC message type RE. • PIC—IPC message type PIC. • ASP cfg—IPC message type ASP configuration. • ASP cmd—IPC message type ASP command.. • L2TP cfg—IPC message type L2TP configuration. • Collector—IPC message type Collector. • PIC state—IPC message type PIC state. • Aggregator—IPC message type Aggregate. • Empty—IPC message type Empty. • PFE socket-buffer mbuf depth—Information about Packet Forwarding Engine socket-buffer depth • bucket—mbuf bucket value. • count—mbuf count value. •
PFE socket-buffer bytes pending transmit—	Information about Packet Forwarding Engine socket-buffer bytes pending for transmit. • TX Messages—Number of transmitted messages. • RX messages—Number of received messages.

Sample Output

show pfe ssb

```
user@host> show pfe ssb
SSB status:
```

```

Slot:                Present
State:               Online
Last State Change:   2005-03-06 03:10:28 PST
Uptime (total):      11:23:27
Failures:            0
Pending:             0

```

Peer message type receive qualifiers:

Message Type	Receive Qualifier
-----	-----
TTP	Slot only
IFD	All
IFL	All
Nexthop	All
COS	All
Route	All
SW Firewall	All
HW Firewall	All
PFE Statistics	All
PIC Statistics	None
Sampling	All
Monitoring	None
ASP	None
L2TP	None
Collector	None
PIC Configuration	None
Queue Statistics	None
(null)	None

PFE listener statistics:

```

Open:                1
Close:               0
Sleep:               0
Wakeup:              0
Resync Request:      0
Resync Done:         1
Resync Fail:         0
Resync Time:         0

```

PFE IPC statistics:

type	TX Messages	RX messages

Header	0	0
Test	0	0
Interface	737	9911
Chassis	0	0
Boot	0	0
Next-hop	48	0
Jtree	0	0
Cprod	0	0
Route	94	0
Pfe	2034	683
Dfw	8	0
Mastership	0	0
Sampling	0	0
GUCP	0	0
CoS	73	0
GCCP	0	0
GHCP	0	0
IRSD	0	0
Monitoring	0	0
RE	0	0
PIC	0	0
ASP cfg	0	0
ASP cmd	0	0
L2TP cfg	0	0
Collector	0	0
PIC state	0	0
Aggregator	0	0
Empty	0	0

PFE socket-buffer mbuf depth:

bucket	count
-----	-----
0	0
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0

```

10          0
11          0
12          0
13          0
14          0
15          0
16          0
17          0
18          0
19          0
20          0
21          0

PFE socket-buffer bytes pending transmit:
bucket      count
-----
0           0
1           0
2           0
3           0
4           0
5           0
6           0
7           0
8           0
9           0
10          0
11          0
12          0
13          0
14          0
15          0
16          0
17          0
18          0
19          0
20          0
21          0
```

Release Information

Command introduced before Junos OS Release 7.4.

show system switchover

IN THIS SECTION

- [Syntax | 1266](#)
- [Syntax \(TX Matrix Router\) | 1266](#)
- [Syntax \(TX Matrix Plus Router\) | 1266](#)
- [Syntax \(MX Series Router\) | 1267](#)
- [Description | 1267](#)
- [Options | 1267](#)
- [Additional Information | 1269](#)
- [Required Privilege Level | 1269](#)
- [Output Fields | 1269](#)
- [Sample Output | 1270](#)
- [Release Information | 1272](#)

Syntax

```
show system switchover
```

Syntax (TX Matrix Router)

```
show system switchover  
<all-chassis | all-lcc | lcc number | scc>
```

Syntax (TX Matrix Plus Router)

```
show system switchover  
<all-chassis | all-lcc | lcc number | sfc number>
```

Syntax (MX Series Router)

```
show system switchover
<all-members>
<local>
<member member-id>
```

Description

Display whether graceful Routing Engine switchover is configured, the state of the kernel replication (ready or synchronizing), any replication errors, and whether the primary and standby Routing Engines are using compatible versions of the kernel database.

NOTE: Issue the **show system switchover** command *only* on the backup Routing Engine. This command is *not* supported on the primary Routing Engine because the **kernel-replication** process daemon does not run on the primary Routing Engine. This process runs only on the backup Routing Engine.

Beginning Junos OS Release 9.6, the **show system switchover** command has been deprecated on the primary Routing Engine on all routers other than a TX Matrix (switch-card chassis) or a TX Matrix Plus (switch-fabric chassis) router.

However, in a routing matrix, if you issue the **show system switchover** command on the primary Routing Engine of the TX Matrix router (or switch-card chassis), the CLI displays graceful switchover information for the primary Routing Engine of the T640 routers (or line-card chassis) in the routing matrix. Likewise, if you issue the **show system switchover** command on the primary Routing Engine of a TX Matrix Plus router (or switch-fabric chassis), the CLI displays output for the primary Routing Engine of T1600 or T4000 routers in the routing matrix.

Options

all-chassis (TX Matrix routers and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display graceful Routing Engine switchover information for all Routing Engines on the TX Matrix router and the T640 routers configured in the routing matrix. On a TX Matrix Plus router, display graceful Routing Engine switchover information for all Routing Engines on the TX Matrix Plus router and the T1600 or T4000 routers configured in the routing matrix.

all-lcc	(TX Matrix routers and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display graceful Routing Engine switchover information for all T640 routers (or line-card chassis) connected to the TX Matrix router. On a TX Matrix Plus router, display graceful Routing Engine switchover information for all connected T1600 or T4000 LCCs. Note that in this instance, packets get dropped. The LCCs perform GRES on their own chassis (GRES cannot be handled by one particular chassis for the entire router) and synchronization is not possible as the LCC plane bringup time varies for each LCC. Therefore, when there is traffic on these planes, there may be a traffic drop.
all-members	(MX Series routers only) (Optional) Display graceful Routing Engine switchover information for all Routing Engines on all members of the Virtual Chassis configuration.
lcc <i>number</i>	(TX Matrix routers and TX Matrix Plus routers only) (Optional) On a TX Matrix router, display graceful Routing Engine switchover information for a specific T640 router connected to the TX Matrix router. On a TX Matrix Plus router, display graceful Routing Engine switchover information for a specific router connected to the TX Matrix Plus router. Replace <i>number</i> with the following values depending on the LCC configuration: • 0 through 3, when T640 routers are connected to a TX Matrix router in a routing matrix. • 0 through 3, when T1600 routers are connected to a TX Matrix Plus router in a routing matrix. • 0 through 7, when T1600 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix. • 0, 2, 4, or 6, when T4000 routers are connected to a TX Matrix Plus router with 3D SIBs in a routing matrix.
local	(MX Series routers only) (Optional) Display graceful Routing Engines switchover information for all Routing Engines on the local Virtual Chassis member.
member <i>member-id</i>	(MX Series routers only) (Optional) Display graceful Routing Engine switchover information for all Routing Engines on the specified member of the Virtual Chassis configuration. Replace <i>member-id</i> with a value of 0 or 1.
scc	(TX Matrix router only) (Optional) Display graceful Routing Engine switchover information for the TX Matrix router (or switch-card chassis).
sfc	(TX Matrix Plus routers only) (Optional) Display graceful Routing Engine switchover information for the TX Matrix Plus router.

Additional Information

If you issue the **show system switchover** command on a TX Matrix backup Routing Engine, the command is broadcast to all the T640 backup Routing Engines that are connected to it.

Likewise, if you issue the **show system switchover** command on a TX Matrix Plus backup Routing Engine, the command is broadcast to all the T1600 or T4000 backup Routing Engines that are connected to it.

If you issue the **show system switchover** command on the active Routing Engine in the primary router of an MX Series Virtual Chassis, the router displays a message that this command is not applicable on this member of the Virtual Chassis.

Required Privilege Level

view

Output Fields

[Table 73 on page 1269](#) describes the output fields for the **show system switchover** command. Output fields are listed in the approximate order in which they appear.

Table 73: show system switchover Output Fields

Field Name	Field Description
Graceful switchover	Display graceful Routing Engine switchover status: • On—Indicates graceful-switchover is specified for the routing-options configuration command. • Off—Indicates graceful-switchover is not specified for the routing-options configuration command.
Configuration database	State of the configuration database: • Ready—Configuration database has synchronized. • Synchronizing—Configuration database is synchronizing. Displayed when there are updates within the last 5 seconds. • Synchronize failed—Configuration database synchronize process failed.

Table 73: show system switchover Output Fields (Continued)

Field Name	Field Description
Kernel database	State of the kernel database: • Ready—Kernel database has synchronized. This message implies that the system is ready for GRES. • Synchronizing—Kernel database is synchronizing. Displayed when there are updates within the last 5 seconds. • Version incompatible—The primary and standby Routing Engines are running incompatible kernel database versions. • Replication error—An error occurred when the state was replicated from the primary Routing Engine. Inspect Steady State for possible causes, or notify Juniper Networks customer support.
Peer state	Routing Engine peer state: This field is displayed only when ksyncd is running in multichassis mode (LCC primary). • Steady State—Peer completed switchover transition. • Peer Connected—Peer in switchover transition.
Switchover Status	Switchover Status: • Ready—Message for system being switchover ready. • Not Ready—Message for system not being ready for switchover.

Sample Output

show system switchover (Backup Routing Engine - Ready)

```

user@host> show system switchover
Graceful switchover: On
Configuration database: Ready

```

```
Kernel database: Ready
Peer state: Steady State
Switchover Status: Ready
```

Switchover Status: Ready is the way the last line of the output reads if you are running Junos OS Release 16.1R1 or later. If you are running Junos OS Release 15.x, the last line of the output reads as Switchover Ready, for example:

```
user@host> show system switchover
Graceful switchover: On
Configuration database: Ready
Kernel database: Ready
Switchover Ready
```

show system switchover (Backup Routing Engine - Not Ready)

```
user@host> show system switchover
Graceful switchover: On
Configuration database: Ready
Kernel database: Ready
Peer state: Steady State
Switchover Status: Not Ready
```

Switchover Status: Not Ready is the way the last line of the output reads if you are running Junos OS Release 16.1R1 or later. If you are running Junos OS Release 15.x, the last line of the output reads as Not ready for primary role switch, try after xxx secs, for example:

```
user@host> show system switchover
Graceful switchover: On
Configuration database: Ready
Kernel database: Ready
Not ready for mastership switch, try after xxx secs.
```

show system switchover all-lcc (Routing Matrix and Routing Matrix Plus)

```
user@host> show system switchover all-lcc

lcc0-re0:
```



```

-----
Multichassis replication: On
Configuration database: Ready
Kernel database: Ready
Peer state: Steady State
Switchover Status: Ready

```

```
lcc2-re0:
```

```

-----
Multichassis replication: On
Configuration database: Ready
Kernel database: Ready
Peer state: Steady State
Switchover Status: Ready

```

Release Information

Command introduced before Junos OS Release 7.4.

sfc option introduced for the TX Matrix Plus router in Junos OS Release 9.6.

RELATED DOCUMENTATION

| [Routing Matrix with a TX Matrix Plus Router Solutions Page](#)

show task replication

IN THIS SECTION

- [Syntax | 1273](#)
- [Description | 1273](#)
- [Options | 1273](#)
- [Required Privilege Level | 1273](#)
- [Output Fields | 1273](#)
- [Sample Output | 1274](#)

Syntax

```
show task replication
```

Description

Displays nonstop active routing (NSR) status. When you issue this command on the primary Routing Engine, the status of nonstop active routing synchronization is also displayed.



CAUTION: If BGP is configured, before attempting nonstop active routing switchover, check the output of **show bgp replication** to confirm that BGP routing table synchronization has completed on the backup Routing Engine. The **complete** status in the output of **show task replication** only indicates that the socket replication has completed and the BGP synchronization is in progress.

To determine whether BGP synchronization is complete, you must check the **Protocol state** and **Synchronization state** fields in the output of **show bgp replication** on the primary Routing Engine. The **Protocol state** must be **idle** and the **Synchronization state** must be **complete**. If you perform NSR switchover before the BGP synchronization has completed, the BGP session might flap.

Options

This command has no options.

Required Privilege Level

view

Output Fields

[Table 74 on page 1274](#) lists the output fields for the **show task replication** command. Output fields are listed in the approximate order in which they appear.

Table 74: show task replication Output Fields

Field Name	Field Description
Stateful replication	Displays whether or not graceful Routing Engine switchover is configured. The status can be Enabled or Disabled .
RE mode	Displays the Routing Engine on which the command is issued: Master , Backup , or Not applicable (when the router has only one Routing Engine).
Protocol	Protocols that are supported by nonstop active routing.
Synchronization Status	Nonstop active routing synchronization status for the supported protocols. States are NotStarted, InProgress, and Complete. Synchronization states are shown for each of the supported protocols that are running on the device at that moment.

Sample Output

show task replication (Issued on the Primary Routing Engine)

```

user@host> show task replication
    Stateful Replication: Enabled
    RE mode: Master

    Protocol                Synchronization Status
    -----
    OSPF                    NotStarted
    BGP                     Complete
    IS-IS                   NotStarted
    LDP                     Complete
    PIM                     Complete

```

show task replication (Issued on the Backup Routing Engine)

```
user@host> show task replication
Stateful Replication: Enabled
RE mode: Backup
```

show task replication (Junos OS Evolved)

In Junos OS Evolved, both the primary and backup Routings have the same CLI output. If you configured any protocol, you should see the synchronization state for the same.

```
user@host> show task replication

Stateful Replication: Enabled
RE mode: Master

Protocol                Synchronization Status
-----
OSPF                    NotStarted
BGP                     Complete
IS-IS                   NotStarted
LDP                     Complete
PIM                     Complete
```

Release Information

Command introduced in Junos OS Release 8.5.

Support for logical systems introduced in Junos OS Release 13.3

RELATED DOCUMENTATION

[Example: Configuring Nonstop Active Routing on Switches](#) | 301

show vrrp

IN THIS SECTION

- [Syntax | 1276](#)
- [Description | 1276](#)
- [Options | 1276](#)
- [Required Privilege Level | 1277](#)
- [Output Fields | 1277](#)
- [Sample Output | 1289](#)
- [Release Information | 1296](#)

Syntax

```
show vrrp
<brief | detail | extensive | summary>
<interface interface-name <group number>>
<logical-system logical-system-name >
<nsr>
```

Description

Display status information about Virtual Router Redundancy Protocol (VRRP) groups.

Options

none	(Same as brief) Display brief status information about all VRRP interfaces.
brief detail extensive summary	(Optional) Display the specified level of output.
interface <i>interface-name</i> <group number>	(Optional) Display information and status about the specified VRRP interface and, optionally, the group number.

logical-system <i>logical-system-name</i>	(Optional) Perform this operation on a particular logical system.
nsr	(Optional) Display state replication information when graceful Routing Engine switchover (GRES) with nonstop active routing (NSR) is configured. Use only on the backup Routing Engine.

Required Privilege Level

view

Output Fields

[Table 75 on page 1277](#) lists the output fields for the **show vrrp** command. Output fields are listed in the approximate order in which they appear

Table 75: show vrrp Output Fields

Field Name	Field Description	Level of Output
Interface	Name of the logical interface.	brief extensive none summary
Interface index	Physical interface index number, which reflects its initialization sequence.	extensive
Groups	Total number of VRRP groups configured on the interface.	extensive
Active	Total number of VRRP groups that are active (that is, whose interface state is either up or down).	extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Interface VRRP PDU statistics	Non-errored statistics for the logical interface: • Advertisement sent—Number of VRRP advertisement protocol data units (PDUs) that the interface has transmitted. • Advertisement received—Number of VRRP advertisement PDUs received by the interface. • Packets received—Number of VRRP packets received for VRRP groups on the interface. • No group match received—Number of VRRP packets received for VRRP groups that do not exist on the interface.	extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Interface VRRP PDU error statistics	Errored statistics for the logical interface: • Invalid IPAH next type received—Number of packets received that use the IP Authentication Header protocol (IPAH) and that do not encapsulate VRRP packets. • Invalid VRRP ttl value received—Number of packets received whose IP time- to-live (TTL) value is not 255. • Invalid VRRP version received—Number of packets received whose VRRP version is not 2. • Invalid VRRP pdu type received—Number of packets received whose VRRP PDU type is not 1. • Invalid VRRP authentication type received—Number of packets received whose VRRP authentication is not none, simple, or md5. • Invalid VRRP IP count received—Number of packets received whose VRRP IP count exceeds 8. • Invalid VRRP checksum received—Number of packets received whose VRRP checksum does not match the calculated one.	extensive
Physical interface	Name of the physical interface.	detail extensive
Unit	Logical unit number.	All levels
Address	Address of the physical interface.	brief detail extensive none
Index	Physical interface index number, which reflects its initialization sequence.	detail extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
SNMP ifIndex	SNMP index number for the physical interface.	detail extensive
VRRP-Traps	Status of VRRP traps: Enabled or Disabled .	detail extensive
VRRP-Version	VRRP version: 2 or 3 .	detail extensive
Type and Address	Identifier for the address and the address itself: • lcl—Configured local interface address. • mas—Address of the primary virtual router. This address is displayed only when the local interface is acting as a backup router. • vip—Configured virtual IP addresses.	brief none summary
Interface state/Int state/State	State of the physical interface: • down—The device is present and the link is unavailable. • not present—The interface is configured, but no physical device is present. • unknown—The VRRP process has not had time to query the kernel about the state of the interface. • up—The device is present and the link is established.	brief extensive none summary
Group	VRRP group number.	brief extensive none summary

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
State	The state of the interface on which VRRP is running: • backup—The interface is acting as the backup router interface. • bringup—VRRP is just starting and the physical device is not yet present. • idle—VRRP is configured on the interface and is disabled. This can occur when VRRP is first enabled on an interface whose link is established. • init—VRRP is initializing. • master—The interface is acting as the primary router interface. • master(ISSU)—The primary router interface is going through a unified in-service software upgrade. • transition—The interface is changing between being the backup and being the primary router.	extensive
VRRP Mode	If the interface inherits its state and configuration from the active VRRP group, or if it is part of the active VRRP group. • Active—Part of the active VRRP group • Inherit—Inherits state and configuration from the active VRRP group.	detail extensive
Priority	Configured VRRP priority for the interface.	detail extensive
Advertisement interval	Configured VRRP advertisement interval.	detail extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Authentication type	Configured VRRP authentication type: none , simple , or md5 .	detail extensive
Advertisement Threshold	A value from 1 through 15, used for setting the time when a peer should be considered down. - The time a peer is considered down is equal to the advertisement-threshold multiplied by the advertisement-interval. (advertisement-threshold *advertisement-interval) = Peer down.	detail extensive
Computed Send Rate	How many protocol data units (PDUs) are generated per second. Based on the number of instances and the advertisement interval.	detail extensive
Preempt	Whether preemption is allowed on the interface: yes or no .	detail extensive
Accept-data mode	Whether the interface is configured to accept packets destined for the virtual IP address: yes or no .	detail extensive
VIP count	Number of virtual IP addresses that have been configured on the interface.	detail extensive
VIP	List of virtual IP addresses configured on the interface.	detail extensive
Advertisement timer	How long, in seconds, until the advertisement timer expires.	detail extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Master router	IP address of the interface that is acting as the primary. If the VRRP interface is down, the output is N/A .	detail extensive
Virtual router uptime	How long, in seconds, that the virtual router has been up.	detail extensive
Master router uptime	How long, in seconds, that the primary route has been up.	detail extensive
Virtual MAC	MAC address associated with the virtual IP address.	detail extensive
Tracking	Whether tracking is enabled or disabled .	detail extensive
Current priority	Current operational priority for being the VRRP primary.	detail extensive
Configured priority	Configured base priority for being the VRRP primary.	detail extensive
Priority hold-time	Minimum time interval, in seconds, between successive changes to the current priority. Disabled indicates no minimum interval.	detail extensive
Remaining-time	(track option only) Displays the time remaining in the priority hold-time interval.	detail
Interface tracking	Whether interface tracking is enabled or disabled. When enabled, the output also displays the number of tracked interfaces.	detail extensive
Interface/Tracked interface/Track Int	Name of the tracked interface.	detail extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Int state/Interface state/State	Current operational state of the tracked interface: up or down .	detail extensive
Int speed/Speed	Current operational speed, in bits per second, of the tracked interface.	detail extensive
Incurred priority cost	Operational priority cost incurred due to the state and speed of this tracked interface. This cost is applied to the configured priority to obtain the current priority.	detail extensive
Threshold	Speed below which the corresponding priority cost is incurred. In other words, when the speed of the interface drops below the threshold speed, the corresponding priority cost is incurred. An entry of down means that the corresponding priority cost is incurred when the interface is down.	detail extensive
Route tracking	Whether route tracking is enabled or disabled. When enabled, the output also displays the number of tracked routes.	detail extensive
Route count	The number of routes being tracked.	detail extensive
Route	The IP address of the route being tracked.	detail extensive
VRF name	The VPN routing and forwarding (VRF) routing instance that the tracked route is in.	detail extensive
Route state	The state of the route being tracked: up , down , or unknown .	detail extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Priority cost	Configured priority cost. This value is incurred when the interface speed drops below the corresponding threshold or when the tracked route goes down.	detail extensive
Active	Whether the threshold is active (*). If the threshold is active, the corresponding priority cost is incurred.	detail extensive
Group VRRP PDU statistics	Number of VRRP advertisements sent and received by the group.	extensive

Table 75: show vrrp Output Fields (*Continued*)

Field Name	Field Description	Level of Output
Group VRRP PDU error statistics	Errored statistics for the VRRP group: • Bad authentication type received—Number of VRRP PDUs received with an invalid authentication type. The received authentication can be none, simple, or md5 and must be the same for all routers in the VRRP group. • Bad password received—Number of VRRP PDUs received with an invalid key (password). The password for simple authentication must be the same for all routers in the VRRP group • Bad MD5 digest received—Number of VRRP PDUs received for which the MD5 digest computed from the VRRP PDU differs from the digest expected by the VRRP instance configured on the router. • Bad advertisement timer received—Number of VRRP PDUs received with an advertisement time interval that is inconsistent with the one in use among the routers in the VRRP group. • Bad VIP count received—Number of VRRP PDUs whose virtual IP address counts differ from the count that has been configured on the VRRP instance. • Bad VIPADDR received—Number of VRRP PDUs whose virtual IP addresses differ from the list of virtual IP addresses configured on the VRRP instance.	extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
Group state transition statistics	State transition statistics for the VRRP group: • Idle to master transitions—Number of times that the VRRP instance transitioned from the idle state to the primary state. • Idle to backup transitions—Number of times that the VRRP instance transitioned from the idle state to the backup state. • Backup to master transitions—Number of times that the VRRP instance transitioned from the backup state to the primary state. • Master to backup transitions—Number of times that the VRRP instance transitioned from the primary state to the backup state.	extensive

Table 75: show vrrp Output Fields *(Continued)*

Field Name	Field Description	Level of Output
VR state	The state of the VRRP: • backup—The interface is acting as the backup router interface. • bringup—VRRP is just starting, and the physical device is not yet present. • idle—VRRP is configured on the interface and is disabled. This can occur when VRRP is first enabled on an interface whose link is established. • init—VRRP is initializing. • master—The interface is acting as the primary router interface. • transition—The interface is changing between being the backup and being the primary router. NOTE: When show vrrp nsr is used on the backup Routing Engine, it displays the current VRRP state on the primary Routing Engine, which is the future VRRP state for the backup Routing Engine. Do not use on the primary Routing Engine.	brief none summary

Table 75: show vrrp Output Fields (Continued)

Field Name	Field Description	Level of Output
NSR	VRRP nonstop active routing is enabled for the configured VRRP group: yes or no. NOTE: A yes value means that the new primary Routing Engine will immediately start with the VRRP State value from the original primary Routing Engine. A no value means that the VRRP session will: • Start afresh. • Go through asilent startup period. • Move to a backup state. • Wait for the D Timer to run out before becoming the primary (only if the primary has not been configured already).	brief none
RPD-NSR	The routing options have been set to nonstop active routing: yes or no .	brief none
Timer	VRRP timer information: • A—How long, in seconds, until the advertisement timer expires. • D—How long, in seconds, until the Primary is Down timer expires.	brief none

Sample Output

show vrrp

```

user@host> show vrrp
Interface      State      Group      VR state      Timer
Type      Address
fe-0/0/0.121  up         1          master        A 1.052

```

```

lcl      fec0::12:1:1:1
                                     vip
fe80::12:1:1:99
                                     vip
fec0::12:1:1:99
fe-0/0/2.131    up                1      master    A 0.364    lcl
fec0::13:1:1:1
                                     vip
fe80::13:1:1:99
                                     vip
fec0::13:1:1:99

```

show vrrp brief

The output for the **show vrrp brief** command is identical to that for the **show vrrp** command. For sample output, see ["show vrrp" on page 1289](#).

show vrrp detail (IPv6)

```

user@host> show vrrp detail
Physical interface: fe-0/0/0, Unit: 121, Vlan-id: 212, Address:
fec0::12:1:1:1/120
  Index: 67, SNMP ifIndex: 45, VRRP-Traps: enabled
  Interface state: up, Group: 1, State: master, VRRP Mode: Active
  Priority: 200, Advertisement interval: 1, Authentication type: none
  Advertisement threshold: 3, Computed send rate: 0
  Preempt: yes, Accept-data mode: no, VIP count: 2, VIP: fe80::12:1:1:99,
fec0::12:1:1:99
  Advertisement timer: 1.121s, Master router: fe80::12:1:1:1
  Virtual router uptime: 00:03:47, Master router uptime: 00:03:41
  Virtual MAC: 00:00:5e:00:02:01
  Tracking: disabled

Physical interface: fe-0/0/2, Unit: 131, Vlan-id: 213, Address:
fec0::13:1:1:1/120
  Index: 69, SNMP ifIndex: 47, VRRP-Traps: enabled
  Interface state: up, Group: 1, State: master
  Priority: 200, Advertisement interval: 1, Authentication type: none
  Preempt: yes, Accept-data mode: no, VIP count: 2, VIP: fe80::13:1:1:99,
fec0::13:1:1:99
  Advertisement timer: 0.327s, Master router: fe80::13:1:1:1

```

```

Virtual router uptime: 00:03:47, Master router uptime: 00:03:41
Virtual MAC: 00:00:5e:00:02:01
Tracking: disabled

```

show vrrp detail (Route Track)

```

user@host> show vrrp detail
Physical interface: ge-0/0/0, Unit: 1, Vlan-id: 1, Address: 101.1.1.1/24
  Index: 324, SNMP ifIndex: 623, VRRP-Traps: enabled, VRRP-Version: 2
  Interface state: up, Group: 1, State: master(ISSU), VRRP Mode: Active
  Priority: 200, Advertisement interval: 1, Authentication type: none
  Advertisement threshold: 3, Computed send rate: 0
  Preempt: yes, Accept-data mode: no, VIP count: 1, VIP: 101.1.1.3
  Advertisement Timer: 0.469s, Master router: 101.1.1.1
  Virtual router uptime: 00:02:10, Master router uptime: 00:02:05
  Virtual Mac: 00:00:5e:00:01:01
  Tracking: disabled

```

show vrrp detail (Route Track)

```

user@host> show vrrp detail
Physical interface: ge-1/2/0, Unit: 0, Address: 30.30.30.30/24
  Index: 67, SNMP ifIndex: 379, VRRP-Traps: enabled, VRRP-Version: 2
  Interface state: up, Group: 100, State: master
  Priority: 150, Advertisement interval: 1, Authentication type: none
  Preempt: yes, Accept-data mode: no, VIP count: 1, VIP: 30.30.30.100
  Advertisement timer: 1.218s, Master router: 30.30.30.30
  Virtual router uptime: 00:04:28, Master router uptime: 00:00:13
  Virtual MAC: 00:00:5e:00:01:64
  Tracking: enabled
    Current priority: 150, Configured priority: 150
    Priority hold-time: disabled
    Interface tracking: disabled
    Route tracking: enabled, Route count: 1

```

Route	VRF name	Route state	Priority cost
192.168.40.0/22	default	up	30

show vrrp extensive

```

user@host> show vrrp extensive
Interface: ge-2/0/0.0, Interface index :65539, Groups: 1, Active :1

  Interface VRRP PDU statistics
    Advertisement sent                :0
    Advertisement received             :0
    Packets received                   :0
    No group match received             :0

  Interface VRRP PDU error statistics
    Invalid IPAH next type received    :0
    Invalid VRRP TTL value received    :0
    Invalid VRRP version received      :0
    Invalid VRRP PDU type received     :0
    Invalid VRRP authentication type received:0
    Invalid VRRP IP count received     :0
    Invalid VRRP checksum received     :0

Physical interface: ge-2/0/0, Unit: 0, Address: 10.10.10.1/24
Index: 65539, SNMP ifIndex: 648, VRRP-Traps: enabled, VRRP-Version: 3
Interface state: up, Group: 1, State: backup, VRRP Mode: Active
Priority: 100, Advertisement interval: 1, Authentication type: none
Advertisement threshold: 3, Computed send rate: 0
Preempt: yes, Accept-data mode: no, VIP count: 1, VIP: 10.10.10.2
Dead timer: 3.078s, Master priority: 0, Master router: 10.10.10.1
Virtual router uptime: 00:00:04
Tracking: disabled

  Group VRRP PDU statistics
    Advertisement sent                :0
    Advertisement received             :0

  Group VRRP PDU error statistics
    Bad authentication Type received   :0
    Bad password received               :0
    Bad MD5 digest received             :0
    Bad advertisement timer received    :0
    Bad VIP count received              :0
    Bad VIPADDR received               :0

  Group state transition statistics
    Idle to master transitions          :0
    Idle to backup transitions         :1

```

Backup to master transitions	:0
Master to backup transitions	:0

show vrrp interface

```
user@host> show vrrp interface ge-0/0/0.1
```

```
Interface: ge-0/0/0.1, Interface index :324, Groups: 2, Active :2
```

Interface VRRP PDU statistics

Advertisement sent	:39
Advertisement received	:0
Packets received	:0
No group match received	:0

Interface VRRP PDU error statistics

Invalid IPAH next type received	:0
Invalid VRRP TTL value received	:0
Invalid VRRP version received	:0
Invalid VRRP PDU type received	:0
Invalid VRRP authentication type received	:0
Invalid VRRP IP count received	:0
Invalid VRRP checksum received	:0

```
Physical interface: ge-0/0/0, Unit: 1, Vlan-id: 1, Address: 101.1.1.1/24
```

```
Index: 324, SNMP ifIndex: 623, VRRP-Traps: enabled, VRRP-Version: 2
```

```
Interface state: up, Group: 1, State: master(ISSU), VRRP Mode: Active
```

```
Advertisement threshold: 3, Computed send rate: 0
```

```
Priority: 200, Advertisement interval: 1, Authentication type: none
```

```
Advertisement threshold: 3, Computed send rate: 0
```

```
Preempt: yes, Accept-data mode: no, VIP count: 1, VIP: 101.1.1.3
```

```
Advertisement Timer: 0.619s, Master router: 101.1.1.1
```

```
Virtual router uptime: 00:00:22, Master router uptime: 00:00:17
```

```
Virtual Mac: 00:00:5e:00:01:01
```

```
Tracking: disabled
```

Group VRRP PDU statistics

Advertisement sent	:20
Advertisement received	:0

Group VRRP PDU error statistics

Bad authentication Type received	:0
Bad password received	:0
Bad MD5 digest received	:0
Bad advertisement timer received	:0
Bad VIP count received	:0

```

    Bad VIPADDR received                :0
Group state transition statistics
    Idle to master transitions          :0
    Idle to backup transitions          :1
    Backup to master transitions        :1
    Master to backup transitions        :0
Interface: fe-0/0/0.121, Interface index: 67, Groups: 1, Active : 1
Interface VRRP PDU statistics
    Advertisement sent                  :      205
    Advertisement received               :         0
    Packets received                    :         0
    No group match received              :         0
Interface VRRP PDU error statistics
    Invalid IPAH next type received      :         0
    Invalid VRRP TTL value received      :         0
    Invalid VRRP version received        :         0
    Invalid VRRP PDU type received       :         0
    Invalid VRRP authentication type received:         0
    Invalid VRRP IP count received       :         0
    Invalid VRRP checksum received       :         0

```

show vrrp nsr

This command is similar to **show vrrp**. Here, the **VR state** column displays the current VRRP state on the primary Routing Engine, which is the future VRRP state for the backup Routing Engine. Do not use on the primary Routing Engine.

NSR is yes if VRRP nonstop active routing is enabled for the configured VRRP group.

RPD-NSR is yes if the routing options have been set to nonstop active routing.

```

user@host>show vrrp nsr
Interface  State  Group  VR state  VR Mode  Type  NSR  RPD-NSR  Address
ge-1/0/1.0 up    1      master   Active   lcl  yes   yes
10.0.0.1
                                     vip
10.0.0.3
ge-1/0/1.0 up    2      master   Active   lcl  yes   yes
20.0.0.1
                                     vip
20.0.0.3
ge-1/0/1.0 up    3      master   Active   lcl  yes   yes

```

```

30.0.0.1
                                vip
30.0.0.3
ge-1/0/1.0  up    4      master  Active  lcl  yes   yes
40.0.0.1
                                vip
40.0.0.3
ge-1/0/1.0  up    5      master  Active  lcl  yes   yes
50.0.0.1
                                vip
50.0.0.3
ge-1/0/1.0  up    1      master  Active  lcl  yes   yes
1000::1
                                vip
fe80::200:5eff:fe00:1
                                vip
1000::3
ge-1/0/1.0  up    2      master  Active  lcl  yes   yes
2000::1
                                vip
fe80::200:5eff:fe00:2
                                vip
2000::3
ge-1/0/1.0  up    3      master  Active  lcl  yes   yes
3000::1
                                vip
fe80::200:5eff:fe00:3
                                vip
3000::3
ge-1/0/1.0  up    4      master  Active  lcl  yes   yes
4000::1
                                vip
fe80::200:5eff:fe00:4
                                vip
4000::3
ge-1/0/1.0  up    5      master  Active  lcl  yes   yes
5000::1
                                vip
fe80::200:5eff:fe00:5
                                vip
5000::3

```


show vrrp summary

```
user@host> show vrrp summary
Interface      State      Group  VR state  Type  Address
ge-4/2/0.0    up         1      backup   lcl   10.57.0.2
                                vip   10.57.0.100
```

Release Information

Command introduced before Junos OS Release 7.4.

nsr option added in Junos OS Release 13.2.

RELATED DOCUMENTATION

- [show vrrp track | 1296](#)
- [clear vrrp | 1001](#)

show vrrp track

IN THIS SECTION

- [Syntax | 1297](#)
- [Description | 1297](#)
- [Options | 1297](#)
- [Required Privilege Level | 1297](#)
- [Output Fields | 1297](#)
- [Sample Output | 1300](#)
- [Release Information | 1302](#)

Syntax

```
show vrrp track
<all | interfaces | routes>
<detail | summary>
<logical-system logical-system-name>
```

Description

Display status information about Virtual Router Redundancy Protocol (VRRP) tracked routes and tracked interfaces.

Options

none	(Same as summary) Display summarized status information of tracked routes and tracked interfaces.
all interfaces routes	(Optional) These options display the following information: • all—Output is the same as for the show vrrp track command. • interfaces—Show summary of VRRP tracked interfaces. • routes—Show summary of VRRP tracked routes
detail summary	(Optional) Display detailed or summarized information.
logical-system <i>logical-system-name</i>	(Optional) Perform this operation on a particular logical system.

Required Privilege Level

view

Output Fields

[Table 76 on page 1298](#) lists the output fields for the **show vrrp track** command. Output fields are listed in the approximate order in which they appear.

Table 76: show vrrp track Output Fields

Fields	Description	Level
Tracked interface/Track Int	Name of the tracked interface.	detail or summary
State	Current operational state of the tracked interface: up or down .	detail or summary
Speed	Current operational speed, in bits per second, of the tracked interface.	detail or summary
Incurred priority cost	Operational priority cost incurred resulting from the state and speed of this tracked interface. This cost is applied to the configured priority to obtain the current priority cost.	detail
VRRP Int/ Tracking VRRP interface	Name of the VRRP interface.	detail or summary
Group	VRRP group number.	detail or summary

Table 76: show vrrp track Output Fields (Continued)

Fields	Description	Level
VR state	The state of the VRRP: • backup—The interface is acting as the backup router interface. • bringup—VRRP is just starting, and the physical device is not yet present. • idle—VRRP is configured on the interface and is disabled. This can occur when VRRP is first enabled on an interface whose link is established. • init—VRRP is initializing. • master—The interface is acting as the primary router interface. • transition—The interface is changing between being the backup and being the primary router. NOTE: When the show vrrp nsr command is used on the backup Routing Engine, it displays the current VRRP state on the primary Routing Engine, which is the future VRRP state for the backup Routing Engine. Do not use the show vrrp nsr command on the primary Routing Engine.	detail or summary
Current priority	Current operational priority for being the VRRP primary.	detail or summary
Priority hold-time	Minimum time interval, in seconds, between successive changes to the current priority cost. Disabled indicates no minimum interval.	detail
Track route	IP address of route.	detail or summary
State	State of route. Possible values are unknown , up , and down .	detail or summary

Table 76: show vrrp track Output Fields *(Continued)*

Fields	Description	Level
Cost	Priority cost. When the route state is not up , the cost will be deducted from the configured priority of the VRRP session.	detail or summary
Interface	Name of the logical interface (for example, ge-0/0/1.0) on which the corresponding VRRP session is configured.	detail or summary
Cfg	Configured priority.	detail or summary
Run	Current (or running) priority cost.	detail or summary

Sample Output

show vrrp track summary

```
user@host> show vrrp track summary
```

Track Int	State	Speed	VRRP Int	Group	VR State	Current prio
ge-0/0/2.0	up	1g	ge-0/0/1.0	1	master	80
ge-0/0/8.0	up	1g	ge-0/0/1.0	1	master	80

Track route	State	Cost	Interface	Group	Cfg	Run	VR State
44.44.44.0/24	unknown	10	ge-0/0/1.0	1	100	80	master
55.55.55.0/24	unknown	10	ge-0/0/1.0	1	100	80	master

show vrrp track detail

```
user@host> show vrrp track detail
```

```
Tracked interface: ge-0/0/2.0
  State: up, Speed: 1g
  Incurred priority cost: 0
Tracking VRRP interface: ge-0/0/1.0, Group: 1
```

```

VR State: master
Current priority: 80, Configured priority: 100
Priority hold-time: disabled

Tracked interface: ge-0/0/8.0
State: up, Speed: 1g
Incurred priority cost: 0
Tracking VRRP interface: ge-0/0/1.0, Group: 1
VR State: master
Current priority: 80, Configured priority: 100
Priority hold-time: disabled

```

Track route	State	Cost	Interface	Group	Cfg	Run	VR State
44.44.44.0/24	unknown	10	ge-0/0/1.0	1	100	80	master
55.55.55.0/24	unknown	10	ge-0/0/1.0	1	100	80	master

show vrrp track interfaces summary

```

user@host> show vrrp track interfaces summary

```

Track Int	State	Speed	VRRP Int	Group	VR State	Current prio
ge-0/0/2.0	up	1g	ge-0/0/1.0	1	master	80
ge-0/0/8.0	up	1g	ge-0/0/1.0	1	master	80

show vrrp track interfaces detail

```

user@host> show vrrp track interfaces detail

```

Tracked interface: ge-0/0/2.0

State: up, Speed: 1g

Incurred priority cost: 0

Tracking VRRP interface: ge-0/0/1.0, Group: 1

VR State: master

Current priority: 80, Configured priority: 100

Priority hold-time: disabled

Tracked interface: ge-0/0/8.0

State: up, Speed: 1g

Incurred priority cost: 0

Tracking VRRP interface: ge-0/0/1.0, Group: 1

VR State: master

```
Current priority: 80, Configured priority: 100
Priority hold-time: disabled
```

show vrrp track routes summary

```
user@host> show vrrp track routes summary
```

Track route	State	Cost	Interface	Group	Cfg	Run	VR State
44.44.44.0/24	unknown	10	ge-1/0/0.0	1	100	60	bringup
55.55.55.0/24	unknown	10	ge-1/0/0.0	1	100	60	bringup

show vrrp track routes detail

The output for **show vrrp track routes detail** is the same as that for **show vrrp track routes summary**.

Release Information

Command introduced before Junos OS Release 7.4.

all and **routes** options added in Junos OS Release 17.1.

RELATED DOCUMENTATION

Configuring a Logical Interface to Be Tracked for a VRRP Group 459
Configuring a Route to Be Tracked for a VRRP Group 462
show vrrp 1276

Troubleshooting

IN THIS CHAPTER

- [Tracing Nonstop Active Routing Synchronization Events | 1303](#)
- [Troubleshooting the EX Series Redundant Power System Power On and Power Backup Issues | 1305](#)

Tracing Nonstop Active Routing Synchronization Events

To track the progress of nonstop active routing synchronization between Routing Engines, you can configure nonstop active routing trace options flags for each supported protocol and for BFD sessions and record these operations to a log file.

To configure nonstop active routing trace options for supported routing protocols, include the **nsr-synchronization** statement at the **[edit protocols *protocol-name* traceoptions flag]** hierarchy level and optionally specify one or more of the **detail**, **disable**, **receive**, and **send** options:

```
[edit protocols]
bgp {
  traceoptions {
    flag nsr-synchronization <detail> <disable> <receive> <send>;
  }
}
isis {
  traceoptions {
    flag nsr-synchronization <detail> <disable> <receive> <send>;
  }
}
ldp {
  traceoptions {
    flag nsr-synchronization <detail> <disable> <receive> <send>;
  }
}
mpls {
```



```

    traceoptions {
        flag nsr-synchronization;
        flag nsr-synchronization-detail;
    }
}
msdp {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
(ospf | ospf3) {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
rip {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
ripng {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}
pim {
    traceoptions {
        flag nsr-synchronization <detail> <disable> <receive> <send>;
    }
}

```

To configure nonstop active routing trace options for BFD sessions, include the **nsr-synchronization** and **nsr-packet** statements at the **[edit protocols bfd traceoptions flag]** hierarchy level.

```

[edit protocols]
bfd {
    traceoptions {
        flag nsr-synchronization;
        flag nsr-packet;
    }
}

```

To trace the Layer 2 VPN signaling state replicated from routes advertised by BGP, include the **nsr-synchronization** statement at the **[edit routing-options traceoptions flag]** hierarchy level. This flag also traces the label and logical interface association that VPLS receives from the kernel replication state.

```
[edit routing-options]
traceoptions {
    flag nsr-synchronization;
}
```

RELATED DOCUMENTATION

[Configuring Nonstop Active Routing | 290](#)

[Configuring Nonstop Active Routing on Switches | 293](#)

[Example: Configuring Nonstop Active Routing on Switches | 301](#)

[Example: Configuring Nonstop Active Routing | 296](#)

Troubleshooting the EX Series Redundant Power System Power On and Power Backup Issues

IN THIS SECTION

- [The EX Series RPS Is Not Powering On | 1306](#)
- [A Switch Is Not Recognized by the RPS | 1307](#)
- [An Error Message Indicates That an RPS Power Supply is Not Supported | 1307](#)
- [The EX Series Redundant Power System Is Not Providing Power Backup to a Connected Switch | 1308](#)
- [The Wrong Switches Are Being Backed Up | 1309](#)
- [Six Switches That Do Not Require PoE Are Not All Being Backed Up | 1310](#)

This topic provides troubleshooting information for problems related to the EX Series Redundant Power System (RPS).

The EX Series RPS Is Not Powering On

IN THIS SECTION

- Problem | 1306
- Cause | 1306
- Solution | 1306

Problem

Description

The RPS does not power on even though it has a power supply installed and is connected to an AC power source outlet.

Environment

The RPS with one EX-PWR3-930-AC power supply installed in it is connected to a switch.

Symptoms

The SYS LED on the power supply side of the RPS is off, and when you check the RPS status using the CLI command **show chassis redundant-power-system**, the message **No RPS connected** is displayed.

Cause

A power supply must be installed in the middle slot on the RPS to power on the RPS.

Solution

Install a power supply in the middle slot on the power supply side of the RPS and verify that the AC power source outlet is properly connected to it. See [Installing a Power Supply in the EX Series Redundant Power System](#).

Verify that the **AC OK** LED and the **DC OK** LED on the power supply in the RPS are lit green.

A Switch Is Not Recognized by the RPS

IN THIS SECTION

- [Problem | 1307](#)
- [Cause | 1307](#)
- [Solution | 1307](#)

Problem

Description

I cannot set up the RPS.

Cause

A switch must be active to be recognized by the RPS.

Solution

Activate the switch by configuring it and issuing a commit statement.

An Error Message Indicates That an RPS Power Supply is Not Supported

IN THIS SECTION

- [Problem | 1307](#)
- [Cause | 1308](#)
- [Solution | 1308](#)

Problem

Description

An RPS error message indicates that an RPS power supply is not supported.

Cause

RPS supports only one power supply, the EX-PWR3-930-AC. If you install another similar power supply, it may fit in the slot but it is not compatible with RPS.

Solution

The power supply shipped with your RPS (in a separate box) is an EX-PWR3-930-AC. If you installed more power supplies, you ordered them separately. Replace any other power supply model (such as the EX-PWR2-930-AC) with an EX-PWR3-930-AC model.

The EX Series Redundant Power System Is Not Providing Power Backup to a Connected Switch

IN THIS SECTION

- [Problem | 1308](#)
- [Cause | 1309](#)
- [Solution | 1309](#)

Problem

Description

The RPS does not provide power backup to a connected switch.

Environment

The RPS has an EX-PWR3-930-AC power supply installed in the middle power supply slot and is connected to two switches with power loss, one connected to RPS switch connector port 1 and the other on port 2.

Symptoms

The status LED on the associated switch connector port is not blinking green—it is either solid green (connected) or not lit (off).

Cause

The RPS provides backup power based on the power priority assigned to each switch.

Solution

If the status LED on a switch connector port is off, ensure that the RPS cable is properly connected to both the RPS and the switch, and ensure that the priority configured for the switch is not 0. See "[show redundant-power-system status](#)" on page 1176.

If the status LED on switch connector port 1 is on and is steadily green, check the backup priority configured for the switch and assign it a higher priority. See "[Determining and Setting Priority for Switches Connected to an EX Series RPS](#)" on page 402

If the status LED on switch connector port 1 is amber, check if the RPS has enough power supplies installed in it to provide backup power. If it does not, install a power supply in an empty power supply slot on the RPS. See [Installing a Power Supply in the EX Series Redundant Power System](#).

If the status LED on switch connector port 1 is still off, check the priority configured for the switch. Ensure that it is not set to 0, which means off. See "[show redundant-power-system status](#)" on page 1176. The priority assigned must be from 1 through 6. See "[Determining and Setting Priority for Switches Connected to an EX Series RPS](#)" on page 402.

Verify that a dedicated power supply is installed in the switch. The RPS cannot boot a switch that does not have a dedicated power supply. See [Installing a Power Supply in the EX Series Redundant Power System](#).

Also keep in mind that when the command "[request redundant-power-system multi-backup](#)" on page 1023 has been set, support for switches that supply PoE is not guaranteed. To reverse this setting, use the command **request redundant-power-system no-multi-backup**.

The Wrong Switches Are Being Backed Up

IN THIS SECTION

- Problem | 1310
- Cause | 1310
- Solution | 1310

Problem

Description

Four or more switches are connected to an RPS with three power supplies. When all four switches fail, the wrong three switches have .

Environment

Four or more switches are connected to an RPS with three power supplies. One or more switches provide PoE to other devices.

Symptoms

When all four switches fail, the wrong three switches have .

Cause

The RPS provides backup power based on the power priority assigned to each switch. This is derived from two configurations, one of which has precedence over the other one. Initial is derived from the location of the port used to attach a switch—the leftmost connector has lowest priority and the rightmost connector has highest priority. The second, dominant priority configuration is derived from a CLI priority setting on the switch itself. With this CLI configuration, 6 is highest priority and 1 is the lowest priority.

Solution

Connect the three switches to the three rightmost connectors on the RPS. Then, using the CLI on each switch, set each switch's priority to 1 using the ["redundant-power-system" on page 798](#) configuration command **redundant-power-system 1**. Now, physical connection location is determining .

If you do not want to change the cabling on the switches, you can use the configuration statement **redundant-power-system** on all four switches, assigning priority **6** (highest), **5**, **4** and **3** to the appropriate switches. Priority configuration on the switch always overcomes set by connector location.

Six Switches That Do Not Require PoE Are Not All Being Backed Up

IN THIS SECTION

 [Problem | 1311](#)

- Cause | 1311
- Solution | 1311

Problem

Description

Only three switches out of six are simultaneously backed up when all switches experience power supply failure. None of these switches supply PoE power to any device.

Environment

The RPS with three EX-PWR3-930-AC power supplies installed in it is connected to six switches, none of which is connected to a non-PoE device.

Symptoms

Only three switches out of six are simultaneously backed up when all switches experience power supply failure. None of these switches supply PoE power to any device.

Cause

Each power supply can support two switches that do not need enough power for PoE, as long as you configure the RPS to do so.

Solution

From any of the attached switches, issue the ["request redundant-power-system multi-backup" on page 1023](#) command from the operational mode. Now standard power will be supplied to two non-PoE switches per power supply.

CHAPTER 53

Knowledge Base