

Feature List	VAST	ST7501 (Free-standard)
Live View on Dual Monitors	V (64-CH)	V (32-CH)
Synchronous/ Asynchronous 16-channel Playback	V	Asynchronous only
Remote Access via Client/Server Architecture	V	V
Event Trigger Management	V	V
Recording Group & Recording Schedule Management	V	V
User Management	V	V
Data Backup, Search, and Export	V	V
PTZ/ E-PTZ Remote Camera Control	V	V
E-map	V	V
Hierarchical Management	V	--
VAST Matrix for Hundreds of Live Views	V	--
PiP Function -- Digital Zoom In and Multi-touch Mode	V	--
Integrated with VIVOTEK NVR	V	--
Web Access via IE and FireFox	V	--
Post-Video Enhancement and Defog	V	--

## Technical Specifications

<b>General</b> <ul style="list-style-type: none"><li>Hundreds of live view channel (VAST Matrix)*</li><li>OS: Windows 7, Vista, XP, W2K, Server 2003 &amp; Server 2008</li><li>Supported DBMS: SQL server &amp; PostgreSQL</li></ul>	<b>Protocol</b> <ul style="list-style-type: none"><li>Client &amp; Server communication protocol: HTTP tunnel with XML content</li><li>Encryption: AES Encryption</li></ul>
<b>Codec</b> <ul style="list-style-type: none"><li>Video compression : H.264, MPEG-4 &amp; MJPEG</li><li>Audio compression: AAC, GAMR, G.711 &amp; G.711A</li></ul>	<b>Playback</b> <ul style="list-style-type: none"><li>Max. number of channel: 16</li><li>Playback mode: Asynchronous &amp; Synchronous</li><li>Event &amp; Log search: Yes</li></ul>
<b>Recording</b> <ul style="list-style-type: none"><li>Recording type: Manual, Schedule &amp; Event trigger</li><li>Support seamless recording</li><li>Event trigger source: Motion, Temperature, Tampering, DI/O, IR, PIR, IVA, Video lost, Recording error, Recording status, Substation connection status, Storage connection status, Storage capacity status, License status, Network status &amp; Virtual memory status</li><li>Media file format: ISO base media file format</li><li>Cyclic recording: Day based &amp; Spatial based</li><li>Supports multiple hard disks</li><li>Max. 256-CH recording channels/per hard disk</li><li>Supports NAS &amp; SMB</li></ul>	<b>Video Enhancement</b> <ul style="list-style-type: none"><li>Post-video Enhancement: Brightness, Contrast, Saturation &amp; Hue</li><li>Intelligent Enhancement: Defog for Fog, Rain, Snow, Fire &amp; Smoke</li></ul>
<b>Security</b> <ul style="list-style-type: none"><li>Account role type: 5 levels of user roles</li><li>Supports authentication protection</li></ul>	<b>Event Management</b> <ul style="list-style-type: none"><li>Live event awareness: Yes</li><li>Trigger source: Motion, Temperature, Tampering, DI/O, IR, PIR, IVA, Video lost, Recording error, Recording status, Substation connection status, Storage connection status, Storage capacity status, License status, Network status &amp; Virtual memory status</li><li>Actions: Email, Start recording, Move to the preset position, Set DO, GSM short message &amp; Send CGI command</li></ul>
<b>Exporting</b> <ul style="list-style-type: none"><li>Exporting format: AVI, EXE, 3GP</li><li>Snapshot format: BMP, JPEG</li><li>Source: Live view and media files</li></ul>	<b>Other</b> <ul style="list-style-type: none"><li>Camera configuration: Web-based configuration page embedded in VAST LiveClient</li><li>Multi-lingual user interface: Nine languages &amp; additional customized languages (English, French, German, Italian, Spanish, Traditional Chinese, Simplified Chinese, Japanese, Portugal)</li><li>PTZ control: Support PTZ control panel, Joystick, Click on Image &amp; Keyboard shortcut</li><li>Installer: 4 divided installers for VAST Server, VAST LiveClient, VAST Playback &amp; All in One</li></ul>
<b>Backup</b> <ul style="list-style-type: none"><li>Backup types: Manual, Scheduled</li></ul>	<b>Keyboard Hotkey</b> <ul style="list-style-type: none"><li>PTZ &amp; E-PTZ</li><li>Full screen, Single view &amp; Layout page change</li><li>Snapshot</li><li>Stop alarm</li><li>Mute audio of the focused channel</li><li>Start &amp; Stop rotation</li></ul>
<b>Layout-live</b> <ul style="list-style-type: none"><li>Layout types: 1x1, 2x2, 1+5, 3x3, 1+12, 4x4, 5x5, 1+31</li><li>Supports drag &amp; drop</li><li>Supports layout sets (Switch between different layout sets)</li><li>Supports automatically add a newly-inserted device to the layout</li><li>Supports page mode</li><li>Supports multi-touch mode on VAST Matrix</li></ul>	<b>Touch Screen Support</b> <ul style="list-style-type: none"><li>Multi-touch mode on PiP*</li></ul>
<b>Architecture</b> <ul style="list-style-type: none"><li>System: Client &amp; Server</li><li>Remote access: Windows IE6, IE7, IE8 &amp; FireFox 3.6</li><li>Hierarchical: Yes</li><li>Program: VAST LiveClient, VAST Playback, VAST Matrix &amp; VAST Server with VAST Server tool</li></ul>	<b>Audio</b> <ul style="list-style-type: none"><li>Supports two way audio</li></ul>

\* 3 Depends on H/W spec

\* 4 Supports on Win7

All specifications are subject to change without notice. Copyright © 2011 VIVOTEK INC. All rights reserved. P/N:



VIVOTEK INC.  
6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.  
| T: +886-2-82455282 | F: +886-2-82455332 | E: sales@vivotek.com

VIVOTEK USA, INC.  
470 Lakeside Drive Suite C, Sunnyvale, CA 94085 USA  
| T: 408-773-8686 | F: 408-773-8298 | E: salesusa@vivotek.com



Ver 1.1

## Central Management Software

VAST

Hierarchical Management • VAST Matrix • PiP



VIVOTEK is proud to introduce VAST, the most comprehensive central management software designed for managing all VIVOTEK IP surveillance products with intuitive functions and numerous features. It supports hundreds of cameras and stations in a hierarchical structure of system for monitoring, recording, playback, and event trigger management with ease-of-use and efficient control.

Most particularly, the newest fully scalable feature VAST Matrix offers an hundreds of number of live views for monitoring. Together with simultaneous 16-channel playback facilitating quick & easy browsing from multiple stations, it performs remote management with a large scale of the server & client structure and constitutes a robust system for stores, banking, and public space.



Features

LiveClient UI



Playback UI




- Powerful Video Wall Solution “VAST Matrix” for Hundreds of Live Views\*
- Intelligent PiP Function -- Digital Zoom In and Multi-touch Mode
- Integrated with VIVOTEK NVR for Large-Scale Applications
- Convenient Remote Access via Client/Server Architecture
- Powerful Hierarchical Management\*
- Effective & Reliable Event Trigger Management
- Real-time 64-channel Live Viewing and Simultaneous 16-channel Playback
- Multiple Simultaneous Streams for Different Media Platforms
- Extremely Versatile Settings for Recording Group and Recording Schedule Management
- Overall Device Management through Intuitive E-map Feature
- Supports Seamless Recording with the Cameras for Uninterrupted Video Recording

\*1 The ability to monitor multiple devices is subject to existing network bandwidth and server hardware performance.  
\*2 The number of stations depends on the purchased licenses on the key dongle.


Remote Access via Client/Server Architecture

User can access VAST via Internet by using LiveClient and Playback programs or web browsers.

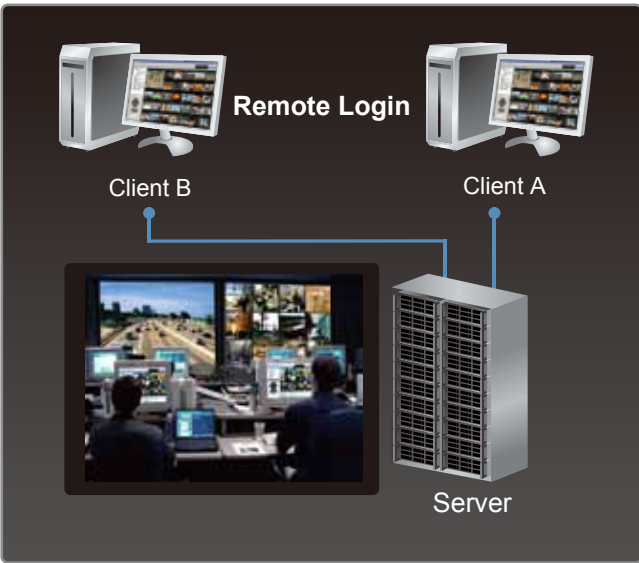


Effective Event Management

The VAST LiveClient supports comprehensive event management which allows the user to quickly respond to any emergencies. The VAST Playback offers an array of event search engine for retrieving video clips from the database of recorded videos based on different search criteria.

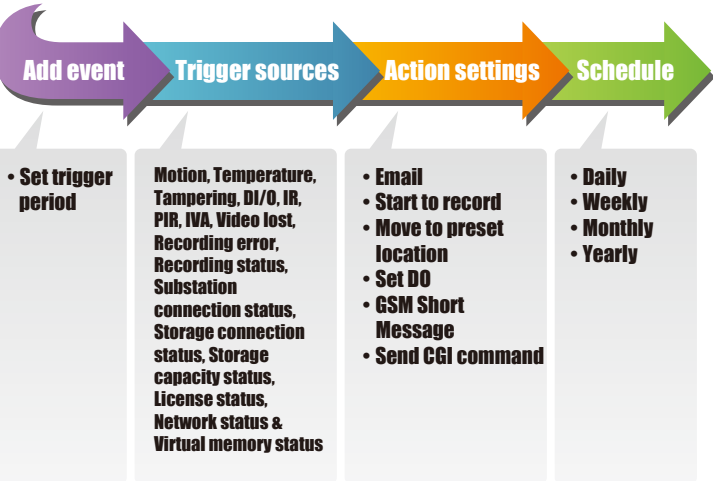

Truly Open Platform with Hierarchical Management Architecture

The powerful management scalability of VAST makes it suitable for managing from the small-scale to the large-scale surveillance systems.

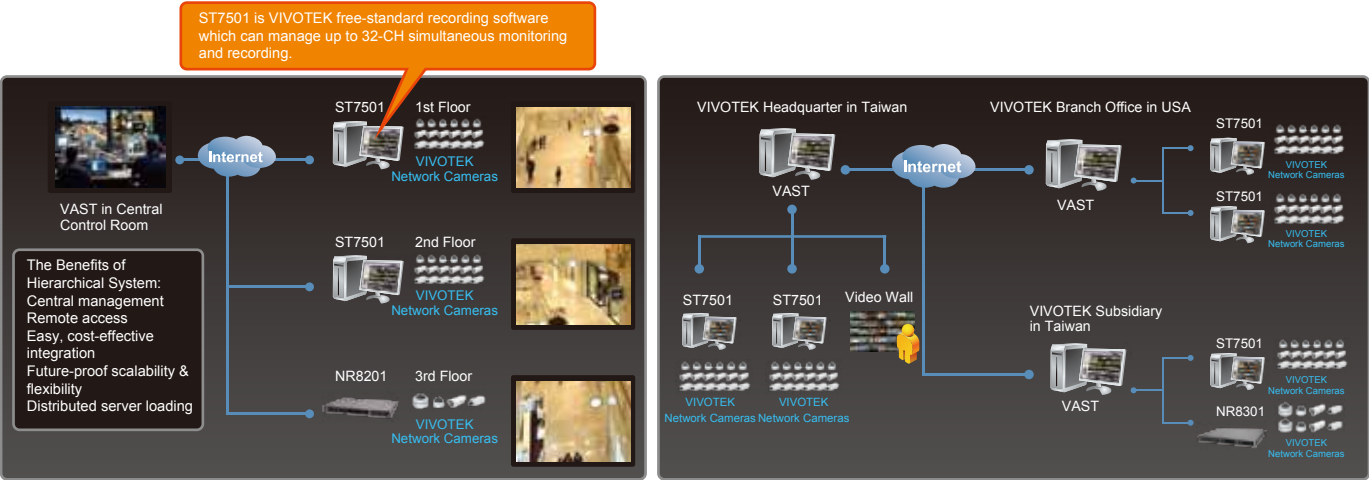


Fully Scalable VAST Matrix

The VAST Matrix is an extremely useful tool for displaying multiple monitors, helping users to efficiently construct a real-time video wall in a control center and making VAST an integral part of a powerful central management system.

Video Wall



System Structure of VAST Matrix

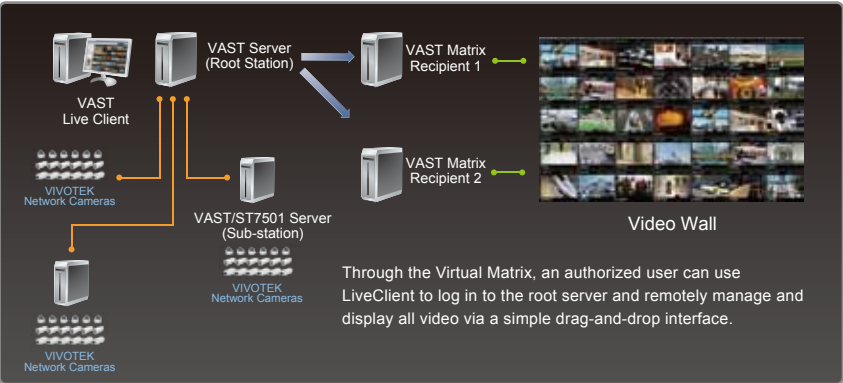

Intuitive User Interface

PiP (Picture-in-Picture)

PIP is an advanced function for user to simultaneously view a Global View and ROI (Region of Interest) for live monitoring, which is very useful while viewing high-megapixel video. The digital zoom in function can only focus on the interested area and represent the details of megapixel video. Moreover, the **multi-touch mode** is a user-friendly interface for user to easily digital zoom in a view with two fingers upon the multi-touch monitors.



E-map

VAST LiveClient supports intuitive E-map function which allows users to upload E-maps for overall devices management. The whole system architecture is thus visualized through e-map links.

