



User Manual

AX6000 Wi-Fi 6 SOHO Router

DBR-560

Preface

D-Link reserves the right to revise this publication and to make changes in the content hereof without obligation to notify any person or organization of such revisions or changes.

Manual Revisions

Revision	Date	Description
1.00	05/07/2025	Initial Version

Trademarks

D-Link and the D-Link logo are trademarks or registered trademarks of D-Link Corporation or its subsidiaries in the United States or other countries. All other company or product names mentioned herein are trademarks or registered trademarks of their respective companies.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Apple®, Apple logo®, Safari®, iPhone®, and Macintosh® are trademarks of Apple Inc., registered in the U.S. and other countries. App StoreSM is a service mark of Apple Inc.

Chrome™ browser, Google Play™ and Android™ are trademarks of Google Inc.

Google, Nest Hub, and Google Home are trademarks of Google LLC.

Internet Explorer®, Windows® and the Windows logo are trademarks of the Microsoft group of companies.

Copyright © 2025 by D-Link Corporation, Inc.


All rights reserved. This publication may not be reproduced, in whole or in part, without prior expressed written permission from D-Link Corporation, Inc.

Table of Contents


Package Contents.....	1	IPv6	39
System Requirements	2	IPv6 - Auto Detection	40
Introduction	3	Internet - VLAN	52
Hardware Overview	5	Internet - VLAN	53
AX3000 Wi-Fi 6 Travel Router LED Indicator.....	5	Mobile Network.....	55
AX3000 Wi-Fi 6 Travel Router Rear Panel.....	6	Wi-Fi Hotspot.....	56
Installation	7	Internet Profiles	57
Before You Begin.....	7	Wireless	58
Wireless Installation Considerations.....	8	Wireless.....	59
Setup.....	9	Guest Zone	63
Hardware Setup	10	Network.....	65
Setup Wizard	12	USB Sharing	67
Configuration.....	19	User	68
Accessing the Web User Interface	19	D-Link Cloud.....	69
Home	20	Features.....	70
Internet.....	21	Parental Control	70
Internet.....	22	Cellular Data Cap	73
AX3000 Wi-Fi 6 Travel Router.....	23	SMS	74
Connected Clients	24	PIN	76
Extenders	25	Firewall	77
Mesh Network.....	26	Firewall Settings - IPv4/IPv6 Rules	79
Settings.....	28	Firewall Settings - IPv4/IPv6 Rules	80
Wizard.....	28	Port Forwarding	81
Internet.....	29	Port Forwarding - Virtual Server.....	82
IPv4	29	Port Forwarding - Virtual Server.....	83
		Static Routes - IPv4.....	84

Static Routes - IPv6.....	85	Connect or Disconnect.....	115
Dynamic DNS	86	Android	116
Security	88	VPN Setup Instructions.....	116
IPSec	88	Connect or Disconnect.....	118
OpenVPN	91	Windows® 11/10	120
L2TP	92	Troubleshooting	122
PPTP	93	Wireless Basics	124
WireGuard	94	What is Wireless?.....	125
Management.....	95	Tips.....	127
Time & Schedule - Time	95	Wireless Security	128
Time & Schedule - Schedule	96	Technical Specifications	129
System Log	97	Regulatory Information	131
System Admin	99		
Admin.....	99		
System	101		
User.....	102		
Upgrade	103		
Statistics	104		
Quick VPN.....	105		
Important Information	106		
iOS Devices	107		
VPN Setup Instructions.....	107		
Connect or Disconnect.....	109		
Mac OS X.....	110		
VPN Setup Instructions.....	110		
Connect or Disconnect.....	112		
Windows 10	113		
VPN Setup Instructions.....	113		


Package Contents




DBR-560 AX6000 Wi-Fi 6 SOHO Router



Ethernet Cable (RJ45/1m)



Quick Installation Guide



12V/4A Power Adapter

If any of the above items are missing or damaged, please contact your local reseller.

Note: Using a power supply with a different voltage rating from the one included with the device may cause damage and void the warranty for this product.

System Requirements

Network Requirements	• A D-Link DWM-222W & D501 USB adapter or an Ethernet-based LAN (10/100/1000 Mbps Ethernet) • IEEE 802.11ax/ac/n/g/b/a wireless clients
Web-based Configuration Utility Requirements	Computer with the following: • Windows®, Macintosh, or Linux-based operating system • An installed Ethernet adapter or Wi-Fi interface Browser requirements: • Mozilla Firefox 28 or higher • Apple Safari 6 or higher • Google Chrome 28 or higher

Introduction

D-Link introduces the high-performance AX6000 Wi-Fi 6 SOHO Router based on Wi-Fi 6 technology. The advanced Wi-Fi 6 delivers 3000 Mbps speed with low latency, allowing fast and reliable communication among multiple connected devices that need to process data simultaneously. This speed and reliability improvements have made possible with the Orthogonal Frequency Division Multiple Access (OFDMA) and Overlapping Basic Service Sets (OBSS) in a crowded network joined by lots of devices. In addition, the USB port allow for on-the-go connectivity to a compatible D-Link DWM-222W & D501 USB adapter.

Features

Flexibility in Network Connection

The DBR-560 offers multiple Internet connection methods to ensure high connectivity availability. Depending on your current network environment, you can connect to the Internet through the 2.5GbE WAN port or wirelessly via cellular WAN or a Wireless Internet Service Provider (WISP).

Extended Wi-Fi Coverage Built on a Mesh System

A mesh system built on multiple DBR-560 allows mobile devices to roam seamlessly without interruption in connection. In addition, with intelligent Wi-Fi channel tuning and beamforming technology, transmission efficiency can be much improved to attain higher speeds. And the dual-band capability allows devices to connect to the best available band further reduces interference by optimizing channel utilization to preserve the speed and stability of all connected devices.

Convenient File Sharing - Join N' Share

File sharing can never be easier with the build-in Join N' Share file sharing.

Multi-gigabit WAN Port & Multiple LAN Ports

The 2.5G WAN connection distributes multi-gigabit bandwidth to offer fast and reliable connectivity for your devices throughout your home. Furthermore, the four gigabit Ethernet ports eliminate the need for an additional switch.

Secure Remote Access

Provides VPN connectivity using PPTP or L2TP, plus Site-to-Site IPSec VPN for creating virtual links between two endpoints.


Hardware Overview

AX6000 Wi-Fi 6 SOHO Router LED Indicator



	Indicator	Color	Status	Description
1	Power/Status	White	Solid	Fully powered.
		Orange	Blinking	The device cannot connect to the Internet or is trying to connect to the Internet during device setup.
		Red	Blinking	Resetting to factory default or system malfunction.
			Solid	Powering on, which happens when system starts or restarts or during factory reset.

AX6000 Wi-Fi 6 SOHO Router Rear Panel

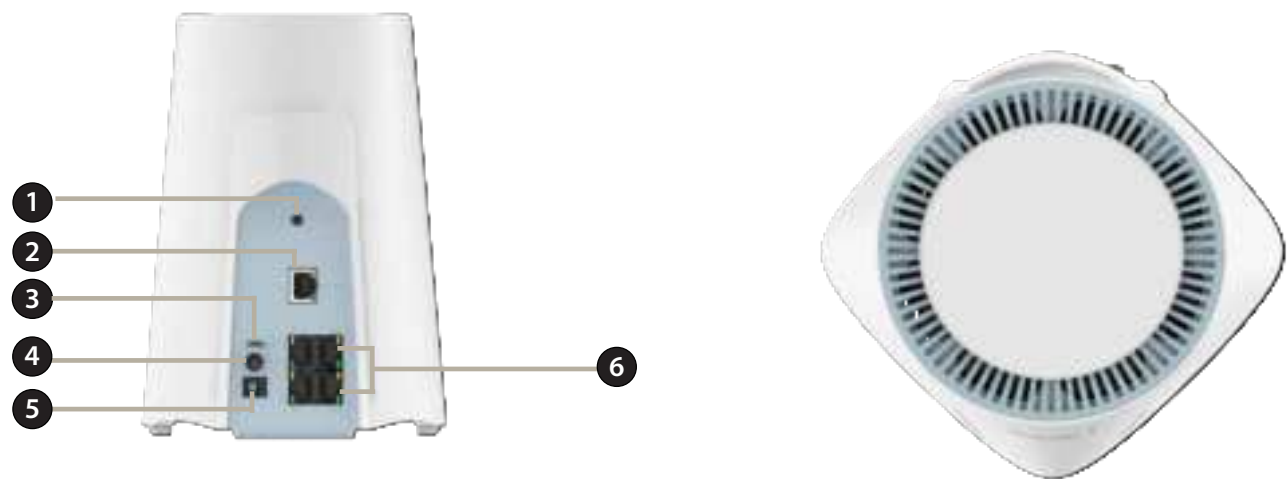

1	WPS	Press to initiate a WPS process.
2	2.5 Gigabit WAN Port	Connect to broadband modem for Internet service or connect to Ethernet devices such as computers, switches, storage (NAS) devices, and game consoles.
3	USB Type-C	Store and share files in your local network. It also works with D-Link DWM-222W and D501 to provide cellular connection as a failover Internet connection.
4	Power Button	Press to power on or off the device.
5	Power Connector	Connect to a USB Type-C power input with Power Delivery (PD). It requires a minimum of 30W power.
6	Gigabit LAN Port	Connect to broadband modem for Internet service or connect to Ethernet devices such as computers, switches, storage (NAS) devices, and game consoles.
7	Reset Button	The reset button turns the router to default settings. Insert a paperclip into the hole, wait for the LED to turn solid red, and then release.

Installation

This section will guide you through the installation of your DBR-560.

Before You Begin

- Placement of a router is very important. Do not place the router in an enclosed area such as a closet, cabinet, attic, or garage.
- Configure the router with a computer that was last connected directly to your Internet connection. Verify that it is connected to the Internet before connecting additional devices.
- If your Internet Service Provider (ISP) provided you with a modem/router combo, you will need to set it to “bridge” mode so that the router can work properly. Please contact your ISP or refer to the user manual of your modem/router device.
- You can only use the Ethernet port on your modem. If you were using the USB connection before using the router, then you must turn off your modem, disconnect the USB cable and connect an Ethernet cable to the Internet port on the router, and then turn the modem back on. In some cases, you may need to call your ISP to change your connection types (USB to Ethernet).
- If connecting to a DSL modem, make sure to have your DSL service information provided by your ISP handy. This information is likely to include your DSL account's Username and Password. Your ISP may also supply you with additional WAN configuration settings which might be necessary to establish a connection.
- If you are connecting a considerable amount of networking equipment, it may be a good idea to take your time to label each cable first or take a picture of your existing setup before making any changes.
- If you have DSL and are connecting via PPPoE, make sure you disable or uninstall any PPPoE software such as WinPoET, BroadJump, or EnterNet 300 from your computer or you will not be able to connect to the Internet.

Wireless Installation Considerations

The D-Link wireless router lets you access your network using a wireless connection from virtually anywhere within the operating range of your wireless network. Keep in mind that the number, thickness and location of walls, ceilings, or other objects that the wireless signals must pass through may limit the range. Typical ranges vary depending on the types of materials and background radio frequency (RF) noise in your home or business. The key to maximizing wireless range is to follow the following basic guidelines:

1. Keep the number of walls and ceilings between a D-Link router and other network devices to a minimum - each wall or ceiling can reduce your router's range from 3-90 feet (1-30 meters). Minimize the number of walls or ceilings your router and devices are positioned within.
2. Be aware of the direct line between network devices. A wall that is 1.5 feet thick (0.5 meters) appears to be almost 3 feet (1 meter) thick at a 45-degree angle . At a 2-degree angle, the wall appears to be over 42 feet (14 meters) thick. Position devices for their signals to travel straight through a wall or ceiling (instead of from a certain angle) for better signal reception.
3. Building materials make a difference. A solid metal door or aluminum studs may have a negative effect on range. Try to position extenders, access points, wireless routers, and computers for their signal to directly pass through drywall or open doorways. Materials and objects such as glass, steel, metal, walls with insulation, water (fish tanks), mirrors, file cabinets, brick, and concrete will degrade your wireless signal.
4. Keep your product away (at least 3-6 feet or 1-2 meters) from electrical devices or appliances that generate RF noise.
5. If you are using 2.4 GHz cordless phones or X-10 (wireless products such as ceiling fans, lights, and home security systems), your wireless connection may degrade dramatically or drop completely. Make sure your 2.4 GHz phone base is as far away from your wireless devices as possible. The base transmits a signal even if the phone is not in use.

Setup


There are several different ways you can use to configure your router to connect to the Internet.

- **D-Link FALCON** - Use your compatible iOS or Android device to install and configure your router. Refer to **page 10**.
- **Hardware Setup** - This section explains how to set up your DBR-560. Refer to **page 9**.
- **D-Link Setup Wizard** - The wizard will launch when you log in to the router by using your PC for the first time. Refer to **page 11**.
- **Manual Setup** - Log in to the router for manual configuration of your router. Refer to **Configuration** on **page 18**.

Hardware Setup


Step 1-1

Position the DBR-560 close to your Internet-connected modem. Turn off and unplug the power to your cable or DSL broadband modem. This is required. In some cases, you may need to turn it off for up to five minutes. Connect an Ethernet cable to the modem and to the WAN port of DBR-560.

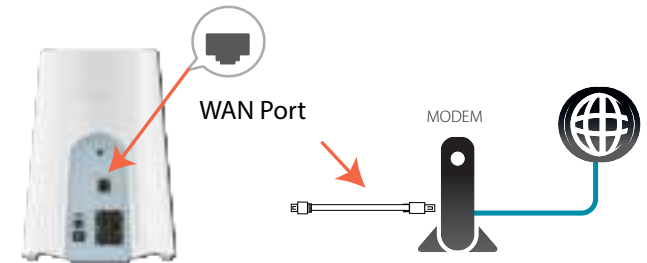


Step 1-2

You may connect to a cellular network using DWM-222W or D501. Simply plug the USB adapter into the USB Type-C port of the DBR-560.

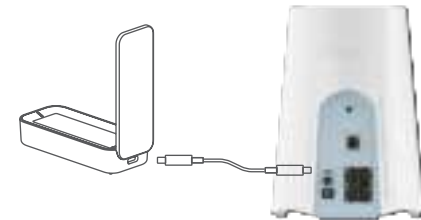

Step 2

Connect the device to the power outlet using the included power adapter. Wait for the DBR-560 to boot up.

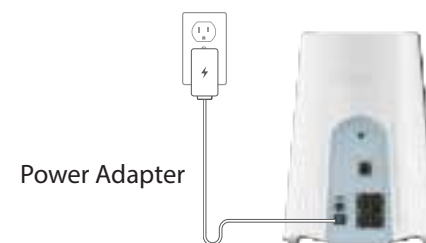

Step 3

When the router's LED lights up white, wirelessly connect your computer to the Wi-Fi name (SSID) printed on the device label.



Step 4

Type <http://xxxx.devicesetup.net/> into a web browser and follow the on-screen instructions to complete the setup.
(xxxx represents the last 4 characters of the MAC address)



Setup Wizard

The setup wizard is designed to guide you through a step-by-step process to configure your new DBR-560 for Internet connection.

If this is your first time configuring the router, open your web browser and enter **http://xxxx.devicesetup.net/** into the browser (xxxx represents the last 4 characters of the MAC address). Enter the **Admin Password** and click **Log In** to start the configuration process. The web address and default admin password are printed on the device label on the bottom of the device.



Select the Operation Mode: Wi-Fi Hotspot Network or Mobile Network.



Connect your devices as instructed depending on the selected mode.

Click **Next** to continue.



If the router does not detect a valid Internet connection, a list of connection types to choose from will be displayed. Select your Internet connection type (this information can be obtained from your ISP).

Click **Next** to continue.

If the router detected a connection or you manually selected **PPPoE**, enter your PPPoE username and password. If you do not have this information, please contact your ISP.

Click **Next** to continue.

Note: *Make sure to remove all other existing PPPoE software from your computer. The software is no longer needed and will not work compatible with your router.*

If the router detected a connection or you manually selected **Static IP**, enter the IP and DNS settings supplied by your ISP. If you do not have this information, please contact your ISP.

Click **Next** to continue.

If the router detected a connection or you manually selected **DHCP connection**, enter a **Wi-Fi Network Name** and **Wi-Fi Password** to set up your Wi-Fi network. Your wireless clients will need to have this passphrase to be able to connect to your wireless network. The password must contain 8 to 63 characters.

Click **Next** to continue.

Note: *The router's Smart Connect feature presents a single wireless network. When connecting clients to an extension network, they will be automatically added to the best band, either 2.4 GHz or 5 GHz. To disable the Smart Connect feature and individually configure 2.4 GHz and 5 GHz networks, refer to **Wireless** on **page 57**.*

To better protect the router's configuration access, please enter a password. You will be prompted for this password every time you want to use the router's web configuration utility.

Note: It is strongly recommended that you change the default device password. The password must contain 8 to 15 characters and include both numbers and letters.

Click **Next** to continue.

Select your time zone from the drop-down menu.

Click **Next** to continue.

Keeping your router's firmware up-to-date can ensure you're always getting the latest security update and new features over the air. Choose whether to keep your device up-to-date automatically or to manage the device updates by yourself.

Click **Next** to continue.

You will be presented with a summary of your settings.

Click **Next** to finalize the settings or **Back** to make changes.

Please wait while the device settings are being saved.

Do not turn off or unplug your router during this time.

Your new settings have been saved and your router is now configured.

Click **OK** to close the Setup Wizard.

You can log in to the configuration utility by entering your Admin Password.

Configuration

Accessing the Web User Interface

1. Type **http://xxxx.devicesetup.net/** in the address bar. (xxxx represents the last 4 characters of the MAC address)
2. Enter the admin password.
 - If this is your first time logging in, please enter the password specified on the device label located on the bottom of the device.
 - If you have previously completed the Setup Wizard, enter the password you created during initial setup.
 - If you can't remember your password for login, press the Reset button to restore the router to its default settings.



The router's home page will display its current connection status. The left panel has quick access to **Settings, Features, Security, and Management.**

Note: The system will automatically log out after a period (180 seconds) of inactivity.



Home

The **Home** page displays the current status of your network in the form of an interactive diagram. You can click on each icon to display information about each node of the network in the middle of the screen. The menu bar at the top-left corner of the page will allow you to quickly navigate to other pages. Refer to the following pages for a description of each section.



Internet

Click on the **Internet** icon to bring up more details about your Internet connection. Click **IPv4** or **IPv6** to see details of the IPv4 and IPv6 connection respectively.

The **Home** page displays whether or not the router is currently connected to the Internet. If it is disconnected, click **Click to repair** to bring up the setup wizard, refer to **Setup Wizard** on **page 11** for more information.

Click **Release IP Address** to release the current IP address and disconnect from the Internet. If you wish to reconnect to the Internet, click **Renew IP Address**.



Internet

Click **Pause Internet Access for clients** to temporarily disconnect the Internet connection; alternatively, click **Resume Internet Access** to resume the Internet access if previously paused.

To reconfigure the Internet settings, click **Go to settings** at the bottom right.



On the **Cellular** section, you can view the connection parameter information such as IMEI and IMSI of the USB adapter.



AX6000 Wi-Fi 6 SOHO Router

Click on the **DBR-560** router icon to view details about the wireless and local network settings. This includes IPv4 and IPv6 local networks, and Wi-Fi information.

To reconfigure network settings, either click **Go to settings** at the bottom of the page, or click **Settings** on the left panel and select **Network**. Refer to Network on **page 62** for more information.

To reconfigure wireless settings, either click **Go to settings**, on the lower right, or click **Settings** on the left pane and select **Wireless**. Refer to Wireless on **page 55** for more information.



Connected Clients

Click on the **Connected Clients** icon to view details about the clients currently connected to the router.

To edit each client's settings, click the pencil icon on the client you want to edit.

Edit Rule

Name: Displays the name of this client. You can edit the client's name here.

Vendor: Displays the vendor of the device.

MAC Address: Displays the MAC address of the device.

IP Address: Displays the current IP address of this client.

Reserve IP: Enable to reserve an IP address for this client.

IP Address (Reserved): Specify an IP address for the DHCP server to assign to this client.

Parental Control: Enable or disable parental control to allow or block this user's access to the network.

Profile: If **Parental Control** is enabled, use the drop-down menu to select a time schedule that the rule will be enabled on. The schedule may be set to **Always Block**, or you can create your own profiles in the **Parental Control** section. Refer to **Parental Control on page 69** for more information.

Click **Save** when you are done.



Extenders

Click on the **Extenders** icon to view details about all additional devices in your Mesh Wi-Fi network.

To edit the Extender name, click on the pencil icon in the top-right of the box of the Extender that you want to rename.

To reboot an Extender, click the settings icon in the bottom-right of the Extenders's box and click **Reboot**.

To remove an Extender from your Mesh Wi-Fi network, click the settings icon in the bottom-right of the Extender's box and click **Remove**.




Edit Name

Name: Enter a name for the Mesh Point.

MAC Address: Displays the MAC address of the Mesh Point.

Click **Flash LED** to visually identify the Extender.

Click **Save** when you are done.

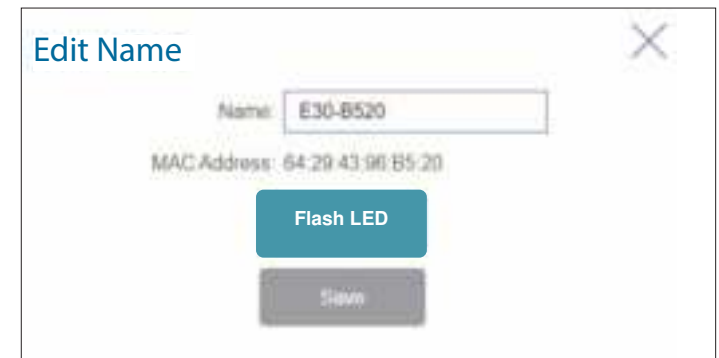


Mesh Network

To access the **Mesh Network** page, click the arrow next to the extender icon. Under the **Mesh Network** page, you can view details of the master device and every extender within the network. Click **DBR-560** to view the status of the main router. Click the pencil icon on the connected client(s) to edit configuration. Configuration details are explained on the next page. Click **Identify this Extender** to visually confirm the location of your router. The router's LED should breathe white several times.



Click the **Extender** icon to view details of the extender and list of connected clients. Click the pencil icon on the connected client(s) to edit configuration. Configuration details are explained on the next page. Click **Identify this Extender** to visually confirm the location of your extender. The router's LED should breathe white several times.

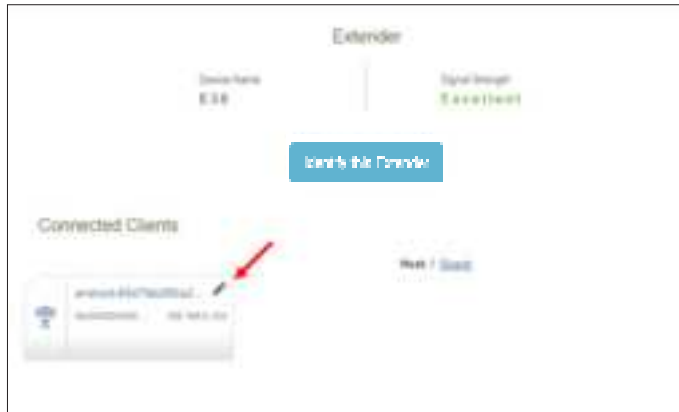

Edit Rule

Name: Displays the name of this client. You can edit the client's name here.

Vendor: Displays the vendor of the device.

MAC Address: Displays the MAC address of the device.

IP Address: Displays the current IP address of this client.


Reserve IP: Enable to reserve an IP address for this client.

IP Address (Reserved): Specify an IP address for the DHCP server to assign to this client.

Parental Control: Enable or disable parental control to allow or block this user's access to the network.

Profile: If **Parental Control** is enabled, use the drop-down menu to select a time schedule that the rule will be enabled on. The schedule may be set to **Always Block**, or you can create your own schedules in the **Schedule** section. Refer to **Parental Control on page 69** for more information.

Click **Save** when you are done.

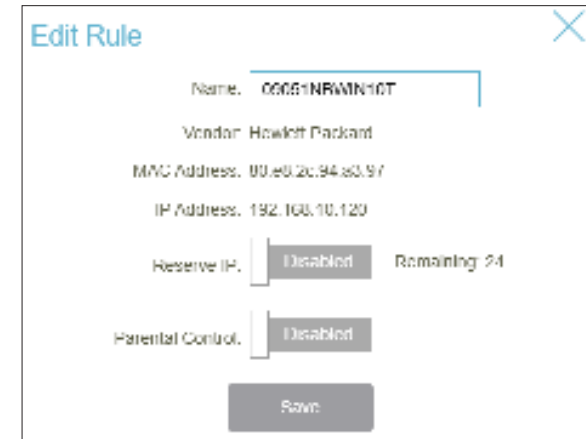

The screenshot shows a web interface titled "Edit Rule" with a close button (X) in the top right corner. The form contains the following fields and controls:

- Name:** A text input field containing "00051NRWN10T".
- Vendor:** A text input field containing "Hewlett Packard".
- MAC Address:** A text input field containing "00:E0:2C:94:8D:97".
- IP Address:** A text input field containing "192.168.10.129".
- Reserve IP:** A toggle switch labeled "Disabled" with a "Remaining: 24" indicator to its right.
- Parental Control:** A toggle switch labeled "Disabled".
- Save:** A button at the bottom of the form.

Settings Wizard

Go to **Settings > Wizard** to open the setup wizard. This is the same wizard that appears when you start configuring the router for the first time. Refer to **Setup Wizard** on **page 13** for details.

Note: When the Wizard is opened, the router will be disconnected from the Internet.



Internet

IPv4

In the **Settings** menu bar on the top-left side of the page, click **Internet** to see the Internet configuration options.

To configure IPv6 Internet and view the network's connection details, click on the **IPv6** tab. Refer to Internet - IPv6 on **page 40**.
To configure VLAN connection details, click on the VLAN link. Refer to **Internet - VLAN** on **page 53**.

Click **Save** at any time to save the changes you have made on this page.

My Internet Connection Is: Choose your Internet connection type from the drop-down menu. You will be presented with the appropriate options for your connection type. Click **Advanced Settings...** to expand the list and see all of the options.

Secure DNS: Enable **Secure DNS** to use public DNS with encryption via DNS-over-HTTPS (DoH).

DNS over HTTP Provider: Select the DNS-over-HTTPS (DoH) service provider: Google or Cloudflare.

Allow Fall-back: Use your primary or secondary DNS server as an alternative if the configured provider is not working.

For **Static IP**, refer to **IPv4 - Static IP on page 29**.

For **Dynamic IP (DHCP)**, refer to **IPv4 - Dynamic IP (DHCP) on page 30**.

For **PPPoE**, refer to **IPv4 - PPPoE on page 31**.

For **PPTP**, refer to **IPv4 - PPTP on page 33**.

For **L2TP**, refer to **IPv4 - L2TP on page 35**.

For **DS-Lite**, refer to **IPv4 - DS-Lite on page 37**.

To configure an **IPv6** connection, click the **IPv6** link. Refer to **page 38**.

IPv4 - Static IP

Select **Static IP** if your IP information is provided by your Internet Service Provider (ISP). Click **Save** at any time to save the changes you have made on this page.

IP Address: Enter the IP address provided by your ISP.

Subnet Mask: Enter the subnet mask provided by your ISP.

Default Gateway: Enter the default gateway address provided by your ISP.

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP.

Advanced Settings...

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP.

MTU: The default Maximum Transmission Unit is 1500 - you may need to change the MTU for optimal performance with your ISP.

MAC Address Clone: The default MAC address is set as the physical interface MAC address of the WAN port of the router. You can use the drop-down menu to replace the Internet port's MAC address with the MAC address of a connected client.

IPv4 - Dynamic IP (DHCP)

Select **Dynamic IP (DHCP)** to automatically obtain IP address information from your ISP. Select this option if your ISP does not specify an IP address for use. Click **Save** at any time to save the changes you have made on this page.

Advanced Settings...

Host Name: The host name is optional but may be required by some ISPs. Leave it blank if you are not sure.

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

MTU: Maximum Transmission Unit - The default is 1500. You may need to change the MTU for optimal performance with your ISP.

MAC Address Clone: The default MAC address is set as the physical interface MAC address of the WAN port of the router. You can use the drop-down menu to replace the Internet port's MAC address with the MAC address of a connected client.

IPv4 - PPPoE

Select **PPPoE** if your ISP provides and requires you to enter a PPPoE username and password in order to connect to the Internet. Click **Save** at any time to save the changes you have made on this page.

Username: Enter the username provided by your ISP.

Password: Enter the password provided by your ISP.

Reconnect Mode: Select either **Always on**, **On Demand**, or **Manual**.

Maximum Idle Time: Configurable when **On Demand** is selected. Enter a maximum idle time for the Internet connection to be maintained during inactivity. To disable this feature, select **Always on** or **Manual** as the reconnect mode. The default time is 5 minutes.

Advanced Settings...

Address Mode: Select **Static IP** if your ISP assigned you the IP address, subnet mask, gateway, and DNS server addresses. In most cases, select **Dynamic IP**.

If you select **Dynamic IP** as the Address Mode:

Service Name: Enter the ISP service name (optional).

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

MTU: Maximum Transmission Unit (1280~1500)- The default is 1492. You may need to change the MTU for optimal performance with your ISP.

IPv4 - PPPoE (continued)

MAC Address Clone: The default MAC address is set as the Internet port's physical interface MAC address on the router. You can replace the Internet port's MAC address with the MAC address of a connected client.

If you select **Static IP** as the Address Mode:

IP Address: Enter the IP address provided by your ISP.

Service Name: Enter the ISP service name (optional).

Primary DNS Server: Enter the primary DNS server IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server IP address assigned by your ISP.

MTU: Maximum Transmission Unit - you may need to change the MTU for optimal performance with your ISP.

MAC Address Clone: The default MAC address is set as the Internet port's physical interface MAC address on the router. You can replace the Internet port's MAC address with the MAC address of a connected client.

IPv4 - PPTP

Choose **PPTP** (Point-to-Point-Tunneling Protocol) if your Internet Service Provider (ISP) uses a PPTP connection. Your ISP will provide you with a username and password. Click **Save** at any time to save the changes you have made on this page.

PPTP Server: Enter the PPTP server's IP address provided by your ISP.

Username: Enter the username provided by your ISP.

Password: Enter the password provided by your ISP.

Reconnect Mode: Select either **Always on**, **On Demand**, or **Manual**.

Maximum Idle Time: Configurable when **On Demand** is selected. Enter a maximum idle time for the Internet connection to be maintained during inactivity. To disable this feature, select **Always on** or **Manual** as the reconnect mode.

Advanced Settings...

Address Mode: Select **Static IP** if your ISP assigned you an IP address, subnet mask, gateway, and DNS server addresses. In most cases, select **Dynamic IP**.

If you select **Dynamic IP** as the Address Mode:

Primary DNS Server: Enter the primary DNS server's IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

Secondary DNS Server: Enter the secondary DNS server's IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

MTU: Maximum Transmission Unit (1280~1460) - The default MTU is 1400. You may need to change the MTU for optimal performance with your ISP.

IPv4 - PPTP (continued)

If you select **Static IP** as the Address Mode:

PPTP IP Address: Enter the IP address provided by your ISP.

PPTP Subnet Mask: Enter the subnet mask provided by your ISP.

PPTP Gateway IP Address: Enter the gateway IP address provided by your ISP.

Primary DNS Server: Enter the primary DNS server's IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server's IP address assigned by your ISP.

MTU: The default Maximum Transmission Unit is 1400 - you may need to change the MTU for optimal performance with your ISP.

IPv4 - L2TP

Choose Layer 2 Tunneling Protocol (**L2TP**) if your ISP uses a L2TP connection. Your ISP will provide you with a username and password. Click **Save** at any time to save the changes you have made on this page.

L2TP Server: Enter the L2TP server's IP address provided by your ISP.

Username: Enter the username provided by your ISP.

Password: Enter the password provided by your ISP.

Reconnect Mode: Select either **Always on**, **On Demand**, or **Manual**.

Maximum Idle Time: Configurable when **On Demand** is selected. Enter a maximum idle (in minutes) time for the Internet connection to be maintained during inactivity. To disable this feature, select **Always on** or **Manual** as the reconnect mode.

Advanced Settings...

Address Mode: Select **Static IP** if your ISP assigned you an IP address, subnet mask, gateway, and DNS server addresses. In most cases, however, select **Dynamic IP**.

If you select **Dynamic IP** as the Address Mode:

Primary DNS Server: Enter the primary DNS server's IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

Secondary DNS Server: Enter the secondary DNS server's IP address assigned by your ISP. This address is usually automatically obtained from your ISP.

MTU: Maximum Transmission Unit (1280~1460) - you may need to change the MTU for optimal performance with your ISP. The default is 1400

IPv4 - L2TP (continued)

If you select **Static IP** as the Address Mode:

L2TP IP Address: Enter the IP address provided by your ISP.

L2TP Subnet Mask: Enter the subnet mask provided by your ISP.

L2TP Gateway IP Address: Enter the gateway IP address provided by your ISP.

Primary DNS Server: Enter the primary DNS server's IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server's IP address assigned by your ISP.

MTU: Maximum Transmission Unit (1280~1460) - The default MTU is 1400. You may need to change the MTU for optimal performance with your ISP.

IPv4 - DS-Lite

DS-Lite allows local IPv4 packets to travel through an IPv6 network. After selecting DS-Lite, the following parameters will be available for configuration. Click **Save** at any time to save the changes you have made on this page.

Advanced Settings...

DS-Lite Configuration: Select **DS-Lite DHCPv6 Option** to let the router allocate the AFTR IPv6 address automatically. Select **Manual Configuration** to enter the AFTR IPv6 address manually.

DS-Lite DHCPv6

B4 IPv4 Address: Enter the Basic Bridging Broadband (B4) IPv4 address that will be encapsulated into IPv6 packets to transmit over an IPv6 network.

WAN IPv6 Address: Once connected, the WAN IPv6 address will be displayed here.

IPv6 WAN Default Gateway: Once connected, the IPv6 WAN default gateway address will be displayed here.

Manual Configuration

AFTR IPv6 Address: Enter the Address Family Transition Router (AFTR) IPv6 address. This is where an IPv6 packet will be decapsulated.

B4 IPv4 Address: Enter the B4 IPv4 address value used here.

WAN IPv6 Address: Once connected, the WAN IPv6 address will be displayed here.

IPv6 WAN Default Gateway: Once connected, the IPv6 WAN default gateway address will be displayed here.

IPv6

Go to **Settings > Internet** to see the Internet configuration options for IPv4, then click the **IPv6** tab to access the configuration options for IPv6.

To configure the IPv4 Internet and view the network connection details, click the **IPv4** tab. Refer to **Internet - IPv4** on **page 30**. To configure the **VLAN** connection details, click the VLAN tab. Refer to **Internet - VLAN** on **page 53**.

Click **Save** at any time to save the changes you have made on this page.

My Internet Connection Is: Choose your IPv6 connection type from the drop-down menu. You will be presented with appropriate options for your connection type. Click **Advanced Settings...** to expand the list and see all of the options.

For **IPv6 - Auto Detection**, refer to **page 41**.

For **IPv6 - Static**, refer to **page 41**.

For **IPv6 - Auto Configuration (SLAAC/DHCPv6)**, refer to **page 43**.

For **IPv6 - PPPoE**, refer to **page 45**.

For **IPv6 - 6rd**, refer to **page 48**.

For **IPv6 - Local Connectivity Only**, refer to **page 50**.

IPv6 - Auto Detection

Select **Auto Detection** to automatically detect the IPv6 connection method used by your ISP. If Auto Detection fails, you can manually select another IPv6 connection type. Click **Save** at any time to save the changes you have made on this page.

IPv6 DNS Settings

DNS Type: Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

Primary DNS Server: If you select **Use the following DNS address**, enter the primary DNS server address.

Secondary DNS Server: If you select **Use the following DNS address**, enter the secondary DNS server address.

LAN IPv6 Address Settings

Enable DHCP-PD: Enable or disable DHCP Prefix Delegation.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

*If **Enable DHCP-PD** is disabled, these additional parameters are available for configuration:*

LAN IPv6 Address: Enter a valid LAN IPv6 address.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Advanced Settings... - Address Autoconfiguration Settings

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature.

Eable Automatic DHCP-PD in LAN: Enable or disable DHCP-PD (DHCP-Prefix Delegation) for automatic prefix assignment for LAN devices. This option is only available if DHCP-PD is enabled above.

Autoconfiguration Type: Select **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, or **Stateful DHCPv6**.

*If you select **SLAAC+RDNSS** or **SLAAC+Stateless DHCP** as the Autoconfiguration Type:*

Router Advertisement Lifetime: Enter the router advertisement lifetime (in minutes).

*If you select **Stateful DHCPv6** as the Autoconfiguration Type:*

IPv6 Address Range (Start): Enter the starting IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Range (End): Enter the ending IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Lifetime: Enter the lifetime for an IPv6 address (minutes).

IPv6 - Static

Select **Static IP** if your IPv6 information is provided by your ISP. Click **Save** at any time to save the changes you have made on this page.

Use Link-Local Address: Enable or disable link-local address use. Enabling this feature will use your local IPv6 address as the static IP. Disable this feature to manually enter your static IPv6 address and subnet prefix length.

IPv6 Address: If **Use Link-Local Address** is disabled, enter the address supplied by your ISP.

Subnet Prefix Length: If **Use Link-Local Address** is disabled, enter the subnet prefix length supplied by your ISP.

Default Gateway: Enter the default gateway for your IPv6 connection.

Primary DNS Server: Enter the primary DNS server address.

Secondary DNS Server: Enter the secondary DNS server address.

LAN IPv6 Address Settings

LAN IPv6 Address: Enter the LAN (local) IPv6 address for the router.

IPv6 - Static (Continued)

Advanced Settings... - Address Autoconfiguration Settings

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature.

Autoconfiguration Type: Select **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, or **Stateful DHCPv6**.

If you select **SLAAC+RDNSS** or **SLAAC+Stateless DHCP** as the Autoconfiguration Type:

Router Advertisement Lifetime: Enter the router advertisement lifetime (in minutes). The default is 30 minutes.

If you select **Stateful DHCPv6** as the Autoconfiguration Type:

IPv6 Address Range (Start): Enter the starting IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Range (End): Enter the ending IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Lifetime: Enter the IPv6 address lifetime (in minutes). The default is 10080 minutes.

IPv6 - Auto Configuration (SLAAC/DHCPv6)

Select **Auto Configuration (SLAAC/DHCPv6)** if your ISP assigns your IPv6 address when your router requests one from the ISP's server. Some ISPs require you to adjust these settings before your router can connect to the IPv6 Internet. Click **Save** when you are done.

IPv6 DNS Settings

DNS Type: Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

Primary DNS Server: If you select **Use the following DNS address**, enter the primary DNS server address

Secondary DNS Server: If you select **Use the following DNS address**, enter the secondary DNS server address.

LAN IPv6 Address Settings

Enable DHCP-PD: Enable or disable prefix delegation services.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

If **Enable DHCP-PD** is disabled, these additional parameters are available for configuration:

LAN IPv6 Address: Enter a valid LAN IPv6 address.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

IPv6 - Auto Configuration (SLAAC/DHCPv6)

Advanced Settings... - Address Autoconfiguration Settings

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature. Enabling this feature will present additional configuration options.

Enable Automatic DHCP-PD in LAN: Enable or disable DHCP-PD (DHCP-Prefix Delegation) for automatic prefix assignment for LAN devices. This option is only available if DHCP-PD is enabled above.

Autoconfiguration Type: Select **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, or **Stateful DHCPv6**.

If **SLAAC+RDNSS** or **SLAAC+Stateless DHCP** is selected as the Autoconfiguration Type:

Router Advertisement Lifetime: Enter the router advertisement lifetime (in minutes). The default is 30 minutes.

If **Stateful DHCPv6** is selected as the Autoconfiguration Type:

IPv6 Address Range (Start): Enter the starting IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Range (End): Enter the ending IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Lifetime: Enter the IPv6 address lifetime (in minutes). The default is 10080 minutes.

IPv6 - PPPoE

Select **PPPoE** if your ISP provides and requires you to enter a PPPoE username and password in order to connect to the Internet. Click **Save** at any time to save the changes you have made on this page.

PPPoE Session: Select **Create a new session** to start a new PPPoE session.

Username: Enter the username provided by your ISP.

Password: Enter the password provided by your ISP.

Address Mode: Select **Static IP** if your ISP assigned you an IP address. In most cases, select **Dynamic IP**.

IP Address: If you select **Static IP** as the Address Mode, enter the IP address provided by your ISP.

Service Name: Enter the ISP service name (optional).

Reconnect Mode: Select either **Always On** or **Manual**.

MTU: The default Maximum Transmission Unit is 1492- you may need to change the MTU for optimal performance with your ISP.

IPv6 - PPPoE

IPv6 DNS Settings

DNS Type: Select either **Obtain DNS server address automatically** or **Use the following DNS address**.

If **Use the following DNS address** is selected:

Primary DNS Server: Enter the primary DNS server address.

Secondary DNS Server: Enter the secondary DNS server address.

LAN IPv6 Address Settings

Enable DHCP-PD: Enable or disable prefix delegation services.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

If **Enable DHCP-PD** is disabled, these additional parameters are available for configuration:

LAN IPv6 Address: Enter a valid LAN IPv6 address.

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

IPv6 - PPPoE (Continued)

Advanced Settings... - Address Autoconfiguration Settings

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature. Enabling this feature will present additional configuration options.

Enable Automatic DHCP-PD in LAN: Enable or disable DHCP-PD (DHCP-Prefix Delegation) for automatic prefix assignment for LAN devices. This option is only available if DHCP-PD is enabled above.

Autoconfiguration Type: Select **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, or **Stateful DHCPv6**.

If you select **SLAAC+RDNSS** or **SLAAC+Stateless DHCP** as the Autoconfiguration Type:

Router Advertisement Lifetime: Enter the router advertisement lifetime (in minutes).

If you select **Stateful DHCPv6** as the Autoconfiguration Type:

IPv6 Address Range (Start): Enter the starting IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Range (End): Enter the ending IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Lifetime: Enter the IPv6 address lifetime (in minutes). The default is 10080 minutes.

IPv6 - 6rd

IPv6 rapid deployment (6rd) allows IPv6 packets to be transmitted over an IPv4 network. Click **Save** at any time to save the changes you have made on this page.

Assign IPv6 Prefix: Currently unsupported.

Primary DNS Server: Enter the primary DNS server address.

Secondary DNS Server: Enter the secondary DNS server address.

6rd Manual Configuration

Enable Hub and Spoke Mode: Enable this feature to minimize the number of routes to the destination by using a hub and spoke method of networking.

6rd Configuration: Choose the **6rd DHCPv4 Option** to automatically discover and populate the data values, or choose **Manual Configuration** to enter the settings yourself.

If you select **Manual Configuration** as the 6rd Configuration:

6rd IPv6 Prefix: Enter the 6rd IPv6 prefix and prefix length supplied by your ISP.

WAN IPv4 Address: Displays the router's IPv4 address.

6rd Border Relay IPv4 Address: Enter the 6rd border relay IPv4 address settings supplied by your ISP.

IPv6 - 6rd

LAN IPv6 Address Settings

LAN IPv6 Link-Local Address: Displays the router's LAN link-local address.

Advanced Settings... - Address Autoconfiguration Settings

Enable Automatic IPv6 Address Assignment: Enable or disable the Automatic IPv6 Address Assignment feature.

Autoconfiguration Type: Select **SLAAC+RDNSS**, **SLAAC+Stateless DHCP**, or **Stateful DHCPv6**.

If you select **SLAAC+RDNSS** or **SLAAC+Stateless DHCP** as the Autoconfiguration Type:

Router Advertisement Lifetime: Enter the router advertisement lifetime (in minutes). The default is 30 minutes.

If you select **Stateful DHCPv6** as the Autoconfiguration Type:

IPv6 Address Range (Start): Enter the starting IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Range (End): Enter the ending IPv6 address for the DHCP server's IPv6 assignment.

IPv6 Address Lifetime: Enter the IPv6 address lifetime (in minutes). The default is 10080 minutes

IPv6 - Local Connectivity Only

Local Connectivity Only allows you to set up an IPv6 connection that will not connect to the Internet. Click **Save** at any time to save the changes you have made on this page.

Advanced Settings - IPv6 ULA Settings

Enable ULA: Click here to enable Unique Local IPv6 Unicast Addresses settings.

Use Default ULA Prefix: Enable this option to use the default ULA prefix.

If you select **Enable ULA** and disable **Default ULA Prefix**:

ULA Prefix: Enter your own ULA prefix.

Advanced Settings - Current IPv6 ULA Settings

Current ULA Prefix: Displays the current ULA prefix.

LAN IPv6 ULA: Displays the LAN's IPv6 ULA.

Internet - VLAN

In the Settings menu on the bar at the top-left of the page, click **Internet** to see the Internet configuration options for the IPv4 connection details, then click the **VLAN** link to access the configuration options for the VLAN connection details.

VLAN allows for services such as Triple-Play to be used, and divides a network into segments that can only be accessed by other devices in the same VLAN.

To configure the IPv4 Internet and view network connection details, click the **IPv4** link. Refer to **IPv4** on **page 28**

To configure the IPv6 Internet and view network connection details, click the **IPv6** link. Refer to **IPv6** on **page 38**

Click **Save** at any time to save the changes you have made on this page.

Status: Click to enable or disable the Triple-Play VLAN feature. More configuration options will be available if the Status is enabled.

Internet - VLAN

If Triple-Play Status is **Enabled**:

VLAN TAG: Enable VLAN TAG to enter VLAN ID, as provided by your ISP

Internet VLAN ID: Enter the VLAN ID for your Internet connection, as provided by your ISP.

IPTV VLAN ID: Enter the VLAN ID for your IPTV service, as provided by your ISP.

VoIP VLAN ID: Enter the VLAN ID for your VoIP network, as provided by your ISP.

Priority ID: Enable or disable traffic priority ID for the Internet, IPTV, and VoIP VLANs. Select a priority ID from the drop-down menu to assign to the corresponding VLAN (0-7). Traffic with a higher priority ID takes precedence over traffic with a low priority ID tag.

Advanced Settings

IPTV /VOIP Connection is: You can select the IP addressing method for this type of service: Dynamic IP, Static IP, or Bridge.

If you select **Static IP** as the Address Mode:

IP Address: Enter the IP address provided by your ISP.

Subnet Mask: Enter the subnet mask provided by your ISP.

Devices Vendor Class: Enter the Vendor Class provided by your ISP.

Primary DNS Server: Enter the primary DNS server's IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server's IP address assigned by your ISP.

Multicast Streams: Enable or disable multicast streaming.

If you select **Dynamic IP** as the Address Mode:

Devices Vendor Class: Enter the Vendor Class provided by your ISP.

Primary DNS Server: Enter the primary DNS server's IP address assigned by your ISP.

Secondary DNS Server: Enter the secondary DNS server's IP address assigned by your ISP.

Multicast Streams: Enable or disable multicast streaming.

Interface Traffic Type Setting

LAN Port 1-4: From the drop-down menu, you can select the type of connection (Internet, IPTV, or Voice over IP) coming from the WAN connection to each interface on the router.

Mobile Network

From this page you can configure your mobile Internet settings. Click **Save** at any time to save the changes you have made on this page.

Connection Settings

Service Mode: From the drop-down menu, you can select the cellular technology.

Connection Mode: Select the connection mode.

Data Roaming: Enable or disable data roaming.

Dial-up Settings

APN Mode: Select Auto or Manual for setting the Access Point Name.

APN Name: Enter the Access Point Name if Manual is selected.

PDP Type Select the IP addressing mechanism: IPv4, IPv6 or both.

Username: Enter the connection's username.

Password: Enter the connection's password.

Dial Number Enter the the number to dial.

Authentication Type Enter the authentication type: Auto, PAP, CHAP, or NONE.

Wi-Fi Hotspot

From this page you can configure your Wi-Fi Hotspot Internet settings. Click **Save** at any time to save the changes you have made on this page.

Add Profile

Hotspot Name: Enter the Wi-Fi name(SSID) to be connected.

Password: Enter the Wi-Fi password for authentication.

You can also scan for available networks instead of entering the Wi-Fi name manually.

Internet Profiles

The Internet Profiles records the Internet connection settings of the device. From this page you can configure the failover function. When the current Internet connection is not available, the device will automatically connect using a redundant connection method used by the device previously.

Status

Enable or disable the Failover function.

To Edit a connection profile, click the Edit icon.

Wireless

From this page you can configure your Wi-Fi settings. Click **Save** at any time to save the changes you have made on this page.

Wi-Fi Mesh

Status: Enable Wi-Fi Mesh if you plan to build a mesh network in your environment. The Mesh network is able to find the shortest and fastest path to your gateway/router in a mesh network topology. Hence, it enhances efficiency and reliability.

Smart Connect

Status: Enable or disable the Smart Connect Feature. The Smart Connect feature presents a single wireless network. When connecting clients to the extended network, the clients will be automatically added to the best band, either 2.4 GHz or 5 GHz

If Smart Connect Status is Enabled:

Wireless

Wi-Fi Name (SSID): Enter a name for your Wi-Fi network. Up to 32 characters are allowed.

Password: Create a password for your Wi-Fi network. Wireless clients will need to enter this password to successfully connect to the network.

Wireless

Wireless - Advanced Settings

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal**, **WPA2/WPA3-Persoanl**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these. Note that WPS will be disabled if WPA3 is used.

DFS Channel: Enable Dynamic Frequency Selection (DFS) channels to use additional channel options if the router is not in an area close by an airport or a radar station. If enabled, the router will listen for radar signals, and if radar signals are detected, it will automatically switch to a new channel. The default is disabled.

Transmission Power: Select a desired wireless transmission power. The default is high.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to **Always Enable** or you can add your own schedule.

To add a schedule: Each box represents half an hour, with the clock time (0~23) at the top of each column.

To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

When Smart Connect Status is disabled, 2.4 GHz and 5 GHz configuration options become available.

2.4 GHz / 5 GHz

Status: Enable or disable the 2.4 GHz / 5 GHz wireless network.

Wi-Fi Name (SSID): Create a name for your wireless network. Up to 32 characters are allowed.

Password: Create a Wi-Fi password. Wireless clients will need to enter this password to successfully connect to the network.

2.4 GHz - Advanced Settings...

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal**, **WPA2/WPA3-Persoanl**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these. Note that WPS will be disabled if WPA3 is used.

802.11 Mode (2.4GHz): Select a desired wireless networking standard to use. The available options for the 2.4 GHz wireless network are **Mixed 802.11b/g/n/ax**, **Mixed 802.11b/g/n**, **Mixed 802.11b/g**, **Mixed 802.11g/n**, **802.11b only**, **802.11g only**, or **802.11n only**.

Wi-Fi Channel: Select a desired channel: 1-13. The default is **Auto** (recommended).

Transmission Power: Select a desired wireless transmission power: High, Medium, or Low.

Channel Width (2.4GHz): Select **Auto 20/40 MHz** if you are using a mix of 802.11ax, 802.11n, and older standards (802.11b/g) devices, Select **Auto 20/40 MHz** if you are using a mix of 802.11n and older standards (802.11b/g) devices or select **20 MHz** if you are using a mix of 802.11b/g devices.

Visibility Status: The default setting is **Visible**. Select **Invisible** if you do not want to broadcast the SSID of your wireless network.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to Always Enable or you can add your own schedule.

To add a schedule:

Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

5 GHz - Advanced Settings...

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal**, **WPA2/WPA3-Personal**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these. Note that WPS will be disabled if WPA3 is used.

802.11 Mode (5 GHz): Select a desired wireless networking standard to use. The available options for the 5 GHz wireless network are **Mixed 802.11a/n/ac/ax**, **Mixed 802.11a/n/ac**, **Mixed 802.11a/n**, **802.11ac only**, **802.11a only**, or **802.11n only**.

Wi-Fi Channel: Select a desired channel: 36, 40, 44, or 48. The default is **Auto** (recommended).

DFS Channel: Enable Dynamic Frequency Selection (DFS) channels to use additional channel options if the router is not in an area close by an airport or a radar station. If enabled, the router will listen for radar signals, and if radar signals are detected, it will automatically switch to a new channel. The default is disabled.

Transmission Power: Select a desired wireless transmission power: High, Medium, or Low. The default is High.

Channel Width (5 GHz): Select **Auto 20/40/80/160MHz** if you are using a mix of 802.11ax, 802.11ac, 802.11n, and 802.11a devices, select **Auto 20/40 MHz** if you are using 802.11n and 802.11a devices, or select **20 MHz** if you are using 802.11a devices only. The 80MHz and 160MHz is only available if DFS is enabled for 802.11ax and 802.11ac.

Visibility Status: The default setting is **Visible**. Select **Invisible** if you do not want to broadcast the SSID of your wireless network.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to Always Enable or you can add your own schedule.

To add a schedule:

Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

AI Wi-Fi Optimizer

AI-assisted Wi-Fi Optimizer intelligently assists with bandwidth optimization for your home or office network. It automatically adopts the "cleanest" channel using the mesh beamforming technology, which in turn optimizes the overall mesh network. It also provides push notifications on the network's weekly bandwidth utilization and also network management advice for client prioritization to maintain the highest overall Internet quality. Refer to the **D-Link FALCON** app for more information.

AI Wi-Fi Optimizer: Enable or disable AI Wi-Fi Optimizer functionality.

Choose Optimization Time: Enable or disable scheduled optimization. Select the time at which the AI Wi-Fi Optimizer will start.

Once the AI Wi-Fi optimizer is turned on, you will begin to receive weekly reports on Wi-Fi conditions through AI Assistant.

Wi-Fi Protected Setup

The easiest way to connect your wireless devices to your router is with Wi-Fi Protected Setup (WPS).

WPS-PBC Status: Enable or disable WPS Push Button Configuration (PBC) functionality. Enabling this feature will allow wireless clients to connect to the Wi-Fi through an encrypted connection established through pressing the WPS button. Note that WPS will be disabled if the security mode is WPA3 or None.

Guest Zone

The **Guest Zone** feature will allow you to create a temporary wireless network for guests to access the Internet. This zone will be separate from your main Wi-Fi network.

In the **Settings** menu on the left side of the page, click **Wireless**, then click the **Guest Zone** link. Click **Save** at any time to save the changes you have made on this page.

*If Smart Connect Status is **Enabled** in the previous Wireless settings, configure the following for both radio frequencies. If it is **Disabled**, configure the following for 2.4 GHz and 5 GHz individually.*

Wireless

Status: Enable or disable the Guest Wi-Fi network.

Wi-Fi Name (SSID): Enter a name for your guest wireless network.

Password: Create a password for your guest Wi-Fi network. Wireless clients will need to enter this password to successfully connect to the network.

Schedule: Select the time during which the wireless network will be available. The schedule may be set to Always Enable or you can add your own schedule.

To add a schedule:

Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule.

Advanced Settings

Security Mode: Choose **None**, **WPA/WPA2-Personal**, **WPA2-Personal**, **WPA2/WPA3-Personal**, or **WPA3-Personal**. WPA3 provides the highest level of encryption among these. Note that WPS will be disabled if WPA3 is used.



Home Network Access

Internet Access Only: Enabling this option will confine connectivity to the Internet, preventing guests from accessing other local network devices.

Network

This section allows you to change the local network settings of the router and configure the DHCP settings. In the Settings menu on the left side of the page, click **Network**. Click **Save** at any time to save the changes you have made on this page.

Network Settings

LAN IP Address: Enter the IP address of the router. The default IP address is **192.168.200.1**.

If you change the IP address, you will need to enter the new IP address in your browser to get back into the configuration utility.

Subnet Mask: Enter the subnet mask of the router. The default subnet mask is **255.255.255.0**.

Management Link: The default address to access the router's configuration is **http://DBR560-xxxx.local/** (where xxxx represents the last 4 digits of your router's MAC address). You can replace **DBR560-xxxx** with a name of your choice.

Local Domain Name: Enter the domain name (optional).

Enable DNS Relay: Disable to transfer the DNS server information from your ISP to your computers. If enabled, your computers will use the router's setting for a DNS server.

Status: Enable or disable the DHCP server.



Network

DHCP Server

DHCP IP Address Range: Enter the starting and ending IP addresses for the DHCP server's IP assignment.

Note: If you have reserved static IP addresses for client devices, make sure the IP addresses are outside of this range or you might have an IP conflict.

DHCP Lease Time: Enter the length of time for the IP address lease in minutes. The default is 10080 minutes.

Always Broadcast: Enable this feature to broadcast your network's DHCP server to LAN/WLAN clients.




Advanced Settings...

WAN Port Speed: You may set the port speed of the Internet port to **10 Mbps**, **100 Mbps**, **1000 Mbps**, or **Auto** (recommended).

UPnP: Enable or disable Universal Plug and Play (UPnP). UPnP provides compatibility with networking equipment, software, and peripherals. This is enabled by default.

IPv4 Multicast Streams: Enable to allow IPv4 multicast traffic to pass through the router from the Internet. This is enabled by default.

IPv6 Multicast Streams: Enable to allow IPv6 multicast traffic to pass through the router from the Internet. This is enabled by default.

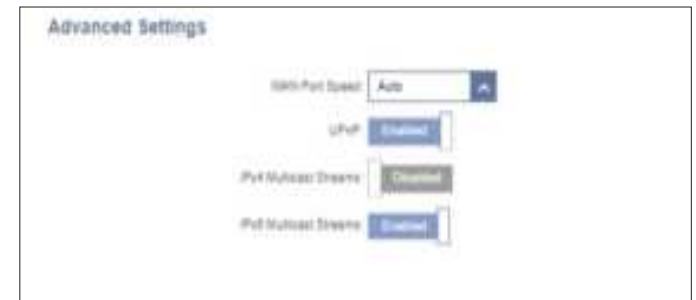

USB Sharing

This page allows you to set up access to files on an external USB device plugged into the router. The built-in Join N' Share web-based file sharing further allows you to perform file sharing through local network. To access this page, go to **Settings > USB Sharing**.

Join N' Share

Status: Enable or disable file sharing. Computers and devices will be able to access the files on the USB device connected to this router through a web browser.

Local Access Port: Enable remote local file sharing with a designated port number.

Remote Access

Remote Access Port Enable remote file sharing across the Internet with a designated port number.

Folder Enter the root file directory for access. Click Browse to browse through the file system of the connected USB drive.



User

This page allows you to set up user accounts for USB file sharing. Click **Save** at any time to save the changes you have made on this page. Click **Create User** to configure user permissions.

User Settings

- User Name:** Name a new user account.
- Password:** Enter a password for this user.



Create New User

User Name:

Password:

D-Link Cloud

In the **Settings** menu on the left side of the page, click **D-Link Cloud** to see your D-Link Cloud Service details. This page shows whether you are registered with D-Link Cloud Service and your email address associated with the account. Use the FALCON app to find out more about D-Link Cloud's features.



Features

Parental Control

Go to **Features > Parental Control** to configure parental control policies. You can configure schedules that restrict online hours and prevent access to certain websites. Click **Save** at any time to save the changes you have made on this page. This page displays a list of profiles with the following information:

- Profile Name** The name describes this profile.
- Device Count** The number of devices that this policy will be applied to.
- State** Displays the current status of Internet accessibility, i.e. Normal, Schedule Paused, or Paused on Demand.
- Edit** Edit the access profile.
- Delete** Remove this access profile.



A maximum of 12 profiles can be defined. Once a profile has been set, you will start receiving weekly reports on Internet access activity of the clients through AI Assistant.

To add a profile, configure the following:

Schedule

Profile Name:

Enter a profile name for the schedule.

Allow Scheduled Internet Access:

Set a time period for the devices to be allowed or disallowed Internet access.

To add a schedule:

Each box represents half an hour, with the clock time (0~23) at the top of each column. To add a time period to the schedule, simply click on the start time and drag to the end time. You can add multiple days and multiple periods per day to the schedule. **Note that Yellow highlights are blocked periods.**

**Block Internet Access
During Bedtime**

Click **Enabled** and define a schedule to block Internet access during bedtime.

To add a bedtime schedule:

Select the time during which bedtime schedule will be active. Select the days of the week, then select the pause time and the resume time for the period during which Internet access will be blocked. To specify different time periods for days of the week, click **Add another Bedtime schedule...** A maximum of 2 schedules can be defined.

Allow Limited Access

Enable this option to allow slow Internet access with reduced speed during restricted hours set above.

Click **Apply** when you are done.

Website Filter

Click **Add Rule** to add a new website to be blocked:

Website Name Enter a name for the website. This blocks access to websites according to the domain names. For example, use "ABC.com" to block both "ABC.com" and "www.ABC.com".

URL Keyword This blocks access to websites according to the keywords with matching URLs. For example, use "ABC" to block "www.ABC.com" and "xxx.ABC.com" and other URLs containing ABC.

You can also modify or delete an existing rule by clicking **Edit** or **Delete** respectively.

Device

Click **Add Device** to add devices to be in a defined profile. Select devices from the list of connected devices to which you want to apply the access policy to, then click **Apply** to close the screen. Click **Save** to save your profile settings and the new profile will be added to the profile list. You can also modify or delete an existing profile by clicking **Edit** or **Delete** respectively. On the **Edit** page for a selected profile, you can immediately **Pause for Internet Access** to specified devices of the profile.

Click **Settings** to view the messages displayed to the Internet access restricted users.

Blocked Webpage Message

You can view and customize displayed messages and titles in **Settings** when **Manual Pause Control**, **Website Filter**, **Custom Schedule**, and **Bedtime Schedule** is enabled. Click on **Settings** to edit Blocked Webpage Message.

Title: Enter a title for the message in the text box.

Description: Enter a message to inform users about the restricted Internet access.

Reset this message: Click this button to reset the modified message to factory default.

Preview this message: Displays the message on a new page.

Cellular Data Cap

Go to **Features > Cellular Data Cap** to configure the Data Cap settings for your device. You can monitor the data usage in real-time and receive alert messages when you reached your data usage allowance.

Click **Save** at any time to save the changes you have made on this page.

Blocked Webpage Message

Data Cap: Enable or disable data cap.

Amount: Set the maximum data usage allowance in GB.

Warning Ratio (%): Set the Warning Ratio to which an alert message will be triggered.

Reset Date Monthly: Enter a day of the month in which the data cap will be reset.

Send SMS: Enable or disable **Send SMS** when the data cap is reached

Phone Number: When **Send SMS** is enabled, enter the phone number for an alert message to be sent.

Note: Sending SMS messages may incur additional fees. Please contact your ISP for more information.



The screenshot shows the 'Cellular Data Cap Settings' page. At the top, there is a title 'Cellular Data Cap Settings'. Below it, there are several settings: 'Data Cap' with a toggle switch set to 'Enabled'; 'Amount' with a text input field containing '1' and a unit selector set to 'GB'; 'Warning Ratio (%)' with a slider set to '100%'; 'Reset Date (month)' with a text input field containing '1'; 'Current data consumption' showing '0.000 GB'; a 'Reset Data' button; and 'Send SMS' with a toggle switch set to 'Disabled'.

SMS

Go to **Features** -> **SMS** to send or receive SMS messages. This page shows all messages that are stored on the SIM card. Click **Save** at any time to save the changes you have made on this page.

Cellular SMS Settings

SMS: Enable or disable the SMS receiving function.

Storage: Select **SIM Card** or **Modem** to store the SMS messages.

Keep Message: Enable or disable Keep Message.

Keep Number: Set the amount of SMS messages to be saved. Up to 20 messages can be saved.



Click **New SMS** to create new SMS messages.

Cellular SMS Settings

Phone Number: Enter the phone number of a recipient.

Message Enter your message here.



From the SMS page, click on **Inbox** to manage the SMS messages you have received. Select a message to display its contents in the SMS window. After you read it, you can delete it or reply to the sender.

Inbox

Status: Displays the status of the message.

ID: Displays the sender's ID.

UnRead: Displays whether the message has been read or not.

Date Time: Displays the time and date at which the message is received.

From Phone Number: Displays the phone number of the sender.

Message Preview: Displays a preview of the selected message.

Delete: Deletes the selected SMS message.



PIN

Go to **Features** -> **Pin** to configure your SIM card's PIN. Click **Save** at any time to save the changes you have made on this page.

Inbox

SIM PIN Lock Settings: Enable or disable SIM PIN Lock

SIM card status: Displays the status of your SIM card.

To change your SIM's PIN, enter a new PIN in the PIN text field. After enabling your PIN protection, you'll have to input your PIN whenever your SIM card is switched.

Click **Apply** when you are done.



Firewall

The integrated firewall helps protect your network from malicious attacks over the Internet. In the Features menu on the bar on the top-left of the page, click **Firewall Settings**. Click **Advanced Settings...** to expand the list and see all of the options.

To configure the IPv4 firewall rules, click the **IPv4 Rules** tab. Refer to **Firewall Settings - IPv4/IPv6 Rules** on **page 73**

To configure the IPv6 firewall rules, click the **IPv6 Rules** tab. Refer to **Firewall Settings - IPv4/IPv6 Rules** on **page 73**

Click **Save** at any time to save the changes you have made on this page.

Enable DMZ: Enable or disable Demilitarized Zone (DMZ). Devices in this zone are completely exposed to threats over the Internet, and is not recommended unless they are servers that must be exposed to the WAN.

DMZ IP Address: If you enabled DMZ, enter the IP address of the client you wish to expose, or use the drop-down menu to quickly select it.

Enable SPI IPv4: Enabling Stateful Packet Inspection (SPI) or dynamic packet filtering helps prevent cyber attacks by tracking more states per session to validate that the traffic passing through the session conforms to the protocol.

Enable Anti-Spoof Checking: Enable this feature to protect your network from certain kinds of “spoofing” attacks.

IPv6 Ingress Filtering: Enable or disable IPv6 ingress filtering for incoming packets to prevent suspicious senders



Firewall

Advanced Settings...

Application Level Gateway (ALG) Configuration

Different ALGs provide special handling for specific protocols or applications. A number of ALGs for common applications are enabled by default as stated below.

PPTP: Allows multiple machines on the LAN to connect to their corporate network using the PPTP protocol.

IPSec (VPN): Allows multiple VPN clients to connect to their corporate network using IPSec. Some VPN clients support traversal of IPSec through NAT. This Application Level Gateway (ALG) may interfere with the operation of such VPN clients. If you are having trouble connecting with your corporate network, try turning this ALG off. Please check with the system administrator of your corporate network whether your VPN client supports NAT traversal.

RTSP: Allows applications that uses Real Time Streaming Protocol (RTSP) to receive streaming media from the Internet.

SIP: Allows devices and applications using VoIP (Voice over IP) to communicate across NAT. Some VoIP applications and devices have the ability to discover NAT devices and work around them. This ALG may interfere with the operation of such devices. If you are having trouble making VoIP calls, try turning this ALG off.



Firewall Settings - IPv4/IPv6 Rules

The IPv4/IPv6 Rules section is an advanced option that lets you configure what traffic is allowed to pass through the network. Go to **Features > Firewall**, then click the **IPv4 Rules** tab or the **IPv6 Rules** tab to configure rules for filtering the inbound/outbound traffic based on parameters like IP address with ports.

To configure the Firewall Advanced settings, click the **Advanced** link. Refer to **Firewall** on **page 72**.

To begin, use the drop-down menu to select whether you want to **ALLOW** or **DENY** the rules you create. You can also choose to turn **OFF** filtering.

To remove a rule, click on the trash can icon in the Delete column. To edit a rule, click on the pencil icon in the Edit column.

Firewall Settings - IPv4/IPv6 Rules

To create a new rule, click on the **Add Rule** button. Click **Save** when you are done. A maximum of 24 rules can be defined. If you edit or create a rule, the following options will appear:

Name: Enter a name for the rule.

Source IP Address Range: Enter the source IP address range (e.g. 1.1.1.1-1.1.1.2 for IPv4 or 2001::1-2001::2 for IPv6) that the rule will apply to, and using the drop-down menu to specify whether it is a **WAN** or **LAN** IP address. Both a single IP address and a range of IP addresses can be entered.

Destination IP Address Range: Enter the destination IP address range (e.g. 1.1.1.1-1.1.1.2 for IPv4 or 2001::1-2001::2 for IPv6) that the rule will apply to, and using the drop-down menu to specify whether it is a **WAN** or **LAN** IP address. Both a single IP address and a range of IP addresses can be entered.

Protocol & Port Range: Select a traffic protocol to allow or deny (**Any**, **TCP**, or **UDP**) and then enter a range of ports (e.g. 21-23) that the rule will apply to. Select **Any** to allow/deny all types of traffic regardless of the port number.

Schedule: Use the drop-down menu to select a time schedule that the rule will be enabled on. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedule** section. Refer to **Time & Schedule - Schedule** on **page 95** for more information.

Click **Apply** when you are done.

Port Forwarding

Port forwarding allows you to specify a port or range of ports to forward to specific devices on the network. This might be necessary for certain applications to connect through the router. For example, access from the Internet can be redirected to a DMZ host using Port Forwarding.

In the **Features** tab on the left side of the page, click **Port Forwarding**. To remove a rule, click on its trash can icon in the Delete column. To edit a rule, click on its pencil icon in the Edit column. To create a new rule, click the **Add Rule** button. Click **Save** when you are done. If you edit or create a rule, the following options will appear:

Name: Enter a name for the rule.

Local IP: Enter the IP address of the device on your local network to which the port will be forwarded. Alternatively, select the device from the drop-down menu.

TCP Port: Enter the TCP ports that you want to forward. You can enter a single port or a range of ports and separate ports with a comma (for example, 24,1009,3000-4000).

UDP Port: Enter the UDP ports that you want to forward. You can enter a single port or a range of ports and separate ports with a comma (for example, 24,1009,3000-4000).

Schedule: Use the drop-down menu to select a time schedule that the rule will be enabled on. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedule** section. Refer to **Time & Schedule - Schedule** on **page 95** for more information.

Click **Apply** when you are done.

Port Forwarding - Virtual Server

The virtual server allows you to specify a single public port on your router for redirection to an internal LAN IP address and Private LAN port. This might be necessary if you are hosting services behind the router.

To configure the virtual server, click **Virtual Server** from the **Port Forwarding** page. To return to the main Port Forwarding page, click **Port Forwarding**.

To remove a rule, click on its trash can icon in the **Delete** column. To edit a rule, click on its pencil icon in the **Edit** column.

Port Forwarding - Virtual Server

To create a new rule, click the **Add Rules** button. Click **Apply** when you are done. If you edit or create a rule, the following options will appear:

Name: Enter a name for the rule. Alternatively, select the protocol/ Application from the drop-down menu. Depending on a requested service, the router redirects the external service request to an appropriate internal host.

Local IP: Enter the IP address of the device on your local network to which the external port will forward. Alternatively, select the device from the drop-down menu.

Protocol: Select a traffic protocol to allow or deny (**TCP**, **UDP**, **Both**, or **Other**).

Protocol Number: If you select **Other** as the protocol, enter the protocol number.

External Port: If you select **TCP**, **UDP**, or **Both** as the protocol, enter the public port you want to forward.

Internal Port: If you select **TCP**, **UDP**, or **Both** as the protocol, enter the private port you want to open.

Schedule: Use the drop-down menu to select a time schedule that the rule will be enabled on. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedule** section. Refer to **Time & Schedule - Schedule** on **page 95** for more information.

Static Routes - IPv4

The Static Routes section allows you to define custom routes to control how traffic moves around your network.

In the **Features** tab on the left side of the page, click **Static Routes**. To configure IPv6 routes, click **IPv6** and refer to **Static Routes - IPv6** on [page 84](#). To return to the main **IPv4 static routes** page, click **IPv4**.

To remove a rule, click on the trash can icon in the Delete column. To edit a rule, click on the pencil icon in the Edit column. To create a new route, click the **Add Route** button. Click **Save** when you are done. If you edit or create a route, the following options will appear:

Name: Enter a name for the route.

Destination Network: Enter the destination IP address of this route.

Mask: Enter the subnet mask of the route.

Gateway: Enter your next hop gateway to be taken if this route is in use.

Metric: The route metric is a value from 1 to 16 that indicates the cost of using this route. A value of 1 represents the lowest cost and 16 the highest cost.

Interface: Select an interface that the IP packet must use to transit out of the router when this route is in use.

Click **Apply** when you are done.

Static Routes - IPv6

To configure IPv6 routes, click **IPv6** on the **Static Routes** page. To return to the main **IPv4 static routes** page, click **IPv4**.

To remove a rule, click on the trash can icon in the Delete column. To edit a rule, click on the pencil icon in the Edit column. To create a new rule, click the **Add Rules** button. Click **Apply** when you are done. If you edit or create a rule, the following options will appear:

Name: Enter a name for the route.

DestNetwork: This is the IP address of the router used to reach the specified destination.

PrefixLen: Enter the IPv6 address prefix length of the packets that will take this route.

Gateway: Enter your next hop gateway to be taken if this route is in use.

Metric: The route metric is a value from 1 to 16 that indicates the cost of using this route. A value of 1 represents the lowest cost and 16 the highest cost.

Interface: Select an interface that the IP packet must use to transit out of the router when this route is in use.

Dynamic DNS

Most ISPs assign dynamic IP addresses. A dynamic DNS service provider allows users to enter their domain name in their web browser to connect to the server no matter what their IP address is. This feature is helpful when running a virtual server. Click **Save** at any time to save the changes you have made on this page.

In the **Features** tab on the left side of the page, click **Dynamic DNS**.

Enable Dynamic DNS: Enable or disable dynamic DNS. Enabling this feature will reveal further configuration options.

Status: Displays the current dynamic DNS connection status.

Server Address: Select a Dynamic DNS server from the drop-down menu.

Host Name: Enter the host name that you registered with your dynamic DNS service provider.

User Name: Enter your dynamic DNS username.

Password: Enter your dynamic DNS password.

Time Out: Enter a time-out value (in hours) to indicate how often the router should update its Dynamic DNS settings.

Dynamic DNS

At the bottom of the page are the IPv6 host settings. A maximum of 10 records can be defined. To remove a record, click on its trash can icon in the Delete column. To edit a rule, click on its pencil icon in the Edit column. To create a new record, click the **Add Record** button. Click **Save** when you are done. If you edit or create a record, the following options will appear:

Host Name: Enter the host name that you registered with your dynamic DNS service provider.

IPv6 Address: Enter the IPv6 address of the dynamic DNS server. Alternatively, select the server device in the drop-down menu.

Click **Apply** when you are done.

Security

IPSec

IPSec facilitates VPN communications with security capabilities. This page allows you to create an IPSec tunnel between two sites and set parameters for authentication method and encryption algorithm.

Click **Add Rule** and configure the following to set up an IPSec profile for VPN connections:

IPSec Settings

Connection Name: Name this IPSec connection.

Local Gateway IP: Enter the IP address of the local gateway for this tunnel.

Remote Gateway IP: Enter the IP address of the remote gateway for this tunnel.

Local Access Range: Select either **Single IP** or **Subnet**. Note that the local and remote access range should use different subnetworks.

Local IP Address: Enter the IP address of the local device that can use this tunnel.

IP Subnet Mask: Enter the subnet mask if you choose **Subnet** for Local Access Range.

Remote Access Range: Select either **Single IP** or **Subnet**. Note that the local and remote access range should use different subnetworks.

Remote IP Address: Enter the IP address of the remote device that can use this tunnel.

IP Subnet Mask: Enter the subnet mask if you choose **Subnet** for Remote Access Range.

Pre-Shared Key: Enter a pre-shared key to authenticate a remote peer. Up to 16 characters including symbols can be entered. Both local and remote device of the VPN tunnel must use the same pre-shared Key.

Perfect Forward Secrecy: Enable or disable Perfect Forward Secrecy. It uses public key cryptography to improve the security of IPSec data communication.

NAT Traversal: Enable or disable NAT traversal for the negotiation of an IPSec VPN connection. It allows IPSec VPN traffic to pass if NAT is used on the gateways.

Key Exchange Phase 1

Exchange Mode: Select **Main**, **Aggressive** or **Base**. The Main mode sends first two messages for negotiating the encryption and authentication method. In general, Aggressive mode is faster than the Main mode but offers less protection against authentication security. Unlike the Aggressive and Main Mode, the Base Mode can transmit the key exchange information and authentication data together .

Encryption Algorithm: Select encryption method as the algorithm for encrypting data packets. The options are **DES**, **3DES**, **AES-128**, **AES-192** or **AES-256**.

Authentication Algorithm: The authentication algorithm validates data packets. Select **MD5**, **SHA1**, or **SHA256**. Both local and remote device of the VPN tunnel must use the same authentication algorithm. Both MD5 and SHA are one-way hashing algorithm but produce different number of digest bit.

Diffie-Hellman Group: The Diffie-Hellman key exchange protocol offers different prime key lengths. Select **768**, **1024**, **1536**, **2048**, **3072**, or **4096 bit**.

Key Life Time: Enter the amount of time that a key is active in Phase 1. Then select the unit: **Seconds, Minutes** or **Hours**.

Key Exchange Phase 2

Encryption Algorithm: Select encryption method as the algorithm for encrypting data packets. The options are **DES, 3DES, AES-128, AES-192** or **AES-256**.

Authentication Algorithm: The authentication algorithm validates data packets. Select **MD5, SHA1**, or **SHA256**. Both local and remote device of the VPN tunnel must use the same authentication algorithm. Both MD5 and SHA1 are one-way hashing algorithm but they produce different length of digest bits.

Diffie-Hellman Group: The Diffie-Hellman key exchange protocol offers different prime key lengths. Select **768, 1024, 1536, 2048, 3072**, or **4096 bit**.

Key Life Time: Enter the amount of time that a key is active in Phase 2. Then select the unit: **Seconds, Minutes** or **Hours**.

Click **Save** when you are done. You can create up to 7 IPSec profiles.

OpenVPN

In the **Security** tab on the left side of the page, click **OpenVPN**. This page will help you configure the OpenVPN feature of your router. Before proceeding, ensure that your Internet connection is working properly. We recommend configuring Dynamic DNS before proceeding with OpenVPN setup. If your router is assigned with an IP address from your ISP using DHCP, it may frequently change, requiring client credentials to be set up again. A DDNS address can avoid this hassle.

To configure the Client settings, click the **Client** tab. Click **Save** at any time to save the changes you have made on this page.

- L2TP over IPsec:** Enable or disable the OpenVPNserver.
- Username:** Enter a username between 1 and 20 characters.
- Password:** Enter a password between 1 and 20 characters.
- PSK:** Enter a passkey between 6 and 64 characters.
- VPN Profile for iOS Device and MAC OS X:** Click export to save the VPN profile settings file for iOS devices or Mac OS X.

Advanced Settings...

- Authentication Protocol:** Choose an authentication protocol type: **MSCHAPv2**, **PAP**, or **CHAP**. **MSCHAPv2** is the default.
- MPPE:** Select encryption cipher strength: **None**, **RC4-40**, or **RC4-128**. **None** is the default.

L2TP

VPN connections use Layer 2 Tunneling Protocol (L2TP) to build tunnels. Click **Save** at any time to save the changes you have made on this page.

L2TP Server Configuration

Status: Enable or disable STUN (Session Traversal Utilities for NAT) server.

Server Address: Enter the STUN server address.

Server Port: Enter the port number for the STUN service.

Username: Enter the username for the STUN service.

Password: Enter the password for the STUN service.

Maximum Keep Alive Period: The maximum number of minutes of keepalive interval.

Minimum Keep Alive Period: The minimum number of minutes of keepalive interval.

PPTP

PPTP is another tunnelling technology for VPN . It differs from L2TP in many aspects, including security and connection speed. Click **Save** at any time to save the changes you have made on this page.

PPTP Server Configuration

Status: Enable or disable STUN (Session Traversal Utilities for NAT) server.

Server Address: Enter the STUN server address.

Server Port: Enter the port number for the STUN service.

Username: Enter the username for the STUN service.

Password: Enter the password for the STUN service.

Maximum Keep Alive Period: The maximum number of minutes of keepalive interval.

Minimum Keep Alive Period: The minimum number of minutes of keepalive interval.

WireGuard

WireGuard is a more recent and secure protocol designed to support simple and yet efficient VPN connections. Click **Save** at any time to save the changes you have made on this page.

WireGuard Server Configuration

Status: Enable or disable STUN (Session Traversal Utilities for NAT) server.

Server Address: Enter the STUN server address.

Server Port: Enter the port number for the STUN service.

Username: Enter the username for the STUN service.

Password: Enter the password for the STUN service.

Maximum Keep Alive Period: The maximum number of minutes of keepalive interval.

Minimum Keep Alive Period: The minimum number of minutes of keepalive interval.

Management

Time & Schedule - Time

The **Time** page allows you to configure, update, and maintain the correct time for the internal clock system. From here you can set the time zone and the Network Time Protocol (NTP) server.

In the **Management** tab on the left side of the page, click **Time & Schedule**. Click **Save** at any time to save the changes you have made on this page.


Time Configuration

Time Zone: Select your time zone from the drop-down menu.

Time: Displays the current date and time of the device.

Automatic Time Configuration

NTP Server: Select one of the following servers from the drop-down menu to synchronize the time and date for your router:
D-Link NTP Server or Google NTP Server.
Choose Manual to set the NTP server's IP address or domain name.

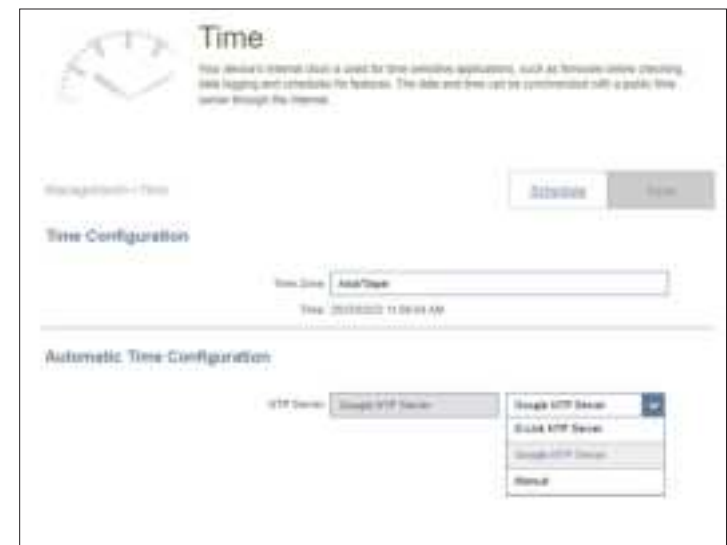

Time & Schedule - Schedule

Some functions can be controlled through a pre-configured schedule. To create, edit, or delete schedules, click **Schedule** from the **Time** page. To return to the **Time** page, click **Time**.

To remove a rule, click on the trash can icon in the Delete column. To edit a rule, click on its pencil icon in the Edit column. To create a new rule, click the **Add Device** button. Click **Save** when you are done. If you edit or create a rule, the following options will appear:

First, enter a name for your schedule in the **Name** field.

Then, set up your schedule. Each box represents half an hour, with the time at the top of each column and the day of the week to the left of each row. To add a time period to the schedule, simply click on the starting hour and drag to the ending hour. You can add multiple days and multiple periods per day to the schedule.

To remove a time period from the schedule, click on the cross icon at the end of the highlighted section.

Click **Apply** when you are done.



System Log

The router keeps a running log of events. This log can be sent to a Syslog server or your email address. In the **Management** tab on the left side of the page, click **System Log**. Click **Save** at any time to save the changes you have made on this page.


Log Settings

System Log: Click the **Check System Log** to download a copy of the system log to your hard drive. You can view the log entries by opening them with any text editing applications, such as WordPad, on Windows.

SysLog Settings

Enable Logging to Syslog Server: Enable this function to send the router's logs to a SysLog Server.

Syslog Server IP Address: If **Enable Logging to Syslog Server** is **Enabled**, enter the IP address of the Syslog server. Or, select from the drop-down menu for IP address auto-population if the Syslog server is connected to the router.

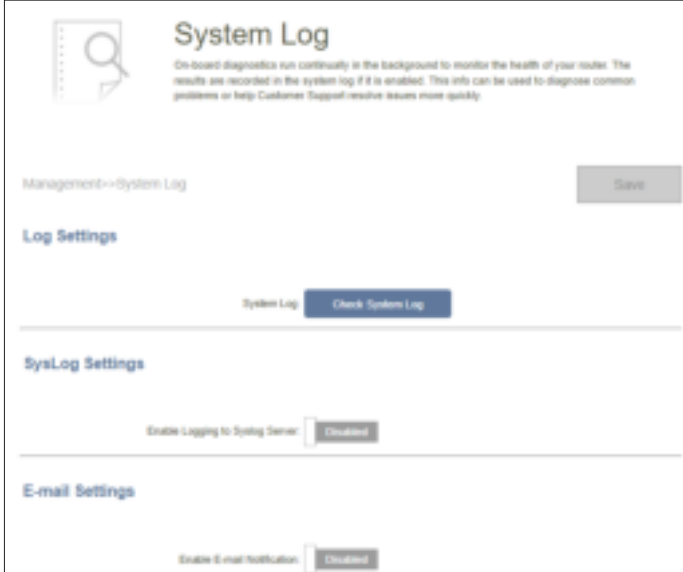

The screenshot shows the 'System Log' configuration page. At the top, there is a header with a magnifying glass icon and the title 'System Log'. Below the header, a note states: 'On-board diagnostics run continually in the background to monitor the health of your router. The results are recorded in the system log if it is enabled. This info can be used to diagnose common problems or help Customer Support resolve issues more quickly.' The page is divided into three main sections: 'Log Settings', 'SysLog Settings', and 'E-mail Settings'. In the 'Log Settings' section, there is a 'System Log' label and a 'Check System Log' button. In the 'SysLog Settings' section, there is a label 'Enable Logging to Syslog Server' and a 'Disabled' button. In the 'E-mail Settings' section, there is a label 'Enable E-mail Notification' and a 'Disabled' button. A 'Save' button is located in the top right corner of the page.

System Log

Email Settings

Enable E-mail Notification: Enable this option if you want the logs to be automatically sent to an email address.

If E-mail notification is Enabled:

From E-mail Address: Enter an email address your SysLog messages will be sent from.

To E-mail Address: Enter an email address your SysLog messages will be sent to.

SMTP Server Address: Enter your SMTP server address.

SMTP Server Port: Enter your SMTP server port. The default is 25.

Enable Authentication: Enable this option if your SMTP server requires authentication.

Account Name: Enter your SMTP account name.

Password: Enter your SMTP account password.

E-mail Log When Full or On Schedule

Send When Log Full: If enabled, the router is set to automatically send the log when it is full.

Send on Schedule: If enabled, the router is set to send the log according to a set schedule.

Schedule: If you want to enable **Send On Schedule**, use the drop-down menu to select a schedule to apply. The schedule may be set to **Always Enable**, or you can create your own schedules in the **Schedule** section. Refer to **Time & Schedule - Schedule** on **page 95** for more information.

System Admin Admin

This page allows you to change the administrator (Admin) password and enable the HTTPS server. In the **Management** tab on the left side of the page, click **System Admin**. Click **Save** at any time to save the changes you have made on this page.

Admin Password

Password: Enter a new password for the administrator account. You will need to enter this password whenever you configure the router using a web browser.

Advanced Settings - Administration

Enable HTTPS Management: Enable **HTTPS Management** to connect to the extender securely.

Enable HTTPS Remote Management: Enable **HTTPS Remote Management** over the Internet using encrypted HTTP connection.

Remote Admin Port: The port number is used in the URL to access the web configuration page. The default port number is **8081**.

Note: If you enabled **Use HTTPS** and wish to access the router remotely and securely, you must enter https:// at the beginning of the address.



Admin

LED Control

Status LED: Choose to enable or disable the status LED indicator on the router and other Mesh Point(s). When disabled, the LED will no longer light up solid white during normal operation and will instead turn off.

The LED will still light up with the corresponding color and mode in any of the following circumstances:

Color	Status	Router Mode	Extender Mode	Bridge Mode
White	Solid	Connected to the Internet with strong signal	Connected to the network with strong signal	Connected to the Internet with strong signal
	Blinking	Establishing a WPS connection	Uplink to your router is weak, or DBR-560 is establishing a WPS connection	Establishing a WPS connection
Orange	Blinking	Ready for connection	Not connected	Not connected
White/Orange	Interleaving	Firmware updating	Firmware updating	Firmware updating
Red	Blinking	Resetting to factory default	Resetting to factory default	Resetting to factory default
	Solid	Powering on	Powering on	Powering on

Once any of the above situations has ended, the LED will briefly light up and then turn off again.

System

This page allows you to backup, restore configuration settings or restore settings from a previous backup, reset, and set up a reboot schedule for the device. On the **System Admin** page, click **System**. Click **Save** at any time to save the changes you have made on this page.

System

- Save Settings To Local Hard Drive:

Click **Save** to download a backup file (bin type) of your current configuration settings to your local hard drive. This backup can later be used to restore your settings.
- Load Settings From Local Hard Drive:

Click **Select File** to load a previously saved router configuration file. This will overwrite the router’s current configuration.
- Restore To Factory Default Settings:

Click **Restore** to restore all configuration settings back to the settings that were in effect at the time the device was shipped from the factory. Any settings that have not been saved will be lost, including rules that you have created.



Auto Reboot Configuration

- Reboot the Device:

Click **Reboot** to reboot the device immediately.
- Auto Reboot:

Use the drop-down menu to select a schedule for the device to automatically reboot. The schedule may be set to **Never**, **Daily**, or **Weekly**. You may set a day and hour and minute of a day for automatic reboot.



User

The User section is used to create, manage, and delete user accounts that have access to certain router services. In the **Management** tab on the left side of the page, click **User**.

Click **Save** at any time to save the changes you have made on this page.

To remove a user, click on the trash can icon in the **Delete** column. To edit a user, click on the pencil icon in the **Edit** column.

To create a new user, click the **Create User** button.

- User Name** Enter a username for the new user account.
- Password** Enter a password for the new user account.
- Status** Enable or disable VPN functionality for this user.

A maximum of 9 users (not including the Admin) can be created. Click **OK** to close the screen.

Upgrade

This page allows you to upgrade the router's firmware, either automatically or manually. To manually upgrade the firmware, you must first download the latest firmware file from **<http://support.dlink.com>**.

In the **Management** tab on the left side of the page, click **Upgrade**. Click **Save** at any time to save the changes you have made on this page.

Firmware Information

Master: Displays the name of the master router.

Firmware Version: Displays the current firmware version of the router.

Check for New Firmware: Click this button to prompt the router to automatically check for a new firmware version. If a newer version is found, click **Upgrade Firmware** to download and install the new firmware.

Advanced Settings... Upgrade Manually

Device Name: Select a device in the mesh network for manual update.

Select File: Click the **Select File** button and browse your computer to locate the firmware file you want to install. With the file selected, click **Upload** to begin the upgrade process.

Automatic Firmware Update

Automatic Upgrade: If enabled, the router will automatically upgrade to the newest firmware. The system will automatically upgrade to the latest firmware every day at 3:30-4:00 AM.

Choose Upgrade Time: Enable this function to set the router's automatic firmware upgrade at a set time every day.

Upgrade Time: Configurable if **Choose Upgrade Time** is enabled. Set the hour and minute to automatically upgrade the router.

Statistics

On the **Statistics** page, you can view the amount of packets that pass through your Internet and LAN interfaces as well as the traffic from Wi-Fi 2.4 GHz and Wi-Fi 5 GHz networks.

In the **Management** tab on the left side of the page, click **Statistics**.

Router


You can view the **Internet**, **LAN**, **Wi-Fi 2.4 GHz**, and **Wi-Fi 5 GHz** by clicking on the respective tabs at the top of the graph. The graph will update in real time. To clear the information of the graph, click **Clear**.

The table below for each interface and radio frequency shows the total number of packets and data that are sent and received through the interface. The traffic counter will reset if the device is rebooted.


Quick VPN

This router is equipped with D-Link's OpenVPN technology. Virtual Private Networking (VPN) creates a connection between devices across the Internet. Using OpenVPN allows you to connect your computer or mobile device to places with free, untrusted Wi-Fi hotspots in places like coffee shops and hotels by encrypting and relaying it through your home Internet connection. This extra 'hop' reduces the chances of hackers stealing your information, such as logins, passwords, and credit card numbers. When traveling, OpenVPN lets you watch sports and use video streaming services without experiencing blackouts or filtering. You can surf the whole Internet unfiltered and unblocked, just as you would at home.

Without Quick VPN

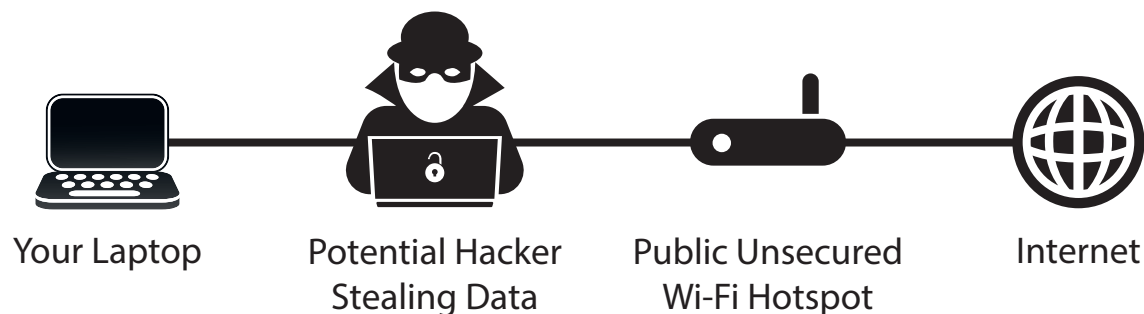

With Quick VPN

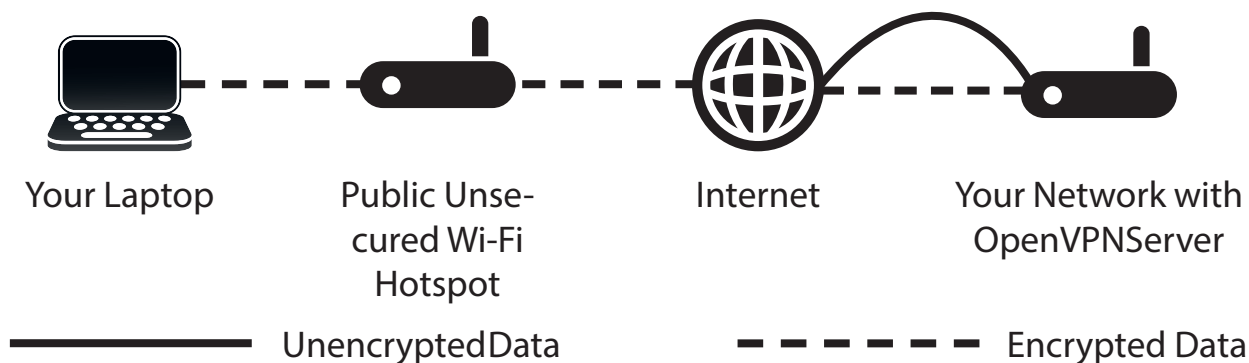

Important Information

The following instructions explain and help you configure your D-Link OpenVPN-enabled router and devices to create a Virtual Private Network (VPN). This feature is intended for advanced users who wish to connect remotely and use their router's Internet connection with an extra layer of security while using untrusted networks. Configure an OpenVPN Server on your router first and then set up client devices to connect through your router's WAN connection.

- OpenVPN only provides an added layer of security against specific types of snooping attacks and does not guarantee complete data integrity or protection. Only traffic in the tunnel between your router and device will be encrypted, WAN traffic will leave your D-Link OpenVPN-enabled router unencrypted.
- Keep your OpenVPN Username, Password, and Passkey safe. It is recommended that you change these credentials periodically.
- A device connected via OpenVPN tunnel may experience lower data throughput and higher latency due to a number of factors including but not limited to Internet conditions, local and remote network Wi-Fi and WAN bandwidth limitations, and increased latency. This may negatively affect real-time voice and video communication.
- OpenVPN supports up to five concurrent VPN client sessions using the same login and password. OpenVPN uses L2TP/IPsec with MSCHAPv2, PAP, or CHAP authentication.
- Your device may warn you of your information being intercepted, and you may ignore this warning since you are in control of the OpenVPN server.
- UDP Ports 500, 4500, 1701 and IP Port 50 must be open in order for OpenVPN to work.
- L2TP/IPsec VPN usage may be restricted in some countries and on some networks. If you have trouble using OpenVPN on some networks and are sure you are not violating any network access rules, try to contact your ISP or network administrator.
- Devices connected via OpenVPN are assigned with addresses on a separate subnet (ex. 192.168.1.x). Some network resources may be unavailable when connecting via Quick VPN.
- If your Internet connection uses DHCP, it is strongly recommended that you first set up Dynamic DNS (DDNS), such as D-Link DDNS, to eliminate the need to reconfigure client devices in the event that your ISP assigns you a new WAN IP address.

iOS Devices

VPN Setup Instructions

This section provides OpenVPNsetup instructions for iOS devices. Refer to **Security** menu for your router setup instructions.

Go into **Settings** on your compatible iOS device.
Scroll to and tap **General**.
Scroll to and tap **VPN**.



Tap **Add VPN Configuration...**



You should see a pop up window asking you to fill out the details of your VPN connection.

Type: Choose **IPSec**. Tap **Back** to return to the **Add Configuration** page.

Description: For reference purposes only, used to differentiate between multiple VPN connections.

Server: Enter the IP/DDNS address of your OpenVPNserver.

Account: Enter the Username used to authenticate login to VPN server

Password: Enter Password used to authenticate login to VPN server

Secret: Enter your Passkey (PSK).

Tap **Done** at the top right corner of the page to finish adding the configuration.

Your iOS device is now configured to connect to your OpenVPNserver.





The screenshot shows the 'Quick VPN' configuration window on an iOS device. At the top, there are three buttons: 'Cancel' (blue), 'Quick VPN' (black), and 'Done' (blue). The main configuration area has a light blue background. It includes the following fields and controls:


- Type:** A dropdown menu set to 'IPsec'.
- Description:** A text field containing 'Quick VPN'.
- Server:** A text field containing 'IP/DDNS_address_of_QuickVPN'.
- Account:** A text field containing 'vpn'.
- Password:** A text field with three dots indicating a masked password.
- Use Certificate:** A toggle switch that is currently turned off.
- Group Name:** A text field.
- Secret:** A text field with seven dots indicating a masked password.
- PROXY:** A section with three buttons: 'Off' (blue), 'Manual' (white), and 'Auto' (white).

Connect or Disconnect

To connect to or disconnect from your OpenVPNserver, open **Settings** and tap the button next to **VPN**.

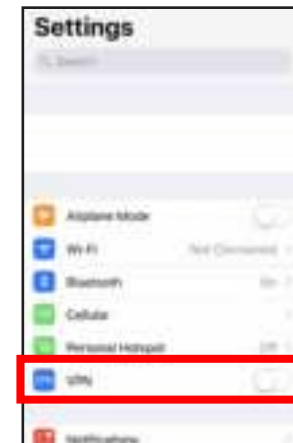

The VPN icon will appear in the notification area at the top of your screen indicating that your device is currently connected to the OpenVPNserver.

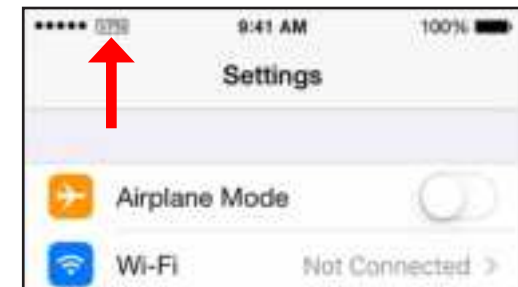

Mac OS X



VPN Setup Instructions

This section provides OpenVPNsetup instructions for OS X using the **Export** Profile function. Refer to **Security** menu for your router setup instructions.


Open the exported profile. The Install Profile dialogue will appear; click **Continue** and **Install**.

Enter your user account password when prompted. Close the **Profiles** dialogue.

Go to **Apple > System Preferences... > Network** and select the OpenVPN-connection and click **Authentication Settings**.

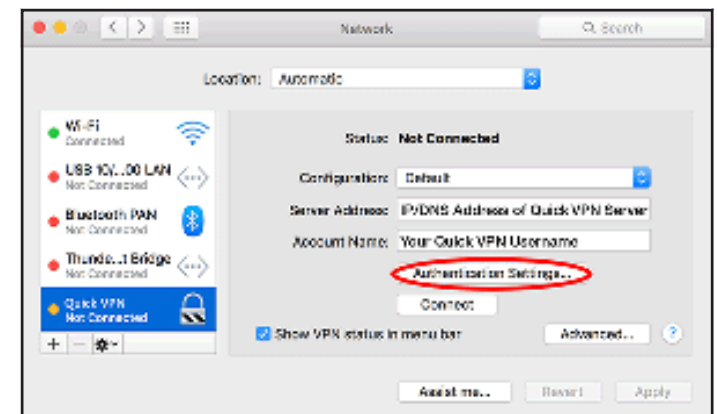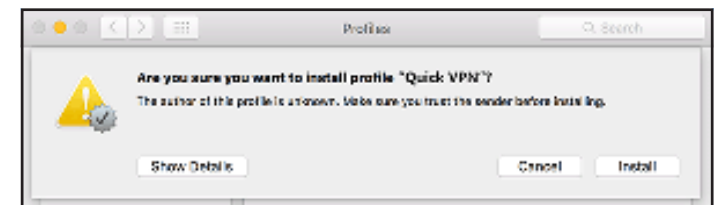

Enter your **Passkey** in the **Shared Secret** text box and click **OK, Apply**, then **OK**.


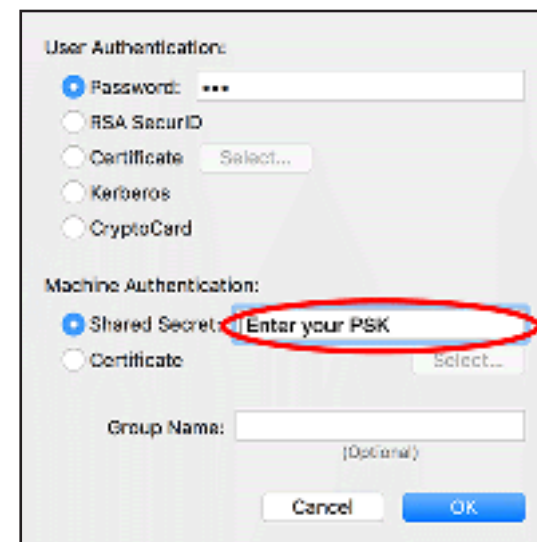


Your Mac is now configured to connect to your OpenVPNserver.

Connect or Disconnect

To connect to or disconnect from your OpenVPNserver, go to **Apple > System Preferences... > Network**.

Select the OpenVPNconnection and click on the **Connect** or **Disconnect** button.

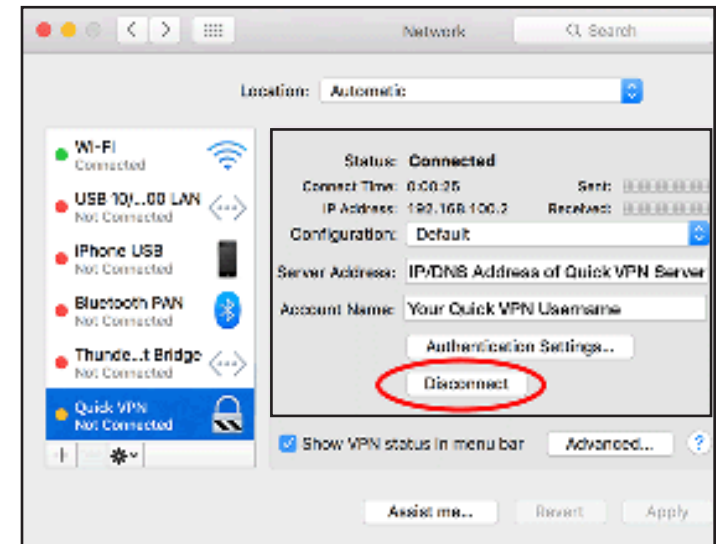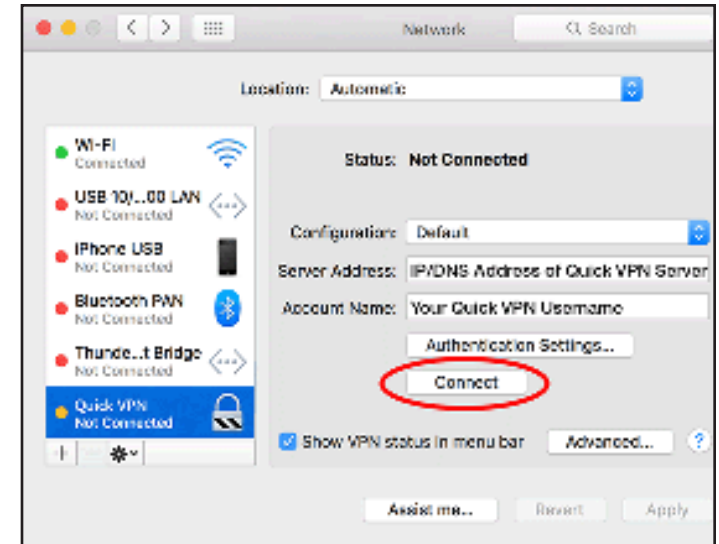


Windows 10

VPN Setup Instructions

This section provides OpenVPNsetup instructions for Windows 10. Refer to **Security** menu for your router setup instructions.

This section provides OpenVPNsetup instructions for Windows 10.

Click **Start > Settings > Network & Internet > Network and Sharing Center > VPN > Add a VPN Connection**.

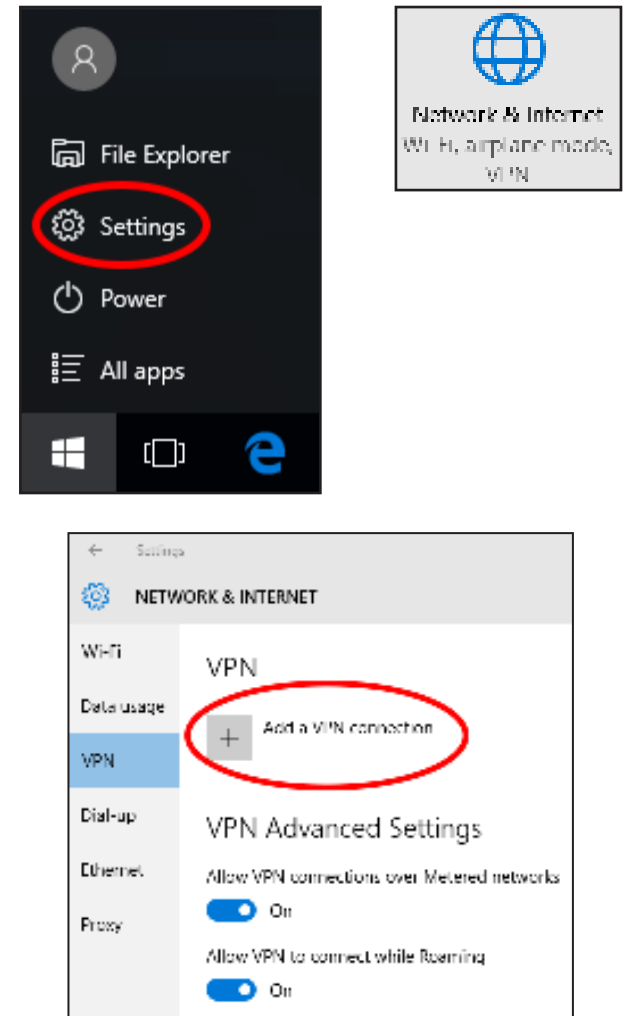

- 1 Select **Windows (built-in)** from the **VPN Provider** drop down menu.
- 2 Create a name for your VPN connection.
- 3 Enter your **IP/DDNS address** of your OpenVPNserver.
- 4 Select **L2TP/IPSec with pre-shared key** from **VPN type**.
- 5 Enter the **Passkey**.
- 6 Select **User name and password** from **Type of sign-in info**.

If you would like windows to remember your sign-in information, enter your **User name, Password**, and select **Remember my sign-in info**



- 7 Choose **Save**.

Your Windows 10 system is now configured to connect to your OpenVPN-server.

The screenshot shows the 'Add a VPN connection' window in Windows 10. The window has a blue header and a white body. The steps are numbered 1 through 7, corresponding to the instructions on the left. Step 1: 'VPN provider' dropdown menu is set to 'Windows (built-in)'. Step 2: 'Connection name' text box contains 'Quick VPN'. Step 3: 'Server name or address' text box contains 'IP/DDNS Address of Quick VPN Server'. Step 4: 'VPN type' dropdown menu is set to 'L2TP/IPSec with pre-shared key'. Step 5: 'Pre-shared key' text box contains 'Passkey'. Step 6: 'Type of sign-in info' dropdown menu is set to 'User name and password'. Below this, the 'User name (optional)' text box contains 'Username' and the 'Password (optional)' text box contains '*****'. Step 7: The 'Remember my sign-in info' checkbox is checked. At the bottom right, there are 'Save' and 'Cancel' buttons.

Connect or Disconnect

To connect to or disconnect from your OpenVPNserver, click on the **Network Settings** icon in the notification area of the Windows taskbar and click on your OpenVPNconnection. The **Network & Internet** Settings page will open. Click on the **Connect** or **Disconnect** button.

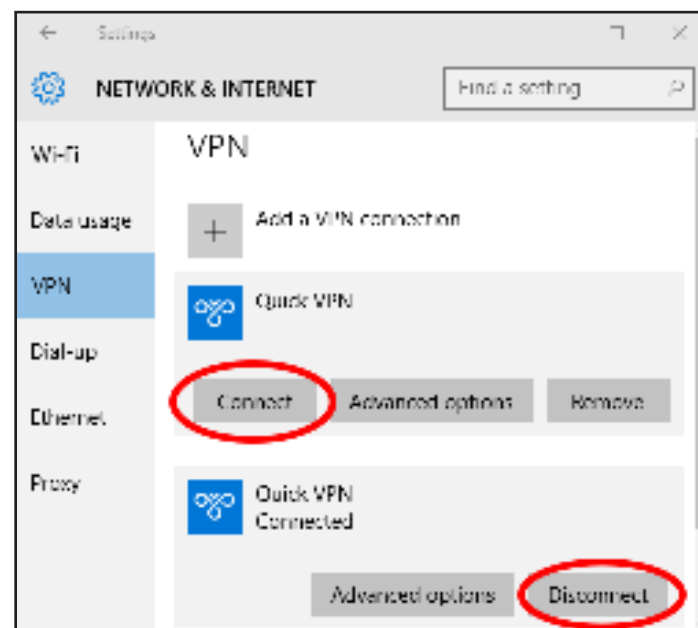
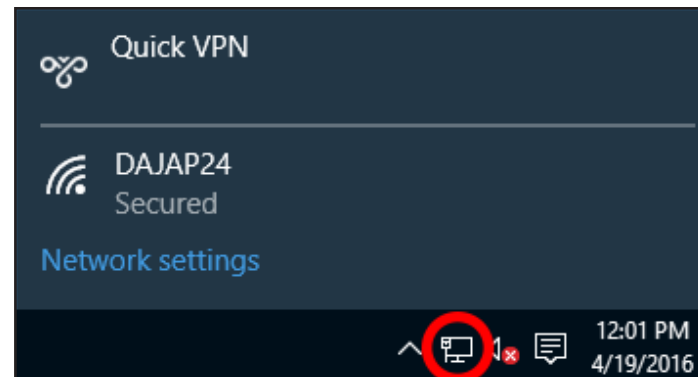


Android

VPN Setup Instructions

This section provides OpenVPNsetup instructions for Android devices. Your device's screens may vary. Refer to **Security** for your router setup instructions.

Go to **Settings** > **More** from the **Wireless & networks** > **VPN** > +

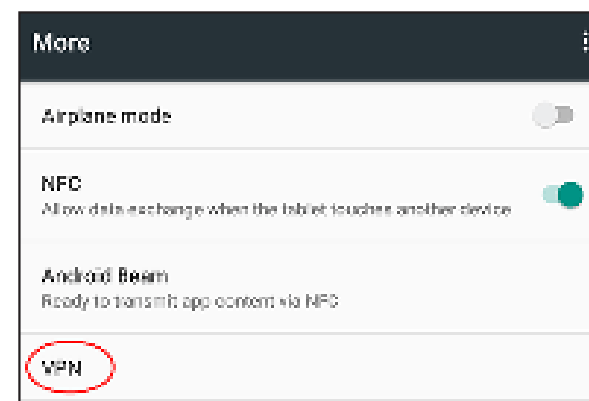

- 1 Enter a name for your VPN connection.
- 2 Select **L2TP/IPSec** PSK for **Type**.
- 3 Enter the **IP/DDNS address** of your OpenVPNserver.
- 4 Enter your **Passkey** in **IPSec pre-shared key** field.
- 5 Choose **Save**.

Your Android device is now configured to connect to your OpenVPNserver.

VPN

Edit VPN profile

Name

1 Quick VPN

Type

2 L2TP/IPSec PSK

Server address

3 Quick VPN IP/DDNS address

L2TP secret

(not used)

IPSec identifier

(not used)

IPSec pre-shared key

4




☐ Show advanced options

5

CANCEL SAVE

Connect or Disconnect

To connect to or disconnect from your OpenVPNserver, go to **Settings** > **More** from the **Wireless & networks** > **VPN** and select the **OpenVPN** connection you created.

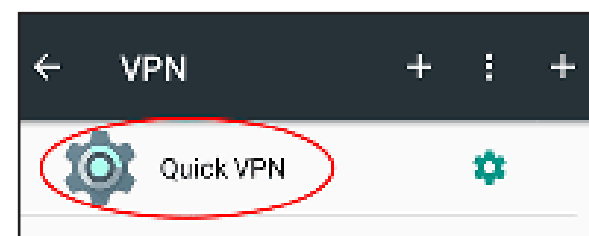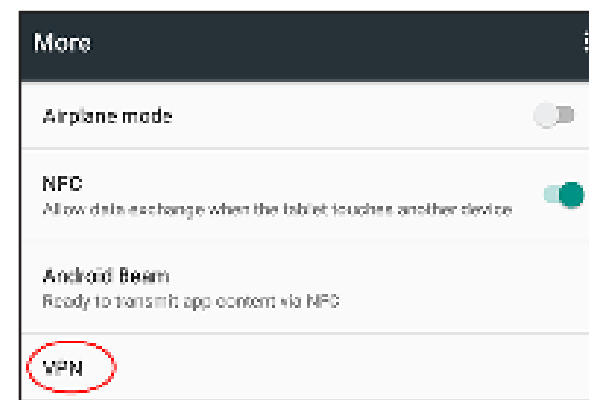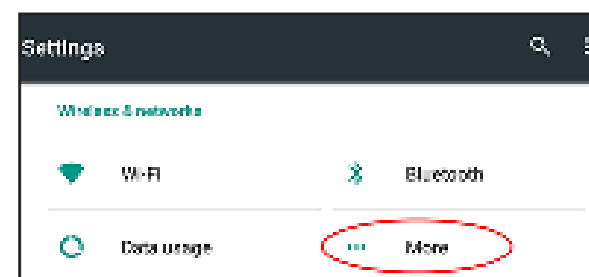

To connect, enter your **Username** and **Password** and select **CONNECT**.

Connect to Quick VPN

Username

Your Quick VPN Username

Password

••••••••••••••••

☐ Save account information

CANCEL

CONNECT

To disconnect, select **DISCONNECT**.

VPN is connected

Session: Quick VPN

Duration: 00:00:00

Sent: 97 bytes / 5 packets

Received: 64 bytes / 4 packets

DISCONNECT

CANCEL

Windows® 11/10

When connecting to the DBR-560 wirelessly for the first time, you will need to input the wireless network name (SSID) and Wi-Fi password (security key) of the device you are connecting to. If your product has a Wi-Fi configuration card, you can find the default network name and Wi-Fi password here. Otherwise, refer to the product label on the bottom of the device for the default Wi-Fi network SSID and password or enter the Wi-Fi credentials set during the product configuration.


Note: To enjoy the benefits offered by Wi-Fi 6 and WPA3, please make sure that your operating system and wireless network adapter support Wi-Fi 6.

To join an existing network, locate the wireless network icon in the taskbar, next to the time display and click on it.




Wireless Icon

Clicking on the Network icon , , or  to enable Wi-Fi to display a list of wireless networks which are within the range of your computer. Select the desired network by clicking on the SSID.

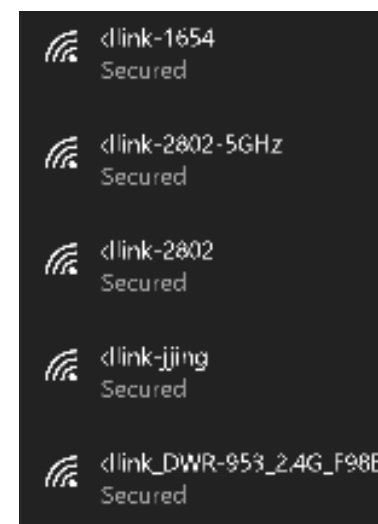


To connect to the SSID, click **Connect**.

To automatically connect with the router when your device next detects the SSID, click the **Connect automatically** check box.

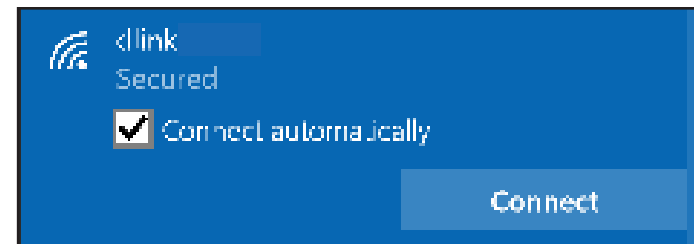

You will then be prompted to enter the Wi-Fi password (network security key) for the wireless network. Enter the password into the box and click **Next** to connect to the network. Your computer will now automatically connect to this wireless network when it is detected.

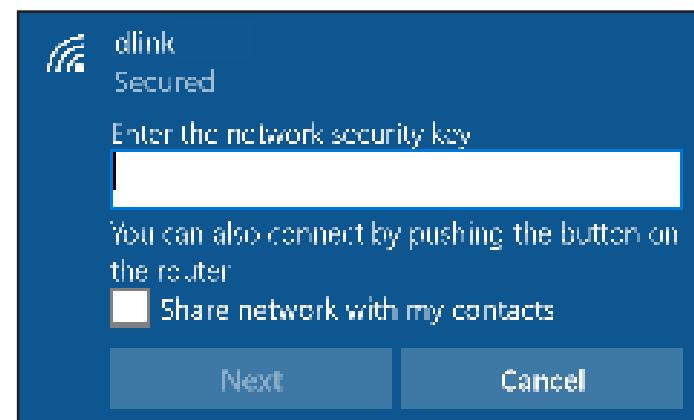

Troubleshooting

This chapter provides solutions to problems that can occur during the installation and operation of the router. Read the following descriptions if you are having any problems.

1. Why can't I access the web-based configuration utility?

When entering the IP address of the D-Link router (**192.168.200.1** for example), you are not connecting to a website, nor do you have to be connected to the Internet. The device has the utility built-in to a ROM chip in the device itself. Your computer must be on the same IP subnet to connect to the web-based utility.

- Make sure you have an updated Java-enabled web browser. We recommend the following:
 - Mozilla Firefox 28 or higher
 - Google™ Chrome 28 or higher
 - Apple Safari 6 or higher
- Verify physical connectivity by checking for solid link lights on the device. If you do not get a solid link light, try using a different cable, or connect to a different port on the device if possible. If the computer is turned off, the link light may not be on.
- Disable any Internet security software running on the computer. Software firewalls such as ZoneAlarm, BlackICE, Sygate and Norton Personal Firewall may block access to the configuration pages. Check the help files included with your firewall software for more information on how to disable or configure it.

- Access the web management. Open your web browser and enter the IP address of your D-Link router in the address bar. This should open the login page for your web management.
- If you still cannot access the configuration, unplug the power to the router for 10 seconds and plug back in. Wait for about 30 seconds and try to access the configuration. If you have multiple computers, try connecting using a different computer.

2. What can I do if I forgot my password?

If you forgot your password, you must reset your router. This process will change all your settings back to the factory defaults.

To reset the router, locate the reset button (hole) on the rear panel of the unit. With the router powered on, use a paperclip to hold the recessed button down for 2 seconds. Release the button and the router will go through its reboot process. Wait for about 30 seconds to access the router. The default IP address is **192.168.200.1**. When logging in, use the default device password printed on the product label.

Wireless Basics

Based on industry standards, D-Link wireless products provide easy-to-use and compatibly high-speed wireless connectivity within your home, business, or public accessible wireless networks. Strictly adhering to the IEEE standard, the D-Link wireless products family will allow you to access the data you want, when, and where you want it. You will be able to enjoy the freedom that wireless networking delivers.

A wireless local area network (WLAN) is a cellular computer network that transmits and receives data with radio signals instead of through wires. Wireless LANs are used increasingly in both home and office environments, and at public areas such as airports, coffee shops, and universities. Innovative ways to utilize WLAN technology is helping people work and communicate more efficiently. Increased mobility and the absence of cabling and other fixed infrastructure have proven to be beneficial for many users.

Wireless users can use the same applications they use on a wired network. Wireless adapter cards used on laptop and desktop systems support the same protocols as Ethernet adapter cards do.

Under many circumstances, it may be desirable for mobile network devices to link to a conventional Ethernet LAN in order to use servers, printers or an Internet connection supplied through the wired LAN. A wireless router is a device used to provide this link.

What is Wireless?

Wireless or Wi-Fi technology is another way of connecting your computer to the network without using wires. Wi-Fi uses radio frequency to connect wirelessly so you have the freedom to connect computers anywhere in your home or office network.

Why D-Link Wireless?

D-Link is a worldwide leader and also award-winning designer, developer, and manufacturer of networking products. We deliver the performance you need at an affordable price, and offer all the products you need to build your network.

How does wireless technology work?

Wireless technology works just as how cordless phones work: through radio signals, data is transmitted from one point A to point B. But there are restrictions for wireless technology: how you can access the network. You must be within the range of a wireless network area to be able to connect your computer. There are, basically, two different types of wireless networks: Wireless Local Area Network (WLAN), and Wireless Personal Area Network (WPAN).

Wireless Local Area Network (WLAN)

In a wireless local area network, a device called an Access Point (AP) connects computers to the network. The access point has a small antenna attached to it, which allows it to transmit data back and forth over radio signals. With an indoor access point, the signal can travel up to 300 feet away. With an outdoor access point, the signal can reach out up to 30 miles to serve places like manufacturing plants, industrial locations, university and high school campuses, airports, golf courses, and many other outdoor venues.

Wireless Personal Area Network (WPAN)

Bluetooth is the industry standard wireless technology used for WPAN. Bluetooth devices in WPAN operate in a range up to 30 feet away.

Compared to WLAN, both the speed and wireless operation range of WPAN are less than those of WLAN, and WPAN in turn does not consume as much power as WLAN does. This makes it ideal for personal devices, such as mobile phones, PDAs, headphones, laptops, speakers, and other devices that operate on batteries.

Who uses wireless?

In recent years, wireless technology has become so popular that almost everyone is using it, and whether it's for homes, offices, businesses, D-Link has a wireless solution to offer.

Home uses/benefits

- Gives everyone at home broadband access
- Web surfing, email and instant message checking, etc.
- Gets rid of the cables around your house
- Simple and easy to use

Small office and home office uses/benefits

- Stay on top of everything at home as you would at office
- Remotely access your office network from home
- Share Internet connection and printer with multiple computers
- No need to dedicate office space

Tips

When you configure a wireless network, here are a few things to keep in mind:

Centralize your router or access point

Make sure you place a router/access point at a centralized location within your network for the best performance. Try to place the router/access point as high as possible in the room, so the signal gets dispersed throughout your home. If you have a two-story home, you may need a repeater to boost the signal and extend the coverage range.

Eliminate Interference

Place home appliances such as cordless telephones, microwaves, and televisions as far away as possible from the router/access point. This would significantly reduce any interference that the appliances might cause since they may operate on the same frequency.

Another way to reduce wireless resource contention is to separate the use of radio frequency and channel by allocating devices accordingly. Advanced Wi-Fi devices supporting the 5 GHz band should use this band instead of 2.4GHz, which can be used to accommodate legacy devices and Bluetooth. Enable **Smart Connect** that manages band selection automatically when connecting to devices. The same principle applies to automatic channel selection. This option enables the system to select the cleanest channel for your network. You can also turn on the AI-powered Wi-Fi Optimizer and Mesh to have the system tune the Wi-Fi environment automatically according to the present network condition and receive personalized weekly Wi-Fi reports.

Wireless Encryption

Don't let your next-door neighbors or intruders connect to your wireless network. Encrypt your wireless network by turning on the router's latest WPA3 security feature. Refer to the product manual for detailed information on how to set it up.

Wireless Security

This section introduces different encryption levels and types you can use to better protect your data from intruders. The router offers some of the following types of security protocols:

- WPA3 (Wi-Fi Protected Access 3)
- WPA2-PSK (Pre-Shared Key)
- WPA-PSK (Pre-Shared Key)

What is WPA?

Wi-Fi Protected Access (WPA), is a Wi-Fi standard that was designed to improve the security features of Wired Equivalent Privacy (WEP).

The 2 major improvements over WEP:

- Improved data encryption through the Temporal Key Integrity Protocol (TKIP). TKIP scrambles keys using a hashing algorithm and by adding an integrity-checking feature to ensure that the keys have not been tampered. WPA2 is based on 802.11i and uses Advanced Encryption Standard (AES) instead of TKIP.
- User authentication through the Extensible Authentication Protocol (EAP), which is generally missing in WEP. WEP regulates access to a wireless network based on a computer's hardware-specific MAC address, which is relatively simple to be sniffed out and stolen. EAP is built on a more secure public-key encryption system to ensure that only authorized network users can access the network.

WPA-PSK/WPA2-PSK/WPA3-SAE uses a passphrase or key to authenticate your wireless connection. The key is an alpha-numeric password between 8 and 63 characters long. The password can include symbols (!?*&_) and spaces. This key must be the exact same key entered on your wireless router or access point.

WPA/WPA2 incorporates user authentication through the Extensible Authentication Protocol (EAP). EAP is built on a more secure public key encryption system to ensure that only authorized network users can access the network.

WPA3 has the strongest encryption among these with an increased cryptographic capability and the requirements of the Protected Management Frames (PMFs) to facilitate protection from snooping attack.

Technical Specifications

Device Interfaces

- 1 x 2.5 Gigabit Ethernet WAN port
- 4 x Gigabit Ethernet LAN port
- 1x USB Type-C
- 1 x Power connector
- 1 x WPS button
- 1 x Power button

Wi-Fi Access Point

- IEEE 802.11ax/ac/n (5 GHz)
- IEEE 802.11ax/n/g/b (2.4 GHz)

Wi-Fi Data Rate*

- 6000 Mbps (5 GHz up to 4804 Mbps / 2.4 GHz up to 1148 Mbps)

Antenna

- 4x Wi-Fi 2.4 GHz internal antennas
- 4x Wi-Fi 5 GHz internal antennas

Indicators

- Power status
- Wi-Fi status
- WPS status
- Internet status

Wireless Encryption

- WPA™
- WPA2™
- WPA3™

Dimensions (L x W x H)

- 137 x 146 x 205 mm (5.39 x 5.75 x 8.07 in)

Power Input

- 12V/4A

Weight

- 660 g (23.32 oz)

Operating Temperature

- -10 to 40 °C (14 to 104 °F)

Storage Temperature

- -20 to 65° C (-4 to 149° F)

* The maximum data rates mentioned are theoretical values. The actual data rates achieved may vary depending on the specific network environment and conditions.

Regulatory Information

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Operations in the 5.15-5.25 GHz band are restricted to indoor usage only. This device meets all the other requirements specified in Part 15E, Section 15.407 of the FCC Rules.

IMPORTANT NOTICE:

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 49 cm between the radiator & your body.

Note

The country code selection is for non-USA models only and is not available to all USA models. Per FCC regulations, all WiFi product marketed in the USA must be fixed to USA operational channels only.

Innovation, Science and Economic Development Canada (ISED) Statement:

This device complies with ISED licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution :

- (i) the device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- (iii) the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and
- (iv) the worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in Section 6.2.2(3) shall be clearly indicated.
- (v) Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Avvertimento:

Le guide d'utilisation des dispositifs pour réseaux locaux doit inclure des instructions précises sur les restrictions susmentionnées, notamment :

- (i) les dispositifs fonctionnant dans la bande 5150-5250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux;
- (ii) le gain maximal d'antenne permis pour les dispositifs utilisant les bandes de 5250 à 5350 MHz et de 5470 à 5725 MHz doit être conforme à la limite de la p.i.r.e.;
- (iii) le gain maximal d'antenne permis (pour les dispositifs utilisant la bande de 5725 à 5850 MHz) doit être conforme à la limite de la p.i.r.e. spécifiée pour l'exploitation point à point et l'exploitation non point à point, selon le cas;
- (iv) les pires angles d'inclinaison nécessaires pour rester conforme à l'exigence de la p.i.r.e. applicable au masque d'élévation, et énoncée à la section 6.2.2 3), doivent être clairement indiqués.
- (v) De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5250-5350 MHz et 5650-5850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

Radiation Exposure Statement

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 49 cm between the radiator and your body.

Déclaration d'exposition aux radiations

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 49 cm de distance entre la source de rayonnement et votre corps.



	Frequency Band(s) Frequenzband Fréquence bande(s) Bandas de Frecuencia Frequenza/e Frequentie(s)	Max. Output Power (EIRP) Max. Output Power Consommation d'énergie max. Potencia máxima de Salida Potenza max. Output Max. Output Power
5 G	5.15 – 5.25 GHz	200 mW
	5.25 – 5.35 GHz	200 mW
	5.47 – 5.725 GHz	1 W
2.4 G	2.4 – 2.4835 GHz	100 mW

European Community Declaration of Conformity:

Česky [Czech]	Tímto D-Link Corporation prohlašuje, že tento produkt, jeho příslušenství a software jsou v souladu se směrnicí 2014/53/EU. Celý text ES prohlášení o shodě vydaného EU a o firmwaru produktu lze stáhnout na stránkách k produktu www.dlink.com .
Dansk [Danish]	D-Link Corporation erklærer herved, at dette produkt, tilbehør og software er i overensstemmelse med direktiv 2014/53/EU. Den fulde tekst i EU-overensstemmelseserklæringen og produktfirmware kan wnloades fra produktsiden hos www.dlink.com .
Deutsch [German]	Hiermit erklärt die D-Link Corporation, dass dieses Produkt, das Zubehör und die Software der Richtlinie 2014/53/EU entsprechen. Der vollständige Text der Konformitätserklärung der Europäischen Gemeinschaft sowie die Firmware zum Produkt stehen Ihnen zum Herunterladen von der Produktseite im Internet auf www.dlink.com zur Verfügung.
Eesti [Estonian]	Käesolevaga kinnitab D-Link Corporation, et see toode, tarvikud ja tarkvara on kooskõlas direktiiviga 2014/53/EL. Euroopa Liidu vastavusdeklaratsiooni täistekst ja toote püsivara on allalaadimiseks saadaval tootelehel www.dlink.com .
English	Hereby, D-Link Corporation, declares that this product, accessories, and software are in compliance with directive 2014/53/EU. The full text of the EU Declaration of Conformity and product firmware are available for download from the product page at www.dlink.com
Español [Spanish]	Por la presente, D-Link Corporation declara que este producto, accesorios y software cumplen con las directivas 2014/53/UE. El texto completo de la declaración de conformidad de la UE y el firmware del producto están disponibles y se pueden descargar desde la página del producto en www.dlink.com .
Ελληνική [Greek]	Με την παρούσα, η D-Link Corporation δηλώνει ότι αυτό το προϊόν, τα αξεσουάρ και το λογισμικό συμμορφώνονται με την Οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης της ΕΕ και το υλικολογισμικό του προϊόντος είναι διαθέσιμα για λήψη από τη σελίδα του προϊόντος στην τοποθεσία www.dlink.com .
Français [French]	Par les présentes, D-Link Corporation déclare que ce produit, ces accessoires et ce logiciel sont conformes aux directives 2014/53/UE. Le texte complet de la déclaration de conformité de l'UE et le microprogramme du produit sont disponibles au téléchargement sur la page des produits à www.dlink.com .
Italiano [Italian]	Con la presente, D-Link Corporation dichiara che questo prodotto, i relativi accessori e il software sono conformi alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE e il firmware del prodotto sono disponibili per il download dalla pagina del prodotto su www.dlink.com .

Latviski [Latvian]	Ar šo uzņēmums D-Link Corporation apliecina, ka šis produkts, piederumi un programmatūra atbilst direktīvai 2014/53/ES. ES atbilstības deklarācijas pilno tekstu un produkta aparātprogrammatūru var lejupielādēt attiecīgā produkta lapā vietnē www.dlink.com .
Lietuvių [Lithuanian]	Šiuo dokumentu „D-Link Corporation“ pareiškia, kad šis gaminys, priedai ir programinė įranga atitinka direktyvą 2014/53/ES. Visą ES atitikties deklaracijos tekstą ir gaminio programinę aparatinę įrangą galima atsisiųsti iš gaminio puslapio adresu www.dlink.com .
Nederlands [Dutch]	Hierbij verklaart D-Link Corporation dat dit product, accessoires en software voldoen aan de richtlijnen 2014/53/EU. De volledige tekst van de EU conformiteitsverklaring en productfirmware is beschikbaar voor download van de productpagina op www.dlink.com .
Malti [Maltese]	Bil-preżenti, D-Link Corporation tiddikjara li dan il-prodott, l-aċċessorji, u s-software huma konformi mad-Direttiva 2014/53/UE. Tista' tnizzel it-test sħiħ tad-dikjarazzjoni ta' konformità tal-UE u l-firmware tal-prodott mill-paġna tal-prodott fuq www.dlink.com .
Magyar [Hungarian]	Ezennel a D-Link Corporation kijelenti, hogy a jelen termék, annak tartozékai és szoftvere megfelelnek a 2014/53/EU sz. rendeletnek. Az EU Megfelelőségi nyilatkozat teljes szövege és a termék firmware a termék oldaláról tölthető le a www.dlink.com címen.
Polski [Polish]	D-Link Corporation niniejszym oświadcza, że ten produkt, akcesoria oraz oprogramowanie są zgodne z dyrektywami 2014/53/EU. Pełen tekst deklaracji zgodności UE oraz oprogramowanie sprzętowe do produktu można pobrać na stronie produktu w witrynie www.dlink.com .
Português [Portuguese]	Desta forma, a D-Link Corporation declara que este produto, os acessórios e o software estão em conformidade com a diretiva 2014/53/UE. O texto completo da declaração de conformidade da UE e do firmware
Slovensko[Slovenian]	Podjetje D-Link Corporation s tem izjavlja, da so ta izdelek, dodatna oprema in programska oprema skladni z direktivami 2014/53/EU. Celotno besedilo izjave o skladnosti EU in vdelana programska oprema sta na voljo za prenos na strani izdelka na www.dlink.com .
Slovensky [Slovak]	Spoločnosť D-Link týmto vyhlasuje, že tento produkt, príslušenstvo a softvér sú v súlade so smernicou 214/53/EÚ. Úplné znenie vyhlásenia EÚ o zhode a firmvéri produktu sú k dispozícii na prevzatie zo stránky produktu www.dlink.com .
Suomi [Finnish]	D-Link Corporation täten vakuuttaa, että tämä tuote, lisävarusteet ja ohjelmisto ovat direktiivin 2014/53/EU vaatimusten mukaisia. Täydellinen EU-vaatimustenmukaisuusvakuutus samoin kuin tuotteen laiteohjelmisto ovat ladattavissa osoitteesta www.dlink.com .

Svenska[Swedish]	D-Link Corporation försäkrar härmed att denna produkt, tillbehör och programvara överensstämmer med direktiv 2014/53/EU. Hela texten med EU-försäkran om överensstämmelse och produkt-firmware kan hämtas från produktsidan på www.dlink.com .
Íslenska [Icelandic]	Hér með lýsir D-Link Corporation því yfir að þessi vara, fylgihlutir og hugbúnaður eru í samræmi við tilskipun 2014/53/EB. Sækja má ESB-samræmisýfirlýsinguna í heild sinni og fastbúnað vörunnar af vefsíðu vörunnar á www.dlink.com .
Norsk [Norwegian]	Herved erklærer D-Link Corporation at dette produktet, tilbehøret og programvaren er i samsvar med direktivet 2014/53/EU. Den fullstendige teksten i EU-erklæring om samsvar og produktets fastvare er tilgjengelig for nedlasting fra produktsiden på www.dlink.com .

Warning Statement:

The power outlet should be near the device and easily accessible.

NOTICE OF WIRELESS RADIO LAN USAGE IN THE EUROPEAN COMMUNITY (FOR WIRELESS PRODUCT ONLY):

- This device is restricted to indoor use when operated in the European Community using channels in the 5.15-5.35 GHz band to reduce the potential for interference.
- This device is a 2.4 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries. This equipment may be operated in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, and CY.

Usage Notes:

- To remain in conformance with European National spectrum usage regulations, frequency and channel limitations will be applied on the products according to the country where the equipment will be deployed.
- This device is restricted from functioning in Ad-hoc mode while operating in 5 GHz. Ad-hoc mode is direct peer-to-peer communication between two client devices without an Access Point.
- Access points will support DFS (Dynamic Frequency Selection) and TPC (Transmit Power Control) functionality as required when operating in 5 GHz band within the EU.
- Please refer to the product manual or datasheet to check whether your product uses 2.4 GHz and/or 5 GHz wireless.

HINWEIS ZUR VERWENDUNG VON DRAHTLOS-NETZWERK (WLAN) IN DER EUROPÄISCHEN GEMEINSCHAFT (NUR FÜR EIN DRAHTLOSES PRODUKT)

- Der Betrieb dieses Geräts in der Europäischen Gemeinschaft bei Nutzung von Kanälen im 5,15-5,35 GHz Frequenzband ist ausschließlich auf Innenräume beschränkt, um das Interferenzpotential zu reduzieren.
- Bei diesem Gerät handelt es sich um ein zum Einsatz in allen EU-Mitgliedsstaaten und in EFTA-Ländern - ausgenommen Frankreich. Der Betrieb dieses Geräts ist in den folgenden Ländern erlaubt: AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Gebrauchshinweise:

- Um den in Europa geltenden nationalen Vorschriften zum Nutzen des Funkspektrums weiterhin zu entsprechen, werden Frequenz und Kanalbeschränkungen, dem jeweiligen Land, in dem das Gerät zum Einsatz kommt, entsprechend, auf die Produkte angewandt.
- Die Funktionalität im Ad-hoc-Modus bei Betrieb auf 5 GHz ist für dieses Gerät eingeschränkt. Bei dem Ad-hoc-Modus handelt es sich um eine Peer-to-Peer-Kommunikation zwischen zwei Client-Geräten ohne einen Access Point.
- Access Points unterstützen die Funktionen DFS (Dynamic Frequency Selection) und TPC (Transmit Power Control) wie erforderlich bei Betrieb auf 5 GHz innerhalb der EU.
- Bitte schlagen Sie im Handbuch oder Datenblatt nach, ob Ihr Gerät eine 2,4 GHz und / oder 5 GHz Verbindung nutzt.

AVIS CONCERNANT L'UTILISATION DE LA RADIO SANS FIL LAN DANS LA COMMUNAUTÉ EUROPÉENNE (UNIQUEMENT POUR LES PRODUITS SANS FIL)

- Cet appareil est limité à un usage intérieur lorsqu'il est utilisé dans la Communauté européenne sur les canaux de la bande de 5,15 à 5,35 GHz afin de réduire les risques d'interférences.
- Cet appareil est un système de transmission à large bande (émetteur-récepteur) de 2,4 GHz, destiné à être utilisé dans tous les États-membres de l'UE et les pays de l'AELE. Cet équipement peut être utilisé dans les pays suivants : AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Notes d'utilisation:

- Pour rester en conformité avec la réglementation nationale européenne en matière d'utilisation du spectre, des limites de fréquence et de canal seront appliquées aux produits selon le pays où l'équipement sera déployé.
- Cet appareil ne peut pas utiliser le mode Ad-hoc lorsqu'il fonctionne dans la bande de 5 GHz. Le mode Adhoc fournit une communication directe pair à pair entre deux périphériques clients sans point d'accès.
- Les points d'accès prendront en charge les fonctionnalités DFS (Dynamic Frequency Selection) et TPC (Transmit Power Control) au besoin lors du fonctionnement dans la bande de 5 GHz au sein de l'UE.
- Merci de vous référer au guide d'utilisation ou de la fiche technique afin de vérifier si votre produit utilise 2.4 GHz et/ou 5 GHz sans fil.

AVISO DE USO DE LA LAN DE RADIO INALÁMBRICA EN LA COMUNIDAD EUROPEA (SOLO PARA EL PRODUCTO INALÁMBRICO)

- El uso de este dispositivo está restringido a interiores cuando funciona en la Comunidad Europea utilizando canales en la banda de 5,15-5,35 GHz, para reducir la posibilidad de interferencias.
- Este dispositivo es un sistema de transmisión (transceptor) de banda ancha de 2,4 GHz, pensado para su uso en todos los estados miembros de la UE y en los países de la AELC. Este equipo se puede utilizar en AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Notas de uso:

- Para seguir cumpliendo las normas europeas de uso del espectro nacional, se aplicarán limitaciones de frecuencia y canal en los productos en función del país en el que se pondrá en funcionamiento el equipo.
- Este dispositivo tiene restringido el funcionamiento en modo Ad-hoc mientras funcione a 5 Ghz. El modo Ad-hoc es la comunicación directa de igual a igual entre dos dispositivos cliente sin un punto de acceso.
- Los puntos de acceso admitirán la funcionalidad DFS (Selección de frecuencia dinámica) y TPC (Control de la potencia de transmisión) si es necesario cuando funcionan a 5 Ghz dentro de la UE.
- Por favor compruebe el manual o la ficha de producto para comprobar si el producto utiliza las bandas inalámbricas de 2.4 GHz y/o la de 5 GHz.

AVVISO PER L'USO DI LAN RADIO WIRELESS NELLA COMUNITÀ EUROPEA (SOLO PER PRODOTTI WIRELESS)

- Nella Comunità europea, l'uso di questo dispositivo è limitato esclusivamente agli ambienti interni sui canali compresi nella banda da 5,15 a 5,35 GHz al fine di ridurre potenziali interferenze. Questo dispositivo è un sistema di trasmissione a banda larga a 2,4 GHz (ricetrasmittente), destinato all'uso in tutti gli stati membri dell'Unione europea e nei paesi EFTA.
- Questo dispositivo può essere utilizzato in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Note per l'uso

- Al fine di mantenere la conformità alle normative nazionali europee per l'uso dello spettro di frequenze, saranno applicate limitazioni sulle frequenze e sui canali per il prodotto in conformità alle normative del paese in cui il dispositivo viene utilizzato.
- Questo dispositivo non può essere attivato in modalità Ad-hoc durante il funzionamento a 5 GHz. La modalità Ad-hoc è una comunicazione diretta peer-to-peer fra due dispositivi client senza un punto di accesso.
- I punti di accesso supportano le funzionalità DFS (Dynamic Frequency Selection) e TPC (Transmit Power Control) richieste per operare a 5 GHz nell'Unione europea.
- Ti invitiamo a fare riferimento al manuale del prodotto o alla scheda tecnica per verificare se il tuo prodotto utilizza le frequenze 2,4 GHz e/o 5 GHz.

KENNISGEVING VAN DRAADLOOS RADIO LAN-GEBRUIK IN DE EUROPESE GEMEENSCHAP (ALLEEN VOOR DRAADLOOS PRODUCT)

- Dit toestel is beperkt tot gebruik binnenshuis wanneer het wordt gebruikt in de Europese Gemeenschap gebruik makend van kanalen in de 5.15-5.35 GHz band om de kans op interferentie te beperken.
- Dit toestel is een 2.4 GHz breedband transmissiesysteem (transceiver) dat bedoeld is voor gebruik in alle EU lidstaten en EFTA landen. Deze uitrusting mag gebruikt worden in AL, AD, BE, BG, DK, DE, FI, FR, GR, GW, IS, IT, HR, LI, LU, MT, MK, MD, MC, NL, NO, AT, PL, PT, RO, SM, SE, RS, SK, ES, CI, HU, CY

Gebruiksaanwijzingen:

- Om de gebruiksvoorschriften van het Europese Nationale spectrum na te leven, zullen frequentie- en kanaalbeperkingen worden toegepast op de producten volgens het land waar de uitrusting gebruikt zal worden.
- Dit toestel kan niet functioneren in Ad-hoc mode wanneer het gebruikt wordt in 5 GHz. Ad-hoc mode is directe peer-to-peer communicatie tussen twee klantenapparaten zonder een toegangspunt.
- Toegangspunten ondersteunen DFS (Dynamic Frequency Selection) en TPC (Transmit Power Control) functionaliteit zoals vereist bij gebruik in 5 GHz binnen de EU.
- Raadpleeg de handleiding of de datasheet om te controleren of uw product gebruik maakt van 2.4 GHz en/of 5 GHz.

SAFETY INSTRUCTIONS

The following general safety guidelines are provided to help ensure your own personal safety and protect your product from potential damage. Remember to consult the product user instructions for more details.

- Static electricity can be harmful to electronic components. Discharge static electricity from your body (i.e. touching grounded bare metal) before touching the product.
- Do not attempt to service the product and never disassemble the product. For some products with a user replaceable battery, please read and follow the instructions in the user manual.
- Do not spill food or liquid on your product and never push any objects into the openings of your product.
- Do not use this product near water, areas with high humidity, or condensation unless the product is specifically rated for outdoor application.
- Keep the product away from radiators and other heat sources.
- Always unplug the product from mains power before cleaning and use a dry lint free cloth only.

SICHERHEITSVORSCHRIFTEN

Die folgenden allgemeinen Sicherheitsvorschriften dienen als Hilfe zur Gewährleistung Ihrer eigenen Sicherheit und zum Schutz Ihres Produkts. Weitere Details finden Sie in den Benutzeranleitungen zum Produkt.

- Statische Elektrizität kann elektronischen Komponenten schaden. Um Schäden durch statische Aufladung zu vermeiden, leiten Sie elektrostatische Ladungen von Ihrem Körper ab, (z. B. durch Berühren eines geerdeten blanken Metallteils), bevor Sie das Produkt berühren.
- Unterlassen Sie jeden Versuch, das Produkt zu warten, und versuchen Sie nicht, es in seine Bestandteile zu zerlegen. Für einige Produkte mit austauschbaren Akkus lesen Sie bitte das Benutzerhandbuch und befolgen Sie die dort beschriebenen Anleitungen.
- Vermeiden Sie, dass Speisen oder Flüssigkeiten auf Ihr Produkt gelangen, und stecken Sie keine Gegenstände in die Gehäuseschlitze oder -öffnungen Ihres Produkts.
- Verwenden Sie dieses Produkt nicht in unmittelbarer Nähe von Wasser und nicht in Bereichen mit hoher Luftfeuchtigkeit oder Kondensation, es sei denn, es ist speziell zur Nutzung in Außenbereichen vorgesehen und eingestuft.
- Halten Sie das Produkt von Heizkörpern und anderen Quellen fern, die Wärme erzeugen.
- Trennen Sie das Produkt immer von der Stromzufuhr, bevor Sie es reinigen und verwenden Sie dazu ausschließlich ein trockenes fusselfreies Tuch.

CONSIGNES DE SÉCURITÉ

Les consignes générales de sécurité ci-après sont fournies afin d'assurer votre sécurité personnelle et de protéger le produit d'éventuels dommages. Veuillez consulter les consignes d'utilisation du produit pour plus de détails.

- L'électricité statique peut endommager les composants électroniques. Déchargez l'électricité statique de votre corps (en touchant un objet en métal relié à la terre par exemple) avant de toucher le produit.
- N'essayez pas d'intervenir sur le produit et ne le démontez jamais. Pour certains produits contenant une batterie remplaçable par l'utilisateur, veuillez lire et suivre les consignes contenues dans le manuel d'utilisation.
- Ne renversez pas d'aliments ou de liquide sur le produit et n'insérez jamais d'objets dans les orifices.
- N'utilisez pas ce produit à proximité d'un point d'eau, de zones très humides ou de condensation sauf si le produit a été spécifiquement conçu pour une application extérieure.
- Éloignez le produit des radiateurs et autres sources de chaleur.
- Débranchez toujours le produit de l'alimentation avant de le nettoyer et utilisez uniquement un chiffon sec non pelucheux.

INSTRUCCIONES DE SEGURIDAD

Las siguientes directrices de seguridad general se facilitan para ayudarle a garantizar su propia seguridad personal y para proteger el producto frente a posibles daños. No olvide consultar las instrucciones del usuario del producto para obtener más información.

- La electricidad estática puede resultar nociva para los componentes electrónicos. Descargue la electricidad estática de su cuerpo (p. ej., tocando algún metal sin revestimiento conectado a tierra) antes de tocar el producto.
- No intente realizar el mantenimiento del producto ni lo desmonte nunca. Para algunos productos con batería reemplazable por el usuario, lea y siga las instrucciones del manual de usuario.
- No derrame comida o líquidos sobre el producto y nunca deje que caigan objetos en las aberturas del mismo.
- No utilice este producto cerca del agua, en zonas con humedad o condensación elevadas a menos que el producto esté clasificado específicamente para aplicación en exteriores.
- Mantenga el producto alejado de los radiadores y de otras fuentes de calor.
- Desenchufe siempre el producto de la alimentación de red antes de limpiarlo y utilice solo un paño seco sin pelusa.

ISTRUZIONI PER LA SICUREZZA

Le seguenti linee guida sulla sicurezza sono fornite per contribuire a garantire la sicurezza personale degli utenti e a proteggere il prodotto da potenziali danni. Per maggiori dettagli, consultare le istruzioni per l'utente del prodotto.

- L'elettricità statica può essere pericolosa per i componenti elettronici. Scaricare l'elettricità statica dal corpo (ad esempio toccando una parte metallica collegata a terra) prima di toccare il prodotto.
- Non cercare di riparare il prodotto e non smontarlo mai. Per alcuni prodotti dotati di batteria sostituibile dall'utente, leggere e seguire le istruzioni riportate nel manuale dell'utente.
- Non versare cibi o liquidi sul prodotto e non spingere mai alcun oggetto nelle aperture del prodotto.
- Non usare questo prodotto vicino all'acqua, in aree con elevato grado di umidità o soggette a condensa a meno che il prodotto non sia specificatamente approvato per uso in ambienti esterni.
- Tenere il prodotto lontano da caloriferi e altre fonti di calore.
- Scollegare sempre il prodotto dalla presa elettrica prima di pulirlo e usare solo un panno asciutto che non lasci filacce.

VEILIGHEIDSinFORMATIE

De volgende algemene veiligheidsinformatie werd verstrekt om uw eigen persoonlijke veiligheid te waarborgen en uw product te beschermen tegen mogelijke schade. Denk eraan om de gebruikersinstructies van het product te raadplegen voor meer informatie.

- Statische elektriciteit kan schadelijk zijn voor elektronische componenten. Ontlaad de statische elektriciteit van uw lichaam (d.w.z. het aanraken van geaard bloot metaal) voordat u het product aanraakt.
- U mag nooit proberen het product te onderhouden en u mag het product nooit demonteren. Voor sommige producten met door de gebruiker te vervangen batterij, dient u de instructies in de gebruikershandleiding te lezen en te volgen.
- Mors geen voedsel of vloeistof op uw product en u mag nooit voorwerpen in de openingen van uw product duwen.
- Gebruik dit product niet in de buurt van water, gebieden met hoge vochtigheid of condensatie, tenzij het product specifiek geclassificeerd is voor gebruik buitenshuis.
- Houd het product uit de buurt van radiators en andere warmtebronnen.
- U dient het product steeds los te koppelen van de stroom voordat u het reinigt en gebruik uitsluitend een droge pluisvrije doek.

Disposing and Recycling Your Product



EN

ENGLISH



This symbol on the product or packaging means that according to local laws and regulations this product should not be disposed of in household waste but sent for recycling. Please take it to a collection point designated by your local authorities once it has reached the end of its life, some will accept products for free. By recycling the product and its packaging in this manner you help to conserve the environment and protect human health.

D-Link and the Environment

At D-Link, we understand and are committed to reducing any impact our operations and products may have on the environment. To minimise this impact D-Link designs and builds its products to be as environmentally friendly as possible, by using recyclable, low toxic materials in both products and packaging.

D-Link recommends that you always switch off or unplug your D-Link products when they are not in use. By doing so you will help to save energy and reduce CO2 emissions.

To learn more about our environmentally responsible products and packaging please visit www.dlinkgreen.com.

DEUTSCH

DE



Dieses Symbol auf dem Produkt oder der Verpackung weist darauf hin, dass dieses Produkt gemäß bestehender örtlicher Gesetze und Vorschriften nicht über den normalen Hausmüll entsorgt werden sollte, sondern einer Wiederverwertung zuzuführen ist. Bringen Sie es bitte zu einer von Ihrer Kommunalbehörde entsprechend amtlich ausgewiesenen Sammelstelle, sobald das Produkt das Ende seiner Nutzungsdauer erreicht hat. Für die Annahme solcher Produkte erheben einige dieser Stellen keine Gebühren. Durch ein auf diese Weise durchgeführtes Recycling des Produkts und seiner Verpackung helfen Sie, die Umwelt zu schonen und die menschliche Gesundheit zu schützen.

D-Link und die Umwelt

D-Link ist sich den möglichen Auswirkungen seiner Geschäftstätigkeiten und seiner Produkte auf die Umwelt bewusst und fühlt sich verpflichtet, diese entsprechend zu mindern. Zu diesem Zweck entwickelt und stellt D-Link seine Produkte mit dem Ziel größtmöglicher Umweltfreundlichkeit her und verwendet wiederverwertbare, schadstoffarme Materialien bei Produktherstellung und Verpackung.

D-Link empfiehlt, Ihre Produkte von D-Link, wenn nicht in Gebrauch, immer auszuschalten oder vom Netz zu nehmen. Auf diese Weise helfen Sie, Energie zu sparen und CO2-Emissionen zu reduzieren.

Wenn Sie mehr über unsere umweltgerechten Produkte und Verpackungen wissen möchten, finden Sie entsprechende Informationen im Internet unter www.dlinkgreen.com.

FRANÇAIS**FR**

Ce symbole apposé sur le produit ou son emballage signifie que, conformément aux lois et réglementations locales, ce produit ne doit pas être éliminé avec les déchets domestiques mais recyclé. Veuillez le rapporter à un point de collecte prévu à cet effet par les autorités locales; certains accepteront vos produits gratuitement. En recyclant le produit et son emballage de cette manière, vous aidez à préserver l'environnement et à protéger la santé de l'homme.

D-Link et l'environnement

Chez D-Link, nous sommes conscients de l'impact de nos opérations et produits sur l'environnement et nous engageons à le réduire. Pour limiter cet impact, D-Link conçoit et fabrique ses produits de manière aussi écologique que possible, en utilisant des matériaux recyclables et faiblement toxiques, tant dans ses produits que ses emballages.

D-Link recommande de toujours éteindre ou débrancher vos produits D-Link lorsque vous ne les utilisez pas. Vous réaliserez ainsi des économies d'énergie et réduirez vos émissions de CO2.

Pour en savoir plus sur les produits et emballages respectueux de l'environnement, veuillez consulter le www.dlinkgreen.com.

ESPAÑOL**ES**

Este símbolo en el producto o el embalaje significa que, de acuerdo con la legislación y la normativa local, este producto no se debe desechar en la basura doméstica sino que se debe reciclar. Llévelo a un punto de recogida designado por las autoridades locales una vez que ha llegado al fin de su vida útil; algunos de ellos aceptan recogerlos de forma gratuita. Al reciclar el producto y su embalaje de esta forma, contribuye a preservar el medio ambiente y a proteger la salud de los seres humanos.

D-Link y el medio ambiente

En D-Link, comprendemos y estamos comprometidos con la reducción del impacto que puedan tener nuestras actividades y nuestros productos en el medio ambiente. Para reducir este impacto, D-Link diseña y fabrica sus productos para que sean lo más ecológicos posible, utilizando materiales reciclables y de baja toxicidad tanto en los productos como en el embalaje.

D-Link recomienda apagar o desenchufar los productos D-Link cuando no se estén utilizando. Al hacerlo, contribuirá a ahorrar energía y a reducir las emisiones de CO2.

Para obtener más información acerca de nuestros productos y embalajes ecológicos, visite el sitio www.dlinkgreen.com.

ITALIANO**IT**

La presenza di questo simbolo sul prodotto o sulla confezione del prodotto indica che, in conformità alle leggi e alle normative locali, questo prodotto non deve essere smaltito nei rifiuti domestici, ma avviato al riciclo. Una volta terminato il ciclo di vita utile, portare il prodotto presso un punto di raccolta indicato dalle autorità locali. Alcuni questi punti di raccolta accettano gratuitamente i prodotti da riciclare. Scegliendo di riciclare il prodotto e il relativo imballaggio, si contribuirà a preservare l'ambiente e a salvaguardare la salute umana.

D-Link e l'ambiente

D-Link cerca da sempre di ridurre l'impatto ambientale dei propri stabilimenti e dei propri prodotti. Allo scopo di ridurre al minimo tale impatto, D-Link progetta e realizza i propri prodotti in modo che rispettino il più possibile l'ambiente, utilizzando materiali riciclabili a basso tasso di tossicità sia per i prodotti che per gli imballaggi.

D-Link raccomanda di spegnere sempre i prodotti D-Link o di scollegarne la spina quando non vengono utilizzati. In questo modo si contribuirà a risparmiare energia e a ridurre le emissioni di anidride carbonica.

Per ulteriori informazioni sui prodotti e sugli imballaggi D-Link a ridotto impatto ambientale, visitate il sito all'indirizzo www.dlinkgreen.com.

NEDERLANDS**NL**

Dit symbool op het product of de verpakking betekent dat dit product volgens de plaatselijke wetgeving niet mag worden weggegooid met het huishoudelijk afval, maar voor recyclage moeten worden ingeleverd. Zodra het product het einde van de levensduur heeft bereikt, dient u het naar een inzamelpunt te brengen dat hiertoe werd aangeduid door uw plaatselijke autoriteiten, sommige autoriteiten accepteren producten zonder dat u hiervoor dient te betalen. Door het product en de verpakking op deze manier te recyclen helpt u het milieu en de gezondheid van de mens te beschermen.

D-Link en het milieu

Bij D-Link spannen we ons in om de impact van onze handelingen en producten op het milieu te beperken. Om deze impact te beperken, ontwerpt en bouwt D-Link zijn producten zo milieuvriendelijk mogelijk, door het gebruik van recycleerbare producten met lage toxiciteit in product en verpakking.

D-Link raadt aan om steeds uw D-Link producten uit te schakelen of uit de stekker te halen wanneer u ze niet gebruikt. Door dit te doen bespaart u energie en beperkt u de CO₂-emissies.

Breng een bezoek aan www.dlinkgreen.com voor meer informatie over onze milieuverantwoorde producten en verpakkingen.

POLSKI**PL**

Ten symbol umieszczony na produkcie lub opakowaniu oznacza, że zgodnie z miejscowym prawem i lokalnymi przepisami niniejszego produktu nie wolno wyrzucać jak odpady czy śmieci z gospodarstwa domowego, lecz należy go poddać procesowi recyklingu. Po zakończeniu użytkowania produktu, niektóre odpowiednie do tego celu podmioty przyjmą takie produkty nieodpłatnie, dlatego prosimy dostarczyć go do punktu zbiórki wskazanego przez lokalne władze. Poprzez proces recyklingu i dzięki takiemu postępowaniu z produktem oraz jego opakowaniem, pomogą Państwo chronić środowisko naturalne i dbać o ludzkie zdrowie.

D-Link i środowisko

D-Link podchodzimy w sposób świadomy do ochrony otoczenia oraz jesteśmy zaangażowani w zmniejszanie wpływu naszych działań i produktów na środowisko naturalne. W celu zminimalizowania takiego wpływu firma D-Link konstruuje i wytwarza swoje produkty w taki sposób, aby były one jak najbardziej przyjazne środowisku, stosując do tych celów materiały nadające się do powtórnego wykorzystania, charakteryzujące się małą toksycznością zarówno w przypadku samych produktów jak i opakowań.

Firma D-Link zaleca, aby Państwo zawsze prawidłowo wyłączali z użytku swoje produkty D-Link, gdy nie są one wykorzystywane. Postępując w ten sposób pozwalają Państwo oszczędzać energię i zmniejszać emisje CO₂.

Aby dowiedzieć się więcej na temat produktów i opakowań mających wpływ na środowisko prosimy zapoznać się ze stroną Internetową www.dlinkgreen.com.

ČESKY**CZ**

Tento symbol na výrobku nebo jeho obalu znamená, že podle místně platných předpisů se výrobek nesmí vyhazovat do komunálního odpadu, ale odeslat k recyklaci. Až výrobek doslouží, odnese jej prosím na sběrné místo určené místními úřady k tomuto účelu. Některá sběrná místa přijímají výrobky zdarma. Recyklací výrobku i obalu pomáháte chránit životní prostředí i lidské zdraví.

D-Link a životní prostředí

Ve společnosti D-Link jsme si vědomi vlivu našich provozů a výrobků na životní prostředí a snažíme se o minimalizaci těchto vlivů. Proto své výrobky navrhujeme a vyrábíme tak, aby byly co nejekologičtější, a ve výrobcích i obalech používáme recyklovatelné a nízkotoxické materiály.

Společnost D-Link doporučuje, abyste své výrobky značky D-Link vypnuli nebo vytáhli ze zásuvky vždy, když je nepoužíváte. Pomůžete tak šetřit energii a snížit emise CO₂.

Více informací o našich ekologických výrobcích a obalech najdete na adrese www.dlinkgreen.com.

MAGYAR**HU**

Ez a szimbólum a terméken vagy a csomagoláson azt jelenti, hogy a helyi törvényeknek és szabályoknak megfelelően ez a termék nem semmisíthető meg a háztartási hulladékkal együtt, hanem újrahasznosításra kell küldeni. Kérjük, hogy a termék élettartamának elteltét követően vigye azt a helyi hatóság által kijelölt gyűjtőhelyre. A termékek egyes helyeken ingyen elhelyezhetők. A termék és a csomagolás újrahasznosításával segíti védeni a környezetet és az emberek egészségét.

A D-Link és a környezet

A D-Linknél megértjük és elköteleztük magunkat a műveleteink és termékeink környezetre gyakorolt hatásainak csökkentésére. Az ezen hatás csökkentése érdekében a D-Link a lehető leginkább környezetbarát termékeket tervez és gyárt azáltal, hogy újrahasznosítható, alacsony károsanyag-tartalmú termékeket gyárt és csomagolásokat alkalmaz.

A D-Link azt javasolja, hogy mindig kapcsolja ki vagy húzza ki a D-Link termékeket a tápforrásból, ha nem használja azokat. Ezzel segít az energia megtakarításában és a széndioxid kibocsátásának csökkentésében.

Környezetbarát termékeinkről és csomagolásainkról további információkat a www.dlinkgreen.com weboldalon tudhat meg.

NORSK**NO**

Dette symbolet på produktet eller forpakningen betyr at dette produktet ifølge lokale lover og forskrifter ikke skal kastes sammen med husholdningsavfall, men leveres inn til gjenvinning. Vennligst ta det til et innsamlingssted anvist av lokale myndigheter når det er kommet til slutten av levetiden. Noen steder aksepteres produkter uten avgift. Ved på denne måten å gjenvinne produktet og forpakningen hjelper du å verne miljøet og beskytte folks helse.

D-Link og miljøet

Hos D-Link forstår vi oss på og er forpliktet til å minske innvirkningen som vår drift og våre produkter kan ha på miljøet. For å minimalisere denne innvirkningen designer og lager D-Link produkter som er så miljøvennlig som mulig, ved å bruke resirkulerbare, lav-toksiske materialer både i produktene og forpakningen.

D-Link anbefaler at du alltid slår av eller frakobler D-Link-produkter når de ikke er i bruk. Ved å gjøre dette hjelper du å spare energi og å redusere CO2-utslipp.

For mer informasjon angående våre miljøansvarlige produkter og forpakninger kan du gå til www.dlinkgreen.com.

DANSK**DK**

Dette symbol på produktet eller emballagen betyder, at dette produkt i henhold til lokale love og regler ikke må bortskaffes som husholdningsaffald, mens skal sendes til genbrug. Indlever produktet til et indsamlingssted som angivet af de lokale myndigheder, når det er nået til slutningen af dets levetid. I nogle tilfælde vil produktet blive modtaget gratis. Ved at indlevere produktet og dets emballage til genbrug på denne måde bidrager du til at beskytte miljøet og den menneskelige sundhed.

D-Link og miljøet

Hos D-Link forstår vi og bestræber os på at reducere enhver indvirkning, som vores aktiviteter og produkter kan have på miljøet. For at minimere denne indvirkning designer og producerer D-Link sine produkter, så de er så miljøvenlige som muligt, ved at bruge genanvendelige materialer med lavt giftighedsniveau i både produkter og emballage.

D-Link anbefaler, at du altid slukker eller frakobler dine D-Link-produkter, når de ikke er i brug. Ved at gøre det bidrager du til at spare energi og reducere CO₂-udledningerne.

Du kan finde flere oplysninger om vores miljømæssigt ansvarlige produkter og emballage på www.dlinkgreen.com.

SUOMI**FI**

Tämä symboli tuotteen pakkauksessa tarkoittaa, että paikallisten lakien ja säännösten mukaisesti tätä tuotetta ei pidä hävittää yleisen kotitalousjätteen seassa vaan se tulee toimittaa kierrätettäväksi. Kun tuote on elinkaarensa päässä, toimita se lähimpään viranomaisten hyväksymään kierrätyspisteeseen. Kierrättämällä käytetyn tuotteen ja sen pakkauksen autat tukemaan sekä ympäristön että ihmisten terveyttä ja hyvinvointia.

D-Link ja ympäristö

D-Link ymmärtää ympäristönsuojelun tärkeyden ja on sitoutunut vähentämään tuotteistaan ja niiden valmistuksesta ympäristölle mahdollisesti aiheutuvia haittavaikutuksia. Nämä negatiiviset vaikutukset minimoidakseen D-Link suunnittelee ja valmistaa tuotteensa mahdollisimman ympäristöystävällisiksi käyttämällä kierrätettäviä, alhaisia pitoisuuksia haitallisia aineita sisältäviä materiaaleja sekä tuotteissaan että niiden pakkauksissa.

Suosittelamme, että irrotat D-Link-tuotteesi virtalähteestä tai sammutat ne aina, kun ne eivät ole käytössä. Toimimalla näin autat säästämään energiaa ja vähentämään hiilidioksiidipäästöjä.

Lue lisää ympäristöystävällisistä D-Link-tuotteista ja pakkauksistamme osoitteesta www.dlinkgreen.com.

SVENSKA**SE**


Den här symbolen på produkten eller förpackningen betyder att produkten enligt lokala lagar och föreskrifter inte skall kastas i hushållssoporna utan i stället återvinnas. Ta den vid slutet av dess livslängd till en av din lokala myndighet utsedd uppsamlingsplats, vissa accepterar produkter utan kostnad. Genom att på detta sätt återvinna produkten och förpackningen hjälper du till att bevara miljön och skydda människors hälsa.

D-Link och miljön

På D-Link förstår vi och är fast beslutna att minska den påverkan våra verksamheter och produkter kan ha på miljön. För att minska denna påverkan utformar och bygger D-Link sina produkter för att de ska vara så miljövänliga som möjligt, genom att använda återvinningsbara material med låg gifthalt i både produkter och förpackningar.

D-Link rekommenderar att du alltid stänger av eller kopplar ur dina D-Link produkter när du inte använder dem. Genom att göra detta hjälper du till att spara energi och minska utsläpp av koldioxid.

För mer information om våra miljöansvariga produkter och förpackningar www.dlinkgreen.com.

PORTUGUÊS**PT**

Este símbolo no produto ou embalagem significa que, de acordo com as leis e regulamentações locais, este produto não deverá ser eliminado juntamente com o lixo doméstico mas enviado para a reciclagem. Transporte-o para um ponto de recolha designado pelas suas autoridades locais quando este tiver atingido o fim da sua vida útil, alguns destes pontos aceitam produtos gratuitamente. Ao reciclar o produto e respectiva embalagem desta forma, ajuda a preservar o ambiente e protege a saúde humana.

A D-Link e o ambiente

Na D-Link compreendemos e comprometemo-nos com a redução do impacto que as nossas operações e produtos possam ter no ambiente. Para minimizar este impacto a D-Link concebe e constrói os seus produtos para que estes sejam o mais inofensivos para o ambiente possível, utilizando materiais recicláveis e não tóxicos tanto nos produtos como nas embalagens.

A D-Link recomenda que desligue os seus produtos D-Link quando estes não se encontrarem em utilização. Com esta acção ajudará a poupar energia e reduzir as emissões de CO₂.

Para saber mais sobre os nossos produtos e embalagens responsáveis a nível ambiental visite www.dlinkgreen.com.